

29 October 2021

Market Announcements  
Australian Securities Exchange  
Level 4, 20 Bridge Street  
SYDNEY  
NSW 2000

## UPDATE ON RESOURCES AND RESERVES

Bathurst Resources Limited (ASX: BRL) advises an update on resources and reserves. Total resources<sup>1</sup> have decreased from 191.0 million tonnes ("Mt") to 170.7Mt at 30 June 2021.

Notable changes year-on-year have been:

- South Buller resource has decreased by 17.1Mt due to a review of the coal washability which resulted in the resource being reported to revised ash cut-offs (see separate notice to ASX).
- The North Island domestic resource has decreased by 1.5Mt with the key variations being mining depletion at Rotowaro and Maramarua, and an internal review of the Rotowaro North resource.
- Total Stockton resource has been depleted by 0.8Mt.

The Whareatea West and Escarpment reserves (part of South Buller) have been temporarily removed as they are under review (see separate notice to ASX). There have been no further significant changes to the reserve statement other than mining depletion.

The documents appended<sup>2</sup> have been generated as JORC Table 1 disclosures as required under clause 5 of the JORC (2012) code. The Table 1 documents support both first release and materially changed mineral resources or ore reserves for significant Bathurst projects.

Where there has been no material change the company has continued to report under the JORC 2004 standard.

On behalf of Bathurst Resources Limited.



Richard Tacon, CEO

---

<sup>1</sup> Resource values are presented here as the sum of 100 percent of Bathurst owned permits and 100 percent of BT Mining permits. In the supporting tables Bathurst's ownership percentage against each permit area is clearly documented.

<sup>2</sup> Note that the image quality in the attached document has been reduced in order to meet file size limits set by the ASX. A copy of the high-resolution version of this document can be obtained by contacting Bathurst (subject to the requestor's email account file size restrictions).

# Coal resources

**Table 1 – Resource tonnes (rounded to the nearest million tonnes)**

Area	Bathurst ownership	2021 Measured resource			2020 Measured resource			2021 Indicated resource			2020 Indicated resource			2021 Inferred resource			2020 Inferred resource			2021 Total resource			2020 Total resource		
		2021 Measured resource	2020 Measured resource	Change	2021 Indicated resource	2020 Indicated resource	Change	2021 Inferred resource	2020 Inferred resource	Change	2021 Total resource	2020 Total resource	Change												
Escarpment <sup>(1,7 &amp; 9)</sup>	100%	1.9	3.4	(1.5)	1.2	2.2	(1.0)	0.7	1.1	(0.4)	3.8	6.7	(2.9)												
Cascade <sup>(1)</sup>	100%	0.5	0.5	0.0	0.6	0.6	0.0	0.3	0.3	0.0	1.4	1.4	0.0												
Deep Creek <sup>(1 &amp; 3)</sup>	100%	6.2	6.2	0.0	3.1	3.1	0.0	1.6	1.6	0.0	10.9	10.9	0.0												
Coalbrookdale <sup>(1,7 &amp; 9)</sup>	100%	0.0	0.0	0.0	1.7	3.4	(1.7)	3.1	4.7	(1.6)	4.8	8.1	(3.3)												
Whareatea West <sup>(1,7 &amp; 10)</sup>	100%	6.2	7.9	(1.7)	7.8	11.2	(3.4)	2.7	4.8	(2.1)	16.7	23.9	(7.2)												
Sullivan <sup>(1,7 &amp; 9)</sup>	100%	1.9	2.7	(0.8)	3.0	5.1	(2.1)	3.3	4.1	(0.8)	8.2	11.9	(3.7)												
<b>South Buller totals</b>	<b>100%</b>	<b>16.7</b>	<b>20.7</b>	<b>(4.0)</b>	<b>17.4</b>	<b>25.6</b>	<b>(8.2)</b>	<b>11.7</b>	<b>16.6</b>	<b>(4.9)</b>	<b>45.8</b>	<b>62.9</b>	<b>(17.1)</b>												
Stockton <sup>(2, 5, 6, &amp; 12)</sup>	65%	2.6	0.7	1.9	7.8	10.2	(2.4)	5.9	5.9	0.0	16.3	16.8	(0.5)												
Upper Waimangaroa (Met) <sup>(2, 4 &amp; 5)</sup>	65%	0.7	0.7	0.0	13.2	13.3	(0.1)	32.4	32.6	(0.2)	46.3	46.6	(0.3)												
Upper Waimangaroa (Thermal) <sup>(2 &amp; 5)</sup>	65%	0.0	0.0	0.0	0.6	0.6	0.0	0.9	0.9	0.0	1.5	1.5	0.0												
<b>Stockton totals</b>	<b>65%</b>	<b>3.3</b>	<b>1.4</b>	<b>1.9</b>	<b>21.6</b>	<b>24.1</b>	<b>(2.5)</b>	<b>39.2</b>	<b>39.4</b>	<b>(0.2)</b>	<b>64.1</b>	<b>64.9</b>	<b>(0.8)</b>												
Millerton North <sup>(1, 3 &amp; 11)</sup>	100%	0.0	0.0	0.0	1.8	1.9	(0.1)	3.5	3.6	(0.1)	5.3	5.5	(0.2)												
North Buller totals <sup>(1, 3 &amp; 11)</sup>	100%	2.4	2.4	0.0	7.2	7.3	(0.1)	10.6	10.9	(0.3)	20.2	20.6	(0.4)												
Blackburn <sup>(1 &amp; 3)</sup>	100%	0.0	0.0	0.0	5.8	5.8	0.0	14.1	14.1	0.0	19.9	19.9	0.0												
<b>North Buller totals</b>	<b>100%</b>	<b>2.4</b>	<b>2.4</b>	<b>0.0</b>	<b>14.8</b>	<b>15.0</b>	<b>(0.2)</b>	<b>28.2</b>	<b>28.6</b>	<b>(0.4)</b>	<b>45.4</b>	<b>46.0</b>	<b>(0.6)</b>												
<b>Buller Coal Project totals</b>	<b>100%</b>	<b>22.4</b>	<b>24.5</b>	<b>(2.1)</b>	<b>53.8</b>	<b>64.7</b>	<b>(10.9)</b>	<b>79.1</b>	<b>84.6</b>	<b>(5.5)</b>	<b>155.3</b>	<b>173.8</b>	<b>(18.5)</b>												
Takitimu <sup>(1 &amp; 4)</sup>	100%	0.2	0.3	(0.1)	1.7	1.9	(0.2)	0.1	0.0	0.1	2.0	2.2	(0.2)												
New Brighton <sup>(1)</sup>	100%	0.2	0.2	0.0	0.2	0.2	0.0	0.2	0.2	0.0	0.6	0.6	0.0												
Albury <sup>(1)</sup>	100%	0.0	0.0	0.0	0.7	0.7	0.0	0.1	0.1	0.0	0.8	0.8	0.0												
Canterbury Coal <sup>(1 &amp; 4)</sup>	100%	0.9	0.9	0.0	1.2	1.3	(0.1)	1.0	1.0	0.0	3.1	3.2	(0.1)												
<b>Southland/Canterbury totals</b>	<b>100%</b>	<b>1.3</b>	<b>1.4</b>	<b>(0.1)</b>	<b>3.8</b>	<b>4.1</b>	<b>(0.3)</b>	<b>1.4</b>	<b>1.3</b>	<b>0.1</b>	<b>6.5</b>	<b>6.8</b>	<b>(0.3)</b>												
Rotowaro <sup>(2, 4, 5, &amp; 8)</sup>	65%	0.5	0.6	(0.1)	1.9	2.3	(0.4)	0.5	0.6	(0.1)	2.9	3.5	(0.6)												
Rotowaro North <sup>(5, 8 &amp; 13)</sup>	65%	0.0	0.5	(0.5)	2.7	3.8	(1.1)	1.0	0.1	0.9	3.7	4.4	(0.7)												
Maramarua <sup>(4, 5, &amp; 8)</sup>	65%	2.0	2.3	(0.3)	0.3	0.1	0.2	0.0	0.1	(0.1)	2.3	2.5	(0.2)												
<b>North Island totals</b>	<b>65%</b>	<b>2.5</b>	<b>3.4</b>	<b>(0.9)</b>	<b>4.9</b>	<b>6.2</b>	<b>(1.3)</b>	<b>1.5</b>	<b>0.8</b>	<b>0.7</b>	<b>8.9</b>	<b>10.4</b>	<b>(1.5)</b>												
<b>Total</b>		<b>26.2</b>	<b>29.3</b>	<b>(3.1)</b>	<b>62.5</b>	<b>75.0</b>	<b>(12.5)</b>	<b>82.0</b>	<b>86.7</b>	<b>(4.7)</b>	<b>170.7</b>	<b>191.0</b>	<b>(20.3)</b>												

## Note

All resources and reserves quoted in this release are reported in terms as defined in the 2004 and 2012 Editions of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves' as published by the Joint Ore Reserves Committee of the Australasian Institute of Mining and Metallurgy, Australian Institute of Geoscientists and Minerals Council of Australia ("JORC").

The measured and indicated mineral resources are inclusive of those mineral reserves modified to produce the ore reserves. Rounding of tonnes as required by reporting guidelines may result in summation differences between tonnes and coal quality. All resources quoted are reported as of 30 June 2021.

# Coal resources

**Table 1 – Resource tonnes (rounded to the nearest million tonnes) continued**

Note

- <sup>1</sup> Resource tonnages have been calculated using a density value calculated using approximated in-ground moisture values (Preston and Sanders method) and as such tonnages quoted in this report are wet tonnes (unless stipulated otherwise). All coal qualities quoted are on an air-dried basis.
- <sup>2</sup> Stockton and Upper Waimangaroa density values are based on air-dried ash density regressions. Stockton, Upper Waimangaroa, Rotowaro and Maramarua are reported on an air-dried basis.
- <sup>3</sup> No additional work has been undertaken on the coal resources for Deep Creek, Millerton North and Blackburn since originally reported. This information was prepared and first disclosed under the JORC Code 2004. It has not been updated since to comply with the JORC Code 2012 on the basis that the information has not materially changed since it was last reported.
- <sup>4</sup> Resources were depleted by mining.
- <sup>5</sup> Stockton, Upper Waimangaroa, Rotowaro, Rotowaro North and Maramarua are owned by BT Mining Limited (65 percent Bathurst Resources Limited / 35 percent Talleys Energy Limited).
- <sup>6</sup> A18 Fines Stockpile upgraded from indicated resource to measured resource.
- <sup>7</sup> Update to geological model combined with a review of potential economic recovery.
- <sup>8</sup> Density is based on a fixed 1.3 tonnes per cubic metre.
- <sup>9</sup> Ash cut-off adjusted from 45 percent to 25 percent.
- <sup>10</sup> Ash cut-off adjusted from 45 percent to 35 percent.
- <sup>11</sup> Adjustment following internal review.
- <sup>12</sup> Mining depletion offset by update to geological model.
- <sup>13</sup> Resource classification downgraded following internal review.

**Table 2 – Average coal quality - measured**

Area	Bathurst ownership	Measured resource (Mt)	Ash % (AD)	Sulphur % (AD)	Volatile matter % (AD)	Fixed carbon % (AD)	CSN	Inherent moisture	In situ moisture	Calorific value (AD)
Escarpment	100%	1.9	14.1	0.7	33.9	51.1	7.5	0.9	5.7	29.6
Cascade	100%	0.5	15.5	1.7	39.3	42.6	4.5	2.6	7.6	30.8
Deep Creek	100%	6.2	11.0	2.5	32.9	53.9	-	2.2	5.2	29.7
Coalbrookdale	100%	0.0	-	-	-	-	-	-	-	-
Whareatea West	100%	6.2	20.8	0.8	25.1	53.5	8.0	0.6	6.5	28.2
Sullivan	100%	1.9	4.0	1.1	31.7	59.2	8.5	1.0	6.6	34.3
Stockton	65%	2.6	23.7	2.0	27.0	47.8	7.5	1.5	-	27.7
Upper Waimangaroa (Met)	65%	0.7	3.7	0.8	37.8	54.0	4.5	4.5	-	31.5
Upper Waimangaroa (Thermal)	65%	0.0	-	-	-	-	-	-	-	-
Millerton North	100%	0.0	-	-	-	-	-	-	-	-
North Buller	100%	2.4	8.6	4.7	43.1	45.4	4.5	2.9	11.4	29.7
Blackburn	100%	0.0	-	-	-	-	-	-	-	-
Takitimu	100%	0.2	15.6	0.4	34.6	35.0	N/A	14.8	24.9	20.0
New Brighton	100%	0.2	10.3	0.4	35	41.2	N/A	13.5	20.6	22.6
Albury	100%	0.0	-	-	-	-	-	-	-	-
Canterbury Coal	100%	0.9	9.6	0.9	35.0	37.1	N/A	18.3	26.7	21.1
Rotowaro	65%	0.5	4.3	0.3	37.2	43.9	N/A	14.5	-	24.9
Rotowaro North	65%	0.0	-	-	-	-	-	-	-	-
Maramarua	65%	2.0	5.9	0.2	37.5	38.8	N/A	17.8	-	22.3

# Coal resources

**Table 3 – Average coal quality - indicated**

Area	Bathurst ownership	Indicated resource (Mt)	Ash % (AD)	Sulphur % (AD)	Volatile matter % (AD)	Fixed carbon % (AD)	CSN	Inherent moisture	In situ moisture	Calorific value (AD)
Escarpment	100%	1.2	12.6	1.2	35.0	51.2	7.5	1.2	5.3	30.0
Cascade	100%	0.6	14.8	1.8	38.3	44.5	4.0	2.4	8.0	29.3
Deep Creek	100%	3.1	9.7	2.7	34.7	53.6	-	2.0	4.8	30.3
Coalbrookdale	100%	1.7	12.7	1.6	35.6	50.1	5.0	1.7	5.3	29.7
Whareatea West	100%	7.8	23.6	1.2	23.5	52.3	7.5	0.7	6.6	27.1
Sullivan	100%	3.0	5.1	1.3	30.0	59.4	8.5	1.0	6.6	33.9
Stockton	65%	7.8	5.9	3.4	36.1	56.7	7.0	1.2	-	33.3
Upper Waimangaroa (Met)	65%	13.2	5.6	2.9	37.9	54.3	5.1	2.3	-	31.4
Upper Waimangaroa (Thermal)	65%	0.6	6.5	3.9	37.3	52.1	0.0	4.1	-	27.7
Millerton North	100%	1.8	9.7	4.9	36.9	52.4	10.0	1.0	6.1	31.1
North Buller	100%	7.2	8.8	5.1	42.6	46.3	5.0	2.3	9.4	30.0
Blackburn	100%	5.8	3.9	4.3	42.1	51.8	6.0	2.2	10.1	30.4
Takitimu	100%	1.7	10.8	0.3	35.4	37.7	N/A	16.0	25.4	21.1
New Brighton	100%	0.2	10.6	0.4	35.0	39.7	N/A	14.7	21.3	22.4
Albury	100%	0.7	7.2	1.0	30.9	24.5	N/A	37.4	41.2	15.6
Canterbury Coal	100%	1.2	9.4	0.9	35.1	37.4	N/A	18.1	26.7	21.2
Rotowaro	65%	1.9	4.3	0.3	37.2	44.0	N/A	14.5	-	24.9
Rotowaro North	65%	2.7	6.3	0.2	35.9	43.0	N/A	12.0	-	24.3
Maramarua	65%	0.3	9.7	0.2	36.4	38.3	N/A	15.6	-	22.1

# Coal resources

**Table 4 – Average coal quality - inferred**

Area	Bathurst ownership	Inferred resource (Mt)	Ash % (AD)	Sulphur % (AD)	Volatile matter % (AD)	Fixed carbon % (AD)	CSN	Inherent moisture	In situ moisture	Calorific value (AD)
Escarpment	100%	0.7	12.5	1.5	35.4	50.8	7.0	1.3	5.1	29.8
Cascade	100%	0.3	16.5	2.2	36.7	44.7	4.0	2.1	6.7	27.6
Deep Creek	100%	1.6	10.1	2.4	29.7	57.8	-	2.4	7.1	29.7
Coalbrookdale	100%	3.1	12.8	1.8	35.6	49.9	5.0	1.7	5.5	29.5
Whareatea West	100%	2.7	24.1	1.1	23.0	52.2	7.0	0.7	6.6	26.8
Sullivan	100%	3.3	5.6	1.3	30.6	59.4	8.5	1.0	6.5	33.7
Stockton	65%	5.9	5.8	3.3	34.7	58.2	8.0	1.2	-	33.3
Upper Waimangaroa (Met)	65%	32.4	5.9	2.1	38.7	52.4	4.6	3.6	-	30.3
Upper Waimangaroa (Thermal)	65%	0.9	4.1	1.6	34.7	54.7	2.3	6.6	-	27.8
Millerton North	100%	3.5	12.0	5.5	35.3	51.6	9.0	1.1	7.2	30.2
North Buller	100%	10.6	9.9	5.1	45.6	42.3	5.0	2.2	9.6	29.5
Blackburn	100%	14.1	6.4	4.8	41.8	49.5	6.0	2.3	11.2	30.1
Takitimu	100%	0.1	15.3	0.4	36.3	33.5	N/A	14.9	23.9	20.3
New Brighton	100%	0.2	10.7	0.4	34.5	40.3	N/A	14.5	21.2	22.4
Albury	100%	0.1	7.3	0.8	30.2	23.4	N/A	39.1	43.1	15.6
Canterbury Coal	100%	1.0	9.9	1.0	35.1	37.3	N/A	17.7	26.5	21.2
Rotowaro	65%	0.5	4.4	0.3	37.3	43.8	N/A	14.5	-	25.0
Rotowaro North	65%	1.0	6.8	0.3	36.0	42.8	N/A	11.0	-	24.5
Maramarua	65%	0.0	5.0	0.3	37.7	41.1	N/A	16.2	-	22.9

# Coal reserves

**Table 5 – Coal reserves (ROM) tonnes**

ROM coal area	Bathurst ownership	Proved (Mt)			Probable (Mt)			Total (Mt)		
		2021 <sup>A</sup>	2020	Change	2021 <sup>A</sup>	2020	Change	2021 <sup>A</sup>	2020	Change
Stockton <sup>(B, D, &amp; F)</sup>	65%	0.4	0.6	(0.2)	6.4	7.1	(0.7)	6.8	7.7	(0.9)
Upper Waimangaroa (Met) <sup>(B, D, &amp; F)</sup>	65%	0.6	0.6	0.0	1.6	2.0	(0.4)	2.2	2.6	(0.4)
Takitimu <sup>(C, E, &amp; F)</sup>	100%	0.0	0.0	0.0	1.0	1.2	(0.2)	1.0	1.2	(0.2)
Canterbury Coal <sup>(C, E, &amp; F)</sup>	100%	0.5	0.5	0.0	0.6	0.6	0.0	1.1	1.1	0.0
Rotowaro <sup>(D &amp; F)</sup>	65%	0.4	0.4	0.0	0.7	1.2	(0.5)	1.1	1.6	(0.5)
Maramarua <sup>(D &amp; F)</sup>	65%	1.4	1.8	(0.4)	0.3	0.1	0.2	1.7	1.9	(0.2)
<b>Total</b>		<b>3.3<sup>A</sup></b>	<b>3.9</b>	<b>(0.6)</b>	<b>10.6<sup>A</sup></b>	<b>12.2</b>	<b>(1.6)</b>	<b>13.9<sup>A</sup></b>	<b>16.1</b>	<b>(2.2)</b>

**Table 6 – Marketable coal reserves tonnes**

Product coal area	Bathurst ownership	Proved (Mt)			Probable (Mt)			Total (Mt)		
		2021 <sup>A</sup>	2020	Change	2021 <sup>A</sup>	2020	Change	2021 <sup>A</sup>	2020	Change
Stockton <sup>(B, D, &amp; F)</sup>	65%	0.3	0.4	(0.1)	4.6	5.0	(0.4)	4.9	5.4	(0.5)
Upper Waimangaroa (Met) <sup>(B, D, &amp; F)</sup>	65%	0.6	0.5	0.1	1.5	1.7	(0.2)	2.1	2.2	(0.1)
Takitimu <sup>(C, E, &amp; F)</sup>	100%	0.0	0.0	0.0	0.8	1.1	(0.3)	0.8	1.1	(0.3)
Canterbury Coal <sup>(C, E, &amp; F)</sup>	100%	0.4	0.5	(0.1)	0.6	0.6	0.0	1.0	1.1	(0.1)
Rotowaro <sup>(D &amp; F)</sup>	65%	0.4	0.4	0.0	0.6	1.0	(0.4)	1.0	1.4	(0.4)
Maramarua <sup>(D &amp; F)</sup>	65%	1.4	1.7	(0.3)	0.2	0.1	0.1	1.6	1.8	(0.2)
<b>Total</b>		<b>3.1<sup>A</sup></b>	<b>3.5</b>	<b>(0.4)</b>	<b>8.3<sup>A</sup></b>	<b>9.5</b>	<b>(1.2)</b>	<b>11.4<sup>A</sup></b>	<b>13.0</b>	<b>(1.6)</b>

**Table 7 – Marketable coal reserves – proved and probable average coal quality**

Area	Bathurst ownership	Proved marketable						Probable marketable					
		Mt	Ash %	Sulphur %	VM%	CSN	CV (MJ/kg)	Mt	Ash %	Sulphur %	VM%	CSN	CV (MJ/kg)
Stockton <sup>(B, D, &amp; F)</sup>	65%	0.3	6.6	2.6	31.1	7.0	33.5	4.6	4.7	2.8	33.9	8.0	34.0
Upper Waimangaroa (Met) <sup>(B, D, &amp; F)</sup>	65%	0.6	2.9	0.7	37.6	4.5	31.8	1.5	3.0	1.4	37.6	4.5	31.8
Takitimu <sup>(C, E, &amp; F)</sup>	100%	0.0	9.1	0.3	37.1	N/A	21.9	0.8	6.8	0.2	36.1	N/A	22.1
Canterbury Coal <sup>(C, E, &amp; F)</sup>	100%	0.4	9.3	0.9	35.4	N/A	21.4	0.6	9.1	0.9	35.3	N/A	21.4
Rotowaro <sup>(D &amp; F)</sup>	65%	0.4	5.7	0.3	35.3	N/A	23.8	0.6	4.9	0.3	37.3	N/A	24.0
Maramarua <sup>(D &amp; F)</sup>	65%	1.4	5.1	0.2	37.8	N/A	23.0	0.2	6.0	0.2	37.3	N/A	24.0

# Coal reserves

**Table 8 – Marketable coal reserves – total average quality**

Area	Bathurst ownership	Coal type	Mining method	Mt	Ash %	Sulphur %	VM%	CSN	CV (MJ/Kg)
Stockton <sup>(B, D, &amp; F)</sup>	65%	Met	Open Pit	4.9	4.8	2.8	33.8	8.0	34.0
Upper Waimangaroa (Met) <sup>(B, D &amp; F)</sup>	65%	Met	Open Pit	2.1	3.0	1.2	37.6	4.5	31.8
Takitimu <sup>(C, E, &amp; F)</sup>	100%	Thermal	Open Pit	0.8	6.8	0.2	36.1	N/A	22.1
Canterbury Coal <sup>(C, E, &amp; F)</sup>	100%	Thermal	Open Pit	1.0	9.2	0.9	35.3	N/A	21.4
Rotowaro <sup>(D &amp; F)</sup>	65%	Thermal	Open Pit	1.0	5.2	0.3	36.3	N/A	23.9
Maramarua <sup>(D, &amp; F)</sup>	65%	Thermal	Open Pit	1.6	5.3	0.2	37.7	N/A	23.2

## Note

All reserves quoted in this release are reported in terms as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves' as published by the Joint Ore Reserves Committee of the Australasian Institute of Mining and Metallurgy, Australian Institute of Geoscientists and Minerals Council of Australia ("JORC").

The measured and indicated mineral resources are inclusive of ore reserves. Coal reserve (Run of Mine (ROM) tonnes) include consideration of standard mining factors. Rounding of tonnes as required by reporting guidelines may result in summation differences between tonnes and coal quality. All ore reserves quoted are reported as of 30 June 2021.

- <sup>A</sup> Reserves exclude previously reported Whareatea West, Escarpment Domestic, and Escarpment Export. These have been removed as they are under review due to an updated geological model.
- <sup>B</sup> Stockton and Upper Waimangaroa density values are based on air-dried ash density regressions.
- <sup>C</sup> ROM coal reserves are reported at a moisture content that is based on long term average coal production data and as such all tonnages quoted in this report are wet tonnes.
- <sup>D</sup> Stockton, Upper Waimangaroa, Rotowaro and Maramarua are owned by BT Mining Limited in which Bathurst has a 65 percent equity share.
- <sup>E</sup> Takitimu reserves and Canterbury reserves are 100 percent Bathurst Resources Limited ownership.
- <sup>F</sup> Decrease in coal reserves due to mining depletion.

## Resource quality

Bathurst is not aware of any information to indicate that the quality of the identified resources will fall outside the range of specifications for reserves as indicated in the above table. Further resource and reserve information can be found on Bathurst's website at [www.bathurst.co.nz](http://www.bathurst.co.nz).

## Mineral resource and ore reserves governance and estimation process

Resources and reserves are estimated by internal and external personnel, suitably qualified as Competent Persons under the Australasian Institute of Mining and Metallurgy, reporting in accordance with the requirements of the JORC code, industry standards and internal guidelines.

All resource estimates and supporting documentation are reviewed by a Competent Person either employed directly by Bathurst or employed as an external consultant. If there is a material change in an estimate of a resource, or if the estimate is an inaugural resource, the estimate and all relevant supporting documentation is further reviewed by an external suitably qualified Competent Person.

All reserve estimates are prepared in conjunction with pre-feasibility, feasibility and life of mine studies which consider all material factors. All resource and reserve estimates are then further reviewed by suitably qualified internal management.

The resources and reserves statements included in Bathurst's 2021 annual report have been reviewed by qualified internal and external Competent Persons, and internal management, prior to their inclusion.

# Competent person statements

The information on this report that relates to mineral resources for Deep Creek is based on information compiled by Sue Bonham-Carter, who is a full time employee of Golder Associates (NZ) Ltd and is a Chartered Professional and member of the Australasian Institute of Mining and Metallurgy and member of Professional Engineers and Geoscientists of British Columbia, Canada. Ms Bonham-Carter has a BSc Engineering (Mining) (Hons) from the Queen's University, Canada. Ms Bonham-Carter has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which she is undertaking to qualify as a Competent Person as defined in the 2004 Edition and 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Ms Bonham-Carter consents to the inclusion in this report of the matters based on her information in the form and context in which it appears above.

The information in this report that relates to exploration results and mineral resources for Albury, Takitimu, Canterbury Coal, New Brighton, Rotowaro, Rotowaro North, and Maramarua is based on information compiled by Henry Dillon as a Competent Person who is a full time employee of Golder Associates (NZ) Limited and is a member of the Australasian Institute of Mining and Metallurgy. Mr Dillon has a BSc majoring in geology from the University of Canterbury. Mr Dillon has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Dillon consents to the inclusion in this report of the matters based on his information in the form and context in which it appears above.

The information in this report that relates to exploration results and mineral resources for Stockton, Upper Waimangaroa, Escarpment, Sullivan, Cascade, Coalbrookdale, Whareatea West, Millerton North, North Buller, and Blackburn is based on information compiled by Mark Lionnet as a Competent Person who is a full time employee of BT Mining Limited and is a member of the Australasian Institute of Mining and Metallurgy. Mr Lionnet has a BSc (Hons) majoring in geology from the University of Witwatersrand. Mr Lionnet has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2004 Edition and 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Lionnet consents to the inclusion in this report of the matters based on his information in the form and context in which it appears above.

The information on this report that relates to mineral reserves for Takitimu, Canterbury, Rotowaro and Maramarua is based on information compiled by Damian Spring who is a full time employee of Bathurst Resources Limited and is a Chartered Professional member of the Australasian Institute of Mining and Metallurgy. Mr Spring has a Bachelor of Engineering (Mining) from the University of Auckland. Mr Spring has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Spring consents to the inclusion in this report of the matters based on his information in the form and context in which it appears above.

The information on this report that relates to mineral reserves for Stockton and Upper Waimangaroa is based on information compiled by Ian Harvey who is a full-time employee of Bathurst Resources Limited and is a member of the Australasian Institute of Mining and Metallurgy. Mr Harvey has a Bachelor in Mining Engineering from the University of Otago. Mr Harvey has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Harvey consents to the inclusion in this report of the matters based on his information in the form and context in which it appears above.



# JORC Code, 2012 Edition – Table 1 Report for the Denniston Plateau 2021

## Section 1 Sampling Techniques and Data

Criteria	Commentary
<b>Sampling techniques</b>	<ul style="list-style-type: none"> <li>• Multiple campaigns of data acquisition have been carried out on the Denniston Plateau over the past century.</li> <li>• Modern exploration campaigns include data from 2010:               <ul style="list-style-type: none"> <li>○ 326 PQ-HQ Triple Tube Core (TTC) holes.</li> <li>○ 96 production blast holes.</li> <li>○ 13 outcrop trenches.</li> <li>○ Down-hole geophysics are available for 211 of these modern drillholes.</li> </ul> </li> <li>• Historic data includes:               <ul style="list-style-type: none"> <li>○ Five reverse circulation holes 2009-2010.</li> <li>○ 67 PQ-HQ TTC holes from 1984-2010.</li> <li>○ 23 NQ TTC holes from 1975-1978.</li> <li>○ 74 rotary wash drillholes from 1948-1961.</li> <li>○ Three outcrop trenches.</li> <li>○ 49 historic drillholes of various drilling methods.</li> <li>○ 40 holes of this dataset have down-hole geophysics data available.</li> </ul> </li> <li>• Recent drilling has aimed to infill areas lacking data and to test reliability of historic data. Drilling has been concentrated on areas deemed closer to production, therefore tighter drill spacing exists in Cascade and Escarpment than Whareatea West and Coalbrookdale.</li> <li>• Coal sampling is based on the standardised BRL coal sampling procedures.</li> <li>• 46 additional holes drilled by Solid Energy NZ Ltd (SENZ) were added to the database with the purchase of the Sullivan Mining License. These holes were logged and sampled using standards very similar to those of BRL.</li> <li>• Coal quality ply samples have been selected on all coal logged by a geologist with 95% confidence that the ash will fall below 50%. Material with an estimated ash over 50% was not sampled unless the material was a sandstone parting of &lt; 0.1m in thickness within a coal seam whereby it would be included within a larger ply sample.</li> <li>• Ply samples were generally taken over intervals no greater than 0.5m.</li> <li>• All analytical data has been assessed and verified before inclusion into the resource model.</li> </ul>
<b>Drilling techniques</b>	<ul style="list-style-type: none"> <li>• All BRL managed drilling campaigns have utilised the following drilling methods:               <ul style="list-style-type: none"> <li>○ Full PQ Triple Tube Core.</li> <li>○ HQ Triple Tube Core only where necessary.</li> <li>○ Open-holed overburden where applicable.</li> <li>○ Logged production blast holes using top head hammer blast rig.</li> </ul> </li> <li>• Historic drilling techniques include:               <ul style="list-style-type: none"> <li>○ PQ Triple Tube Core.</li> <li>○ HQ Triple Tube Core.</li> <li>○ NQ Triple Tube Core.</li> <li>○ Open-holed.</li> <li>○ Rotary wash.</li> <li>○ Reverse circulation.</li> </ul> </li> <li>• All exploration drillholes were collared vertically.</li> <li>• PQ sized drilling was utilised to maximise the core recovery.</li> </ul>
<b>Drill sample recovery</b>	<ul style="list-style-type: none"> <li>• Core recovery was measured by the logging geologist for each drillers' run (usually 1.5m) in each drillhole. If recovery of coal intersections dropped below 85% the drillhole was re-drilled. Drillers were paid an incentive if coal recovery was above 90%.</li> <li>• In some instances the recovery of thin rider seams (&lt; 0.5m) was poor due to the soft friable nature of the coal. Therefore the sample dataset for the two rider seams was not as evenly spatially distributed as the main seam.</li> </ul>

Criteria	Commentary
	<ul style="list-style-type: none"> <li>• Average total core recovery over the modern drilling campaigns was 95.6% with core recovery of coal at 93.6%.</li> <li>• Where small intervals of coal were lost, and were confirmed by geophysics, ash values were estimated using the results of overlying and underlying ply samples and the relative response of the open-hole density trace.</li> <li>• Geochemical sampling for overburden characterisation was also completed by taking representative samples of core on a lithological basis with a maximum sample length of 5m.</li> </ul>
<b>Logging</b>	<ul style="list-style-type: none"> <li>• BRL has developed a standardised core logging procedure and all core logging completed by BRL and its contractors has followed this standard.</li> <li>• All modern drill core has been geologically and geotechnically logged by geologists under the supervision and guidance of a team of experienced exploration geologists.</li> <li>• As much data as possible has been logged and recorded including geotechnical and rock strength data.</li> <li>• All core was photographed prior to sampling. Depth metre marks and ply intervals are noted on core in each photograph.</li> <li>• The geophysical logging company maintained and calibrated all tools as per their internal calibration procedures. Additionally, geophysics equipment was calibrated and tested using a calibration hole on the plateau with known depth to coal, thickness and quality.</li> <li>• BRL aimed to geophysically log every drillhole that intersected coal providing hole conditions and operational constraints allowed. The standard suite of tools run included density, dip meter, sonic, and natural gamma.</li> <li>• Where drillhole conditions were poor or mine workings were intersected only in-rods density was acquired. In-rods density produced a reliable trace for use in seam correlation and depth adjustment but was not used for ash correlations.</li> <li>• Down hole geophysical logs were used to aid core logging. Down hole geophysics were used to correlate coal seams, to confirm depths and thickness of coal seams and to validate drillers' logs. Geophysics were also used to accurately calculate recovery rates of coal.</li> </ul>
<b>Sub-sampling techniques and sample preparation</b>	<ul style="list-style-type: none"> <li>• For all exploration data acquired by BRL, an in-house detailed sampling procedure is used. Sampling and sample preparation were consistent with international coal sampling methodology.</li> <li>• Ply samples include all coal recovered for the interval of the sample. Core was not cut or halved. Ply sample intervals were generally 0.5m unless dictated by thin split or parting thickness.</li> <li>• All drilling in the recent campaigns has been completed using triple tube cored holes. No chip or RC samples were taken in these campaigns. Some historic RC and wash drilled holes have poor sampling methods and are excluded from the coal quality model.</li> <li>• Assay samples were completed at the core repository after transport from drill site in core boxes. Samples were taken as soon as practicable and stored in a chiller until transport to the coal quality laboratory.</li> <li>• A series of random duplicate samples representing 1.3% of the total number of samples from Buller has been completed by CRL Energy Ltd. The results of this duplicate testing were comparable to that reported by SGS New Zealand Limited (SGS).</li> </ul>

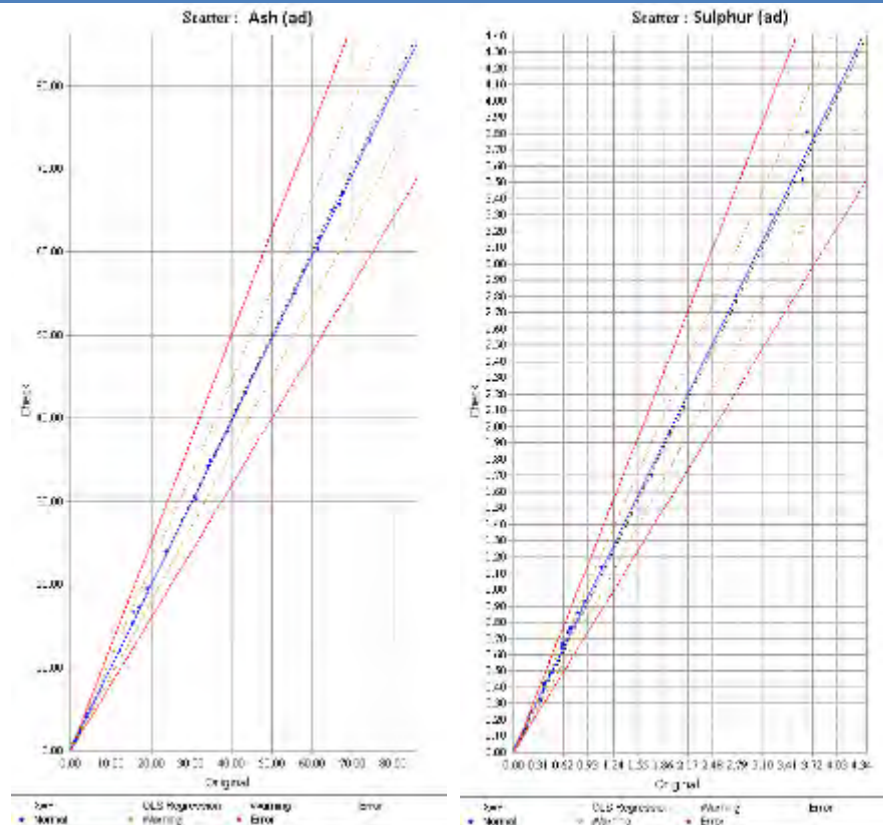


Figure 1 Scatter graphs showing the consistent results obtained for duplicate samples analysed at SGS (original) and CRL (check).

#### Quality of assay data and laboratory tests

- All coal quality testing completed for BRL has been carried out by accredited laboratory SGS.
- SGS have used the following standards for their assay test work:
  - Proximate Analysis is carried out to the ASTM 7582 standard.
  - Ash has used the standard ISO 1171.
  - Volatile matter has used the standard ISO 562.
  - Inherent moisture has used the standard ISO 5068.
  - Total sulphur analysis is carried out to the ASTM 4239 standard.
  - Crucible swell tests are completed using the ISO 501 standard.
  - Calorific value results are obtained using the ISO 1928 standard.
  - Loss on drying data is completed using the ISO 13909-4 standard.
  - Relative Density is calculated using the standard AS 1038.21.1.1.
- CRL completed much of the assay test work for samples collected prior to BRL taking over the projects.
- CRL used the following standards for their test work:
  - Inherent Moisture tests utilised the ISO 117221 standard.
  - Ash tests utilised the ISO 1171 standard.
  - Volatile matter tests utilised the ISO 562 standard.
  - Calorific value tests utilised the ISO 1928 standard.
  - Crucible swelling index testing was carried out using the ISO 501 standard.
- Both SGS and CRL are accredited laboratories.
- BRL has completed a total of 56 composite samples. Composite samples have been tested using the following standards:

Test Work	Standard Followed
Loss on air drying	(ISO 13909-4)
Inherent Moisture	(ASTM D 7582 mod)
Ash	(ASTM D 7582 mod)
Volatile Matter	(ASTM D 7582 mod)
Fixed Carbon	by difference

Criteria	Commentary																								
	<table border="1"> <tr> <td><b>Sulphur</b></td> <td>(ASTM D 4239)</td> </tr> <tr> <td><b>Swelling Index</b></td> <td>(ISO 501)</td> </tr> <tr> <td><b>Calorific Value</b></td> <td>(ISO 1928)</td> </tr> <tr> <td><b>Mean Maximum Reflectance All Vitrinite (RoMax)</b></td> <td>Laboratory Standard</td> </tr> <tr> <td><b>Chlorine in Coal</b></td> <td>(ASTM D4208)</td> </tr> <tr> <td><b>Hardgrove grindability index</b></td> <td>(ISO 5074)</td> </tr> <tr> <td><b>Gieseler plastometer</b></td> <td>(ASTM D 2639)</td> </tr> <tr> <td><b>Audibert arnu dilatometer</b></td> <td>(ISO 349)</td> </tr> <tr> <td><b>Forms of sulphur</b></td> <td>(AS 1038 Part 11)</td> </tr> <tr> <td><b>Ash fusion temperatures</b></td> <td>(ISO 540)</td> </tr> <tr> <td><b>Ash constituents (xrf)</b></td> <td>(ASTM D 4326)</td> </tr> <tr> <td><b>Ultimate Analysis</b></td> <td>(ASTM D3176-09)</td> </tr> </table> <ul style="list-style-type: none"> <li>All analysis was undertaken and reported on an air-dried basis unless stated otherwise.</li> </ul>	<b>Sulphur</b>	(ASTM D 4239)	<b>Swelling Index</b>	(ISO 501)	<b>Calorific Value</b>	(ISO 1928)	<b>Mean Maximum Reflectance All Vitrinite (RoMax)</b>	Laboratory Standard	<b>Chlorine in Coal</b>	(ASTM D4208)	<b>Hardgrove grindability index</b>	(ISO 5074)	<b>Gieseler plastometer</b>	(ASTM D 2639)	<b>Audibert arnu dilatometer</b>	(ISO 349)	<b>Forms of sulphur</b>	(AS 1038 Part 11)	<b>Ash fusion temperatures</b>	(ISO 540)	<b>Ash constituents (xrf)</b>	(ASTM D 4326)	<b>Ultimate Analysis</b>	(ASTM D3176-09)
<b>Sulphur</b>	(ASTM D 4239)																								
<b>Swelling Index</b>	(ISO 501)																								
<b>Calorific Value</b>	(ISO 1928)																								
<b>Mean Maximum Reflectance All Vitrinite (RoMax)</b>	Laboratory Standard																								
<b>Chlorine in Coal</b>	(ASTM D4208)																								
<b>Hardgrove grindability index</b>	(ISO 5074)																								
<b>Gieseler plastometer</b>	(ASTM D 2639)																								
<b>Audibert arnu dilatometer</b>	(ISO 349)																								
<b>Forms of sulphur</b>	(AS 1038 Part 11)																								
<b>Ash fusion temperatures</b>	(ISO 540)																								
<b>Ash constituents (xrf)</b>	(ASTM D 4326)																								
<b>Ultimate Analysis</b>	(ASTM D3176-09)																								
<b>Verification of sampling and assaying</b>	<ul style="list-style-type: none"> <li>Sample assay results have been cross referenced and compared against lithology logs and downhole geophysics data. Results are also inspected by experienced geologists and compared with expected values utilising known coal quality relationships for the Buller coalfield.</li> <li>Anomalous assay results were investigated and, where necessary, the laboratory was contacted and a retest undertaken from sample residue.</li> <li>Where holes were geophysical logged, verification of seam details is made through analysis of the geophysics. Otherwise this is done by physical assessment of the core and/or other drillhole samples. Assessments of coal intersections are undertaken by an internal or contract geologist, and by a senior geologist. Geophysics allows confirmation of the presence (or absence) of coal seams and accurate determination of contacts to coal seams. Density measurements are used to guide sampling and identify high ash bands.</li> <li>12 twinned holes have been drilled at the project with consistent results obtained between drillholes.</li> <li>Laboratory data is imported directly into an acQuire database with no manual data entry at either the SGS laboratory or at BRL.</li> <li>Assay results files are securely stored on a backup server.</li> <li>Once validated, drillhole information is “locked” within the acQuire database to ensure the data is not inadvertently compromised.</li> <li>Localised weathering of coal near fault zones or near outcrops can affect coal assay results. There are a number of instances where this has occurred and only ash data from these samples has been retained for modeling purposes.</li> </ul>																								
<b>Location of data points</b>	<ul style="list-style-type: none"> <li>Modern drillhole positions have been surveyed using Trimble RTK survey equipment.</li> <li>Some historic drill collars have been resurveyed. Some historic collars are not able to be located.</li> <li>Historic mine plans georeferenced by locating and surveying historic survey marks, survey pegs and mine portals drawn on mine plans.</li> <li>New Zealand Trans Mercator 2000 Projection (NZTM) is used by BRL for most of its project areas. NZTM is considered a standard coordinate system for general mapping within New Zealand. Historic data has been converted from various local circuits and map grids using NZ standard cadastral conversions.</li> <li>A LiDAR survey was carried out over the Denniston Plateau in December 2011, with a repeat LiDAR survey flown over Cascade in January 2013. This LiDAR data provided very accurate topographic data used in the model. Contractors’ specifications state that, for the choice of sensor and operating settings used for this project, the LiDAR sensor manufacturer’s specification states 0.15m (1-sigma) horizontal accuracy and 0.1m (1-sigma) as the open ground elevation accuracy.</li> <li>Surveyed elevations of drillhole collars are validated against the LiDAR topography and ortho-corrected aerial photography.</li> </ul>																								

Criteria	Commentary
<b>Data spacing and distribution</b>	<ul style="list-style-type: none"> <li>Data spacing for the Denniston Plateau project areas has been estimated by calculating the diameter required to fill the total area of the project divided by number of drillholes within that area.</li> <li>Escarpment has an average drillhole spacing of 114m.</li> <li>Whareatea West has an average drillhole spacing of 257m.</li> <li>Coalbrookdale has an average drillhole spacing of 198m.</li> <li>Cascade has an average drillhole spacing of 76m.</li> <li>Sullivan has an average drillhole spacing of 78m.</li> <li>Drillhole spacing is not the only measurement used by BRL to establish the degree of resource uncertainty and therefore the resource classification. BRL uses a multivariate approach to resource classification.</li> <li>The current drillhole spacing is deemed sufficient for coal seam correlation purposes.</li> <li>Geostatistics have been applied to the Denniston dataset with positive results being obtained. Variography results have been applied to grade estimation search parameters.</li> <li>The samples database is composited to 0.5m sample length prior to grade estimation. Any samples with composited length of less than 0.1m are not included in the estimation. Compositing starts at the top of seam and small samples are not distributed or merged.</li> </ul>
<b>Orientation of data in relation to geological structure</b>	<ul style="list-style-type: none"> <li>All exploration drilling has been completed at a vertical orientation. Deviation data was acquired by BRL during modern campaigns and showed little to no deviation in those holes. Holes without deviation plots are assumed to be vertical.</li> <li>Any deviation from vertical is not expected to have a material effect on geological understanding as the average drillhole depth in the dataset is 65m with the deepest coal intersection of 131m (at 60m depth a 1° deviation would produce a horizontal deviation at the end of hole of 1m with negligible vertical exaggeration).</li> <li>The majority of the deposit presents a shallow seam dip between 5° – 15°.</li> <li>Vertical drilling is considered to be the most suitable drilling method of assessing the coal resource on the Denniston Plateau.</li> </ul>
<b>Sample security</b>	<ul style="list-style-type: none"> <li>Stringent sample preparation and handling procedures have been followed by BRL. Ply samples are collected and recorded from drill core, bagged and placed within a locked chiller prior to being dispatched for analysis.</li> <li>It is not considered likely that individual coal samples face a risk of theft or sabotage as coal is a bulk commodity with little value for small volumes of coal from drill core.</li> </ul>
<b>Audits or reviews</b>	<ul style="list-style-type: none"> <li>BRL has reviewed the geological data available and considers the data used to produce the resource model is reliable and suitable for the purposes of generating a reliable resource estimate.</li> <li>Results of a duplicate sample testing program comparing SGS and CRL results for ply assays have shown a strong correlation with no laboratory bias.</li> <li>Senior geologists undertake monthly audits of the sample collection and analysis.</li> </ul>

## Section 2 Reporting of Exploration Results

Criteria	Commentary															
<b>Mineral tenement and land tenure status</b>	<ul style="list-style-type: none"> <li>BCL owns and operates a number of coal exploration and mining permits on the Denniston Plateau, northwest of Westport, New Zealand.</li> <li>BRL has 100% ownership in the following coal tenements on the Denniston Plateau: <table border="1" data-bbox="379 1832 1142 2089"> <thead> <tr> <th>Tenement</th> <th>Operation</th> <th>Expiry</th> </tr> </thead> <tbody> <tr> <td>Mining Permit 51279</td> <td>Escarpment</td> <td>23/06/2022</td> </tr> <tr> <td>Mining Permit 41456</td> <td>Coalbrookdale</td> <td>14/05/2017</td> </tr> <tr> <td>Mining Permit 41332</td> <td>Coalbrookdale</td> <td>14/05/2015</td> </tr> <tr> <td>Mining Permit 41274</td> <td>Coalbrookdale</td> <td>29/05/2035</td> </tr> </tbody> </table> </li> </ul>	Tenement	Operation	Expiry	Mining Permit 51279	Escarpment	23/06/2022	Mining Permit 41456	Coalbrookdale	14/05/2017	Mining Permit 41332	Coalbrookdale	14/05/2015	Mining Permit 41274	Coalbrookdale	29/05/2035
Tenement	Operation	Expiry														
Mining Permit 51279	Escarpment	23/06/2022														
Mining Permit 41456	Coalbrookdale	14/05/2017														
Mining Permit 41332	Coalbrookdale	14/05/2015														
Mining Permit 41274	Coalbrookdale	29/05/2035														

**Criteria**

**Commentary**

<b>Mining Permit 41455</b>	Cascade	14/05/2017
<b>Exploration Permit 40591</b>	Whareatea West	19/12/2015
<b>Exploration Permit 40628</b>	Buller	10/01/2015
<b>Coal Mining Licence 37161</b>	Sullivan	31/03/2027

- BRL has submitted an application for a subsequent Mining Permit to replace EP40591 and it is reasonably expected that this permit application will be granted.
- An appraisal extension application (AE) for EP40628 and an extension of duration for MP41332 have been submitted to NZP&M and the applications are currently being processed.
- A new Exploration Permit application is currently being processed by NZP&M (application 60520). This permit application cover areas that were formerly held under EP 40628.
- A royalty payment to the Crown is payable on all coal mined from the Plateau at a rate of \$2 per tonne.
- The acquisition of the Coalbrookdale permits includes a life of mine royalty based on a fixed percentage of FOB revenue.
- The majority of the land on the Denniston Plateau is Crown land administered by the Department of Conservation as Stewardship Areas (Part V Section 25 Conservation Act 1987). These areas are managed to protect the natural and historic values of the region.
- An access arrangement for the Escarpment project was granted by the Minister of Conservation in May 2013.
- Coal Mining Licences confer access rights and land use consents to the Licence Holder.
- Bathurst was granted resource consents for the Escarpment project by an independent panel of commissioners representing the local councils in August 2011. These resource consents were then the subject of a number of appeals. The final consents were granted in October 2013.
- Production from Escarpment began in 2014 and the mine was placed in care and maintenance in May 2016.
- The intent of the company is to continue to compete for other markets for this high quality coal and the company is continuing to develop plans for the export operation.

**Exploration done by other parties**

- Historic geological investigations and reports for Denniston exist, covering much of the past 125 years.
- The Historic drilling database includes the following drillholes compiled from the historical data records.

**Table 1 Table listing historic drilling dataset.**

Years	Agency	Range of Collar ID	# Holes	Drilling Method	# Holes in structure model	# holes in quality model	# holes with Geophysics Available
<b>Multiple</b>	Various	200 - 254	49	Various	36	1	0
<b>1948 – 1950</b>	State Coal Mines	525 – 569A	47	Rotary wash drill	44	32	1
<b>1950 – 1951</b>	State Coal Mines	750 - 895	7	Rotary wash drill	5	3	0
<b>1957 – 1961</b>	State Coal Mines	916 - 984	20	Rotary wash drill	16	2	0
<b>1975 – 1978</b>	State Coal Mines	1070 - 1142	23	NQ triple tube core/open hole	20	12	0
<b>1984 – 1986</b>	Applied Geological Associates (AGA)	1270 - 1495	21	Open hole CSR and triple tube core	16	8	14
<b>1997</b>	Solid Energy NZ Ltd	1509 - 1512	4	PQ wash drill and triple tube core	2	2	4
<b>2005</b>	Eastern Corp	CC01 – CC07	7	PQ wash drill and triple tube core	2	1	1
<b>2005 – 2006</b>	Eastern Corp/ Restpine	WW01 – WW11	11	PQ wash drill and triple tube core	11	9	8
<b>2007</b>	L&M Coal	DEN01 – DEN05	5	HQ wash drill and triple tube core	5	4	4
<b>2008</b>	L&M Coal	DEN01A – DEN09	8	PQ wash drill and triple tube core	5	4	4
<b>2009 – 2010</b>	Eastern Corp	CC08 - CC12	5	RC	3	2	0
<b>2009 – 2010</b>	L&M Coal	DEN10 – DEN18	11	PQ wash drill and triple tube core	11	5	6
<b>2010</b>	L&M Coal	Various	3	Trenches	3	3	0

- All historic data has been checked and validated against original source documents by L&M, Golder Associates (NZ) Ltd and again by BRL staff post acquisition of the project. Where data was deemed unreliable it was removed from the relevant resource model dataset.
- Modern drilling completed by SENZ in the Sullivan Licence has been extensively validated before

Criteria	Commentary																																																																								
	incorporation into the Resource model. SENZ used systems and processed in data capture that are very similar to those employed by BRL.																																																																								
<b>Geology</b>	<ul style="list-style-type: none"> <li>The project is located in the Buller coalfield, New Zealand.</li> <li>The Denniston Plateau is a north west dipping plateau bounded to the west by the Papahaua Overfold/Kongahu Fault zone, and to the east by the Mt William Fault.</li> <li>The defined resource is contained within the Eocene aged Brunner Coal Measures. The coal measures consist of a fluviatile sequence of fine to very coarse sandstones, siltstone, mudstone and coal seams. The deposit generally has a single extensive seam with some localised splitting of the seam. The coal thickness can be up to 12m but generally averages 4-5m vertical thickness.</li> <li>The dip of the plateau reflects the dip of the coal bearing sediments with localised exposures of basement units at structural highs and within incised gullies.</li> <li>Little to no Quaternary deposits or soils overlay the Brunner Coal Measures with overburden generally around 40-50m.</li> <li>A strong trend in coal rank exists across the deposit with coal rank increasing from east to west.</li> </ul>																																																																								
<b>Drillhole Information</b>	<p><b>Table 2 Table listing modern drilling dataset.</b></p> <table border="1"> <thead> <tr> <th>Years</th> <th>Agency</th> <th>Range of Collar ID</th> <th># Holes</th> <th>Drilling Method</th> <th># Holes in structure model</th> <th># Holes in quality model</th> <th># holes with Geophysics Available</th> </tr> </thead> <tbody> <tr> <td>2010 - 2012</td> <td>Rochfort Coal</td> <td>WW12 - WW25</td> <td>14</td> <td>PQ OH and Triple tube Core</td> <td>14</td> <td>13</td> <td>12</td> </tr> <tr> <td>2011 - 2016</td> <td>Buller Coal</td> <td>DEN19 - DEN263</td> <td>244</td> <td>PQ OH and Triple tube Core</td> <td>215</td> <td>206</td> <td>156</td> </tr> <tr> <td>2011 - 2013</td> <td>Cascade Coal</td> <td>CC13 - CC46</td> <td>32</td> <td>HQ/PQ OH and Triple tube Core</td> <td>21</td> <td>19</td> <td>25</td> </tr> <tr> <td>2012</td> <td>Cascade Coal</td> <td>CCT01 - CCT02</td> <td>2</td> <td>Trenches</td> <td>2</td> <td>2</td> <td>0</td> </tr> <tr> <td>2012 - 2016</td> <td>Buller Coal</td> <td>DENT01 – DENT29</td> <td>29</td> <td>Trenches</td> <td>28</td> <td>28</td> <td>0</td> </tr> <tr> <td>2012-2016</td> <td>Cascade Coal</td> <td>CCB16 – CCB60</td> <td>59</td> <td>Logged Production Blast holes</td> <td>50</td> <td>0</td> <td>2</td> </tr> <tr> <td>2011</td> <td>SENZI</td> <td>6000 series holes</td> <td>46</td> <td>PQ OH and Triple tube Core</td> <td>46</td> <td>46</td> <td>46</td> </tr> <tr> <td>2013-2016</td> <td>Buller Coal</td> <td>DENB001 – DENB184</td> <td>184</td> <td>Logged Production Blast holes</td> <td>81</td> <td>3</td> <td>0</td> </tr> </tbody> </table> <ul style="list-style-type: none"> <li>Exploration drilling results have not been reported in detail.</li> <li>The exclusion of this information from this report is considered not to be material to the understanding of the report.</li> </ul>	Years	Agency	Range of Collar ID	# Holes	Drilling Method	# Holes in structure model	# Holes in quality model	# holes with Geophysics Available	2010 - 2012	Rochfort Coal	WW12 - WW25	14	PQ OH and Triple tube Core	14	13	12	2011 - 2016	Buller Coal	DEN19 - DEN263	244	PQ OH and Triple tube Core	215	206	156	2011 - 2013	Cascade Coal	CC13 - CC46	32	HQ/PQ OH and Triple tube Core	21	19	25	2012	Cascade Coal	CCT01 - CCT02	2	Trenches	2	2	0	2012 - 2016	Buller Coal	DENT01 – DENT29	29	Trenches	28	28	0	2012-2016	Cascade Coal	CCB16 – CCB60	59	Logged Production Blast holes	50	0	2	2011	SENZI	6000 series holes	46	PQ OH and Triple tube Core	46	46	46	2013-2016	Buller Coal	DENB001 – DENB184	184	Logged Production Blast holes	81	3	0
Years	Agency	Range of Collar ID	# Holes	Drilling Method	# Holes in structure model	# Holes in quality model	# holes with Geophysics Available																																																																		
2010 - 2012	Rochfort Coal	WW12 - WW25	14	PQ OH and Triple tube Core	14	13	12																																																																		
2011 - 2016	Buller Coal	DEN19 - DEN263	244	PQ OH and Triple tube Core	215	206	156																																																																		
2011 - 2013	Cascade Coal	CC13 - CC46	32	HQ/PQ OH and Triple tube Core	21	19	25																																																																		
2012	Cascade Coal	CCT01 - CCT02	2	Trenches	2	2	0																																																																		
2012 - 2016	Buller Coal	DENT01 – DENT29	29	Trenches	28	28	0																																																																		
2012-2016	Cascade Coal	CCB16 – CCB60	59	Logged Production Blast holes	50	0	2																																																																		
2011	SENZI	6000 series holes	46	PQ OH and Triple tube Core	46	46	46																																																																		
2013-2016	Buller Coal	DENB001 – DENB184	184	Logged Production Blast holes	81	3	0																																																																		
<b>Data aggregation methods</b>	<ul style="list-style-type: none"> <li>Exploration drilling results have not been reported in detail.</li> <li>The maximum ash cut off for the building the Denniston structure model was set at 50%; however, some thin assay samples where ash is greater than 50% are included in the coal quality dataset due to the structure model including that interval within a coal seam.</li> <li>The Sullivan resource has been modelled applying the Stockton resource modelling procedure. An ash cut-off of 25% was used to build the structure model for Sullivan.</li> </ul>																																																																								
<b>Relationship between mineralisation widths and intercept lengths</b>	<ul style="list-style-type: none"> <li>All exploration drillholes have been drilled vertically and the coal seam is generally gently dipping. Therefore, seam intercept thicknesses are representative of the true seam thickness.</li> <li>Dip metre and deviation plots are available for some holes. For those without this data it is assumed that a vertical orientation is achieved and, as most coal intersections are less than 100m in depth, any deviation from vertical would produce only a very minor effect to the reported depth to coal and coal thickness.</li> </ul>																																																																								
<b>Diagrams</b>	<ul style="list-style-type: none"> <li>The Appendix includes a number of plans that display the deposit geographically.</li> </ul>																																																																								
<b>Balanced reporting</b>	<ul style="list-style-type: none"> <li>Exploration drilling results have not been reported. This has avoided any issues with unbalanced or biased reporting.</li> <li>The Competent Person does not believe that the exclusion of this comprehensive exploration data within this report detracts from the understanding of this report or the level of information provided.</li> </ul>																																																																								
<b>Other substantive</b>	<ul style="list-style-type: none"> <li>Three PQ holes have been drilled in the south eastern corner of the Escarpment permit. These holes will be incorporated into the next model update.</li> <li>Representative bulk samples have been collected and tested for:</li> </ul>																																																																								

Criteria	Commentary
<b>exploration data</b>	<ul style="list-style-type: none"> <li>○ Coking behavior</li> <li>○ Material handling properties</li> <li>○ Washability analysis</li> <li>● BRL has completed and compiled a total of 56 coal quality composite samples over the Denniston Plateau.</li> <li>● A number of bulk marketing samples have been completed.</li> <li>● BRL has tested 954 overburden samples for overburden classification for acid forming and neutralising potential.</li> <li>● The first three large diameter drillholes in a washability program for the western margin of Whareatea West have been completed and washability test work is currently being finalised.</li> </ul>
<b>Further work</b>	<ul style="list-style-type: none"> <li>● An updated Denniston resource model is being planned for 2022.</li> <li>● Washability testing is planned to progress recent large diameter holes completed in Whareatea West.</li> </ul>

### Section 3 Estimation and Reporting of Mineral Resources

Criteria	Commentary
<b>Database integrity</b>	<ul style="list-style-type: none"> <li>● All historic and legacy datasets have been thoroughly checked and validated against original logs and results tables.</li> <li>● BRL utilises an acQure database to store and maintain its geological exploration dataset.</li> <li>● The acQAcquire database places explicit controls on certain data fields as they are entered or imported into the database such as overlapping intervals, coincident samples, prohibited sample values, standardised look-up tables for logging codes etc.</li> <li>● Manual data entry of assay results is not required as results are imported directly.</li> <li>● Drillhole and mapping data is exported directly into Vulcan from acQure.</li> </ul>
<b>Site visits</b>	<ul style="list-style-type: none"> <li>● Mark Lionnet (the Competent Person) has worked for the past 14 years in the Buller coalfield.</li> <li>● Mr. Lionnet is familiar with the local and regional geology and style of deposit within the South Buller region.</li> </ul>
<b>Geological interpretation</b>	<ul style="list-style-type: none"> <li>● BRL has confidence in the geological models and the interpretation of the available data. Confidence varies for different areas and this is reflected by the resource classification.</li> <li>● BRL uses a multivariate approach to resource classification which takes into account a number of variables.</li> <li>● BRL considers the amount of geological data sufficient to estimate the resource.</li> <li>● Uncertainty surrounds the historic mine workings, both in the quality and quantity of coal extracted and surveying and positioning of underground workings. This is reflected in the resource classification</li> <li>● BRL has used a total of 16 synthetic holes in the structure model primarily to constrain seam thicknesses around the edges of coal pods that have been worked by historical underground mines.</li> <li>● A Quaternary gravel deposit truncates the coal measures as an unconformity within the Cascade valley. This unconformity surface has been incorporated into the resource model. Some uncertainty surrounds the surface and therefore the coal resource within the area of influence. The Quaternary gravel deposit only covers an area of ~2.5Ha or &lt; 0.1% of the total resource area, much of which has already been extracted at the Cascade opencast mine.</li> <li>● Effect of alternate interpretations is minimal when taken as a portion of total resources.</li> <li>● A small number of digital interpretation strings are used to constrain the coal structure grids within the model. These strings are primarily located near fault boundaries.</li> </ul>
<b>Dimensions</b>	<ul style="list-style-type: none"> <li>● The main coal seam varies in thickness from less than 1m thick up to 14m thickness locally.</li> <li>● Depth of cover varies from 0m at outcrop to over 150m at the eastern margin of the Mt William Fault. Inferred and Indicated resources include coal up to 130m below surface, while the measured resource includes coal up to 75m below surface.</li> <li>● The deposit roughly covers a 6.5km by 4.5km area. The model is bounded by the Escarpment</li> </ul>




Criteria	Commentary
<b>Estimation and modeling techniques</b>	<p data-bbox="357 174 1458 201">Fault to the south, the Waimangaroa Gorge to the north, and the Mt William Fault to the east.</p> <ul data-bbox="309 212 1490 2103" style="list-style-type: none"> <li data-bbox="309 212 1490 275">• All available and reliable exploration data has been used to create geological block models which has been used for resource estimation and classification.</li> <li data-bbox="309 286 1490 313">• All exploration drilling data is stored in acQuire and exported into a Vulcan drillhole database.</li> <li data-bbox="309 324 1490 351">• Mapping data is stored in acQuire and exported into Vulcan.</li> <li data-bbox="309 362 1490 389">• A horizon definition has been developed and is used in the stratigraphic modeling process.</li> <li data-bbox="309 400 1490 463">• The model is subdivided into four distinct domains, each separated by large faults that dissect the project area. Each area is modelled for structure and grade separately.</li> <li data-bbox="309 474 1490 568">• Vulcan is currently used to build the structure models. Grid spacing is 10m x 10m. This spacing was selected to be 1/5 of the minimum average point of observation spacing within a domain area.</li> <li data-bbox="309 580 1490 674">• Vulcan's stacking method was used to produce the structure model. This method triangulates a reference surface (coal roof) and then stacks the remaining horizons by adding structure thickness using inverse distance.</li> <li data-bbox="309 685 1490 712">• The maximum triangle length for the reference surface was set to 1,400m.</li> <li data-bbox="309 723 1490 786">• Based on geostatistics for full seam thickness the maximum search radius for inverse distance is 1500m. The inverse distance power is set to 2, with maximum samples set to 8.</li> <li data-bbox="309 797 1490 860">• Structure grids are checked and validated before being used to construct the resource block model.</li> <li data-bbox="309 871 1490 934">• Vulcan is used to build the block models and to estimate coal qualities. The process is automated using a Lava script.</li> <li data-bbox="309 945 1490 1075">• The coal structure surfaces for each domain, along with LiDAR topography surface, Quaternary unconformity surface, and other mining related surfaces for Cascade and Escarpment are used to build the block model. The block dimensions are constructed at 10m x 10m. Vertical thickness for coal blocks is 0.5m, whilst overburden blocks are set to 5m maximum thickness.</li> <li data-bbox="309 1086 1490 1149">• Overburden characterisation for AMD purposes is modelled in a separate estimation step utilising the same stratigraphic structure grids.</li> <li data-bbox="309 1160 1490 1290">• Grade estimation is performed utilising Vulcan's Tetra Projection Model. The main seam, and two discontinuous rider seams in each domain is estimated for ash, sulphur, air-dried moisture and in situ moisture. Volatile matter, crucible swell index, and calorific value are estimated on the ash pass.</li> <li data-bbox="309 1301 1490 1395">• Geostatistics have been performed on the coal quality dataset to examine and define the estimation search parameters for each variable. The maximum search radius is set to the maximum range of influence found in the semi-variogram for each variable.</li> <li data-bbox="309 1406 1490 1433">• Grade estimation is computed using an inverse distance squared function.</li> <li data-bbox="309 1444 1490 1538">• Various methods have been used to check the validity of the block estimation. This includes manual inspection of the model, QQ plots of the model qualities vs coal quality database and other comparison tools.</li> <li data-bbox="309 1550 1490 1680">• Some mining reconciliation has been completed on the resource model to examine model accuracy within the Cascade and Escarpment mining areas. To date, the results are within the bounds of expected variability based on resource classification used and mining rates. No other bulk reconciliation has been completed.</li> <li data-bbox="309 1691 1490 1928">• Resource tonnages within the model have been discounted where the resource falls within an area of historic underground workings. The primary mining method utilised historically on the Denniston Plateau is bord and pillar mining. Some extraction used a water based coal extraction (hydro mining) when pillaring has also taken place. Historic extraction rates are estimated using mining extraction reports, interviews with miners, underground mine plans and tonnage reports. These factors were used in the resource classification confidence and for depleting the resource tonnages.</li> <li data-bbox="309 1939 1490 2103">• Behre Dolbear Australia Pty Limited (BDA) notes that Bathurst has adopted a procedure over old workings of discounting the estimated resources to account for the depletion of coal from underground mining and due to possible structures not identified by drilling. Based on reconciliations from mining to date at Takitimu and Cascade, this approach has been established as a reasonably reliable, if somewhat conservative, method of estimating resources where there</li> </ul>

Criteria	Commentary
	<p>are clearly areas of depletion. BDA accepts that this appears to be a reasonable approach but cautions there will be areas where the resources may differ from the estimates.</p>
<b>Moisture</b>	<ul style="list-style-type: none"> <li>• Resource tonnages are reported using natural moisture, calculated from air-dried relative density, air-dried moisture and in situ moisture using the Preston Sanders equation.</li> <li>• Block air-dried density is calculated from the block air-dried ash value using the ash-density relationship derived from the project dataset.</li> <li>• A fraction (&lt; 0.1%) of blocks were not estimated for moisture and have been assigned average values based on the permit in which the block is located.</li> </ul>
<b>Cut-off parameters</b>	<ul style="list-style-type: none"> <li>• Structure grids have been developed based on a 50% ash cut-off (except for Sullivan that applied a 25% ash cut-off). Some higher ash samples are retained within the coal quality dataset to allow simplification of the seam model, especially in Whareatea West where higher ash partings become more abundant.</li> <li>• No lower cut-off has been applied. There is an inherent minimum limit to ash samples in modern results due to a laboratory detection limit of 0.17%. Ten modern ply samples fall below this detection limit, while a further 62 historic ply samples have ash values at or below this limit.</li> <li>• Coal resources are reported down to a seam thickness of 0.5m (one block).</li> <li>• Ash cut-offs applied for resource reporting are: <ul style="list-style-type: none"> <li>○ 35% for Whareatea West</li> <li>○ 25% for Sullivan</li> <li>○ 25% for Escarpment</li> <li>○ 25% for Coalbrookdale</li> </ul> </li> </ul>
<b>Mining factors or assumptions</b>	<ul style="list-style-type: none"> <li>• Minimum seam thickness is set at 0.5m or one block in height.</li> <li>• No other mining factors such as strip ratios, mining losses and dilutions have been applied when developing the resource models.</li> <li>• The development of the Escarpment, Whareatea West and Sullivan Coal Resources assumes mining methods consistent with similar or other BRL open pit mining operations. The preferred mining method is conventional truck and shovel open pit mining at an appropriate bench height.</li> <li>• The Coalbrookdale and remaining Cascade resource is considered to be an underground coal resource.</li> </ul>
<b>Metallurgical factors or assumptions</b>	<ul style="list-style-type: none"> <li>• BRL's current understanding of coal washability and yields on the Denniston Plateau has driven the ash cut-offs applied for resource reporting within the project area.</li> <li>• All in situ coal extracted from the Whareatea West resource will require beneficiation.</li> <li>• Contaminated and diluted coal from Sullivan, Deep Creek and Escarpment resources will require beneficiation.</li> <li>• All coal requiring washing is assumed to be processed at the existing Stockton Coal Handling and Processing Plant (CHPP) located approximately 20 km to the northeast.</li> <li>• Processes used at the Stockton CHPP apply standard coal industry practice using proven technologies.</li> </ul>
<b>Environmental factors or assumptions</b>	<ul style="list-style-type: none"> <li>• Open pit mining and coal transport will be conducted amid environmentally and culturally sensitive areas. The proposed mining sites are a likely habitat for endangered snail and kiwi species. High rainfall rates, acid-generating overburden and historical acid mine drainage are all concerns that have been addressed.</li> <li>• Mining within the Escarpment Mining permit has all necessary approvals in place. Similar environmental values occur within the remainder of the Denniston Plateau. It is assumed that any constraints imposed on BRL in terms of environmental protection will not be prohibitive to economic resource extraction.</li> <li>• No other environmental assumptions have been applied in developing the resource model.</li> </ul>
<b>Bulk density</b>	<ul style="list-style-type: none"> <li>• A total of 580 relative density (air-dried) sample results are available for the Denniston project area.</li> <li>• The samples are distributed throughout the project area and the sample set covers a complete range of ash values from &lt;0.17% to 93.5%.</li> <li>• From this dataset an ash-density curve was generated with a co-efficient of determination of <math>R^2=0.9869</math>.</li> </ul>

Criteria	Commentary
	<ul style="list-style-type: none"> <li>• After grade estimation, density was then calculated using the block ash value and the derived density equation.</li> <li>• An in situ density value was then computed using the Preston Saunders method.</li> <li>• In situ moisture determinations have been collected from drill core and from bulk samples.</li> </ul>
<b>Classification</b>	<ul style="list-style-type: none"> <li>• BRL classifies resources using a multivariate approach.</li> <li>• Coal resources have been classified on the basis of geological and grade continuity balanced by relative uncertainties surrounding historic underground extraction and proximity to faults.</li> <li>• Closely spaced drilling with valid samples increases the confidence in resource assessments.</li> <li>• The confidence is reduced by: <ul style="list-style-type: none"> <li>○ A block being within an underground worked area due to extraction rate uncertainty.</li> <li>○ A block being within 20m of an underground worked area due to uncertainty with historic survey of the workings and georeferencing of mine plans.</li> <li>○ A block is in an area of steep structure dip, usually in areas of large faults.</li> <li>○ A block lies within an area of thin or splitting seam resulting in uncertainty of geological continuity.</li> </ul> </li> <li>• If an area is within an area worked by historic underground mines the resource is considered as Inferred as a minimum.</li> </ul>
<b>Audits or reviews</b>	<ul style="list-style-type: none"> <li>• A comprehensive internal review of the resource model has been carried out by BRL in 2020/2021.</li> </ul>
<b>Discussion of relative accuracy/confidence</b>	<ul style="list-style-type: none"> <li>• Statistical comparisons between the resource block model and the coal quality data set have been carried out and are within expected ranges. Techniques utilised include QQ plots and probability plots.</li> <li>• Cascade mine utilised the Denniston resource model for mine planning and scheduling. Production reconciliation for the last 12 months of production showed that ROM coal production was more than 10% in excess of that modelled.</li> </ul>

Appendix A:

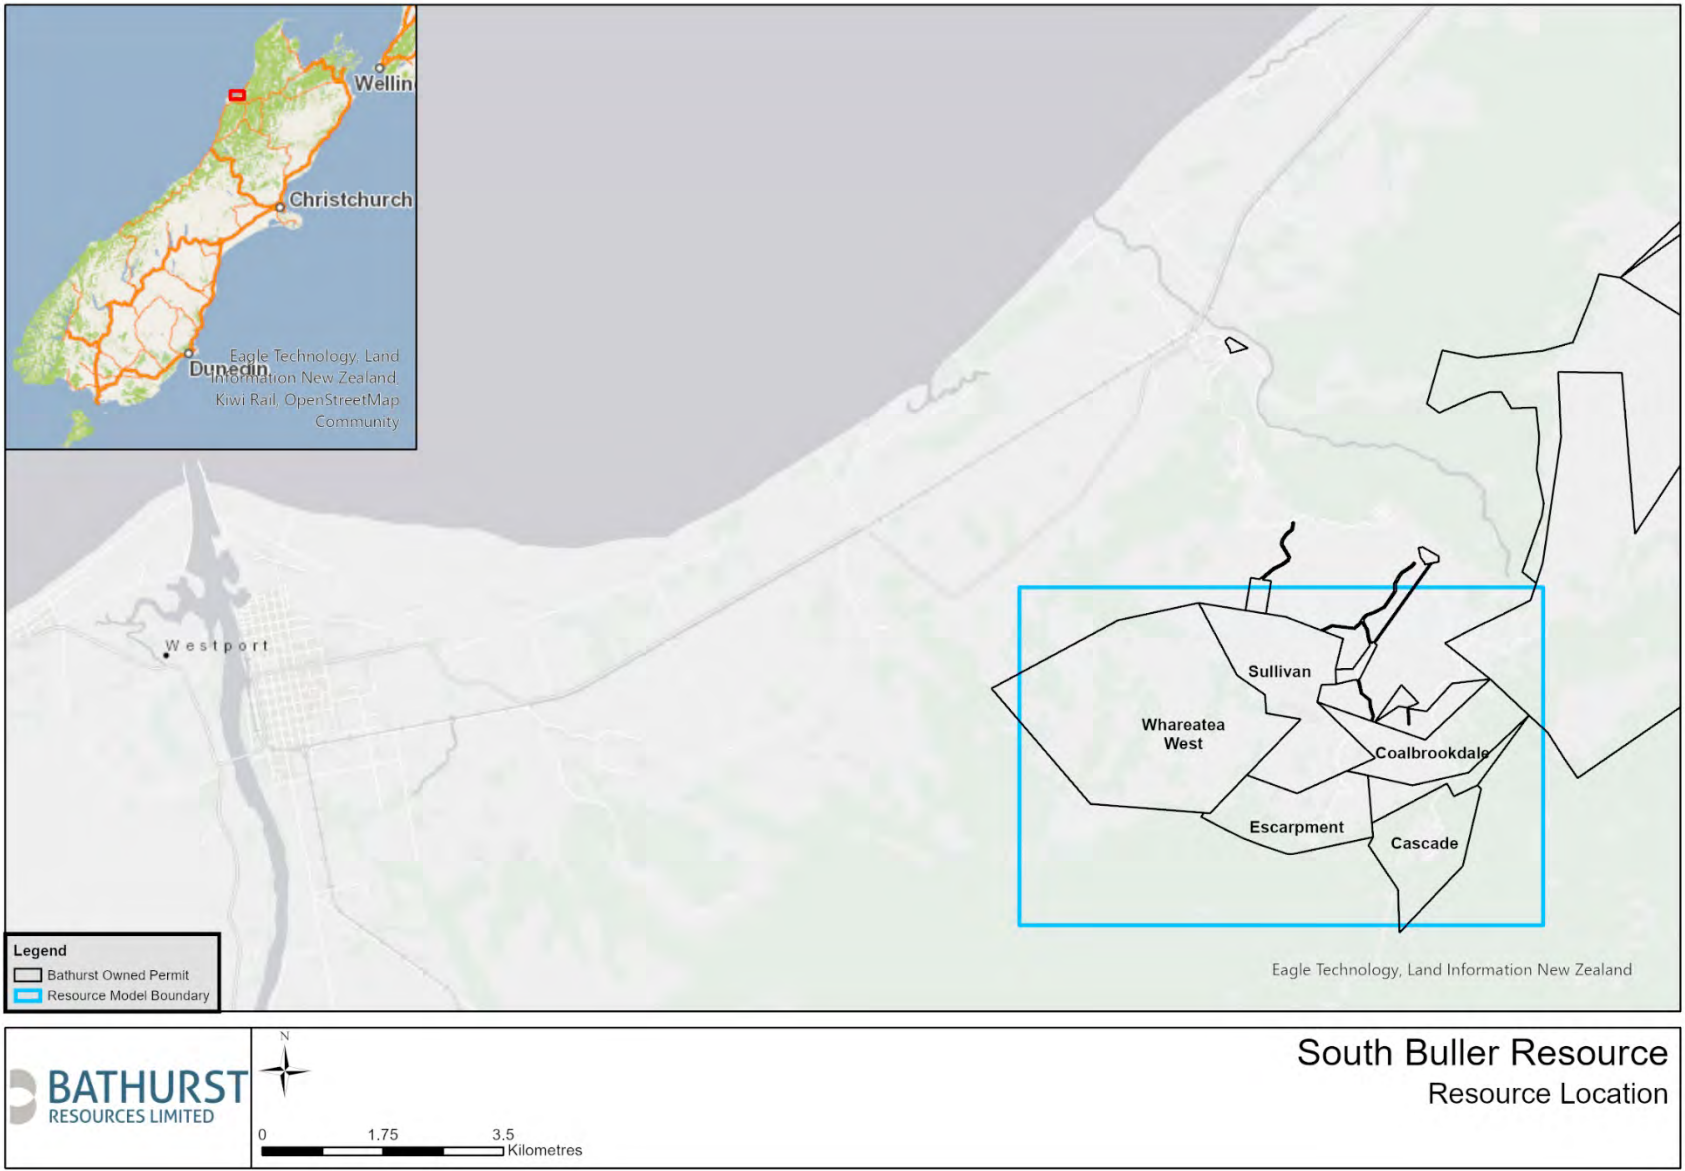

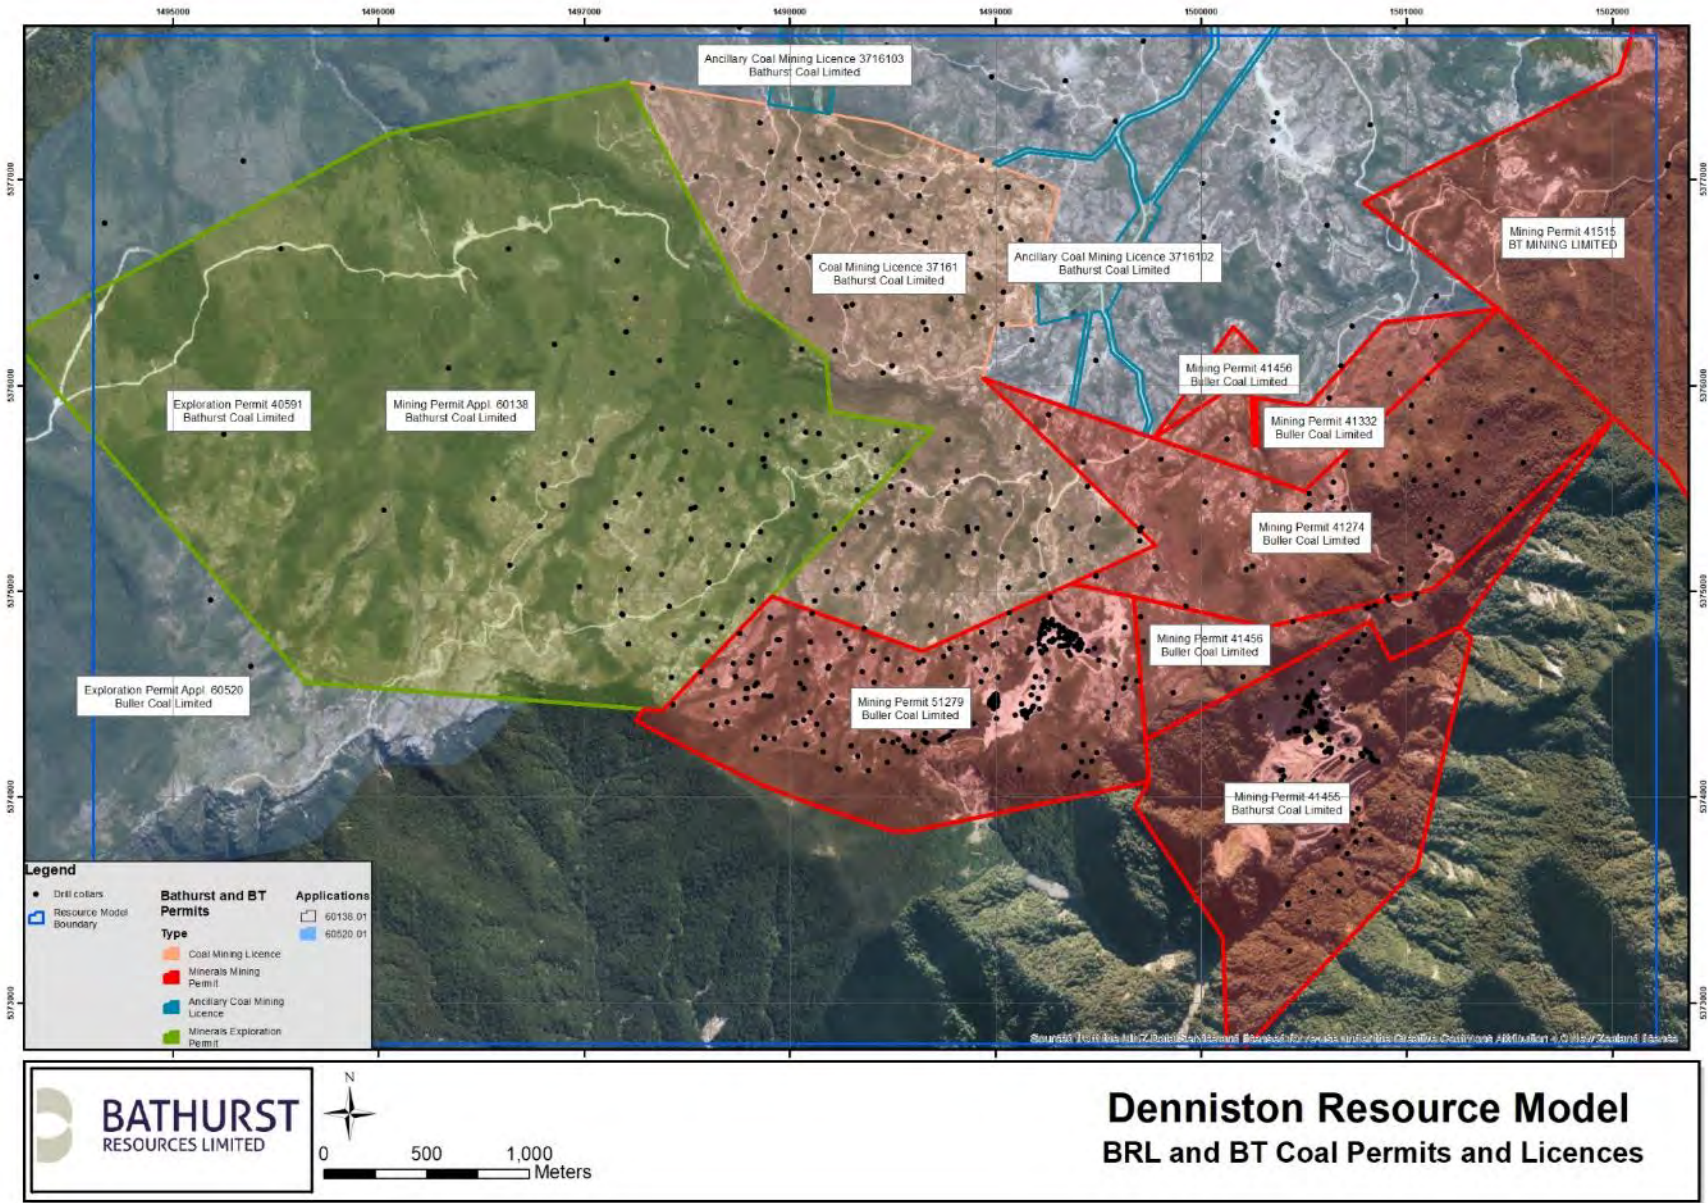


Figure 3: Denniston Plateau and the coal permits and licences within the resource model area

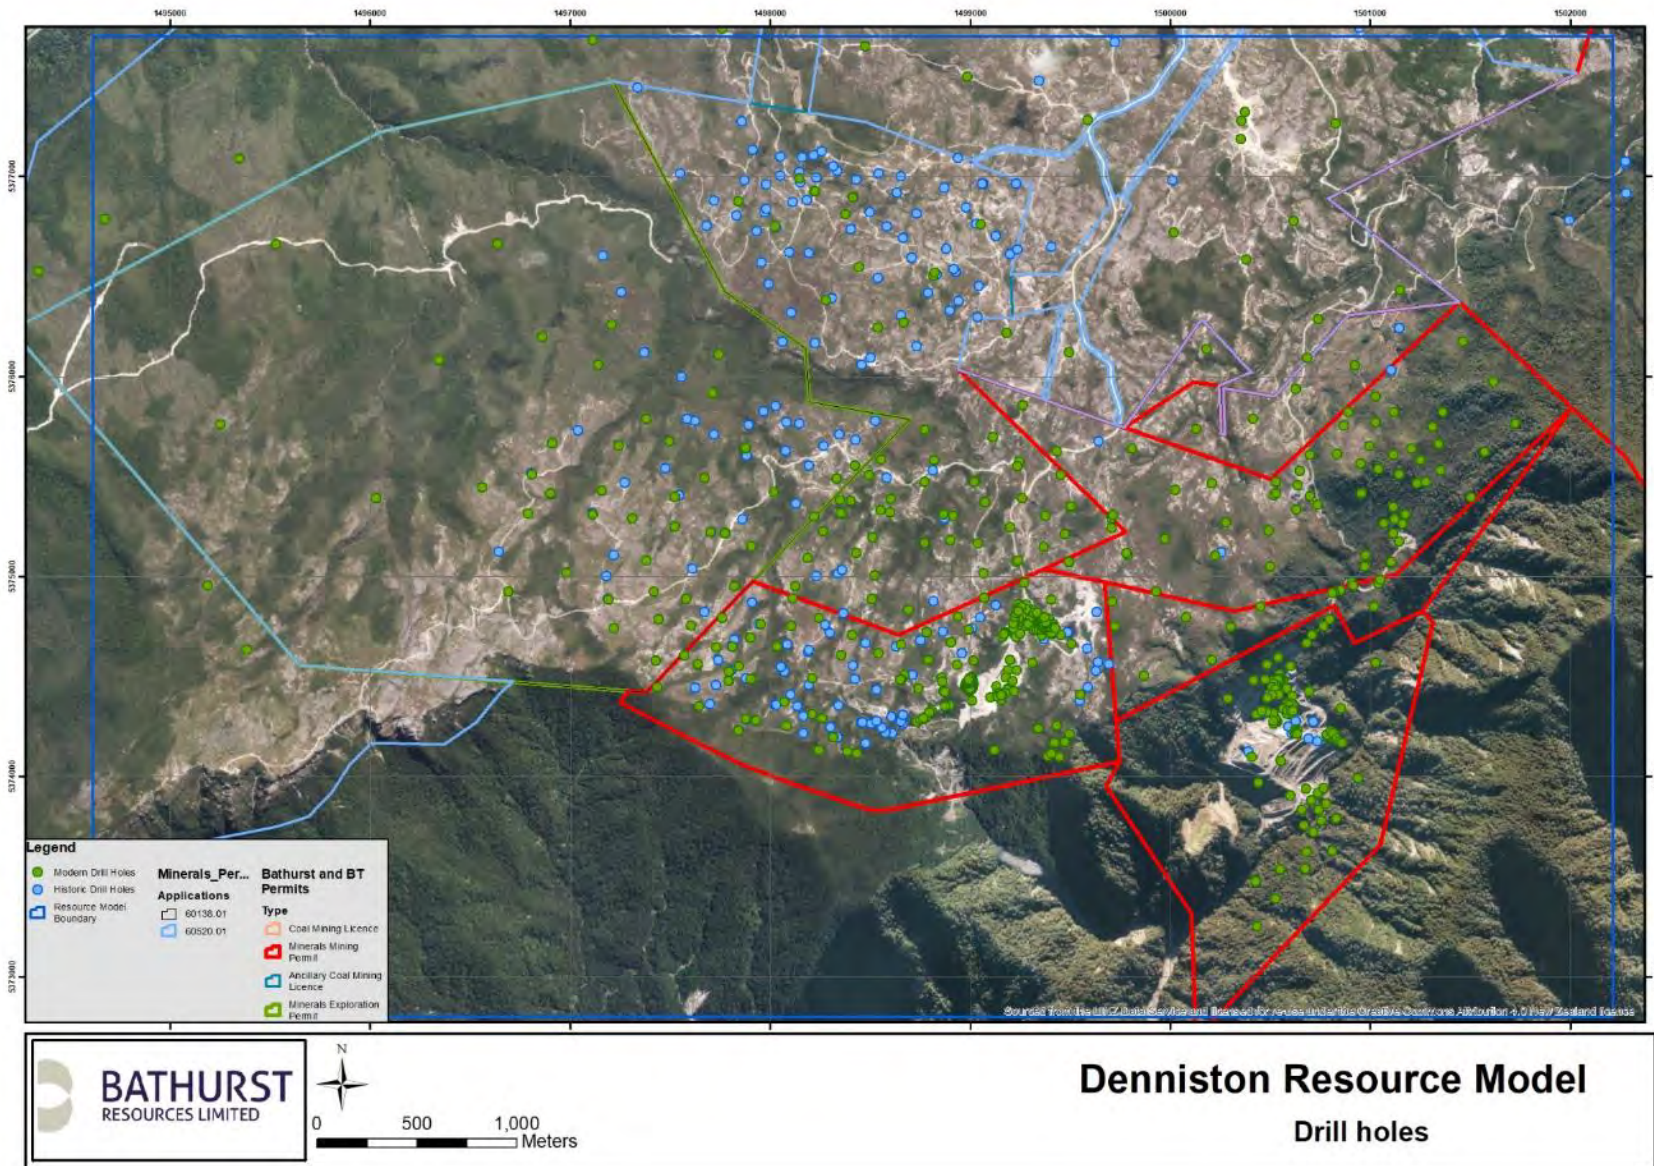


Figure 4: Plan showing the drilling dataset used to produce the resource model

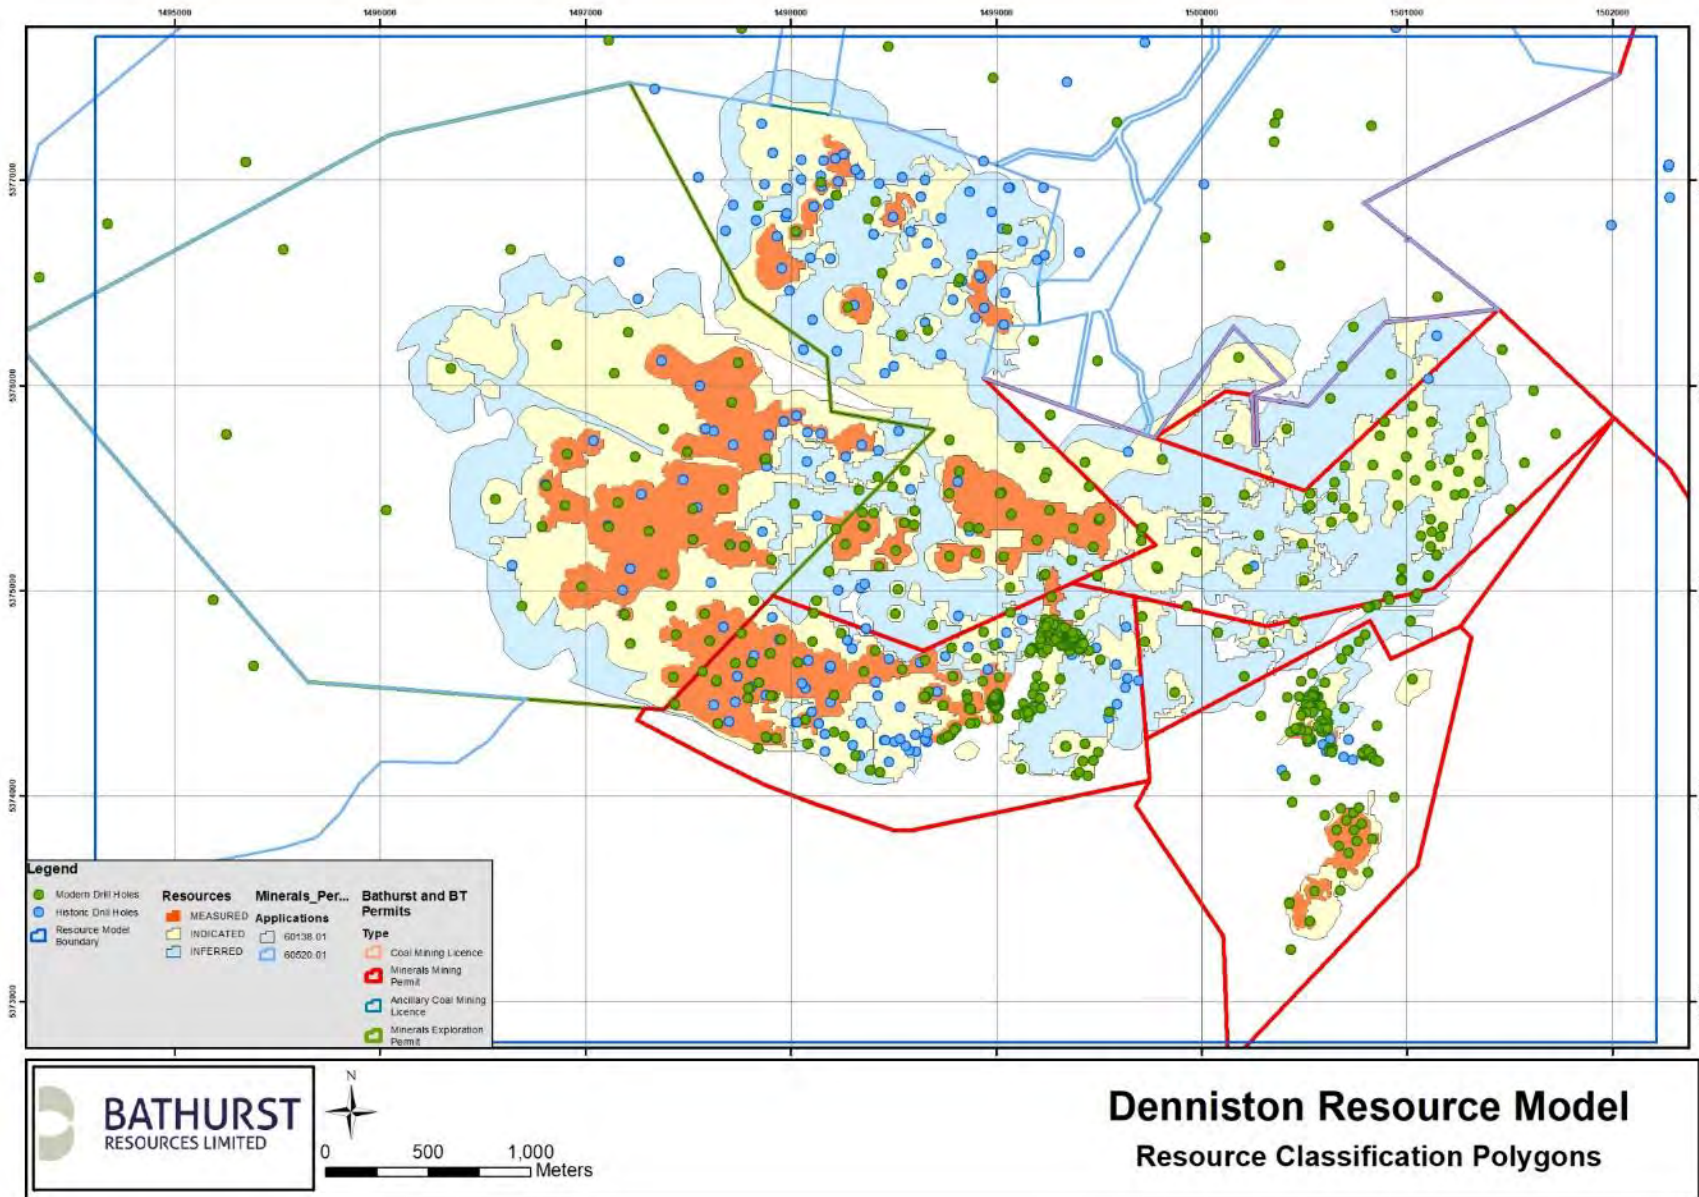


Figure 5: Plan showing the current resource classification polygons

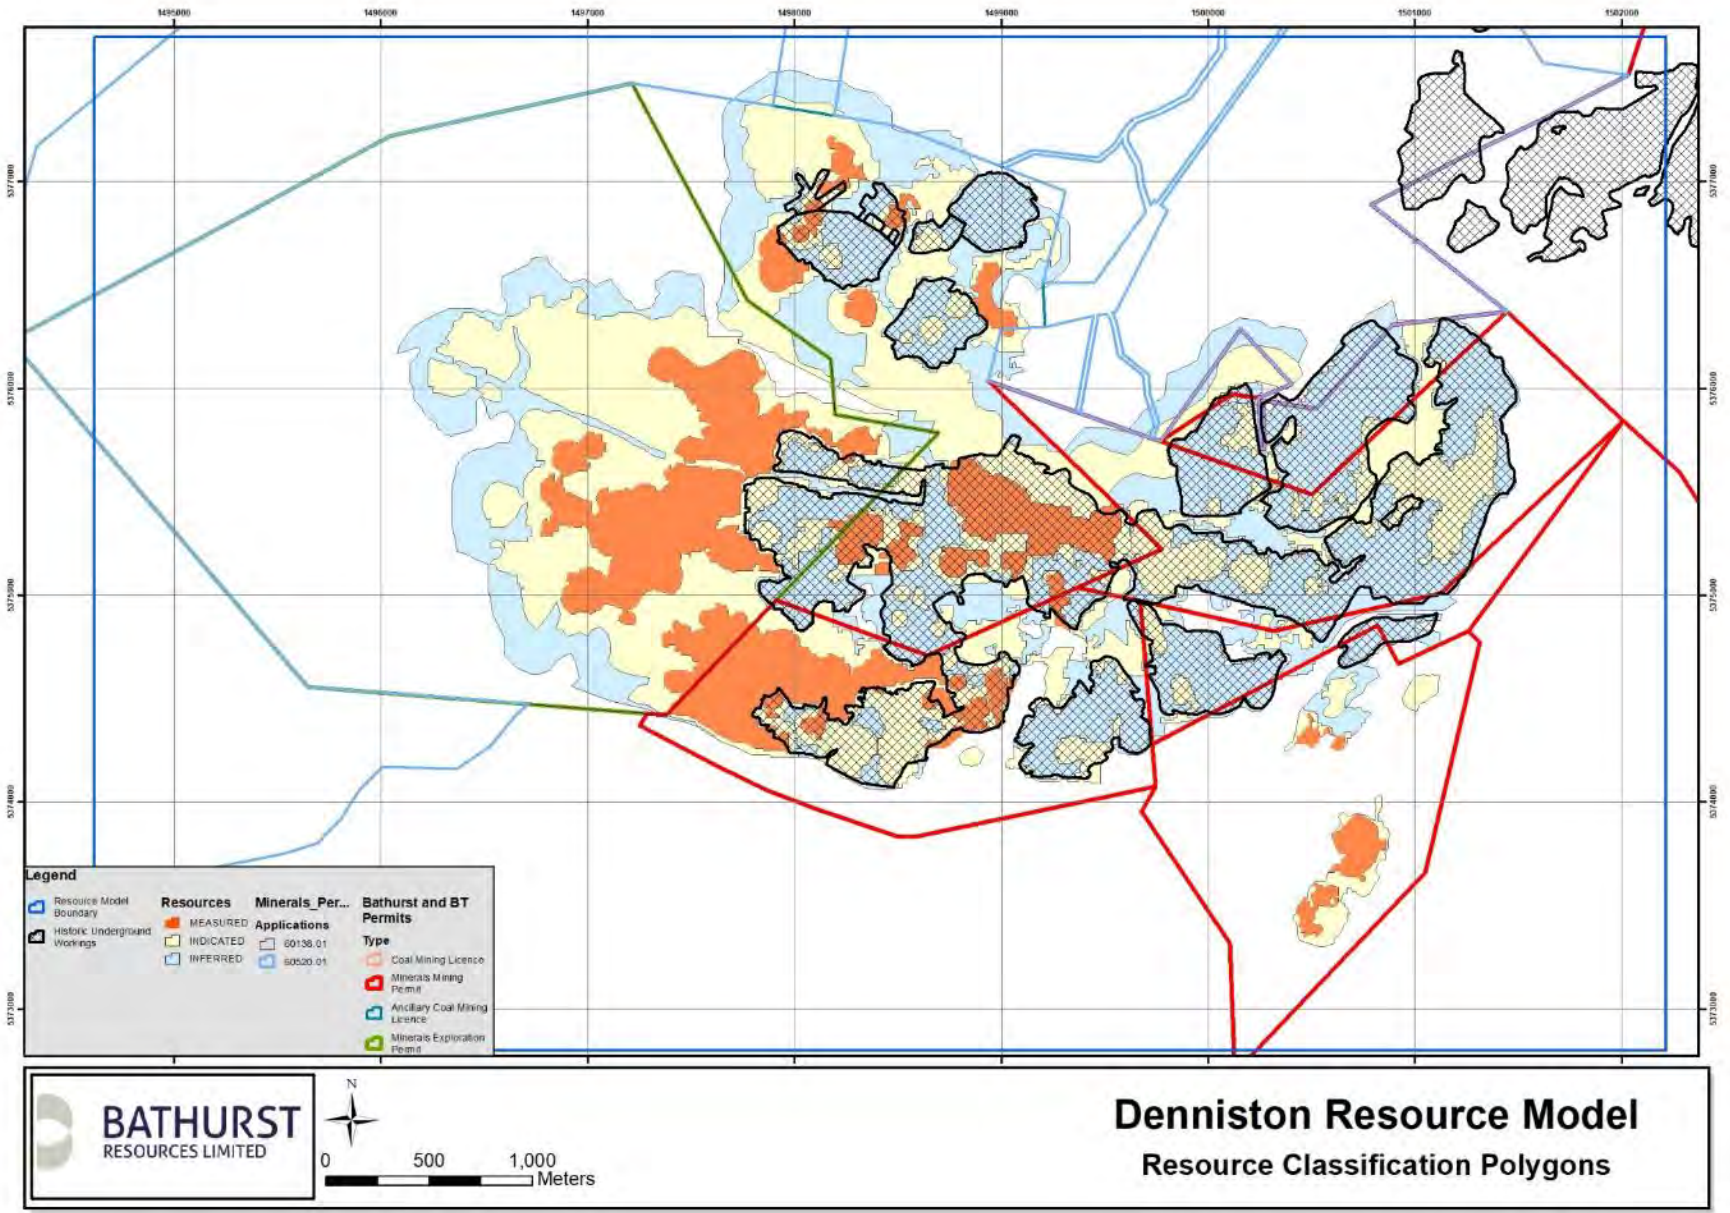


Figure 6: Extent of underground workings and resource classification



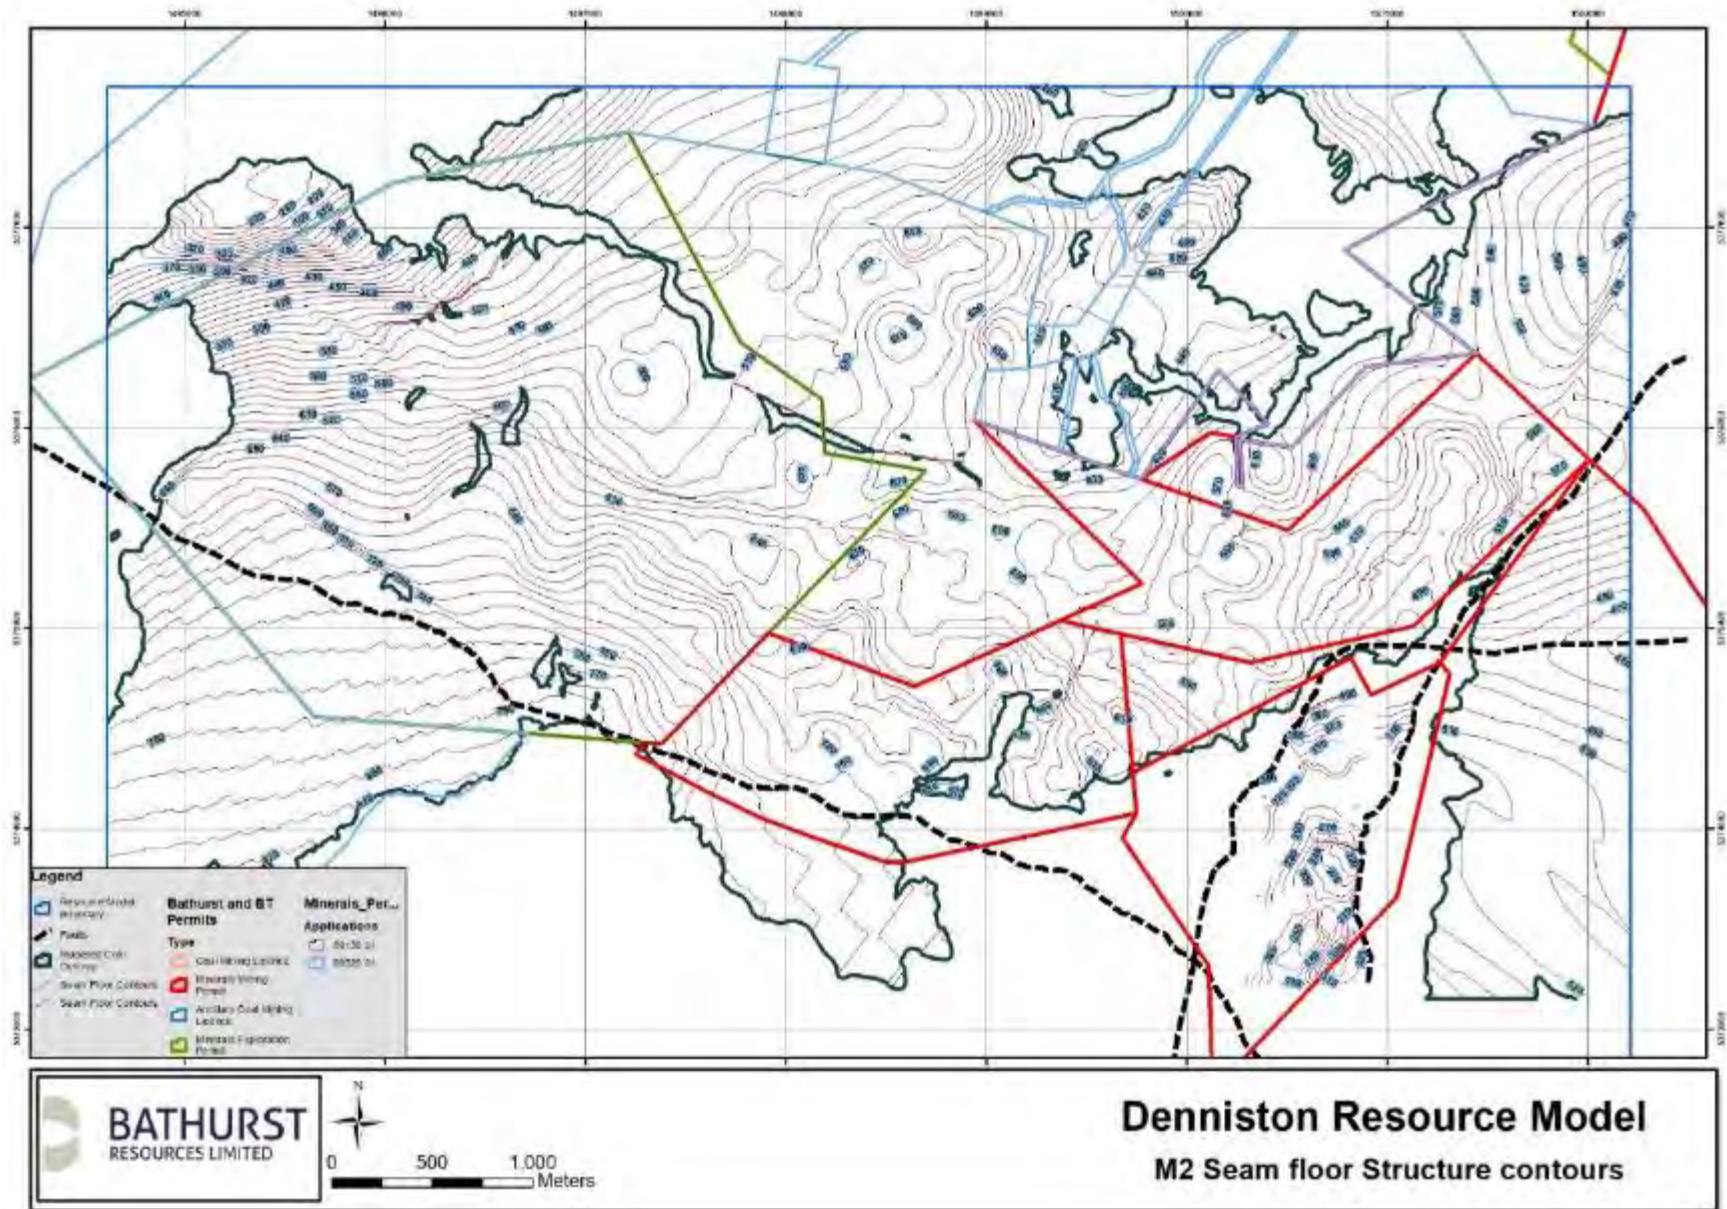


Figure 7: Plan showing the structure contours of coal seam floor

# JORC Code, 2012 Edition – Table 1 Report for Stockton 2021

## Section 1 Sampling Techniques and Data

Criteria	Commentary
<b>Sampling techniques</b>	<ul style="list-style-type: none"> <li>• Diamond Core (DC) drilling sampling for coal quality analysis took place using PQ (85mm) or HQ (64mm) coring methods for coal seams. The entire core is retained for analysis.</li> <li>• DC sampling is carried out under Stockton Specific protocols and QAQC procedures as per industry best practice.</li> <li>• Compositing samples are created at the laboratory from individual plies that are thickness weighted. These compositing samples are compiled for additional coal property test work.</li> <li>• Reverse Circulation (RC) chip samples are collected via a cyclone attached to a reverse circulation percussion drill rig. Sampling is primarily undertaken on 0.5m intervals through the coal seam (~6kg), and indicative 1m rock samples (~70g). The entire coal sample is retained for analysis.</li> <li>• Channel cut samples have been taken in areas of accessible outcrop, with an aim to obtaining sample intervals representing 0.5m of the true thickness.</li> <li>• The quality of drill core, RC chip samples, and channel samples are continuously monitored by site geologists.</li> </ul>
<b>Drilling techniques</b>	<ul style="list-style-type: none"> <li>• Multiple campaigns of data acquisition have been carried out on the Stockton site over the past century.</li> <li>• Drilling has been undertaken using the following techniques: <ul style="list-style-type: none"> <li>○ Diamond Core (triple Tube, PQ core).</li> <li>○ Open hole (Tungsten drag bit, PQ size).</li> <li>○ Reverse Circulation (PQ sized face sampling bit).</li> <li>○ Blade bit.</li> </ul> </li> <li>• Some drill collars had open hole pre-collars.</li> <li>• The bulk of the drillholes have been drilled vertically due to the shallow dipping morphology of the deposit and due to its close proximity to the surface.</li> <li>• No core has been orientated.</li> </ul>
<b>Drill sample recovery</b>	<p><b>Diamond Core</b></p> <ul style="list-style-type: none"> <li>• Standard industry techniques are employed for recovering drilled core samples from drillholes. Core is obtained by PQ (83mm) diameter coring techniques, using triple tube operations, providing good core recovery, averaging &gt;80% over the entire drillhole (inclusive of non-coal lithologies). On average recovery of coal is 90%.</li> <li>• PQ core diameter is considered to provide a sample of sufficient volume to be representative of the in situ material and provides adequate sample mass to undertake the variety of raw coal tests together with compositing sample analysis when required.</li> <li>• In poor ground conditions HQ sized rods, and therefore core was used to ensure that the drillhole was completed without affecting the integrity of the drill core and or loss of drilling equipment.</li> <li>• Downhole geophysics has been undertaken on most of the diamond core holes. A combination of geophysical tools, including Density, Natural Gamma, Calliper, Sonic, Dimeter, Acoustic Scanner, and Verticality have been run down holes. All tools are calibrated on a regular and systematic basis. All geophysical logging work has been conducted by a contractor (currently Weatherford). Sample interval and recovery recorded in the field by drillers is validated and adjusted if required using geophysics during core logging and sampling.</li> <li>• When drillholes are geophysically logged, the geophysical logs are correlated/validated against the core to determine core/chip recovery, while ensuring drill depths recorded in the field by the drillers are correct.</li> <li>• Core photography is undertaken on all diamond core.</li> </ul> <p><b>Reverse Circulation Drilling Chips</b></p> <ul style="list-style-type: none"> <li>• RC chip samples from the reverse circulation percussion drillholes is recovered directly from the rods using a cyclone system. The entire sample interval is retained for coal quality analysis. Sample interval of 0.5m produces a sample between 5 - 7kg</li> <li>• For Non-coal lithologies an indicative sample (~70g) from each meter is retained for geological</li> </ul>

Criteria	Commentary
	<p>logging.</p> <ul style="list-style-type: none"> <li>• RC generated samples with poor recovery (&lt;3kg) are not submitted to the laboratory for analysis.</li> <li>• Should there be poor recovery for the entire coal seam the hole is re-drilled if there is no specific reason for the poor recovery (e.g. presence of underground workings within the coal seam).</li> <li>• BT Mining Ltd is satisfied that the RC holes have taken a sufficiently representative sample of the mineralisation and minimal loss of fines has occurred.</li> <li>• Downhole geophysics has been undertaken on some reverse circulation drillholes. A combination of geophysical tools, including Natural Gamma, Calliper, Dipmeter, and Verticality have been run down holes. All tools are calibrated on a regular and systematic basis. All geophysical logging work has been conducted by contractor (currently Weatherford). Sample interval and recovery recorded in the field by drillers is validated and adjusted if required using geophysics after core logging and sampling. Once drilled drillholes are geophysically logged, the geophysical logs are correlated/validated against the recorded lithological logs to ensuring drill depths recorded in the field by the drillers are correct.</li> </ul>
<b>Logging</b>	<ul style="list-style-type: none"> <li>• All diamond core samples are checked, measured, marked up and finally photographed before being logged in a high level of detail.</li> <li>• All diamond core samples are geologically logged in a high level of detail down to centimetre scale. Intervals are logged for lithology, colour, weathering type, stratigraphy, texture, hardness, RQD and defects. Logging is conducted using a defined set of codes. All percussion drillholes chip samples are geologically logged as per the sampling frequency, with 1m samples used to define the non-coal lithologies (overburden), and 0.5m samples for coal and other non-coal lithologies surrounding or contained within coal seam partings. The geological logs are validated against laboratory results.</li> <li>• Every discrepancy between the measured length of the core and the driller's length marked on the core blocks is investigated. Discrepancies are resolved by site geologists prior to sampling with the use of geophysical logs.</li> <li>• The entire lengths of RC drillholes are logged. Where no sample was returned due to voids/cavities it is recorded as such.</li> <li>• Drillholes that have been geophysically logged with a suite of tools (as described above) are analysed extensively to validate, confirm and correct coal seam depths. Validation and, if required, correction of the geological logs against geophysics is undertaken to ensure accuracy and consistency. Verticality, calliper, density and natural gamma tools are checked regularly with standard calibration assemblies. The density calibrations are performed routinely - with blocks of known densities (aluminium and/or water).</li> </ul> <p><b>Trench samples</b></p> <ul style="list-style-type: none"> <li>• Trench samples have a basic geological lithological log with the lithology being validated against the coal ply result.</li> <li>• All trench, diamond drill and reverse circulation data is captured in a standardised BT Mining acQuire database.</li> </ul>
<b>Sub-sampling techniques and sample preparation</b>	<p><b>Diamond Core</b></p> <ul style="list-style-type: none"> <li>• No splitting of core is undertaken in the field or during sampling.</li> <li>• Sample selection is determined in-house and is documented in the Stockton core sampling procedure. Clean coal core has been sampled to a maximum of 0.5m plies and adjusted for core loss and lithological variations.</li> <li>• Associated high ash coal intervals and partings were sampled separately to assess potential dilution effects where they are &lt;0.5m thick. Intervals with non-coal material (&gt;50% Ash) are excluded from sampling.</li> <li>• Samples are placed into pre-labelled plastic bags to ensure proper Chain of Custody, and then transported by BT Mining personnel to the laboratory for testing. The laboratory continues with the Chain of Custody requirements. Sample preparation is undertaken according to Industry Standards.</li> </ul> <p><b>RC Chips</b></p> <ul style="list-style-type: none"> <li>• No splitting of coal interval chips is undertaken.</li> <li>• Non-coal intervals are sub sampled directly from the cyclone.</li> </ul>

Criteria	Commentary
	<ul style="list-style-type: none"> <li>Sample selection is determined in-house and is documented in a core sampling procedure. Associated high ash coal intervals and partings are sampled separately to assess potential dilution effects where they are adjacent to coal seams. Intervals with non-coal material (&gt;50% Ash) are excluded from sampling.</li> <li>Samples are placed into pre-labelled plastic bags to ensure proper Chain of Custody, and then transported by BT Mining personnel to the laboratory for testing. The laboratory continues with the Chain of Custody requirements. Sample preparation is undertaken according to Industry Standards.</li> </ul> <p><b>Trench samples</b></p> <ul style="list-style-type: none"> <li>No sub-sampling is undertaken with trench samples.</li> </ul> <p><b>Other</b></p> <ul style="list-style-type: none"> <li>A laboratory generated repeat sample is submitted with every 20<sup>th</sup> sample submitted to the laboratory. This sample is provided a new sample ID with no reference to the original sample ID. The results of these repeat samples are reviewed monthly and any discrepancies investigation.</li> </ul>
<b>Quality of assay data and laboratory tests</b>	<ul style="list-style-type: none"> <li>SGS New Zealand Limited (SGS) in Ngakawau and CRL (ACIRL Australia and Newman Energy subcontracted for specific tests) laboratories are used to undertake physical and chemical testing and use Industry Standards for all coal tests and systematic QA/QC procedures for all work. Both laboratories hold accreditation by International Accreditation New Zealand (IANZ). The processes employed are considered to be appropriate for coal sample analysis. Results are reviewed in-house to ensure the accuracy of the data by a geologist and or a senior geologist. The laboratory has been inspected by the Company's personnel. Tests include but are not limited to: <ul style="list-style-type: none"> <li><b>Chemical Analysis</b> <ul style="list-style-type: none"> <li>Proximate analysis (ASTM D5142-2004 (modified))</li> <li>Sulphur (ASTM D4239-04A)</li> <li>Total Moisture (ISO 589)</li> </ul> </li> <li><b>Ultimate Analysis</b> <ul style="list-style-type: none"> <li>Carbon (AL038-in house)</li> <li>Hydrogen (ASTM D3176-09)</li> <li>Nitrogen (ASTM D3176-09)</li> <li>Oxygen (ASTM D3176-09 (by difference))</li> <li>Sulphur (ASTM D3176-09)</li> <li>Forms of Sulphur (AS 1038 Part 11)</li> <li>Chlorine (ISO 587)</li> <li>Ash composition (X-Ray spectrometry (Spectrachem))</li> <li>Ash fusion temperature (ISO 540:1995(E))</li> <li>Trace Elements</li> <li>Calorific Value (ISO 1928-1995)</li> </ul> </li> <li><b>Rheological and Physical Analysis</b> <ul style="list-style-type: none"> <li>Gieseler Fluidity (ASTM D2639-90)</li> <li>Dilatational (Audibert-Arnu) (ISO 349:1975)</li> <li>Free Swelling Index (ISO 501:2003(E) D720-91(1999))</li> <li>Hardgrove Grindability Index (ISO 5074, ASTM D409-02)</li> <li>Relative Density (AS 10382111-1994)</li> </ul> </li> <li><b>Petrographic</b> <ul style="list-style-type: none"> <li>Maceral Analysis (c/- Newman Technologies), Vitrinite Reflectance (ASTM D2798-99).</li> </ul> </li> <li><b>Other tests</b> <ul style="list-style-type: none"> <li>Washability testing as requested (AS 41561 using float-sink methods) (also used Boner gig shaker table process).</li> </ul> </li> </ul> </li> <li>5% of all SGS analysed samples are sent to CRL for re-analysis, and then subsequently re-tested at SGS. The result of these repeats are analysed by the database geologist and the resource geologist, on a monthly basis. Additionally, 5% of all SGS analysed samples are retested by SGS, as part of their in-house QAQC process. These repeat test results are generally within a 5% of their original results. Results outside of set tolerances are investigated.</li> </ul>

Criteria	Commentary
<b>Verification of sampling and assaying</b>	<ul style="list-style-type: none"> <li>• Most holes are geophysically logged, and verification of seam contacts is made through analysis of the geophysics. Assessment of coal intersections are undertaken by a geologist. Geophysics allows confirmation of the presence (or absence) of coal seams, accurate determination of contacts to coal seams, density measurements are used to guide sampling and identify high ash bands and or seam partings.</li> <li>• Geophysical logs (dual density and gamma) are analysed extensively and used to validate and, if required, correct geological and sample interval logs to ensure accuracy and consistency.</li> <li>• Coal ply results are provided by the laboratory and reviewed internally. No adjustments or calibrations are made to any coal quality data. In instances where results are significantly different from what was observed in geophysical logs or outside of local or regional ranges defined by previous testing, sample results are retested.</li> <li>• Since 2006 all coal quality data has been directly submitted and stored in electronic format using acQuire SQL database software.</li> <li>• Historical data has been validated and entered into the acQuire SQL database, from the original paper logs. These geological and geophysical paper logs are housed in the fireproof library in Westport. Historical data was transferred and validated against the current logging codes to ensure the data was valid.</li> <li>• A limited number of twin holes have been drilled and returned acceptable duplicates of the original holes.</li> </ul>
<b>Location of data points</b>	<ul style="list-style-type: none"> <li>• Stockton data is surveyed in Buller 1949 grid coordinate system in New Zealand with mean sea level datum (MSL). However, the Geoid correction for elevation is not undertaken due to the elevation of the mine-site (+150mm). All on-site survey data used in the resource estimation does not have the Geoid correction as well.</li> <li>• All drillholes post 1998 are surveyed using real time kinematic GPS technology and are located within +/- 20mm vertically and +/- 10mm horizontally. Older drillhole collars were surveyed using conventional methods with an unknown precision.</li> <li>• Historical underground workings plans are based off old hand drawn plans that have been georectified (in 2D only) by converting from cadastral links to the Buller 1949 geodetic grid.</li> <li>• Topographic surfaces consists of "original", "cut", and "as-built" triangulations constructed from a combination of airborne LiDAR (accurate to within +/- 0.2m) collected for the whole of the Stockton site in June 2013, conventionally surveyed historical plans (unknown accuracy), GPS survey data (+/- 20mm) and GPS assisted laser scans using I-site laser scanner (+/-40mm).</li> <li>• Drillholes with down-hole geophysics are surveyed for deviation with Weatherford verticality tool (+/- 15° azimuth and +/- 0.5° inclination).</li> </ul>
<b>Data spacing and distribution</b>	<ul style="list-style-type: none"> <li>• Exploration drillholes are variably spaced (&lt;75m to 150m) depending on target seam depth, geological structure, topographic constraints, down-hole conditions due to underground workings, and the location of other drillholes.</li> <li>• Coal quality drilling is drilled on either a 15m, 20m, 30m or 40m grid, depending on structural and or coal quality complexity of the coal seam in the area.</li> <li>• No sample compositing is undertaken prior to initial laboratory ply analysis. Should details coal analysis be required, compositing is undertaken at the laboratory on a length weighted basis.</li> <li>• This drill spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate to support a JORC Code 2012 resource classification and is suitable for this style of deposit.</li> </ul>
<b>Orientation of data in relation to geological structure</b>	<ul style="list-style-type: none"> <li>• Majority of holes are drilled vertically, due to near horizontal coal seams.</li> <li>• A small number of exploration holes have been inclined. The purpose of these holes was to define significant geological structures and not for coal seam geometry and quality.</li> <li>• No drilling orientation and sampling bias has been recognised at this time and is not considered to have introduced a sampling bias.</li> </ul>
<b>Sample security</b>	<ul style="list-style-type: none"> <li>• RC chip samples are collected in uniquely numbered pre-labelled plastic bags. Three to five samples are then placed in a large plastic bag for delivery to the laboratory.</li> <li>• Core samples are placed in uniquely numbered pre-labelled plastic bags. Three to five samples are then placed in a large plastic bag for delivery to the laboratory.</li> <li>• Prior to submission to the laboratory, a standardised dispatch form is generated for each drillhole,</li> </ul>

Criteria	Commentary
	<p>within the acQuire SQL database software, which delineates the set of analysis to be undertaken and the logged sample numbers.</p> <ul style="list-style-type: none"> <li>Once samples and dispatch form are completed, the sample bags are validated and subsequently delivered to the secure laboratory sample receiving area by a BT Mining staff member. Once received at the laboratory, the consignment of samples is receipted against the sample dispatch documents.</li> <li>Any additional analysis is authorised by the site geologist.</li> <li>Sample residues are stored at the laboratory pending results and any possible repeat requests.</li> <li>Sample security is not considered a significant risk to the project.</li> </ul>
<b>Audits or reviews</b>	<ul style="list-style-type: none"> <li>Integrity of all data (drillhole, geological, survey, geophysical and CQ) is reviewed by the site geologist before being used to model either structure or qualities.</li> <li>Periodic internal reviews are conducted, to verify that both core and chips are logged in a consistent manner. These reviews are done by the Competent Person.</li> <li>The BT Mining acQuire database was last externally audited in 2008 by Advanced DataCare. Suggested actions were reviewed and actioned where necessary.</li> <li>The BT Mining Acquire database is considered to be of sufficient quality to carry out resource estimation.</li> </ul>

## Section 2 Reporting of Exploration Results

Criteria	Commentary
<b>Mineral tenement and land tenure status</b>	<ul style="list-style-type: none"> <li>Stockton CML37150 is a Coal Mining License, which is due to expire on 1 April 2027, and covers the majority of the deposit.</li> <li>MP 52937 and 41810 Mining Permits are adjacent to the main CML37150. MP 52937 expires on 4 November 2030 and MP 41810 expires on 8 September 2024.</li> <li>BT Mining Ltd. has sole ownership of the operation, with ownership of the CML 37150 permit areas, and access rights to the Department of Conservation (DOC) owned MP 41810 and MP 52937.</li> <li>All operations at Stockton mine are currently undertaken within these CML boundaries.</li> <li>Royalties and Levies are applied to per tonne of coal produced.</li> </ul>
<b>Exploration done by other parties</b>	<ul style="list-style-type: none"> <li>Within the CML37150, Solid Energy Ltd undertook all exploration on the tenement from 1987 to 2017. However, there have been earlier periods of work that have contributed to the understanding of this Resource. These programs include early drillholes associated with mining dating back to the late 1800s through into the 1900s, with New Zealand Coal Resources Survey performing additional drilling in the 1980s.</li> <li>All historic data was checked and validated by the site geologist, on inclusion into the current Acquire database. All data is coded on usability for resource modelling.</li> </ul>
<b>Geology</b>	<ul style="list-style-type: none"> <li>Coal resources on the Stockton Plateau are restricted to the Middle to Late Eocene aged Brunner Coal Measures (BCM). The BCM unconformably overlies the Ordovician aged Greenland Group greywackes and argillites, which has been extensively intruded by Cretaceous granites and porphyry (Berlins Quartz Porphyry). Due to the stratigraphic nature of coal measures, the coal seams generally lie in a horizontal or sub-horizontal plane. The resource has a dip to the northeast at the northern end of the deposit and to east along the western margin. Folding and faulting through the coal seams can create localised changes in dips up to 80°.</li> <li>The Mangatini coal seams are the main coal seams of the Stockton deposit. The seams have been given the abbreviation M. There are the three seams M1, M2, and the M3. The M2 seam is the predominant seam over the deposit and splits into four segregated seams in places. The M1 seam is thin and discontinuous stratigraphically below the M2 and not considered for resource estimation. The M3 is a rider seam to the M2 however the seam is discontinuous and often not recovered during mining. The M3 is not considered during resource estimation.</li> </ul>
<b>Drillhole Information</b>	<ul style="list-style-type: none"> <li>No exploration results are reported, therefore there is no drillhole information. This section is not relevant to this report on resource and reserve estimations. Comments relating to drillhole information can be found in Section 1.</li> </ul>

Criteria	Commentary
<b>Data aggregation methods</b>	<ul style="list-style-type: none"> <li>No exploration results have been reported for the Stockton deposit.</li> </ul>
<b>Relationship between mineralisation widths and intercept lengths</b>	<ul style="list-style-type: none"> <li>No exploration results have been reported for the Stockton deposit.</li> </ul>
<b>Diagrams</b>	<ul style="list-style-type: none"> <li>Diagrams can be found in the Appendix A for each of the following: <ul style="list-style-type: none"> <li>Location map</li> <li>Map showing Land rights</li> <li>Map showing Mining Permits</li> <li>Geological QMap</li> <li>Map showing drillhole type/distribution</li> <li>Map of underground workings</li> <li>Map of Resource Classification</li> <li>Map showing M2 Ash distribution</li> <li>Map showing M2 Sulphur distribution</li> <li>Map showing M2 CSN distribution</li> <li>Map showing M2 ROMAX distribution</li> <li>Map showing M2 floor contours distribution</li> <li>Map showing M2 apparent seam thickness</li> <li>Map showing reserve pit shells</li> </ul> </li> </ul>
<b>Balanced reporting</b>	<ul style="list-style-type: none"> <li>No exploration results are reported, therefore there is no further exploration results to report. This section is not relevant to reporting resource and reserve estimations.</li> </ul>
<b>Other substantive exploration data</b>	<ul style="list-style-type: none"> <li>Bulk samples to attain specific marketing related data have been taken as and when requested.</li> <li>The different stratigraphic units and rock defects have been assigned various strength parameters based on a mixture of recent and historic laboratory test data (UCS, shear box and ring shears), empirical classifications (RMR, GSI and Hoek Brown) and back analysis of existing cut slopes. Downhole in situ geophysical measurements have been undertaken to compare the strength variability with actual laboratory test data.</li> </ul>
<b>Further work</b>	<ul style="list-style-type: none"> <li>Deposit is currently being mined.</li> <li>Close spaced grade control drilling will continue as mining progresses while additional exploration and near mining resource development drilling will be undertaken to define geological structures, seam structure and coal quality.</li> </ul>

### Section 3 Estimation and Reporting of Coal Resources

Criteria	Commentary
<b>Database integrity</b>	<ul style="list-style-type: none"> <li>All GPS sourced and validated survey data recorded in the field is electronically transferred into the master BT Mining (BTM) acQuire SQL database.</li> <li>All drill core logging data is digitally entered directly into the BTM acQuire SQL database, with in-built enforced data validation rules. Drill chip geological logging data is manually entered into BTM acQuire SQL database, with in-built enforced data validation rules.</li> <li>The acQuire SQL database has been designed to ensure data is entered and stored in a consistent and accurate manner by using dropdown menus of standard logging codes to prompt and constrain inputs. The database highlights out of range coal quality values, duplicate records/intervals, prevents overlapping intervals or depths that extend beyond total drillhole depth. All changes to the database are tracked and archived. Data correction and validation checks are undertaken internally as defined by the BTM Data Validation Standard before the data is used for modelling purposes.</li> <li>All ply coal quality data is imported each night, using an automatic import of the laboratory generated electronic results (comma separated text file with a standardised format, saved to a secure shared server location).</li> </ul>

Criteria	Commentary
	<ul style="list-style-type: none"> <li>Once all validation is completed all drillhole data is signed off by the responsible geologist. On completion of the data sign-off process the data is locked in Acquire and cannot be adjusted unless requested by the resource geologist.</li> <li>The BTM acQuire SQL database is administered by a part-time geological database administrator who has an intimate knowledge and understanding of this dataset. Data validation checks are run routinely by the site geologist using Acquire software validation routines. All validation concerns are referred to the resource geologist and rectified accordingly.</li> <li>The BTM acQuire database was last externally audited in 2008 by Advanced DataCare. Suggested actions were reviewed and actioned where necessary.</li> </ul>
<b>Site visits</b>	<ul style="list-style-type: none"> <li>The Competent Person, Mark Lionnet, has a full-time role with Bathurst Resource Limited as the Export Project Manager with a high level of interaction with the Stockton geologist.</li> <li>Regular visits have been undertaken by the Competent Person.</li> </ul>
<b>Geological interpretation</b>	<ul style="list-style-type: none"> <li>There is sufficient confidence in interpretation of geological stratigraphy, structure and seam correlation/continuity though it is variable across the Stockton area. Mining activities supports a good confidence in the geological interpretation of the deposit.</li> <li>The data used in the geological interpretation included field mapping, drillhole data, core logging data, geophysical logs, sampling, coal quality laboratory testing and structural interpretations. Residual variability exists concerning geological structure along/within the major fault zones, resulting in a lower level of resource confidence. This variability will influence the local estimates rather than the global structural and coal quality estimates for these zones.</li> </ul>
<b>Dimensions</b>	<ul style="list-style-type: none"> <li>The Stockton resource area covers approximately 22.9km<sup>2</sup>, a roughly rectangular shape up to 3.5km wide (E-W), and 8km long (N-S).</li> <li>Within this area all seams are exposed in the operating mine, with in situ coal between 0m and 50m below the original ground surface.</li> <li>Coal thickness varies considerably over the deposit, from 28m (areas with structural thickening) down to &lt;0.5m (areas with coal seam poorly developed). On average the remaining coal resource has an average thickness of 8-10m.</li> <li>The M3 rider seam to the main M2 seams is on average 0.5m thick but can have local thicknesses of 3m.</li> </ul>
<b>Estimation and modelling techniques</b>	<ul style="list-style-type: none"> <li>Modelling has been undertaken using Maptek's Vulcan Version 7.5 and 8.2 software by a resource geologist experienced in its use, using a standardised set of validated automated scripts.</li> <li>16,360 drillholes are utilised in modelling and resource estimation.</li> <li>All valid drilling data, mapping data, together with a number of structural interpretations are used as the source data for creating the coal seam surfaces (grids).</li> <li>Grids for the coal roof and floor (including seam splits) are developed over the entire CML. These coal surfaces are modelled using a stacking algorithm with the coal roof of the predominant coal seam (M2) used as the reference surface. This process is repeated for six geological domains of the deposit to ensure that the coal seams are modelled accurately.</li> <li>The grids are created by using a triangulation algorithm resulting in a 10m x 10m grid. This methodology of creating grids is common practice for the estimation of coal deposits</li> <li>Block model extends from 321500mE to 327010mE and 710500mN to 719510mN and elevation from 300mRL to 1100mRL.</li> <li>A standardised block model schema has been used, with a standardised set of variables, with associated default values.</li> <li>The latest validated survey "original", "cut" and "as-built" surfaces and grids are used to create an empty block model, with 10m by 10m blocks with a minimum thickness of 0.5m (for coal seams). The parent block size (10m by 10m) is half the drill spacing to ensure the mineralisation is well represented by the blocks.</li> <li>The drilling database is used to create a set of 0.5m thick composites, which is then used to estimate the coal qualities for the blocks within the coal seams. Multiple estimation runs are completed to ensure all blocks are populated.</li> <li>All coal blocks have been estimated using the inverse distance methodology, with a power of 2, for the standard set of coal qualities (ash, sulphur, swell, inherent moisture, volatile matter).</li> </ul>



Criteria	Commentary
	<ul style="list-style-type: none"> <li>• Coal Quality Estimation parameters used during coal quality estimation are: <ul style="list-style-type: none"> <li>○ Search ranges used are 150x150x0.5m and 500x500x1m.</li> <li>○ Samples used are a minimum of 2 and a maximum of 8 in the first search radius, and a minimum of 1 and a maximum of 5 in the second search radius.</li> <li>○ A maximum of 2 samples from any one drillhole is allowed.</li> <li>○ Block discretisation of 4,4,1 was applied.</li> <li>○ Using the Vulcan "tetra unfolding" methodology, along the modelled coal seam surfaces.</li> </ul> </li> <li>• Lithology of non-coal overburden, underburden and interburden blocks, are estimated using a probabilistic method, using the drillhole database. Once lithologies have been estimated, the ash, sulphur, swell, inherent moisture, and volatile matter are estimated. <ul style="list-style-type: none"> <li>○ Inverse distance estimation, with a power of 2, is used.</li> <li>○ Search ranges used are 60x60x1m and 200x200x1m.</li> <li>○ Samples used are a minimum of 1 and a maximum of 10.</li> <li>○ Block discretisation of 4,4,1 was applied.</li> <li>○ Using the Vulcan "tetra unfolding" methodology, along the modelled structural seam surfaces.</li> <li>○ Where insufficient data drillhole data is available, then default CQ values are assigned to un-estimated blocks.</li> </ul> </li> <li>• At each stage of the process (initial data points, new surfaces, and final block model) the new data is validated back to the previous model, to ensure consistency.</li> <li>• Standard Block model validation was completed using visual and numerical methods.</li> <li>• No selective mining units were assumed in the estimate.</li> <li>• Part of the deposit has been previously underground mined. A detailed review of the underground mine plans and production records produced depletion factors for underground mining panels. These factors were used in the resource classification confidence and for depleting the resource tonnages.</li> <li>• Underground coal fires related to the underground workings have had impact on the coal quality and ground conditions. A detailed review of these fires and ground conditions have also identified areas with poor coal seam structural integrity (pillar collapse) and or have had their qualities altered due to the presence of fire. The factors have also been used to deplete and coal tonnage and or coal quality for the deposit affected by the presence of fires and or pillar collapse.</li> </ul>
<b>Moisture</b>	<ul style="list-style-type: none"> <li>• All moisture values are reported on an air-dried basis, using air-dried ply results to estimated moisture. Inherent moisture is measured for all drillhole samples.</li> <li>• Tonnages are estimated on a dry basis.</li> </ul>
<b>Cut-off parameters</b>	<ul style="list-style-type: none"> <li>• A minimum seam thickness cut off for all modelled seams is 0.5m as this is what is currently considered as recoverable using open cast methods.</li> <li>• A maximum ash cut-off of 25% has been applied to all coal seams except where seam continuity is required, which may include intervals with greater than 25% Ash.</li> <li>• Coal with Ash &lt;8% is considered "bypass" coal and does not require any further processing. Coal with Ash &gt;8% needs to be processed through the company's Coal Handling and Processing Plant (CHPP).</li> <li>• Coal tonnes are only reported from the M2 seam or its splits (no M3 and M1 tonnes are reported).</li> <li>• All resources blocks have been limited to be within the 2018 Whittle pit optimisation revenue 2.0 factor (RF) pit shell.</li> </ul>
<b>Mining factors or assumptions</b>	<ul style="list-style-type: none"> <li>• This declaration reports on a long-term operating site.</li> <li>• Selected mining method/s chosen from long term experience of local conditions.</li> <li>• A mined-out factor is assigned to each block based on the current site topography, or if within a set of mined out/signed off areas.</li> <li>• Geotechnical parameters for cut slope design were developed based on historical cut slope performance, slope back analysis and laboratory testing of material strength parameters. Slopes are designed to comply with a Factor of Safety that exceeds 1.2 with its related probability of failure and potential failure dimensions.</li> <li>• Minimum recoverable coal thickness is 0.5m. Final coal recovery percentages have been calculated using the degree of previous mining history, adjacent waste material, expected</li> </ul>

Criteria	Commentary
<b>Metallurgical factors or assumptions</b>	<p>contamination, and expected mining losses.</p> <ul style="list-style-type: none"> <li>• Contaminated coals from mining and/or from underground workings are processed via the company's Coal Handling and Processing Plant (CHPP) since 2010. The CHPP removes the dilatant material and a small portion of coal to provide a more saleable product. The plants performance has been routinely monitored since its inception.</li> <li>• Although not included in the resource estimate, studies have been conducted on the properties of the coal pertaining to combustion potential, Ash fusion temperatures and Hardgrove Grindability Index.</li> <li>• Small parcels of coal have been sent to customers for evaluation and test work.</li> </ul>
<b>Environmental factors or assumptions</b>	<ul style="list-style-type: none"> <li>• There are a number of Resource Consents regarding land use, air, and water quality that must be strictly adhered to for the Stockton site however these are unlikely to impact on the Mineral Resource Estimate.</li> <li>• There are a number of lithological units exposed during the mining process which generate acid metal drainage. The water run-off across site is monitored and lime dosing is used at strategic sites to correct the water acidity.</li> <li>• Due to high rainfall over the mine site the high content of suspended solid material is a concern to water quality. There is a series of drains and sumps that collect this 'dirty' water that allow for the settling of the suspended solids.</li> <li>• Mined out areas are rehabilitated using a comprehensive system, which makes use of recovered soil, recovered vegetation, bio-solids, and dried grass.</li> </ul>
<b>Bulk density</b>	<ul style="list-style-type: none"> <li>• The relative density value is calculated using the available ash-density data (268 samples) to define an ash-density curve.</li> <li>• Non-coal units are assigned default density value based upon the lithology type.</li> </ul>
<b>Classification</b>	<ul style="list-style-type: none"> <li>• The resource has been classified into the Inferred/Indicated/Measured status by analysing eight factors upon which the geological confidence is based. <ul style="list-style-type: none"> <li>○ Presence of underground workings.</li> <li>○ Coal seam dip.</li> <li>○ Distance to nearest coal quality data.</li> <li>○ Ratio of coal seam thickness to the number of coal seams.</li> <li>○ Distance to reliable roof contact.</li> <li>○ Coal seam thickness (where less than one metre).</li> <li>○ Estimation passes need to estimate.</li> <li>○ Number of informing drillholes used.</li> </ul> </li> <li>• The Competent Person will review the results of the semi-automated resource classification process and will be manually adjusted where necessary and/or required.</li> <li>• The input data is comprehensive in its coverage of the coal seams and does not miss-represent the in situ coal seams.</li> <li>• The results of the validation of the block model exhibit a good correlation of the input data to the estimated grades.</li> <li>• All resources are within the 2018 Whittle pit optimisation revenue 2.0 factor (RF) pit shell.</li> <li>• The Competent Person has taken into account all relevant factors in undertaking this estimation and considers the estimate to be a true reflection of the current understanding of the deposit.</li> </ul>
<b>Audits or reviews</b>	<ul style="list-style-type: none"> <li>• Definitive Feasibility Reports (PAG L5) for the Coal Handling and Processing Plant and Millerton Coal Resource have included external peer reviews of the geological databases and resource estimate methodology. No significant issues were identified in reviews. The database and geological resource model were also extensively peer reviewed internally by senior geologists and the Competent Person.</li> <li>• Pre-Feasibility and Definitive Feasibility Reports for near deposits (Cypress and Mt William North) have included external peer reviews of the geological database. No significant issues were identified in reviews.</li> <li>• Twin hole drilling programs have been undertaken to validate previous drillholes.</li> <li>• During post mining reconciliation the drillhole ply results, and the associated estimated values, are compared to the mined coal to ensure that the drilling programs have been sufficient to predict the qualities of the mined coal.</li> </ul>

Criteria	Commentary
	<ul style="list-style-type: none"> <li>• A geostatistical study undertaken by Golder and Associates into drillhole spacing was undertaken in 2006, that suggested grade control drillhole spacing should be on 15m or 20m grid spacing where coal quality parameters and coal geometry vary significantly.</li> <li>• A review of the Stockton resource modelling process was undertaken by Palaris in 2013 as part of a Solid Energy New Zealand wide review.</li> <li>• The BTM acQuire database was last externally audited in 2008 by Advanced DataCare. Suggested actions were reviewed and actioned where necessary.</li> </ul>
<b>Discussion of relative accuracy/confidence</b>	<ul style="list-style-type: none"> <li>• Based on the data available, the degree of accuracy of this statement is considered high for the Stockton deposit. The process for calculation has used: BTM Standards and procedures, BTM Resource and Reserve Guidelines and the 2012 JORC Code along with industry best practice where available to define the Resource estimates provided to confirm search estimation ranges and drillhole spacing for each resource classification.</li> <li>• Regular mine area reconciliations are undertaken and show an acceptable correlation between mined coal and estimated coal.</li> </ul>

## Section 4 Estimation and Reporting of Coal Reserves

Criteria	Commentary
<b>Mineral Resource estimate for conversion to Ore Reserves</b>	<ul style="list-style-type: none"> <li>• The Coal Resource estimates used are the Coal Resource estimates undertaken by the Stockton resource geologist as outlined in Section 1-3.</li> <li>• Coal Resources are inclusive of Coal Reserves.</li> <li>• The Coal Reserve estimates are for a long-term operating site.</li> <li>• For the purpose of Reserve calculations, the mine is split into regions which are Millerton, Rockies, No2 South, A Drive, Mt Augustus, and Hope Lyons.</li> <li>• Drillholes are validated then coded to create a structural grid model using Vulcan™ software by BT Mining Limited. This structural model forms the framework that a 3D block model is created from by the site geologists. The model includes topography, seam structure and coal qualities used for in situ Coal Resource delineation.</li> <li>• Coal quality values are estimated into the block model by BT Mining Limited. Coal Resources and Coal Reserves are derived from this model. The Company has robust and stable modelling processes modelling processes in place. Tonnages reported, model mining modifying factors including surface and historic underground mining extraction, loss and dilution, fire affected, plant yields and economics have been reviewed and reconciled against actual performance.</li> <li>• A decrease in the previously reported Stockton Coal Reserves is primarily attributed to the following changes: <ul style="list-style-type: none"> <li>○ Depletion by surface and stockpile mining.</li> <li>○ Decrease attributed to exclusion of a high sulphur (&gt;5% adb) top seam ply across parts of Millerton and Hope Lyons blocks.</li> </ul> </li> <li>• The decrease in Coal Reserve tonnes was partially offset by an overall increase in the A18 Fines stockpile. The A18 Fines were included in the Coal Reserves after a successful Pre-Feasibility study was completed in April 2020.</li> </ul>
<b>Site visits</b>	<ul style="list-style-type: none"> <li>• The Competent Person for this Coal Reserve Statement is Ian Harvey, a full-time employee of BT Mining Limited based at Stockton.</li> <li>• The Competent Person has almost 20 years' experience working at Stockton in various roles, including resource modelling and mine planning, as well as coal quality management and mine/market planning.</li> </ul>
<b>Study status</b>	<ul style="list-style-type: none"> <li>• Stockton mine is an operating mine.</li> <li>• Material Modifying Factors have been considered.</li> <li>• The reported Coal Reserve is based on actual site performance, costs and mine plans that have been determined to be economically viable in the BT Mining cashflow analysis.</li> </ul>
<b>Cut-off parameters</b>	<ul style="list-style-type: none"> <li>• A maximum ash cut-off of 25% has been applied to all coal seams except where seam continuity is required, which may include intervals with greater than 25% ash.</li> <li>• Coal with ash &lt;8% is considered "bypass" coal and does not require any further processing.</li> </ul>

Criteria	Commentary																								
	<ul style="list-style-type: none"> <li>Coal with ash &gt;8% “wash” coal needs to be processed through the company’s Coal Handling and Processing Plant (CHPP). The feed cut-off grade depends on the ash source, being either &gt;8% and &lt;35% if ash is in situ, or &gt;8% and &lt;50% ash if contaminated with non-coal material (e.g. ash introduced due to previous underground extraction).</li> <li>The minimum mineable seam thickness is 0.5m based on recovery by surface mining methods used at the site.</li> <li>Coal Reserves are only reported from the M2 seam horizon.</li> </ul>																								
<b>Mining factors or assumptions</b>	<ul style="list-style-type: none"> <li>The mining method is conventional drill and blast, load and haul open pit mining operation. This utilises truck and excavator for waste movement, while coal is loaded using a combination of loaders and excavators with haulage to the run-of-mine (ROM) hopper CHPP, or stockpiles using dump trucks. The operations are supported by additional equipment including dozers, grader and watercarts. The selected mining method is based on long term experience of local conditions.</li> <li>Minimum recoverable in situ thickness is 0.5m.</li> <li>Coal Reserve tonnages have been estimated using a density value calculated using approximated in-ground moisture values (Preston and Sanders Method). As such, all tonnages quoted in this report are wet tonnes.</li> <li>All coal qualities quoted are on an Air-Dried Basis (ADB).</li> <li>Geotechnical parameters are based on geotechnical studies undertaken by the Stockton engineering geologists. Specific parameters are applied to each pit. Pit designs have been based on geotechnical constraints and parameters. The typical highwall configuration is a batter height of 15m with batter angles between 30°- 76° using 8.5m wide benches. A maximum 10% gradient and 23m wide running surface is being used for in pit ramps and roads.</li> <li>Pit limits have been updated based on pit optimisation studies with restrictions for current land and mineral access determined by mining permits and granted consent limits.</li> <li>Pit optimisations used current cost and revenue assumptions. The latest pit optimisation study was completed by Golder Associates (NZ) Limited in 2018.</li> <li>Grade control drill is undertaken as defined in Sections 1 to 3. Allowances for mining dilution and recovery has been applied to the block model. The mining loss, contamination and dilution is based on the lithology above the coal roof and below the coal floor as follows in metres for each mineable horizon: <table data-bbox="454 1171 922 1434" style="margin-left: 40px;"> <thead> <tr> <th></th> <th colspan="2">Thickness (m)</th> </tr> <tr> <th></th> <th>Roof</th> <th>Floor</th> </tr> </thead> <tbody> <tr> <td>Mudstone Lost:</td> <td>0.10</td> <td>0.05</td> </tr> <tr> <td>Mudstone Contaminated</td> <td>0.05</td> <td>0.10</td> </tr> <tr> <td>Mudstone Dilution:</td> <td>0.25</td> <td>0.25</td> </tr> <tr> <td>Other Lost:</td> <td>0.05</td> <td>0.05</td> </tr> <tr> <td>Other Contaminated:</td> <td>0.10</td> <td>0.10</td> </tr> <tr> <td>Other Dilution:</td> <td>0.05</td> <td>0.05</td> </tr> </tbody> </table> </li> <li>Additional recovery factors for Millerton, Hope Lyons and Rockies mining block areas include losses for historical underground extraction, fire effected coal, and where the overburden material has collapsed into the coal seam.</li> <li>Approximately 60% of total Coal Reserve tonnes require washing to make a marketable product.</li> <li>Minimum mining widths are dependent on volumes to be excavated and the size of the fleet to be used. Typically for the bulk excavator and truck fleet this is approximately 30m. For the small excavators and trucks this is approximately 15m.</li> <li>Current mining methods require the following infrastructure; haul roads, drainage, pumps, sumps and dam structures, lime dosing plants, coal stockpile areas, CHPP, coal load out and bins, aerial ropeway, train load out and bins, workshop, offices, and contractor facilities. Much of this infrastructure is in place with the main new infrastructure required being related to water management and access such as sumps, dams and water control as the mining progresses into new areas.</li> </ul>		Thickness (m)			Roof	Floor	Mudstone Lost:	0.10	0.05	Mudstone Contaminated	0.05	0.10	Mudstone Dilution:	0.25	0.25	Other Lost:	0.05	0.05	Other Contaminated:	0.10	0.10	Other Dilution:	0.05	0.05
	Thickness (m)																								
	Roof	Floor																							
Mudstone Lost:	0.10	0.05																							
Mudstone Contaminated	0.05	0.10																							
Mudstone Dilution:	0.25	0.25																							
Other Lost:	0.05	0.05																							
Other Contaminated:	0.10	0.10																							
Other Dilution:	0.05	0.05																							

Criteria	Commentary
<b>Metallurgical factors or assumptions</b>	<ul style="list-style-type: none"> <li>• <b>Bypass Coal</b> is defined as coal recovered that is not contaminated by rock or other materials and which when mined, is a saleable product (ash &lt;8%).</li> <li>• <b>Wash Coal</b> is defined as coal that requires processing/washing prior to becoming a marketable product. The feed cut-off grade depends on the ash source, being either &gt;8% and &lt;35% if in situ ash, or &gt;8% and &lt;50% for coal contaminated with non-coal material.</li> <li>• Approximately 60% of total Reserve coal tonnes require washing to make a marketable product.</li> <li>• Stockton has a CHPP in operation to produce a marketable product.</li> <li>• The CHPP has an online analyser for identifying coal that is out of specification.</li> <li>• Additional samples are sent for petrographic analysis (Romax).</li> <li>• The processes used are standard for the coal industry and so are well tested technologies. This has also been backed up by bulk samples being taken and tested for washability, yield and recovery factors.</li> <li>• Historical plant performance was used to review these factors in late 2014 and are still considered applicable. A full reconciliation was not completed in 2021 and is recommended to be conducted at least annually.</li> </ul>
<b>Environmental</b>	<ul style="list-style-type: none"> <li>• All mining approvals, consents, permits and licenses to operate have been granted for Stockton Mine. These are CML37150, MP41810 and MP52937.</li> <li>• Environmental planning and management are fully integrated with coal mining at Stockton and the mine has annual rehabilitation targets.</li> <li>• Due to high rainfall over the mine site the high content of suspended solid material is a concern to water quality. Stockton is developing an area for mining which includes systems to divert clean surface water around the disturbed area and for collection and channelling of mining contaminated water from the work site into the mine's water treatment infrastructure.</li> <li>• The mine waste rock has the potential to generate acid; therefore, mine water is treated by lime dosing prior to discharge into receiving environment.</li> <li>• The mine has a Closure Plan that has been approved by regulatory authorities.</li> <li>• Disturbed areas are progressively rehabilitated on completion of mining activities.</li> <li>• Soil and vegetation, where practically assessable, are carefully lifted and taken to a holding area or immediately placed in an area (VDT methods) of the mine undergoing rehabilitation.</li> <li>• Environmental impacts that have been identified can be mitigated to meet permitting requirements.</li> </ul>
<b>Infrastructure</b>	<ul style="list-style-type: none"> <li>• Stockton is an operating site with existing infrastructure in place to support the operation. This includes a CHPP, ROM pads, water treatment plant, lime dosing plant, workshop, offices, access road, aerial ropeway, train load out, water treatment structures, weighbridge area, contractor's laydown yard, power station and explosives storage.</li> <li>• Labour is primarily sourced from the nearby town of Westport.</li> <li>• Accommodation for the labour source is off-site in the small nearby towns but primarily in Westport.</li> </ul>
<b>Costs</b>	<ul style="list-style-type: none"> <li>• Stockton is an operating mine and the majority of required capital expenditure has already been spent. Some additional capital expenditure is required to maintain existing structures, mobile fleet replacement and to develop additional water infrastructure as required for future mining areas (e.g. Resource definition).</li> <li>• Operating costs are reviewed annually. These are based on historical actuals and forecasting for the following financial year. Operating cost is made up of equipment costs, fuel consumption, construction, fixed costs, administration costs, environmental costs and transport costs. These include mining, processing, civils, administration, haulage, coal transport via road, aerial ropeway, rail freight and port storage and handling costs.</li> <li>• The CHPP is owned by BT Mining and costs are based on the demand for wash product in the annual budget. Historical data has been used to calculate CHPP costs.</li> <li>• Mine Rescue Levy, License and Inspection Levy, Energy Resources Levy, Crown Royalty, Coal Mining Licence fees, FME carbon and land rates are applied as per appropriate NZ legislation.</li> </ul>
<b>Revenue factors</b>	<ul style="list-style-type: none"> <li>• Coal prices – Hard Coking Coal (HCC) price estimate used was based on BT Mining Limited supplied pricing, PricewaterhouseCoopers (short-term forecast), and extrapolated for the long-term based on publicly available forecasts. These costs were documented by BT Mining and</li> </ul>

Criteria	Commentary
	<p>were reviewed and applied by Golder for economic pit shell evaluation.</p> <ul style="list-style-type: none"> <li>Foreign exchange rates, sourced from BT Mining, are based on consensus published short term rates, PricewaterhouseCoopers and other publicly available forecasts. Current rates assumed are NZ\$1.00 = US\$0.70.</li> <li>All other prices derived from HCC based on agreed company ratios (generally SHCC 80%, SSCC 70% but can vary by mining area).</li> <li>High sulphur coal products &gt; 4% adb are further discounted to 33% of the HCC benchmark estimate.</li> <li>Price sensitivity to coal with sulphur &gt; 4% was included in the 2018 pit optimisation analysis. Assuming no value for these tonnes in the model resulted in no significant change in the economic pit shell extents.</li> <li>Thermal coal is uneconomic at the current sale price and excluded from the 2021 Coal Reserve tonnes. Thermal coal extracted as part of mining process is currently being stockpiled for potential future sales.</li> <li>Discount rate is reviewed annually based on an internal BT Mining real rate.</li> </ul>
<b>Market assessment</b>	<ul style="list-style-type: none"> <li>The supply and demand situation for coal is affected by a wide range of factors, and coal consumption changes with economic development and circumstances. BT Mining Limited has sales agreements in place with some existing customers. Established external forecast analysts have provided guidance to assess the long-term market and sales of coal.</li> <li>Stockton sells coal into several markets; the Coal Reserve quality in the Stockton pit has been decreasing over the life of mine as the Coal Reserve is depleted. Particularly lower in rank or higher in sulphur coal remaining have resulted in changes over time to coal market requirements. Currently 16% of the Coal Reserves has a sulphur content &gt; 4% and requires a blending to make a marketable product.</li> <li>BT Mining Limited Marketing team is regularly in talks with new customers and investigate potential new markets.</li> </ul>
<b>Economic</b>	<ul style="list-style-type: none"> <li>For the optimisation study carried out July 2018 the following inputs have been taken into consideration: mining, processing, civils, administration, haulage, aerial ropeway, rail, port costs and licenses and levies as per appropriate NZ legislation.</li> <li>Pit optimisation study developed a revenue factor (RF) with a range of 0.4 to 2.0 in 0.1 intervals.</li> <li>The incremental RFs allow for the generation of different pit shells, allowing different stages to be chosen rather than just mining the ultimate pit. RFs &gt; 1 provide an indication of the possible size of a pit with potential price increases and designate likely infrastructure or waste rock storage areas.</li> <li>Sensitivity analysis has been completed on commodity price variations which is the primary driver for the Stockton pits.</li> <li>The updated pit optimisation study carried out by Golder Associates (NZ) Limited in July 2018 for the Stockton pit area has been used to determine the current Coal Reserve block extents.</li> <li>The reported Coal Reserve is based on economic viability determined by BT Mining conducted cashflow analysis using actual site performance, costs, mine plans and BT's marketing studies for sales and pricing, and Golder Associates (NZ) Limited informed of the results.</li> </ul>
<b>Social</b>	<ul style="list-style-type: none"> <li>BT Mining Limited currently holds the required permits for mining activities and landowner access to mine the current Coal Reserves reported.</li> <li>The Millerton and Plateau Protection Society (MAPPs) is an Agreement between BT Mining and the residences of Millerton Township. In this agreement BT Mining has stated that they will not mine within the MAPPs area but have also stated that it retains all the rights to undertake activities covered under the Coal Mining License (CML) including coal mining.</li> <li>As a part of the resource consenting process and general site operations, regular communication and consultation has taken place with the local communities including the local Iwi.</li> </ul>
<b>Other</b>	<ul style="list-style-type: none"> <li>All material legal agreements, marketing arrangements and government approvals are in place and active for the existing operation.</li> <li>There are no currently identified material naturally occurring risks that could impact the project or estimated Coal Reserves.</li> </ul>
<b>Classification</b>	<ul style="list-style-type: none"> <li>Coal Reserves are based upon Resources classified as either Measured or Indicated from the</li> </ul>

Criteria	Commentary
	<p>Resource estimation and classification process.</p> <ul style="list-style-type: none"> <li>• The prospect is an operating site and assessed at or above a Pre-Feasibility Study (PFS) level.</li> <li>• The Coal Reserve classification results appropriately reflect the Competent Persons view of the deposits.</li> <li>• 6% of Probable Coal Reserves are derived from Measured Coal Resources.</li> <li>• Coal tonnes with &gt;4% sulphur require blending with low sulphur coals assumed from the Bathurst Resources Limited (BRL, parent company) owned projects or other unidentified external sources to make a marketable product and have been classified as Probable.</li> </ul>
<b>Audits or reviews</b>	<ul style="list-style-type: none"> <li>• In 2008 a study was undertaken to assess coal washability and based on the results the current CHPP constructed and remains in use at the site.</li> <li>• In 2009 a Definitive Feasibility Study was undertaken for the Millerton Region.</li> <li>• Palaris undertook a review of the Stockton reserve model in 2013 and 2016 as part of a Vender Due Diligence process for the previous owner Solid Energy New Zealand Limited.</li> <li>• Internal review Pit Optimisation Study has been undertaken in 2014.</li> <li>• Golder Associates (NZ) Limited has reviewed the economic pit limits as part of Pit Optimisation studies completed in June 2015 and July 2018.</li> </ul>
<b>Discussion of relative accuracy/confidence</b>	<ul style="list-style-type: none"> <li>• Coal Reserves have been reported in accordance with the guidelines of the 2012 edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves, the basis of the categorisation reflects the accuracy of the coal reserve tonnes.</li> <li>• The accuracy of the Coal Reserve estimate is dependent on the ability to sell the coal at the estimated prices and the site operating costs. Site operating costs are based on historic actual costs, the discount rates and the forecast long-term coal sale price have been reviewed internally by BT Mining and as part of a pit optimisation study by Golder Associates (NZ) Limited in 2018.</li> <li>• The Modifying factors applied to the reserve model are global estimates of tonnes and grade.</li> <li>• Accuracy and confidence of modifying factors are generally consistent with the current operation. Modifying factors applied to the Stockton Coal Reserve are mining losses, dilution and contamination to both roof and floor of the coal seam. The amount of losses, dilution and contamination are dependent on the lithology of the rock in the roof and floor. Additional modifying factors are applied for previous underground (UG) mined area (e.g. Millerton area).</li> <li>• For the UG areas the accuracy of factors for mining losses, dilution and contamination is reflected in the Coal Reserve classification of Probable. The other modifying factor that affects the Millerton block is presence of historic and active UG fires. A fire affected surface is estimated from drillhole data and applied in the block model. The accuracy of this surface is reflected in assigned Coal Resource classification of Inferred. BT Mining conducted additional infill and improved resolution of the surface area in 2018.</li> <li>• Marketable coal tonnes are reported on the basis of in-ground moisture only, further data and assessment is recommended in order to report total product moisture.</li> <li>• There are an estimated 0.97 million tonnes of coal product with a sulphur content &gt;4% currently in the Stockton Coal Reserve (21% of Coal Reserve) that is recovered during the mining process and requires blending to make a marketable product. A high sulphur product (Granity) has been developed that contains a high proportion of high sulphur coal. This product has been accepted following a customer trial during FY20. Other existing customers have contracted to purchase this coal product during the FY21, providing further confidence of market support. High sulphur tonnes (&gt;4%) are classified as a Probable Coal Reserve.</li> </ul>

Appendix A:

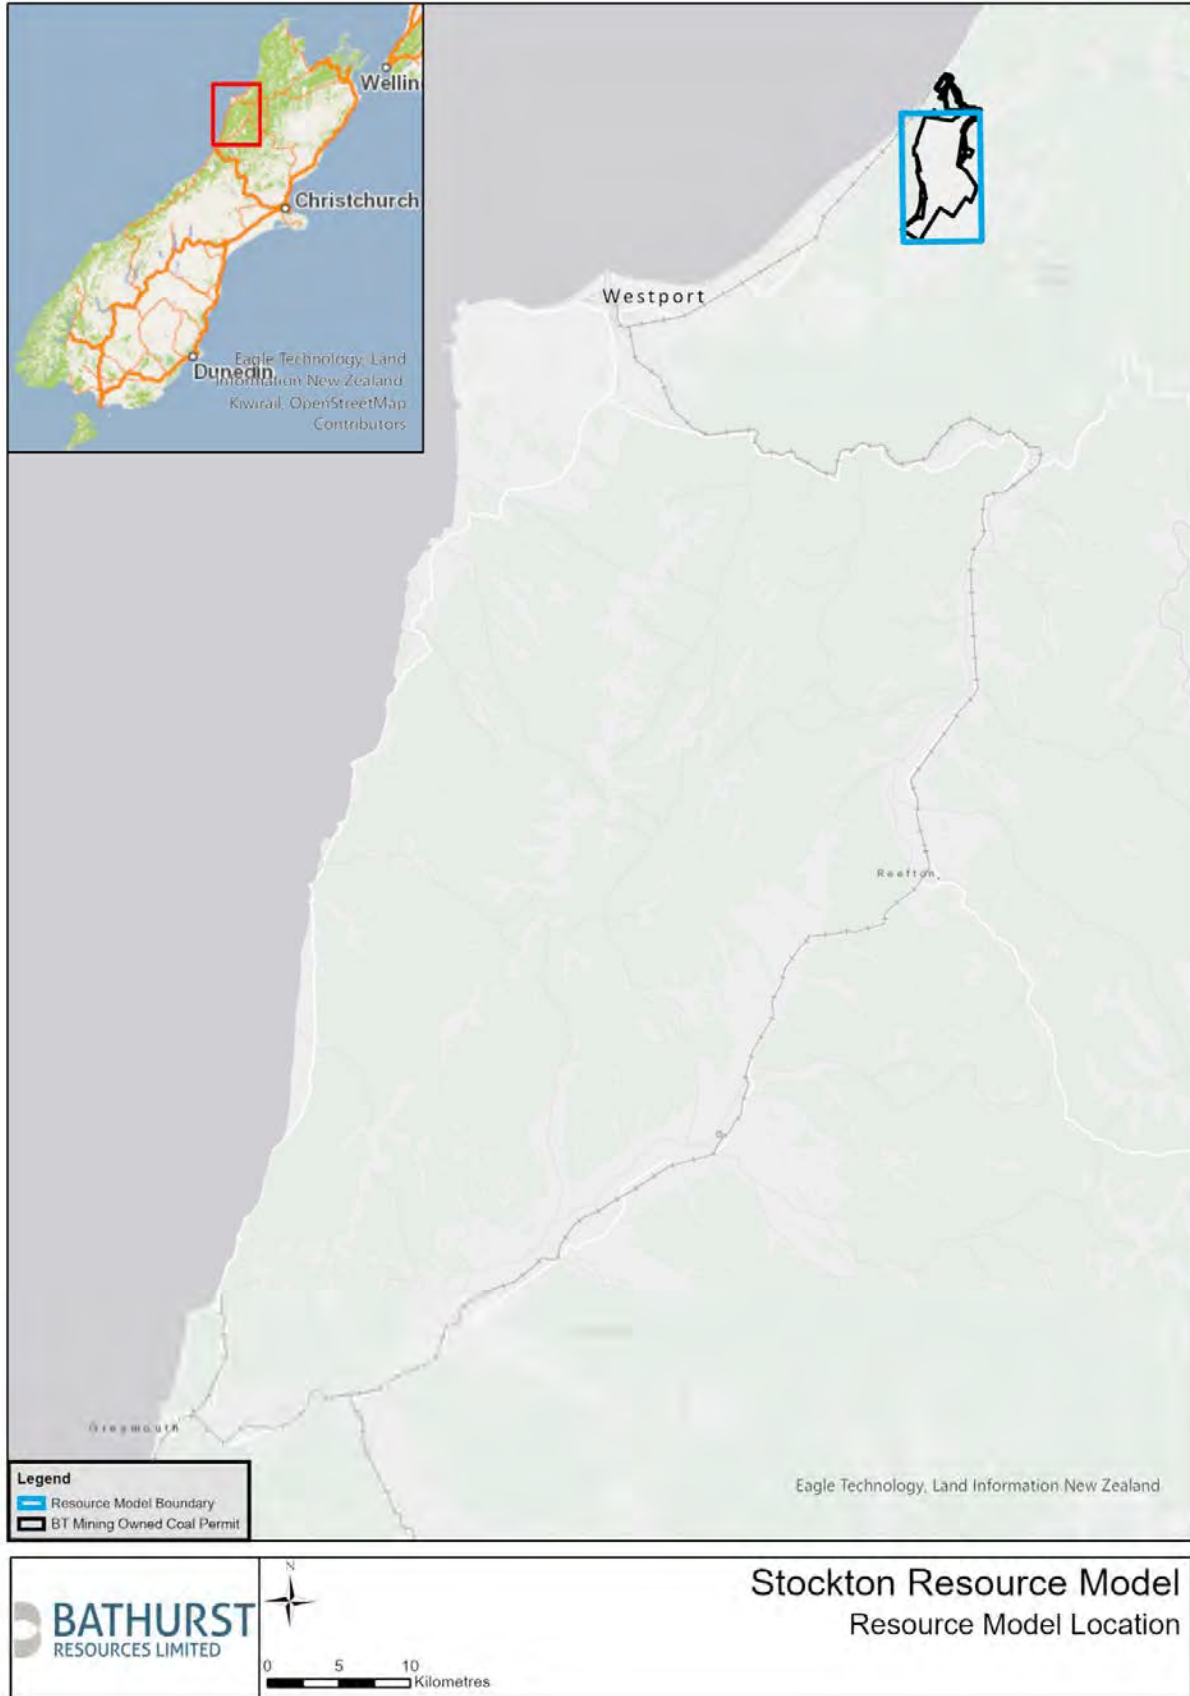


Figure 1: Location map of Stockton block model within Buller District



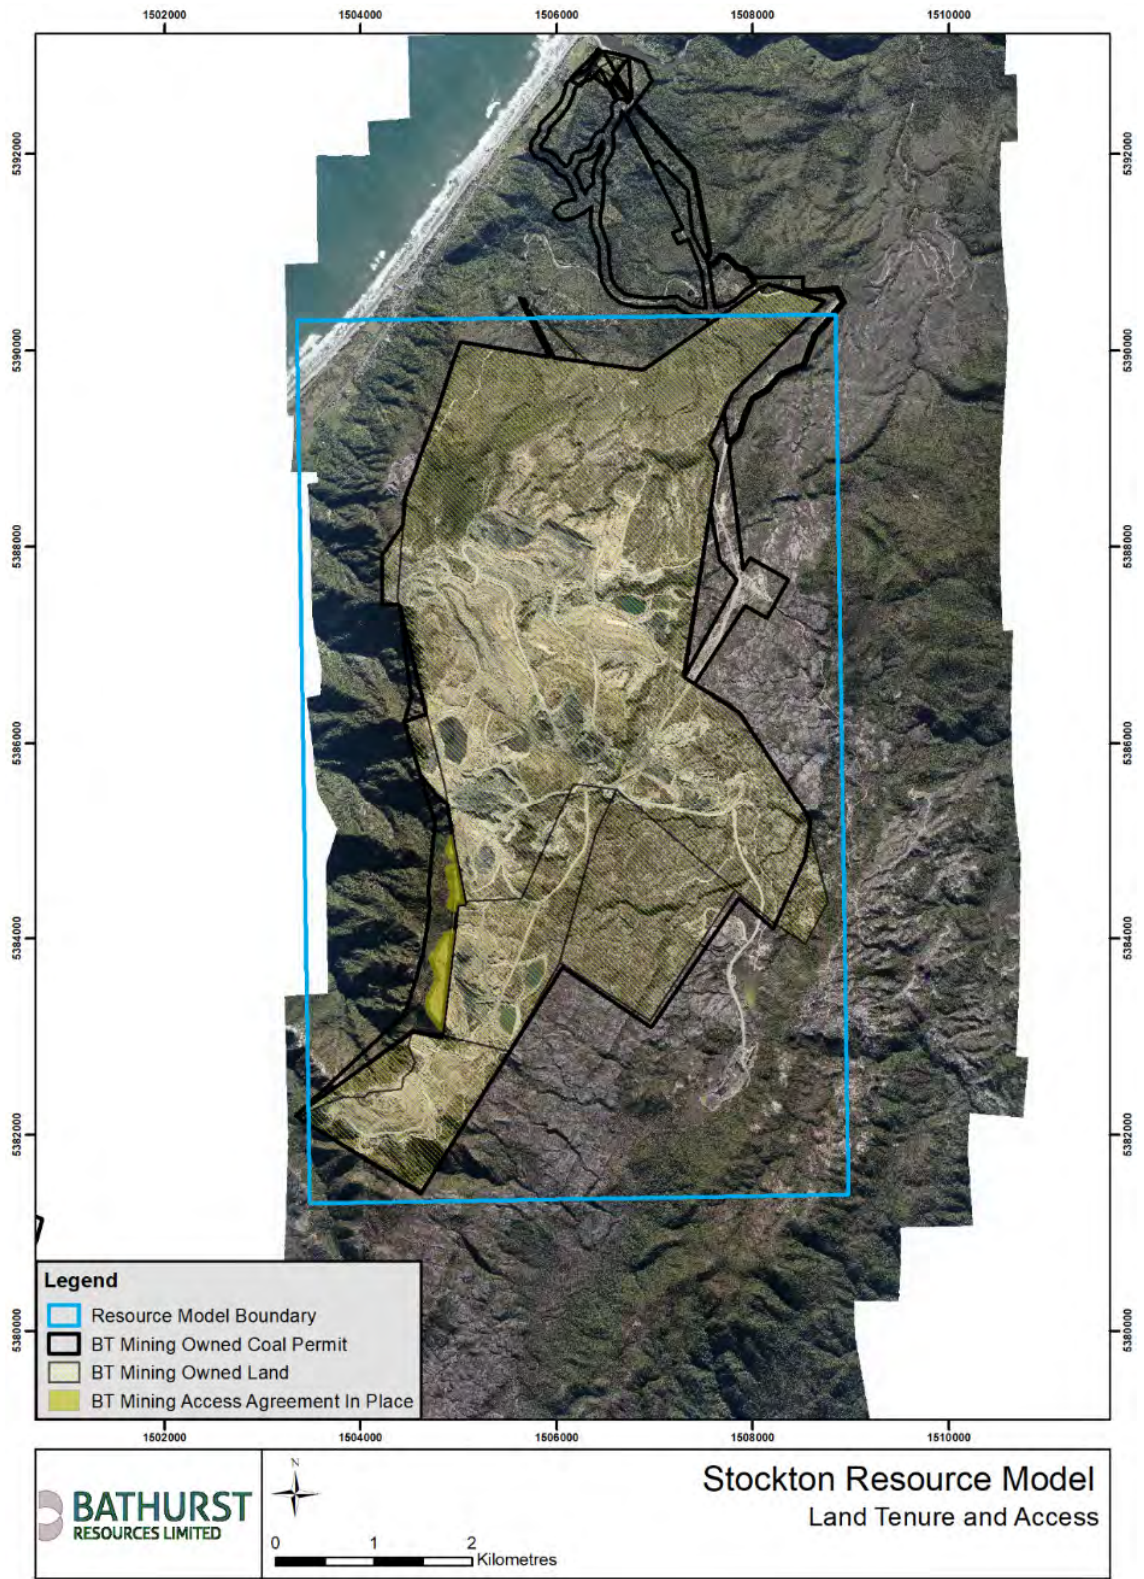


Figure 2: Map showing Land rights across the mine site

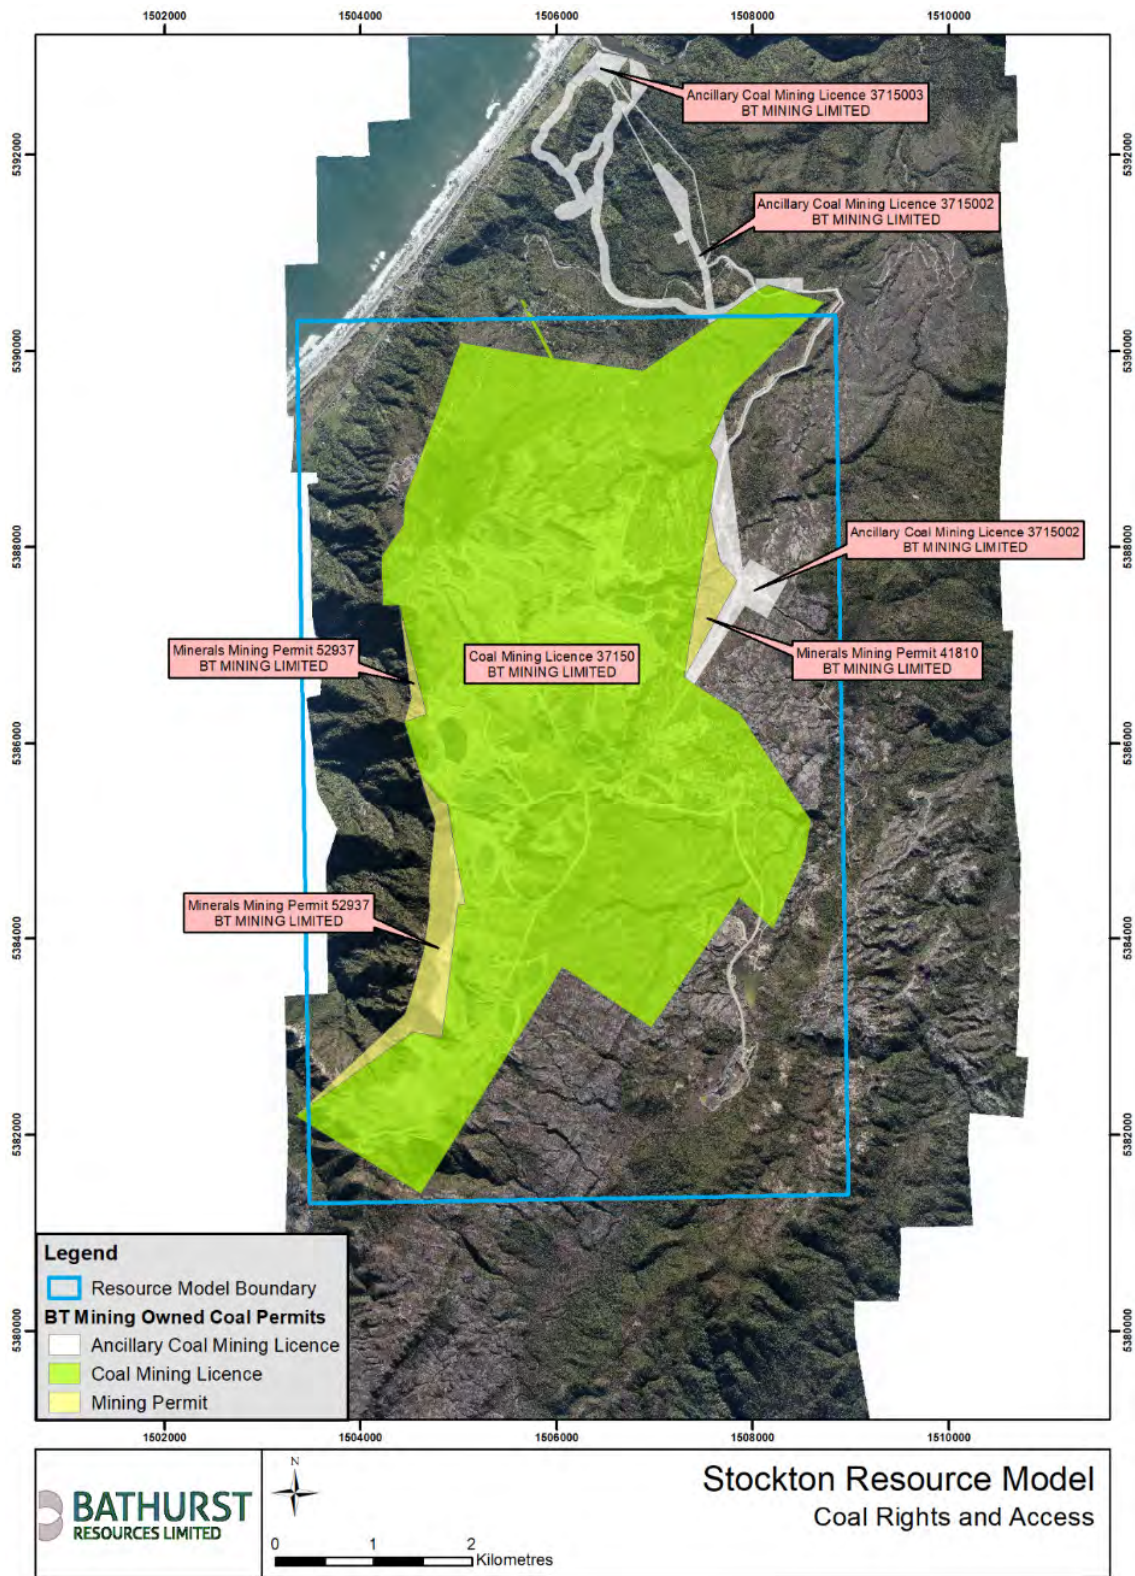


Figure 3: Map showing Mining Permit across mine site

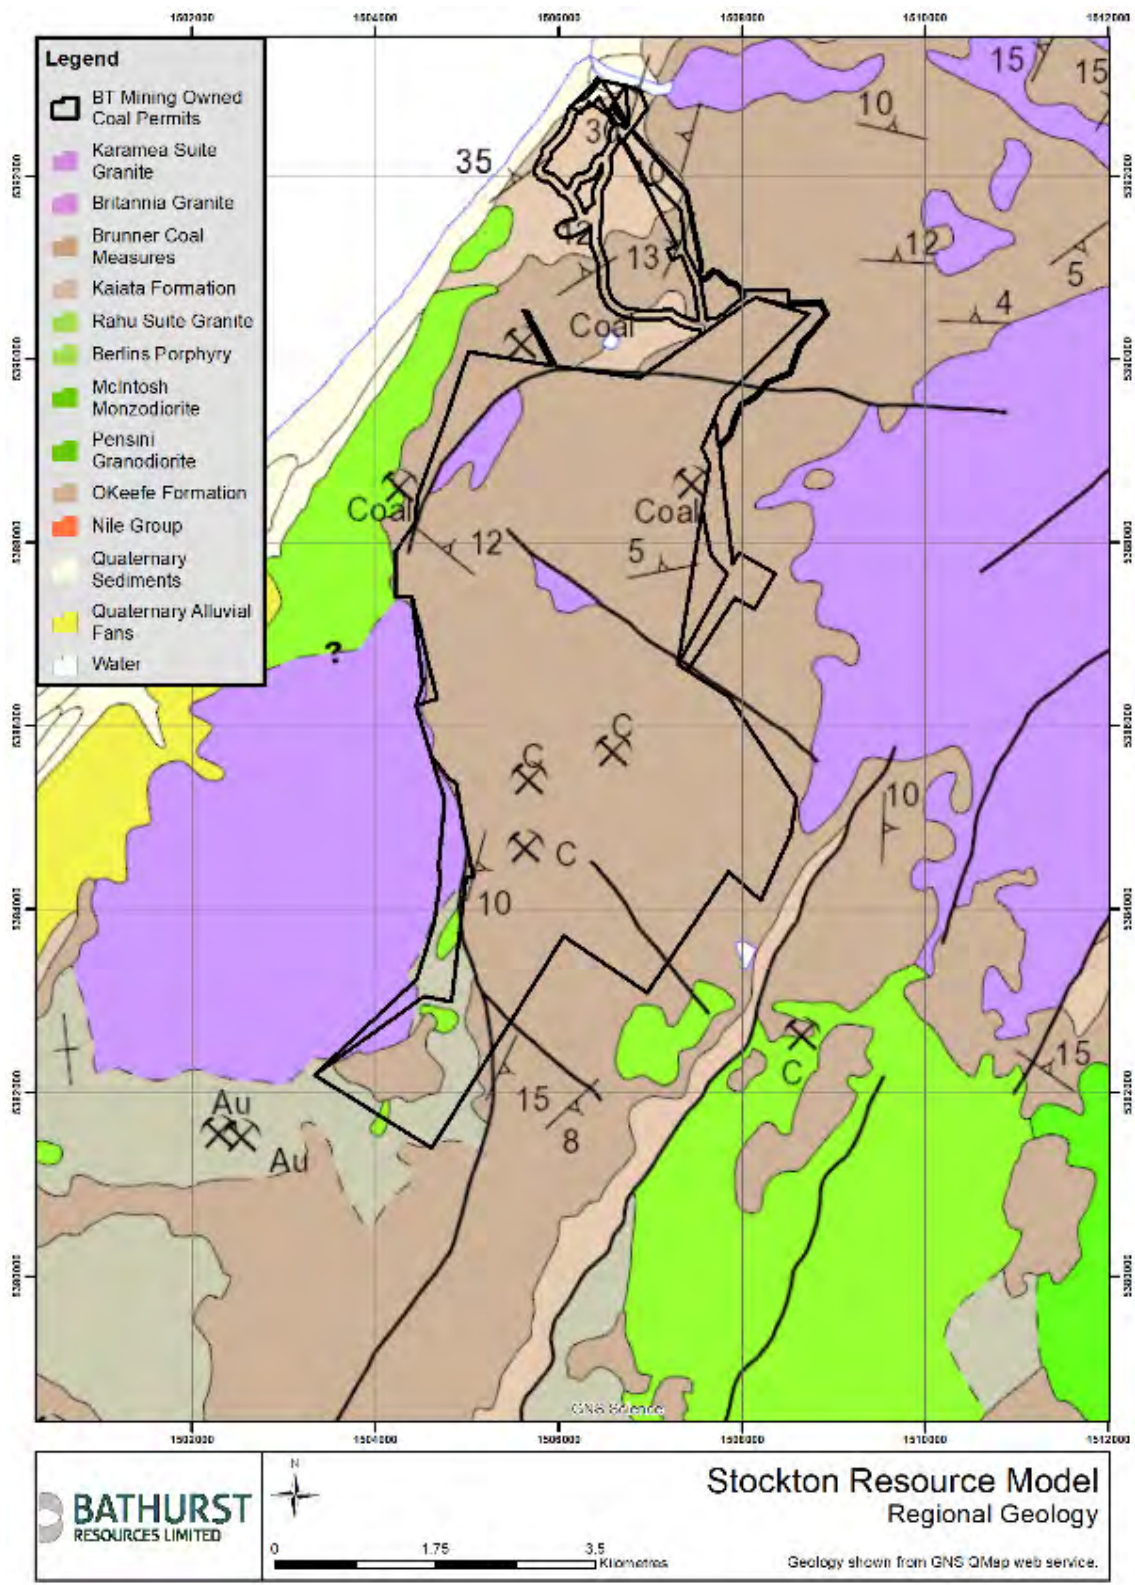


Figure 4: Geological QMap across the mine site

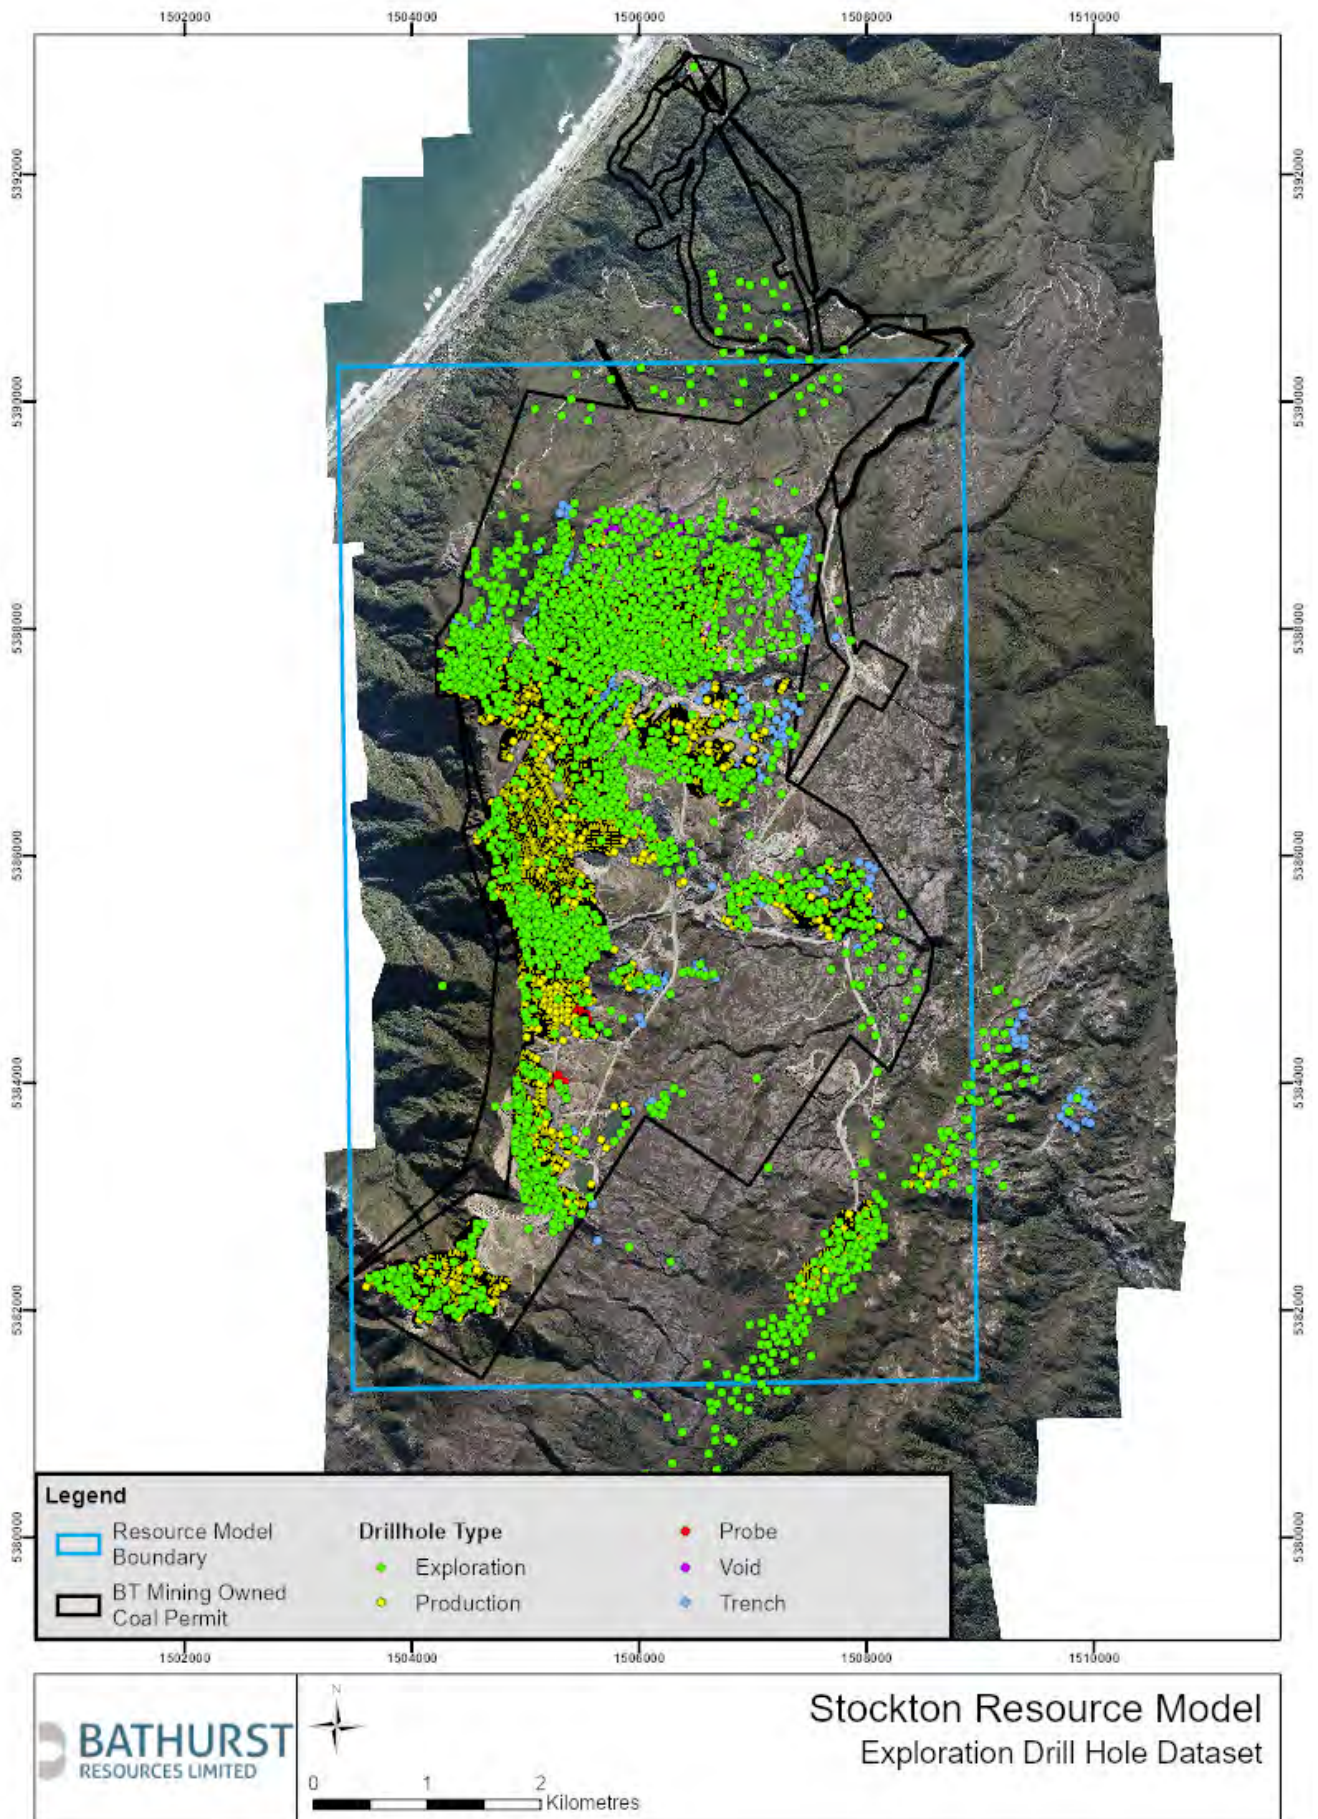


Figure 5: Map showing drillhole type/distribution

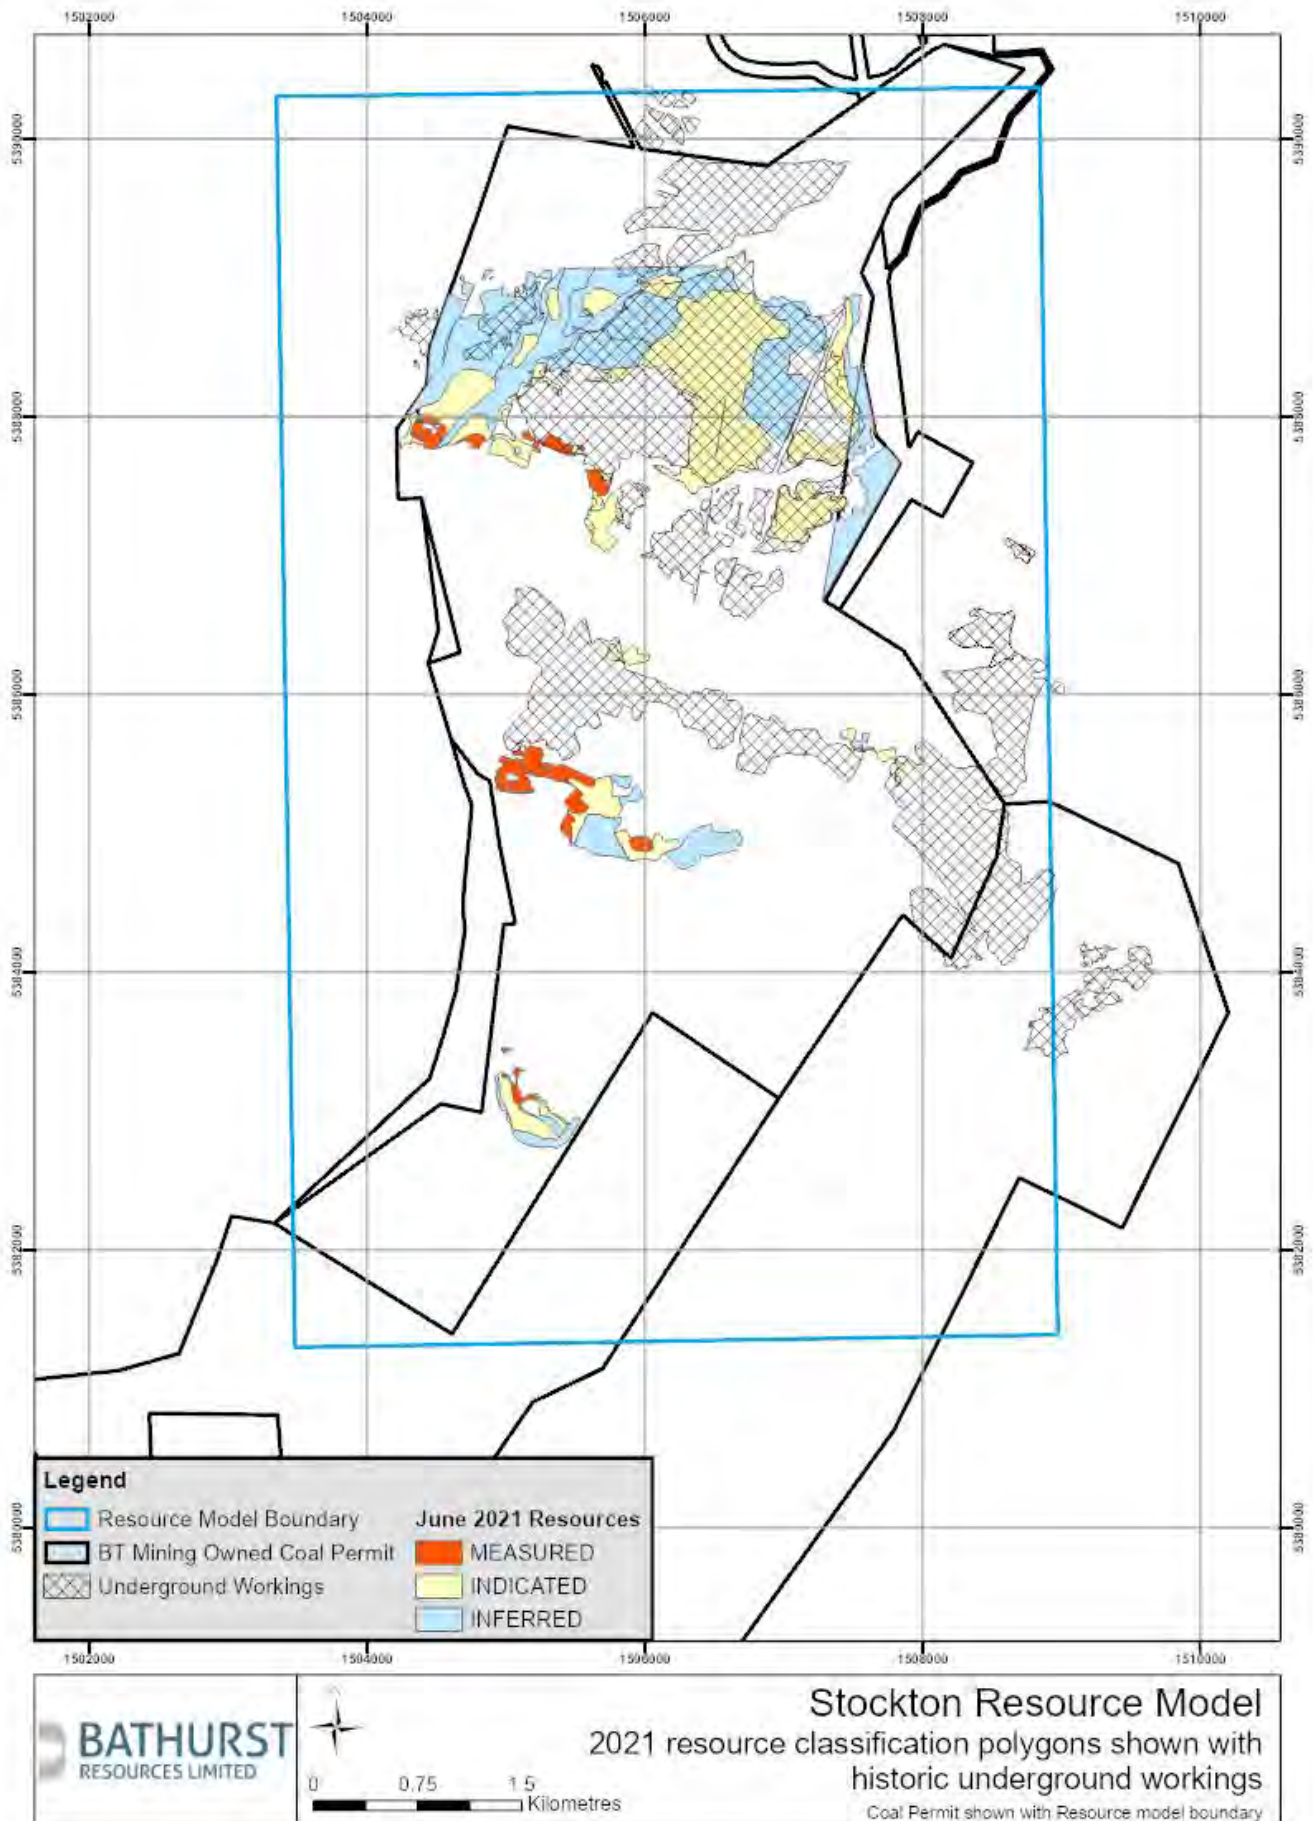


Figure 6: Map of underground workings across mine area

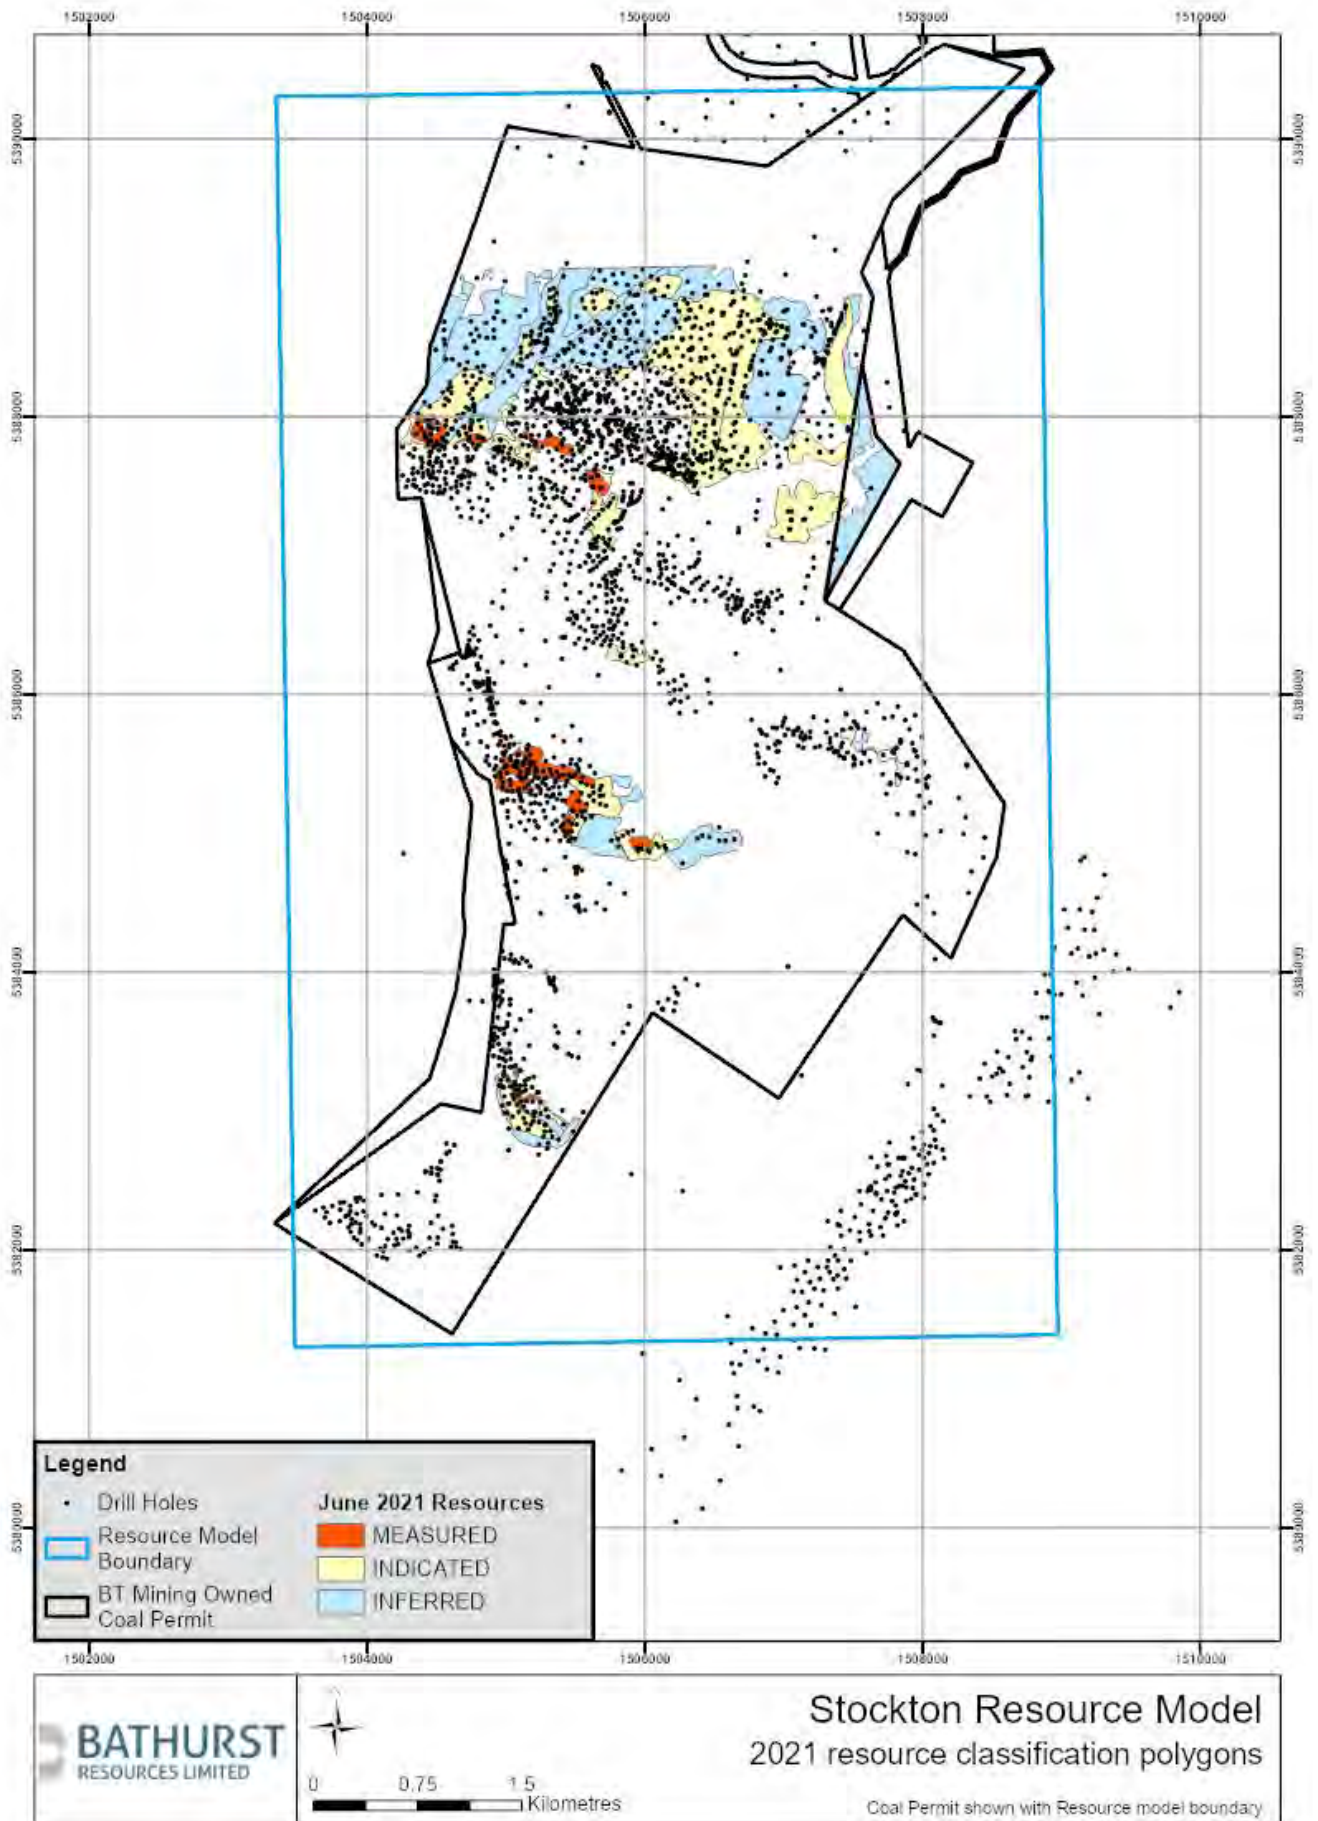


Figure 7: Map of Resource Classification

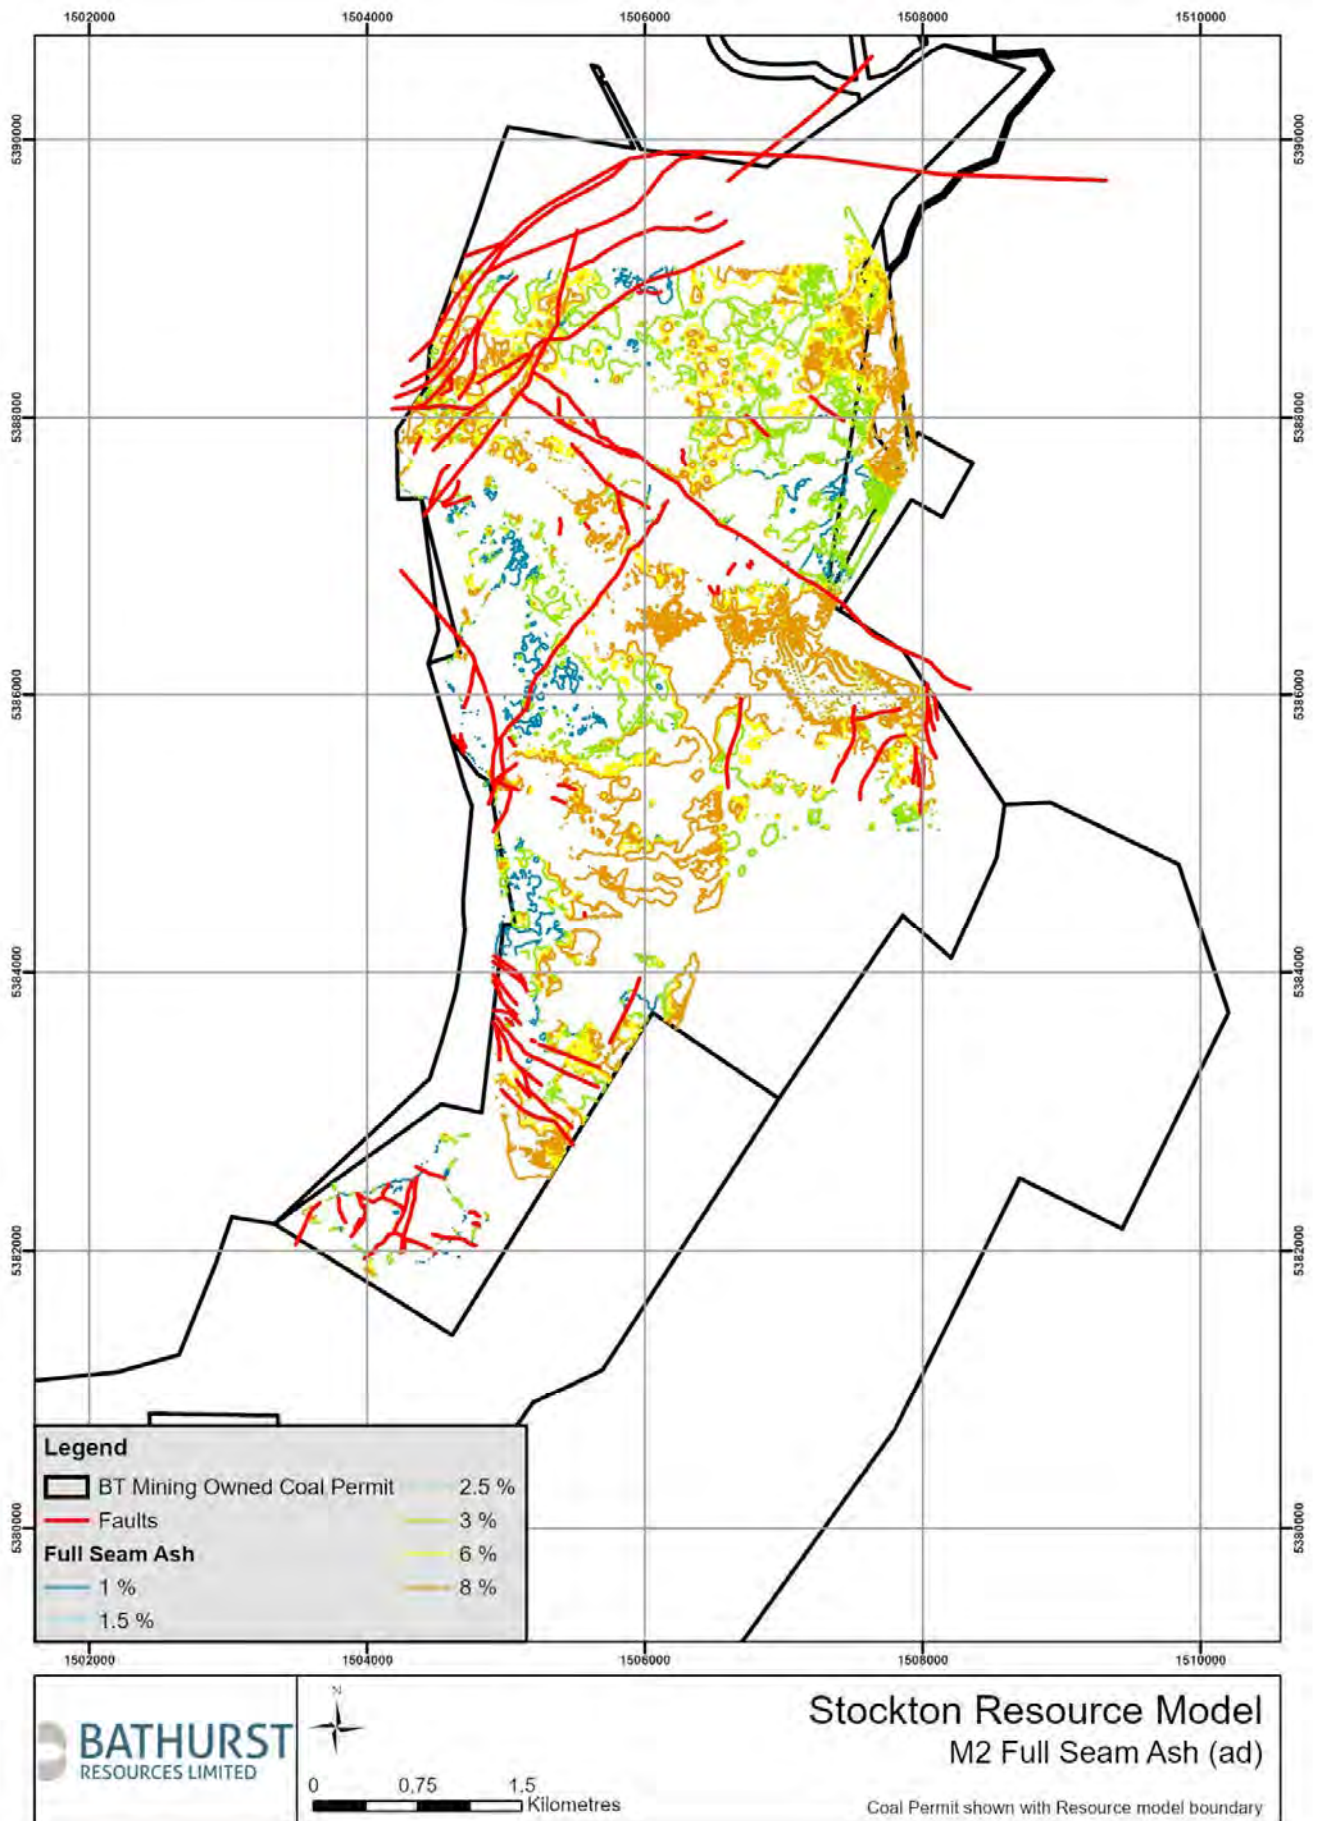


Figure 8: Map showing M2 Ash distribution

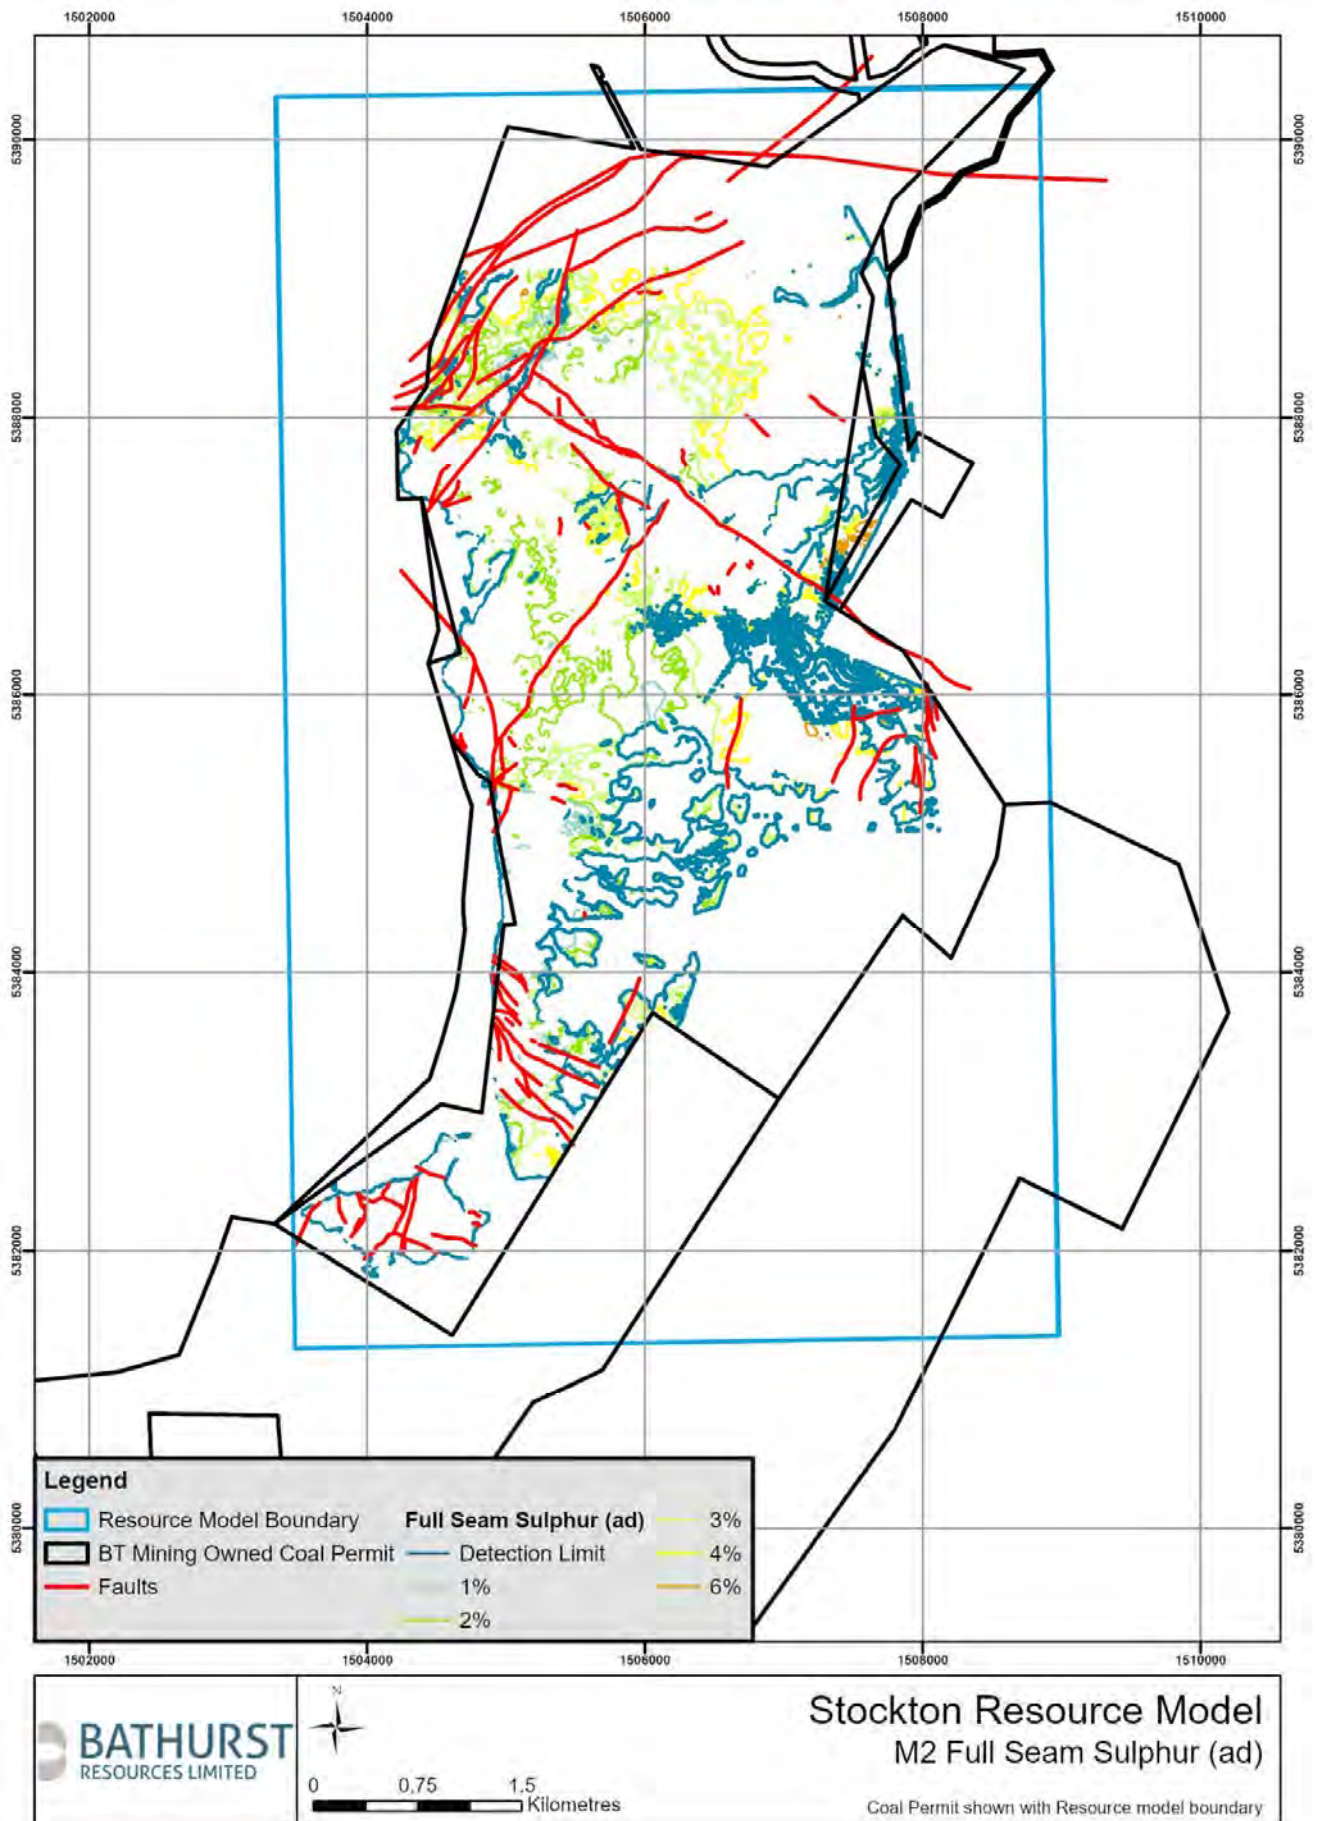


Figure 9: Map showing M2 sulphur distribution



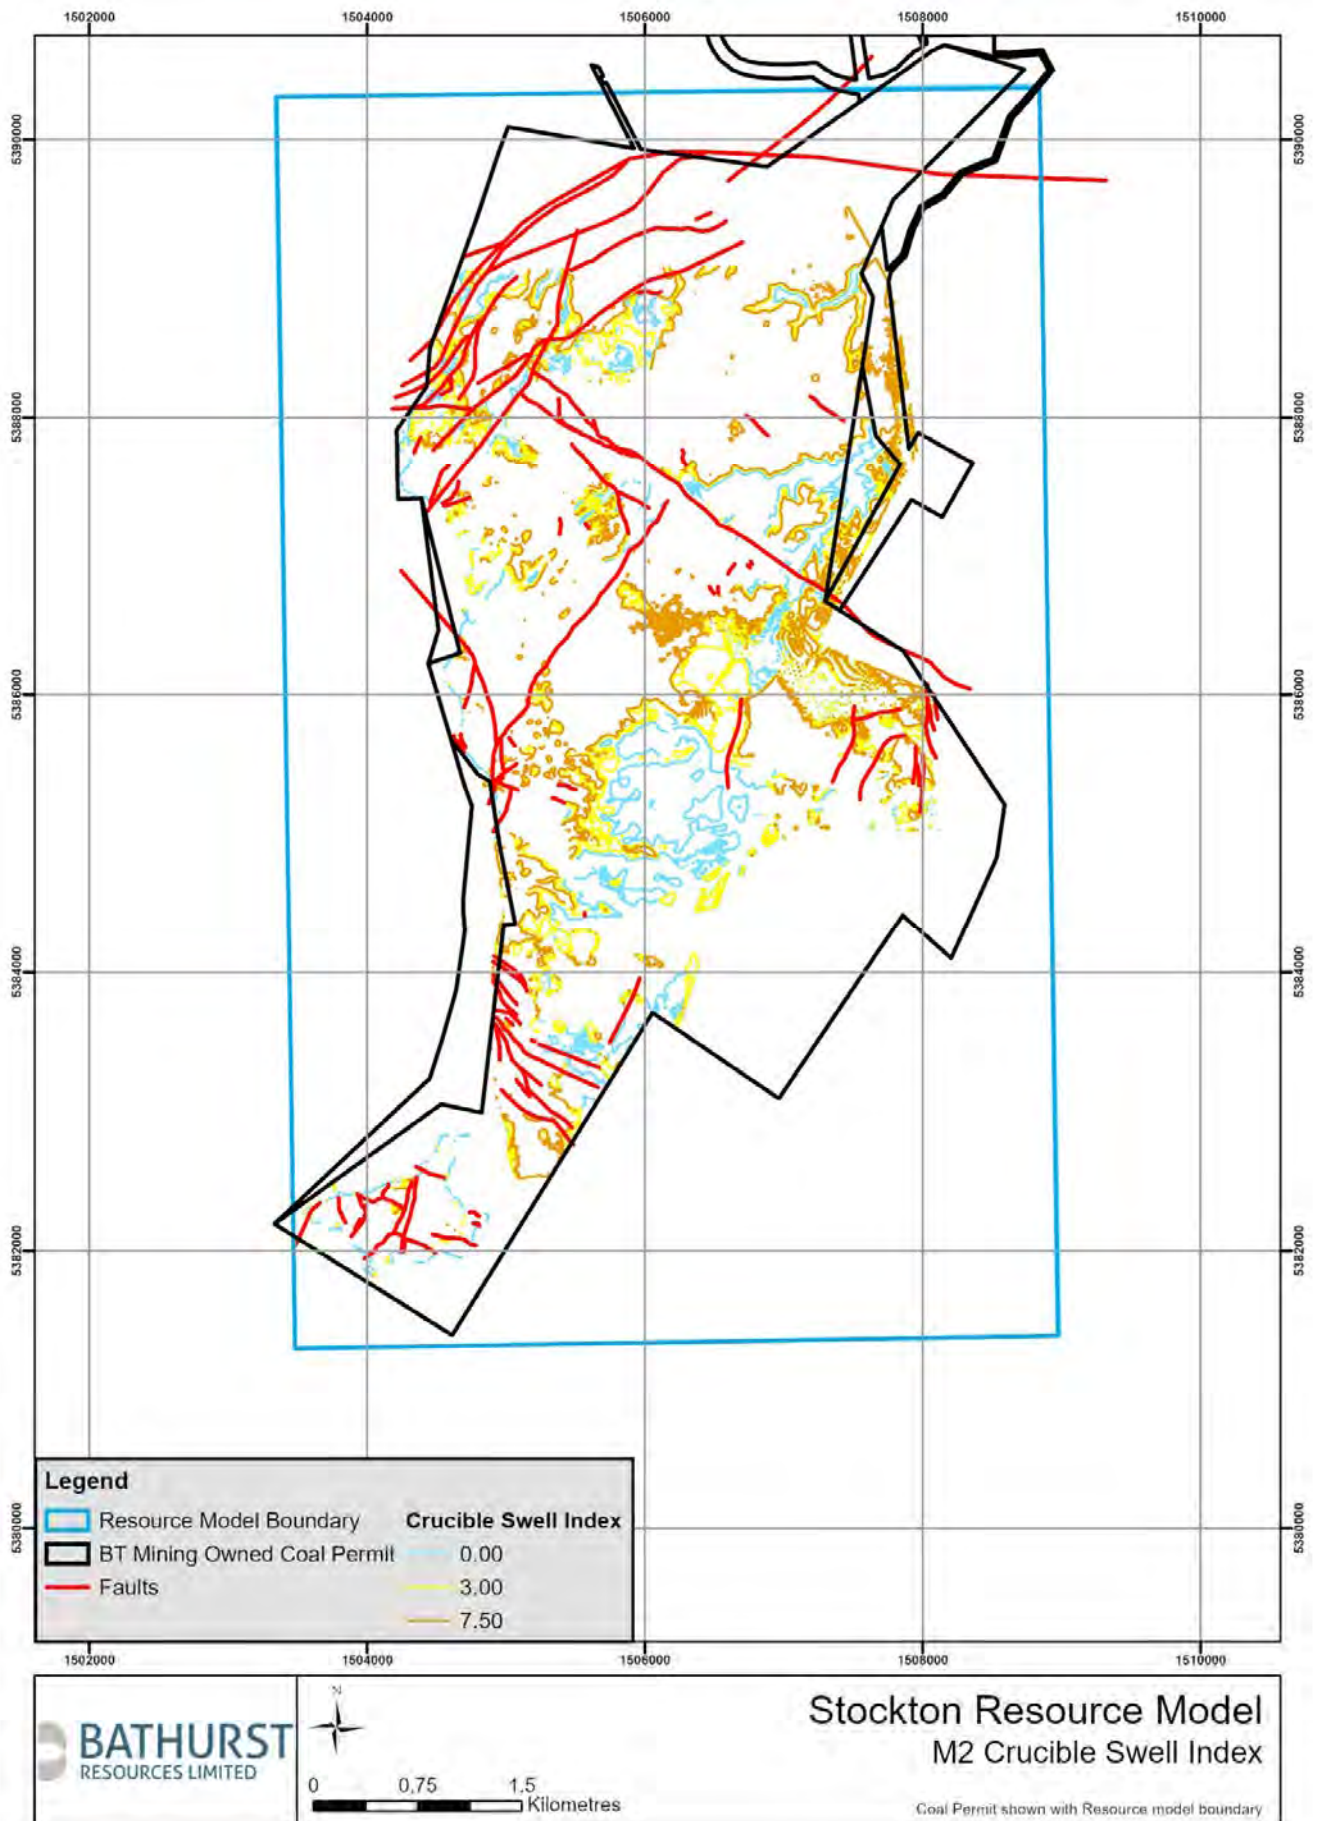


Figure 10: Map showing M2 Crucible Swell Number (CSN) distribution

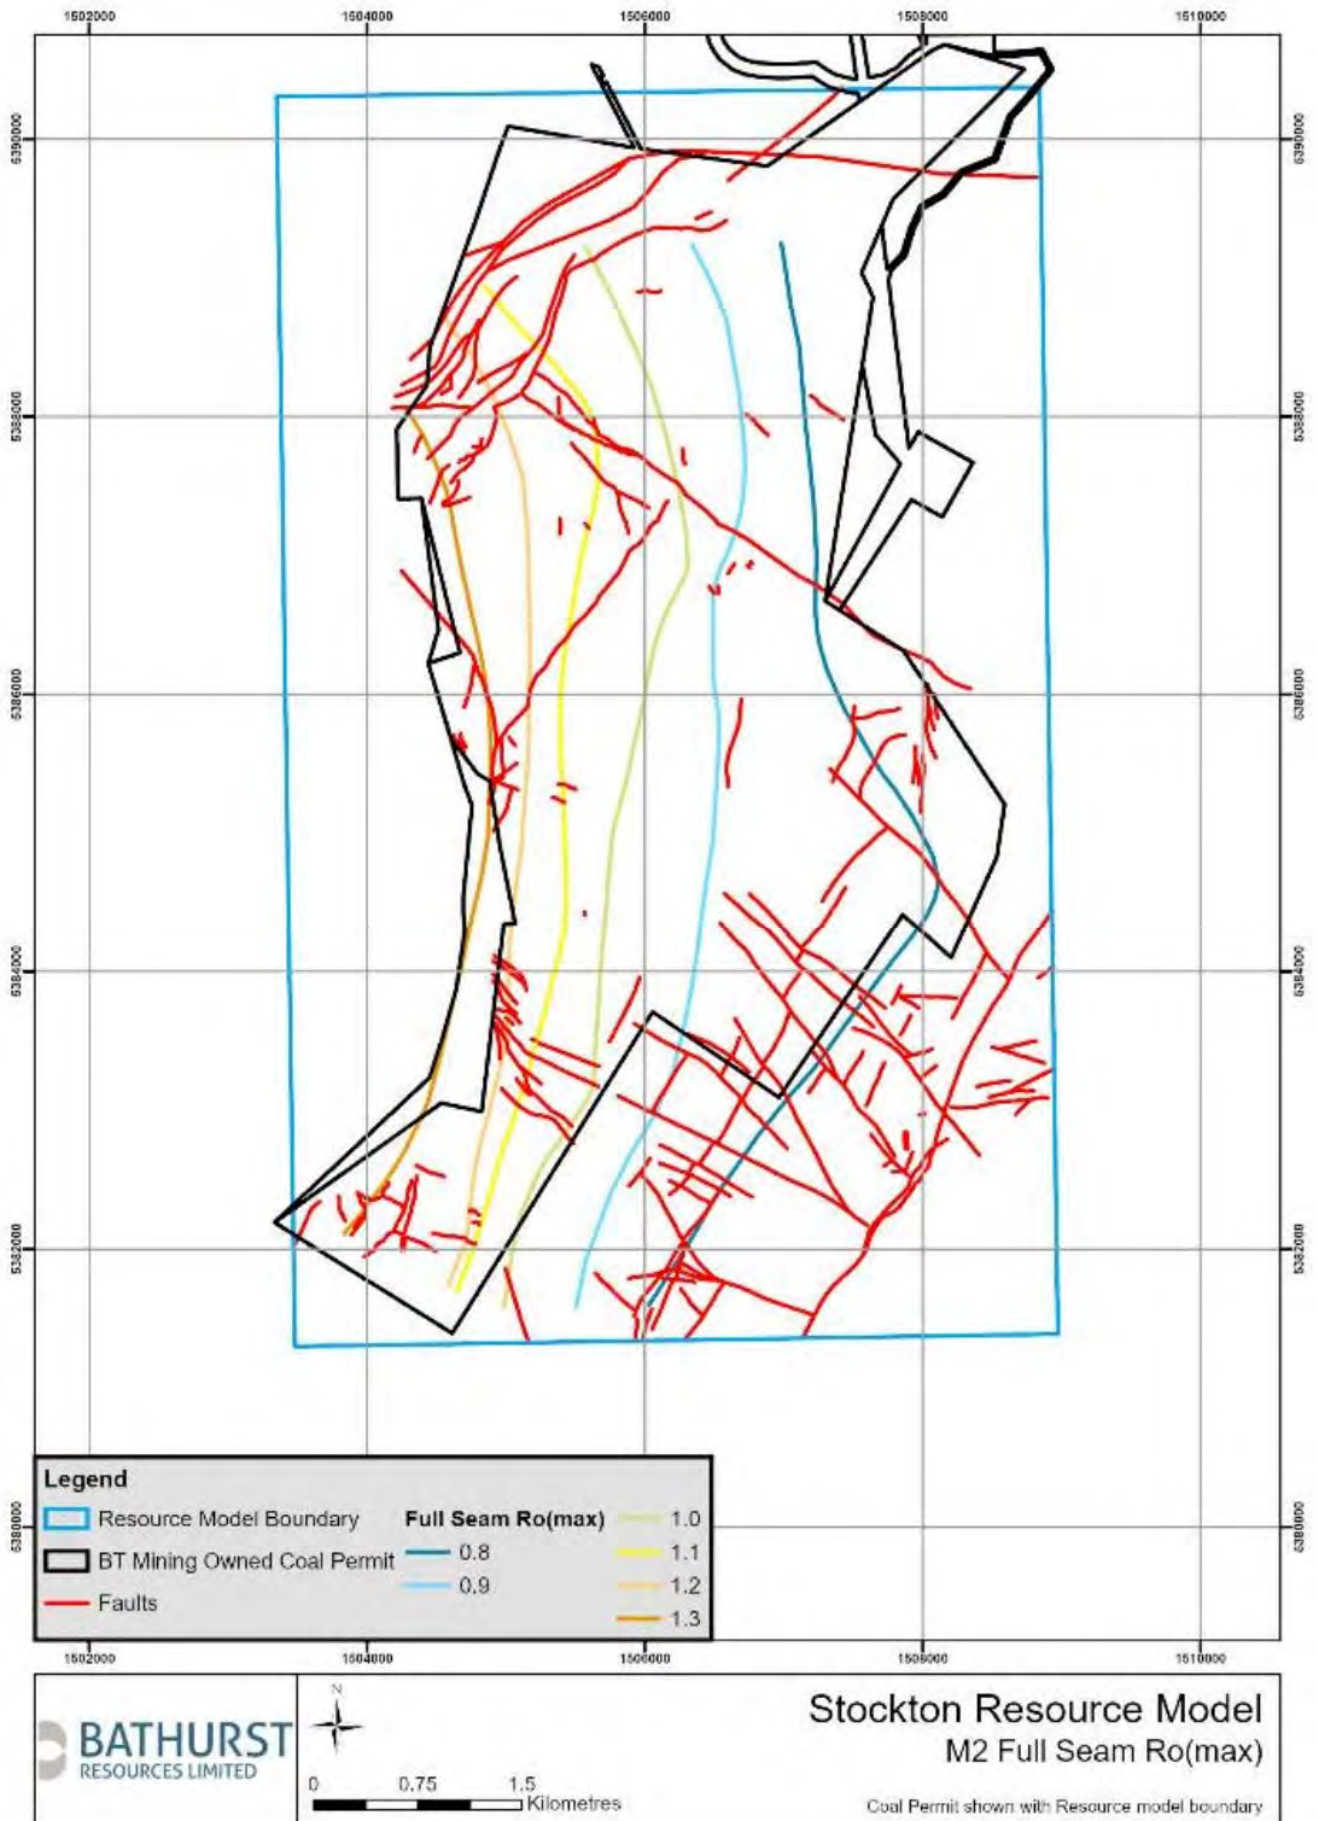


Figure 11: Map showing M2 RO(MAX) distribution

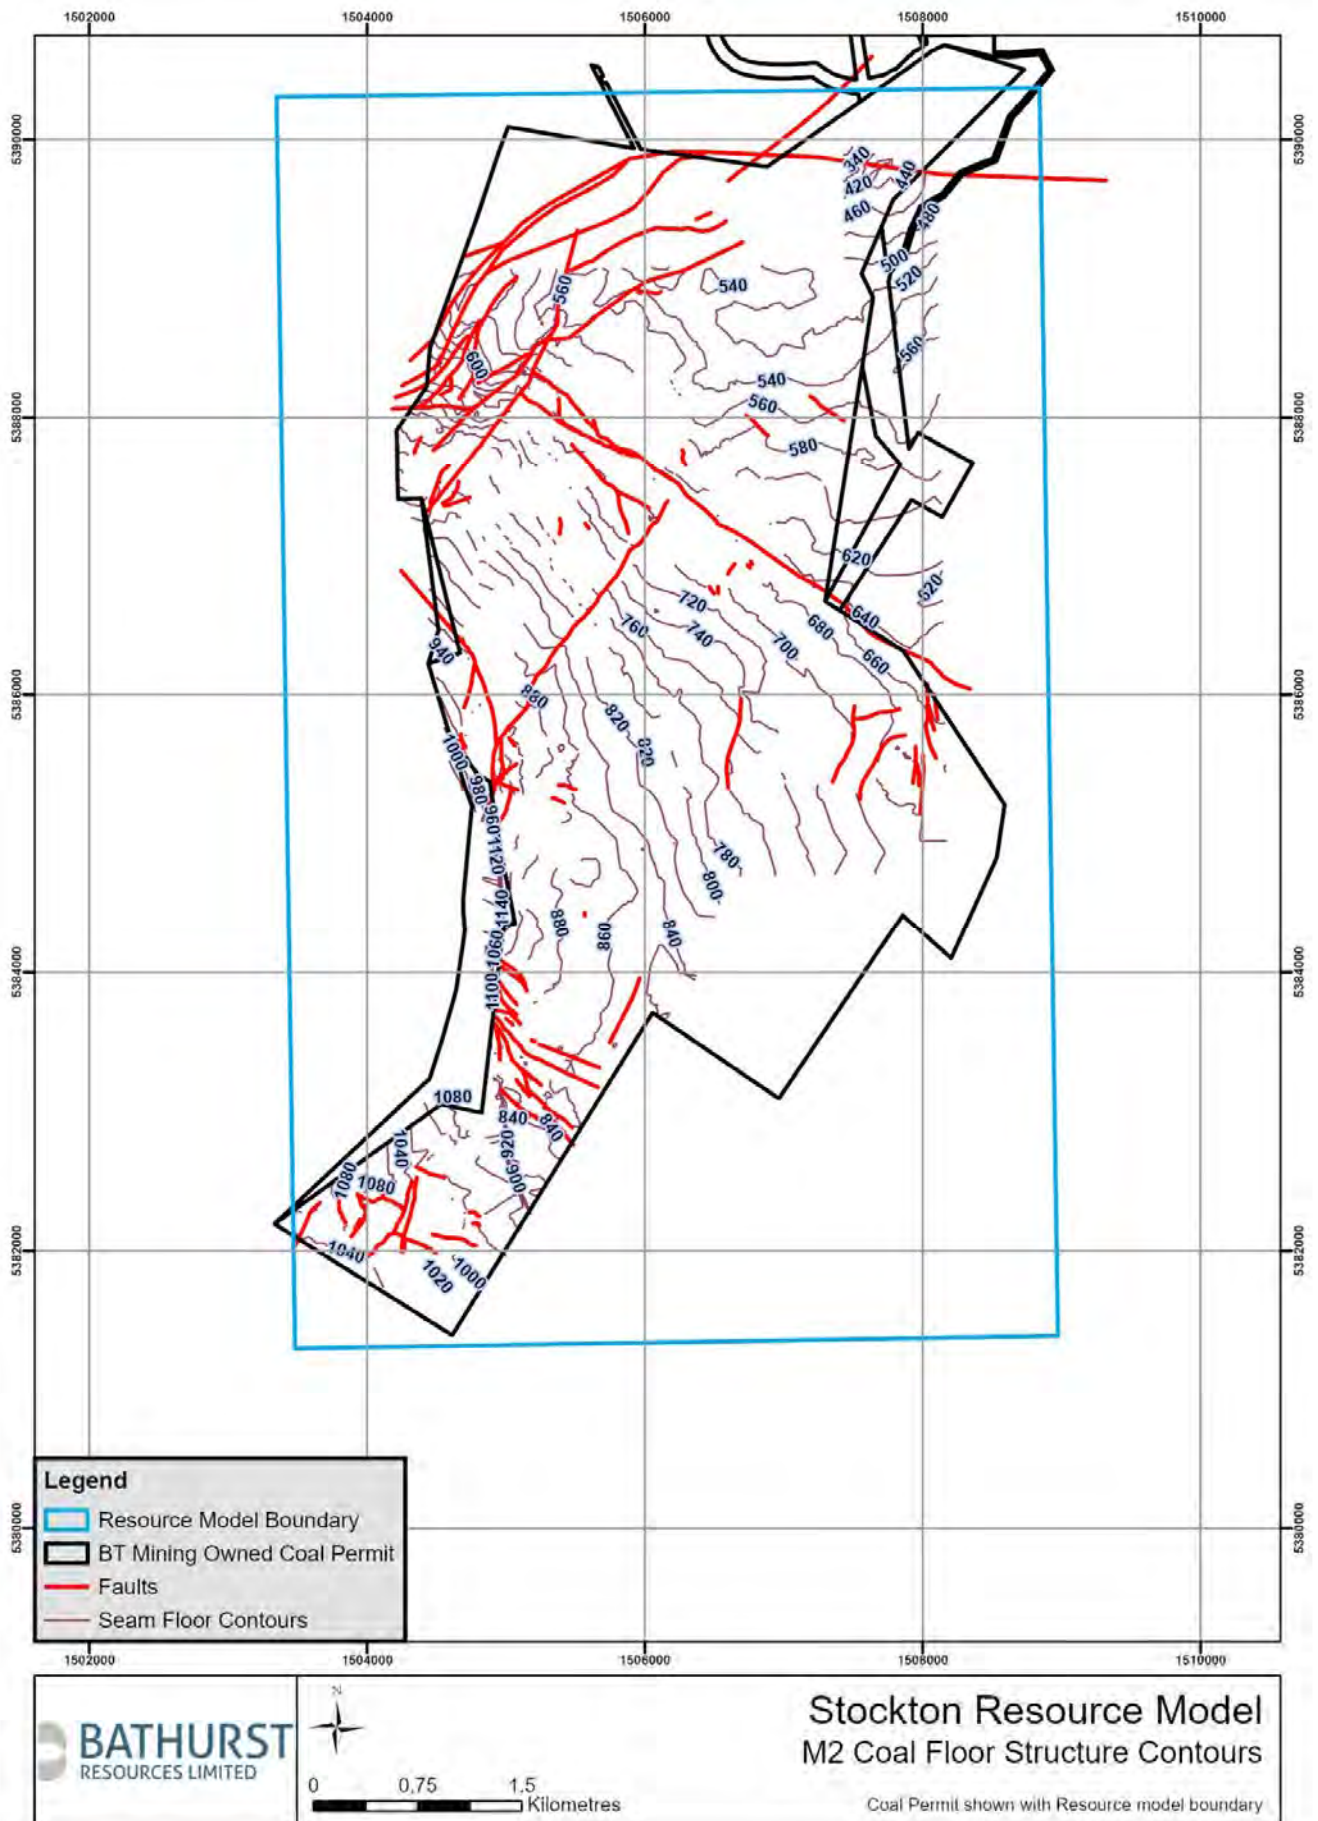


Figure 12: Map showing M2 floor contours distribution

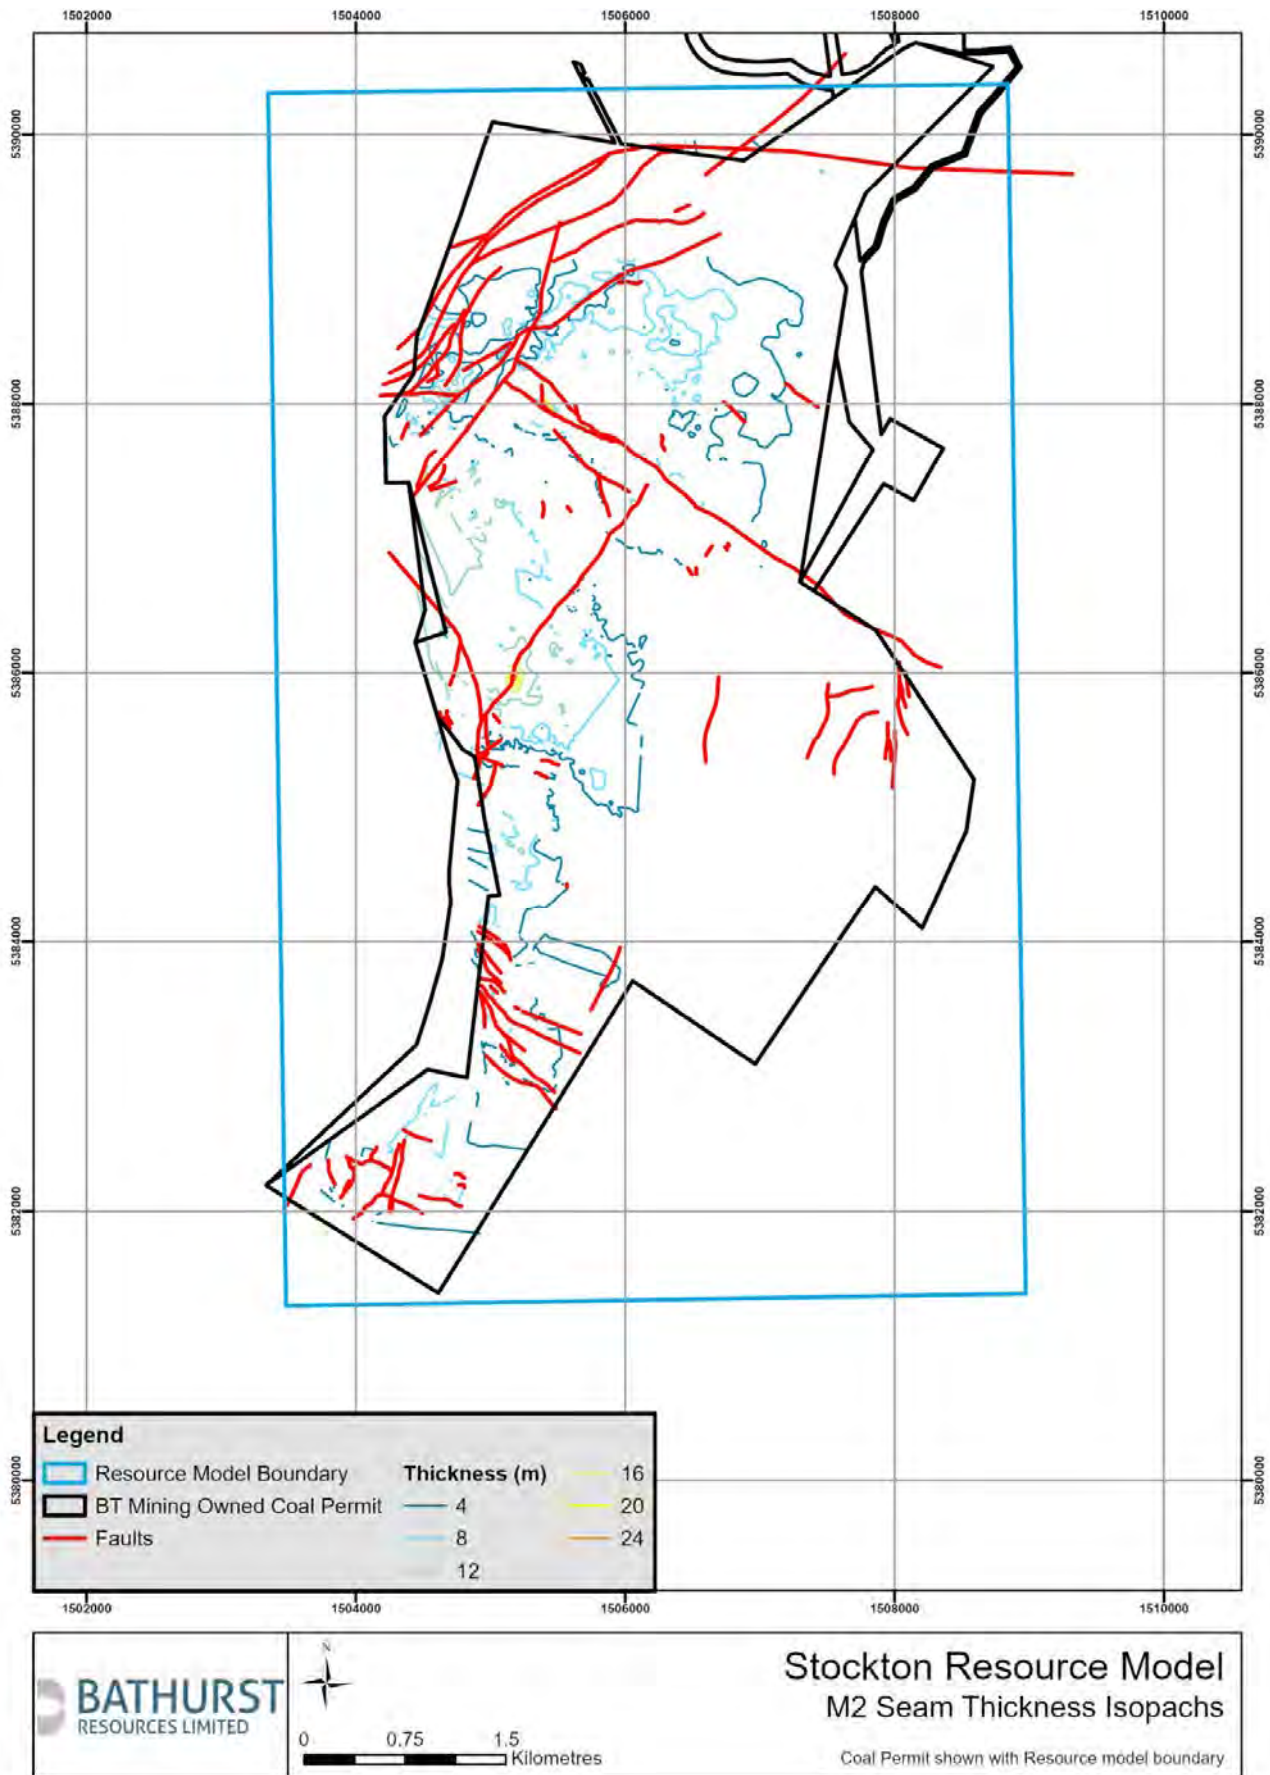


Figure 13: Map showing M2 apparent seam thickness

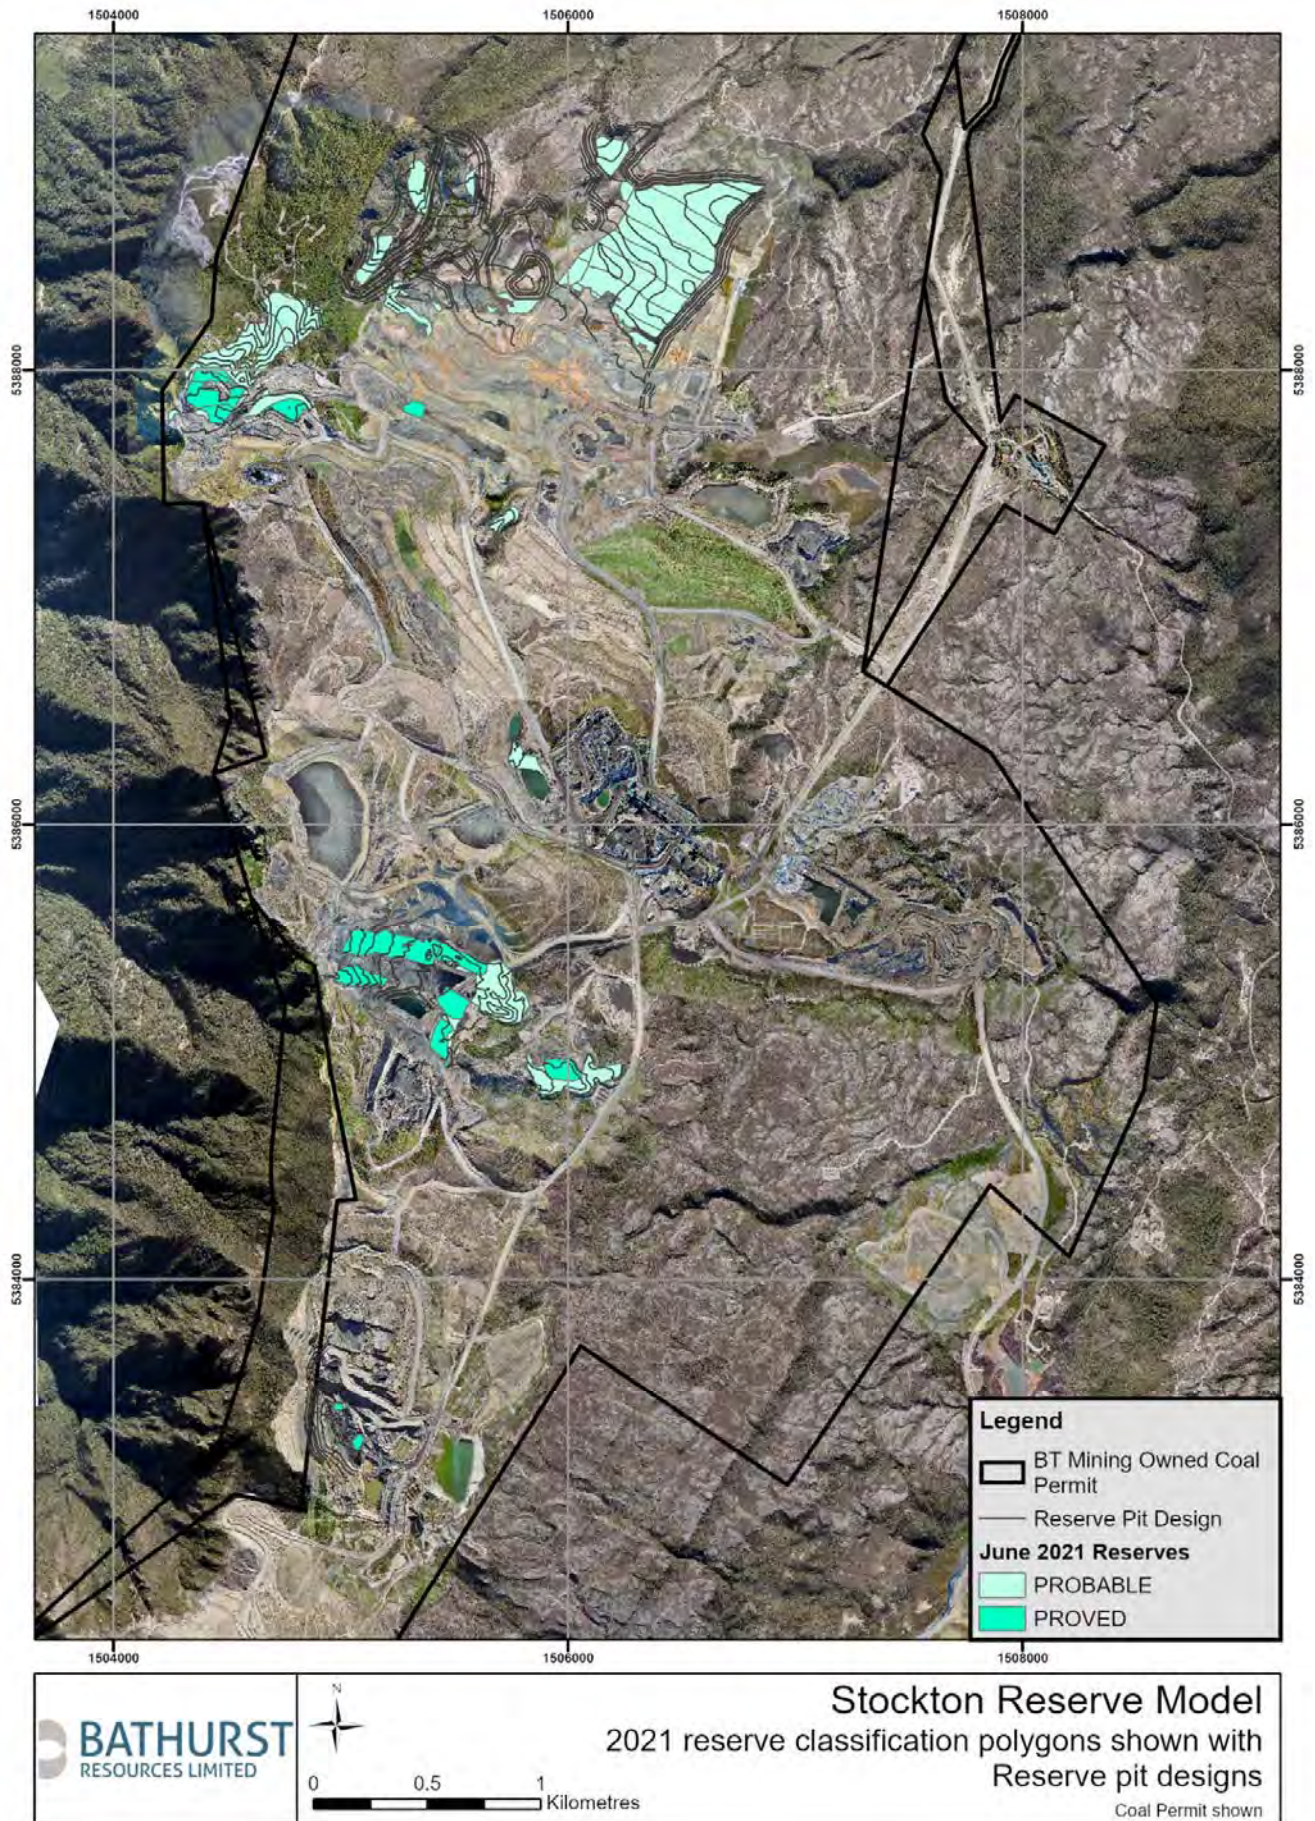


Figure 14: Stockton reserve pit shells

# JORC Code, 2012 Edition – Table 1 Report for Upper Waimangaroa 2021

## Section 1 Sampling Techniques and Data

Criteria	Commentary
<b>Sampling techniques</b>	<ul style="list-style-type: none"> <li>• Diamond Core (DC) drilling sampling for coal quality analysis took place using PQ (85mm) or HQ (64mm) coring methods for coal seams. The entire core is retained for analysis. Resource modelling has been undertaken over four individual areas of interest (Figure 2):               <ul style="list-style-type: none"> <li>○ Mt. William North.</li> <li>○ Cypress.</li> <li>○ Mt. William South.</li> <li>○ Upper Waimangaroa South.</li> </ul>               Individual resource model reports have been compiled for the individual areas of interest.             </li> <li>• DC sampling is carried out under Stockton specific protocols and QAQC procedures.</li> <li>• Composited samples are created at the laboratory from individual plies that are thickness weighted. These composited samples are compiled for additional coal property testwork.</li> <li>• Trench lithology and sampling data collection has been collected in a similar manner to drill core (i.e. 0.5m plies) and have had the same analysis completed.</li> <li>• Reverse Circulation (RC) chip samples are collected via a cyclone attached to a reverse circulation percussion drill rig. Sampling is primarily undertaken on 0.5m intervals through the coal seam (~6kg), and indicative 1m rock samples (~70g). The entire coal sample is retained for analysis.</li> <li>• The quality of drill core, RC chip samples and trench samples are continuously monitored and collected by geologists during drilling.</li> </ul>
<b>Drilling techniques</b>	<ul style="list-style-type: none"> <li>• Drilling has been undertaken using the following techniques:               <ul style="list-style-type: none"> <li>○ Diamond Core (triple tube, PQ core).</li> <li>○ Open hole (Tungsten drag bit, PQ size).</li> <li>○ Reverse Circulation (PQ sized face sampling bit).</li> <li>○ Blade bit.</li> </ul> </li> <li>• Some drill collars have had open hole pre-collars.</li> <li>• The bulk of the drillholes have been drilled vertically due to the shallow dipping morphology of the deposit and due to its close proximity to the surface.</li> <li>• No core has been orientated.</li> </ul>
<b>Drill sample recovery</b>	<p><b>Diamond Core</b></p> <ul style="list-style-type: none"> <li>• Standard industry techniques are employed for recovering drilled core samples from drillholes. Core is obtained by HQ (63mm) diameter coring techniques, using triple tube operations, providing good core recovery, averaging &gt;80% over the entire drillhole (inclusive of non-coal lithologies). On average recovery of coal is 90%.</li> <li>• HQ core diameter is considered to provide a sample of sufficient volume to be representative of the in situ material and provides adequate sample mass to undertake the variety of raw coal tests together with composited sample analysis when required.</li> <li>• In poor ground conditions HQ sized rods, and therefore core were used to ensure that the drillhole was completed without affecting the integrity of the drill core and or loss of drilling equipment.</li> <li>• Downhole geophysics has been undertaken on most of the diamond core holes. A combination of geophysical tools, including Density, Natural Gamma, Caliper, Sonic, Dipmeter, Acoustic Scanner, and Verticality have been run down holes. All tools are calibrated on a regular and systematic basis. All geophysical logging work has been conducted by a contractor (currently Weatherford). Sample interval and recovery recorded in the field by drillers is validated and adjusted if required using geophysics during core logging and sampling.</li> <li>• When drillholes are geophysically logged, the geophysical logs are correlated/validated against the core to determine core/chip recovery, while ensuring drill depths recorded in the field by the drillers are correct.</li> </ul>

Criteria	Commentary
	<ul style="list-style-type: none"> <li>Core photography is undertaken on all diamond core.</li> <li><b>Reverse Circulation Drilling Chips</b></li> <li>RC chip samples from the reverse circulation percussion drillholes is recovered directly from the rods using a cyclone system. The entire sample interval is retained for coal quality analysis. Sample interval of 0.5m produces a sample between 5 - 7kg.</li> <li>For non-coal lithologies an indicative sample (~70g) from each meter is retained for geological logging.</li> <li>RC generated samples with poor recovery (&lt;3kg) are not submitted to the laboratory for analysis.</li> <li>Should there be poor recovery for the entire coal seam the hole is re-drilled if there is no specific reason for the poor recovery (e.g. presence of underground workings within the coal seam).</li> <li>The Competent Person is satisfied that the RC holes have taken a sufficiently representative sample of the mineralisation and minimal loss of fines has occurred.</li> </ul>
<b>Logging</b>	<ul style="list-style-type: none"> <li>All diamond core samples are checked, measured, marked up and finally photographed before logged in a high level of detail.</li> <li>All diamond core samples are geologically logged in a high level of detail down to centimetre scale. Intervals are logged for lithology, colour, weathering type, stratigraphy, texture, hardness, RQD and defects. Logging is conducted using a defined set of codes.</li> <li>Every discrepancy between the measured length of the core and the driller's length marked on the core blocks is investigated. Discrepancies are resolved by geologists prior to sampling with the use of geophysical logs.</li> <li>All percussion drillholes chip samples are geologically logged, with 1m samples used to define the non-coal lithologies (overburden), and 0.5m samples for coal and other non-coal lithologies surrounding or contained within coal seam partings. The geological logs are validated against laboratory results.</li> <li>The entire lengths of RC drillholes are logged. Where no sample was returned due to voids/cavities it is recorded as such.</li> <li>Drillholes that have been geophysically logged with a suite of tools (as described above) are analysed extensively to validate, confirm and correct coal seam depths. Validation and, if required, correction of the geological logs against geophysics is undertaken to ensure accuracy and consistency. Verticality, caliper, density and natural gamma tools are checked regularly with standard calibration assemblies. The density calibrations are performed routinely - with blocks of known densities (aluminum and/or water).</li> </ul>
<b>Sub-sampling techniques and sample preparation</b>	<ul style="list-style-type: none"> <li>No splitting of core is undertaken in the field or during sampling.</li> <li>Sample selection is determined in-house and is documented in a core sampling procedure. Clean coal core has been sampled to a maximum of 0.5m plies, and adjusted for core loss and lithological variations.</li> <li>Associated high ash coal intervals and partings were sampled separately to assess potential dilution effects where they are &lt;0.5m thick. Intervals with non-coal material (&gt;50% ash) are excluded from sampling.</li> <li>Trench samples follow the same procedure as described for core samples.</li> <li>Samples are placed into pre-labeled plastic bags to ensure proper Chain of Custody, and then transported by BT Mining Limited personnel to the laboratory for testing. The laboratory continues with the Chain of Custody requirements. Sample preparation is undertaken according to Industry Standards.</li> <li>A laboratory generated repeat sample is submitted with every 20th sample submitted to the laboratory. This sample is provided a new sample ID with no reference to the original sample ID. The results of these repeat samples are reviewed monthly and any discrepancies investigated.</li> <li><b>RC Chips</b></li> <li>No splitting of coal interval chips is undertaken.</li> <li>Non-coal intervals are sub sampled directly from the cyclone.</li> <li>Sample selection is determined in-house and is documented in a core sampling procedure. Associated high ash coal intervals and partings are sampled separately to assess potential dilution effects where they are adjacent to coal seams. Intervals with non-coal material (&gt;50% ash) are excluded from sampling.</li> </ul>

Criteria	Commentary
	<ul style="list-style-type: none"> <li>• Samples are placed into pre-labelled plastic bags to ensure proper Chain of Custody, and then transported by Stockton personnel to the laboratory for analysis. The laboratory continues with the Chain of Custody requirements. Sample preparation is undertaken according to Industry Standards.</li> <li>• A laboratory generated repeat sample is submitted with every 20<sup>th</sup> sample submitted to the laboratory. Before submission this repeat sample is provided a new unique sample ID with no reference to the original sample ID. The results of these repeat samples are reviewed monthly and any discrepancies investigation.</li> </ul>
<p><b>Quality of assay data and laboratory tests</b></p>	<ul style="list-style-type: none"> <li>• SGS in Ngakawau and CRL (ACIRL Australia and Newman Energy subcontracted for specific tests) laboratories are used to undertake physical and chemical testing and use Industry Standards for all coal tests and systematic QA/QC procedures for all work. Both laboratories hold accreditation by International Accreditation New Zealand (IANZ). The processes employed are considered to be appropriate for coal sample analysis. Results are reviewed in-house to ensure the accuracy of the data by a geologist and or a senior geologist. The laboratory has been inspected by the Company's personnel. Tests include but are not limited to: <ul style="list-style-type: none"> <li><b>Chemical Analysis</b> <ul style="list-style-type: none"> <li>○ Proximate analysis (ASTM D5142-2004 (modified))</li> <li>○ Sulphur (ASTM D4239-04A)</li> <li>○ Total Moisture (ISO 589)</li> </ul> </li> <li><b>Ultimate Analysis</b> <ul style="list-style-type: none"> <li>○ Carbon (AL038-in house)</li> <li>○ Hydrogen (ASTM D3176-09)</li> <li>○ Nitrogen (ASTM D3176-09)</li> <li>○ Oxygen (ASTM D3176-09 (by difference))</li> <li>○ Sulphur (ASTM D3176-09)</li> <li>○ Forms of Sulphur (AS 1038 Part 11)</li> <li>○ Chlorine (ISO 587)</li> <li>○ Ash composition (X-Ray spectrometry (Spectrachem))</li> <li>○ Ash fusion temperature (ISO 540:1995(E))</li> <li>○ Trace Elements</li> <li>○ Calorific Value (ISO 1928-1995)</li> </ul> </li> <li><b>Rheological and Physical Analysis</b> <ul style="list-style-type: none"> <li>○ Gieseler Fluidity (ASTM D2639-90)</li> <li>○ Dilatational (Audibert-Arnu) (ISO 349:1975)</li> <li>○ Free Swelling Index (ISO 501:2003(E) D720-91(1999))</li> <li>○ Hardgrove Grindability Index (ISO 5074, ASTM D409-02)</li> <li>○ Relative Density (AS 10382111-1994)</li> </ul> </li> <li><b>Petrographic</b> <ul style="list-style-type: none"> <li>○ Maceral Analysis (c/- Newman Technologies), Vitrinite Reflectance (ASTM D2798-99)</li> </ul> </li> <li><b>Other Tests</b> <ul style="list-style-type: none"> <li>○ Washability testing as requested (AS 41561 using float-sink methods) (also used Boner gig shaker table process).</li> </ul> </li> </ul> </li> <li>• 5% of all SGS analysed samples from 2010 have been sent to CRL for re-analysis, and then subsequently re-tested at SGS. The result of these repeats are analysed by the database geologist and the resource geologist, on a monthly basis. Additionally 5% of all SGS analysed samples are retested by SGS, as part of their in-house QAQC process. These repeat test results are generally within a 5% of their original results. Results outside of set tolerances are investigated.</li> <li>• Results are reviewed on a regular basis by the project geologist.</li> </ul>
<p><b>Verification of sampling and assaying</b></p>	<ul style="list-style-type: none"> <li>• Most holes are geophysically logged, and verification of seam contacts are made through analysis of the geophysics. Assessment of coal intersections are undertaken by a geologist. Geophysics allows confirmation of the presence (or absence) of coal seams, accurate determination of contacts to coal seams, density measurements are used to guide sampling and identify high ash bands and or seam partings.</li> </ul>



Criteria	Commentary
	<ul style="list-style-type: none"> <li>• Geophysical logs (dual density and gamma) are analysed extensively and used to validate and, if required, correct geological and sample interval logs to ensure accuracy and consistency.</li> <li>• Coal ply results are provided by the laboratory and reviewed internally. No adjustments or calibrations are made to any coal quality data. In instances where results are significantly different from what was observed in geophysical logs or outside of local or regional ranges defined by previous testing, sample results are retested.</li> <li>• Since 2006 all coal quality data has been directly submitted and stored in electronic format using acQuire SQL database software.</li> <li>• Historical data has been validated and entered into the acQuire SQL database, from the original paper logs. These geological and geophysical paper logs are housed in the fire proof library in Westport. Historical data was transferred and validated against the current logging codes to ensure the data was valid. A limited number of twin holes have been drilled, and returned acceptable duplicates of the original holes.</li> <li>• The Competent Person has inspected the sampling processes and inspected the laboratory.</li> </ul>
<b>Location of data points</b>	<ul style="list-style-type: none"> <li>• Upper Waimangaroa data is surveyed in Buller 1949 grid coordinate system in New Zealand with mean sea level datum (MSL). However the Geoid correction for elevation is not undertaken due to the elevation of the mine-site. All on-site survey data used in the resource estimation does not have the Geoid correction as well.</li> <li>• All drillholes post 1998 are surveyed using real time kinematic GPS technology and are located within +/- 20mm vertically and +/- 10mm horizontal. Older drillhole collars were surveyed using conventional methods.</li> <li>• Historical underground workings plans are based off old hand drawn plans that have been georectified (in 2D only) by converting from cadastral links to the Buller 1949 geodetic grid.</li> <li>• Topographic surfaces consists of triangulations constructed from a combination of airborne LiDAR (accurate to within +/- 0.2m) collected for the whole of the Upper Waimangaroa area in June 2013.</li> <li>• Drillholes with down-hole geophysics are surveyed for deviation with Weatherford verticality tool (+/- 15° azimuth and +/- 0.5° inclination).</li> </ul>
<b>Data spacing and distribution</b>	<ul style="list-style-type: none"> <li>• Exploration drillholes are variably spaced (&lt;100m to 1,500m) depending on target seam depth, geological structure, topographic constraints, down-hole conditions due to underground workings, and the location of other drillholes.</li> <li>• RC drillholes were spaced 40-80m apart to define a weathering profile.</li> <li>• No sample compositing is undertaken prior to initial laboratory ply analysis. Should detailed coal analysis be required, compositing is undertaken at the laboratory on a length weighted basis.</li> <li>• This drill spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate to support the resource classification and is suitable for this style of deposit.</li> <li>• Further drilling will be required to upgrade resource classification as part of long term development plans for the greater Stockton Plateau.</li> </ul>
<b>Orientation of data in relation to geological structure</b>	<ul style="list-style-type: none"> <li>• The majority of holes are drilled vertically, due to near horizontal coal seams.</li> <li>• A small number of exploration holes have been inclined. The purpose of these holes were to define significant geological structures and/or for geotechnical purposes and not for coal seam geometry and quality.</li> <li>• No drilling orientation and sampling bias has been recognised at this time and is not considered to have introduced a sampling bias.</li> </ul>
<b>Sample security</b>	<ul style="list-style-type: none"> <li>• RC chip samples are collected in uniquely numbered pre-labelled plastic bags. Three to five samples are then placed in a large plastic bag for delivery to the laboratory.</li> <li>• Core and trench samples are placed in uniquely numbered pre-labelled plastic bags. Three to five samples are then placed in a large plastic bag for delivery to the laboratory.</li> <li>• Prior to submission to the laboratory, a standardised dispatch form is generated for each drillhole, within the acQuire SQL database software, which delineates the set of analysis to be undertaken and the logged sample numbers.</li> <li>• Once samples and dispatch form are completed, the sample bags are validated and</li> </ul>

Criteria	Commentary
	<p>subsequently delivered to the secure laboratory sample receiving area by a staff member. Once received at the laboratory, the consignment of samples is receipted against the sample dispatch documents.</p> <ul style="list-style-type: none"> <li>Any additional analysis is requested as required by the geological services superintendent or resource geologist.</li> <li>Sample residues are stored at the laboratory pending results and any possible repeat requests.</li> <li>Sample security is not considered a significant risk to the project.</li> </ul>
<b>Audits or reviews</b>	<ul style="list-style-type: none"> <li>Integrity of all data (drillhole, geological, survey, geophysical and CQ) is reviewed by the resource geologist before being used to model either structure or qualities.</li> <li>Periodic internal reviews are conducted, to verify that both core and chips are logged in a consistent manner. These reviews are done either by a senior geologist or by the resource geologist.</li> <li>The acQuire database was last externally audited in 2008 by Advanced DataCare. Suggested actions were reviewed and actioned where necessary.</li> <li>The acQuire database is considered to be of sufficient quality to carry out resource estimation</li> <li>Resource models have been externally reviewed by Palaris as part of Solid Energy's Vendor Due Diligence in April 2016.</li> </ul>

## Section 2 Reporting of Exploration Results

Criteria	Commentary
<b>Mineral tenement and land tenure status</b>	<ul style="list-style-type: none"> <li>Upper Waimangaroa MP41515 is a Coal Mining Permit which is due to expire on 11 November 2038.</li> <li>BT Mining Ltd has sole ownership of the Cypress operation and Upper Waimangaroa area.</li> <li>BT Mining is a joint-venture between Bathurst Resources Limited (65%) and Talley's Energy Limited (35%).</li> <li>On 1 September 2017 BT Mining took control of Solid Energy assets including two operating mines Rotowaro and Maramarua in the Waikato region of the North Island, and the Stockton mine on the West Coast of the South Island.</li> <li>All operations at Cypress mine are currently undertaken within the Mining Permit boundaries.</li> <li>BT Mining Ltd does not own any land within the Upper Waimangaroa South resource. The land is owned by the Crown and administered by LINZ. BT Mining Limited has land access agreements with the Crown to access land. The agreements expire at a date after the life of CMP 41515, to be determined by the Crown, to provide sufficient time for rehabilitation. The permit expires in 2038.</li> <li>Royalties and Levies are applied to per ton of coal produced.</li> </ul>
<b>Exploration done by other parties</b>	<ul style="list-style-type: none"> <li>Within the MP41515, the previous owner (Solid Energy) has undertaken all exploration on the tenement since 1987. However, there have been earlier periods of work that have contributed to the understanding of this Resource. These programmes include early drillholes back to the late 1800s through into the 1900s, with New Zealand Coal Resources Survey performing additional drilling in the 1980s.</li> <li>Between 1927-47 28 drillholes were drilled by Westport Coal Company.</li> <li>In 1952-53 a further nine drillholes were drilled in the northwest area by the Mines Department.</li> <li>In 1976-77, 14 drillholes were drilled by the Ministry of Works.</li> <li>Three phases of drilling were completed by New Zealand Coal Resources Survey between 1982 – 1985.</li> <li>State Coal Mines drilled 48 holes between 1985 - 1987.</li> <li>Solid Energy commenced further drilling from 1997 – 2012.</li> </ul>
<b>Geology</b>	<ul style="list-style-type: none"> <li>Coal resources on the Stockton Plateau are restricted to the Middle to Late Eocene aged Brunner Coal Measures (BCM). This unconformably overlies the Ordovician aged Greenland Group greywacke's and argillites, which has been extensively intruded by Cretaceous granites and porphyry (Berlins Quartz Porphyry). Due to the stratigraphic nature of coal measures, the coal</li> </ul>

Criteria	Commentary
	<p>seams generally lie in a horizontal or sub-horizontal plane. The resource has a dip to the NE at the northern end of the deposit and to the east along the western margin. Folding and faulting through the coal seams can create localised changes in dips up to 80°.</p> <ul style="list-style-type: none"> <li>The Mangatini coal seams are the main coal seams of the Upper Waimangaroa Deposit. The seams have been given the abbreviation M. There are the three seams M1, M2, and the M3. The M1 and M2 seams are the predominant seams over the deposit. Seam splitting is common across the deposit and can lead to correlation complications. No distinct marker horizons are present between the seam. Correlations are based on detailed cross sections completed across the deposit. The M1 and M2 seams are the dominant seams targeted for mining and can vary in thickness. The M2 seam overlies the M1 seam. The M3 is a rider seam to the M2. The M3 seam is considered for resource classification in the Cypress consented area where it exceeds the minimal mining cut-off of 0.5m. The M3 seam is characterised by having high sulphur (&gt;4%) and is generally poorly developed.</li> </ul>
<b>Drillhole Information</b>	<ul style="list-style-type: none"> <li>No exploration results are reported. Comments relating to drillhole information can be found in Section 1.</li> <li>The exclusion of this information from this report is considered not to be material to the understanding of the report.</li> </ul>
<b>Data aggregation methods</b>	<ul style="list-style-type: none"> <li>The maximum ash cut-off for building the Upper Wiamangaroa structure models was set at 25%.</li> <li>Resources have been reported with an ash cut-off of 25%.</li> <li>Seams have been sampled on a ply-by-ply basis with ply boundaries determined by reconciliation against down hole geophysics.</li> </ul>
<b>Relationship between mineralisation widths and intercept lengths</b>	<ul style="list-style-type: none"> <li>All exploration drillholes have been drilled vertically and the coal seams are generally gently dipping. Therefore the reported seam intercept thickness is representative of the true seam thickness.</li> <li>Dip meter and deviation plots are available for some holes. For those without this data it is assumed that a vertical orientation is achieved and, as most coal intersections are less than 100m in depth, any deviation from vertical would produce only a very minor effect on the reported depth to coal and coal thickness.</li> </ul>
<b>Diagrams</b>	<ul style="list-style-type: none"> <li>Diagrams can be found in the Appendix A for each of the following: <ul style="list-style-type: none"> <li>Location map</li> <li>Resource modelling area</li> <li>Geological QMap</li> <li>Schematic diagram illustrating coal seam naming convention</li> <li>Map showing drillhole type/distribution</li> <li>Map of Resource Classification</li> <li>Map of underground workings</li> <li>Map showing floor contours distribution</li> <li>Maps showing M1/M2 Coal thickness isopachs</li> <li>Maps showing M1/ M2 Ash distribution</li> <li>Maps showing M1/ M2 Sulphur distribution</li> <li>Map showing M1/ M2 Volatile Matter distribution</li> <li>Map showing M2 ROMAX distribution</li> <li>Upper Waimangaroa Reserve Pit Shells</li> </ul> </li> </ul>
<b>Balanced reporting</b>	<ul style="list-style-type: none"> <li>No exploration results are reported. This avoids any issues with unbalanced or biased reporting.</li> <li>The Competent Person does not believe that the exclusion of this comprehensive exploration data within this report detracts from the understanding of this report or the level of information provided.</li> </ul>
<b>Other substantive exploration data</b>	<ul style="list-style-type: none"> <li>Historically a number of utilisation and specialist marketing testing has been undertaken.</li> <li>The different stratigraphic units and rock defects have been assigned various strength parameters based on historic laboratory test data (UCS, shear box and ring shears), empirical classifications (RMR, GSI and Hoek Brown). Downhole in situ geophysical measurements have been undertaken to compare the strength variability with actual laboratory test data.</li> </ul>
<b>Further work</b>	<ul style="list-style-type: none"> <li>Additional exploration and resource development drilling has been proposed to better define geological structures, seam structure, thickness and coal quality of the deposit.</li> </ul>

### Section 3 Estimation and Reporting of Coal Resources

Criteria	Commentary
<b>Database integrity</b>	<ul style="list-style-type: none"> <li>All GPS sourced and validated survey data recorded in the field is electronically transferred into the master BT Mining (BTM) acQuire SQL database.</li> <li>All drill core logging data is digitally entered directly into the acQuire SQL database, with in-built enforced data validation rules. Drill chip geological logging data is manually entered into the acQuire SQL database, with in-built enforced data validation rules.</li> <li>The acQuire SQL database has been designed to ensure data is entered and stored in a consistent and accurate manner by using dropdown menus of standard logging codes to prompt and constrain inputs. The database highlights out of range coal quality values, duplicate records/intervals, prevents overlapping intervals or depths that extend beyond total drillhole depth. All changes to the database are tracked and archived. Data correction and validation checks are undertaken internally as defined by the Data Validation Standard before the data is used for modeling purposes.</li> <li>Once all validation is completed all drillhole data is signed off by both the responsible geologist, and the resource geologist. On completion of the data sign-off process the data is locked in acQuire and cannot be adjusted unless requested by the site geologist.</li> <li>Data validation checks are run routinely by the site geologist using acQuire software validation routines. All validation concerns are rectified by the site geologist.</li> <li>The acQuire database was last externally audited in 2008 by Advanced DataCare. Suggested actions were reviewed and actioned where necessary.</li> </ul>
<b>Site visits</b>	<ul style="list-style-type: none"> <li>Competent Person, Mark Lionnet, has a full time role with Bathurst Resource Limited as the Export Project Manager with a high level of interaction with the Stockton geologist.</li> <li>The Competent Person has worked for over ten years in the Buller Coalfield and has extensive knowledge of the project area.</li> <li>Regular visits have been undertaken by the Competent Person.</li> </ul>
<b>Geological interpretation</b>	<ul style="list-style-type: none"> <li>There is sufficient confidence in interpretation of geological stratigraphy, structure and seam correlation/continuity though it is variable across the Upper Waimangaroa area.</li> <li>The data used in the geological interpretation included field mapping, drillhole data, core logging data, geophysical logs, sampling, coal quality laboratory testing and structural interpretations. Residual variability exists concerning geological structure along/within the major fault zones, resulting in a lower level of resource confidence. This variability will influence the local estimates rather than the global structural and coal quality estimates for these zones.</li> </ul>
<b>Dimensions</b>	<ul style="list-style-type: none"> <li>The Upper Waimangaroa resource area covers approximately 4km<sup>2</sup>, a roughly rectangular shape up to 2km wide (ESE-WNW), and 10km long (NNE-SSW).</li> <li>Within this area all seams are exposed at outcrop along the western margin of the MP. With the bulk of the in situ coal between 0 and 150m below the original ground surface.</li> <li>Coal thickness varies considerably over the deposit, from over 20m (areas with structural thickening) down to &lt;3m (areas with coal seam poorly developed). On average the cumulative (M1 and M2) coal resource has an average thickness of 8m.</li> <li>The M3 seam is on average 0.5m thick.</li> </ul>
<b>Estimation and modelling techniques</b>	<ul style="list-style-type: none"> <li>Modelling has been undertaken using Maptek's Vulcan Version 9.1 software by resource geologists experienced in its use, using a standardised set of validated scripts and the structural modeling module integrated into the software package.</li> <li>Resource models have been produced across four prospective areas: <ul style="list-style-type: none"> <li>Mt. William North.</li> <li>Cypress.</li> <li>Mt. William South.</li> <li>Upper Waimangaroa South.</li> </ul> </li> <li>Mt William North is based on a resource model utilising a combination of 111 drillholes, reverse circulation and trench intersections.</li> <li>453 drillholes and trenches are utilised in modelling and resource estimation for the Cypress</li> </ul>

Criteria	Commentary
	<p>model.</p> <ul style="list-style-type: none"> <li>• The Upper Waimangaroa model has utilised 192 exploration drillholes and 24 trench intersections.</li> <li>• Mt. William South has been interpreted using 23 exploration drillholes.</li> <li>• All valid drilling data, mapping data, together with a number of structural interpretations are used as the source data for creating the coal seam surfaces (grids).</li> <li>• Grids for the coal roof and floor (including seam splits) are developed over the entire MP. These coal surfaces are modeled using a stacking algorithm with the coal roof of the predominant coal seam (M1 and or M2) used as the reference surface. This process is repeated for six geological domains of the deposit to ensure that the coal seams are modelled accurately. The major fault blocks each have separate interpretation data points, to guide interpretation process, with a hard data boundary with the surrounding fault blocks.</li> <li>• The structural grids are created by using a triangulation algorithm. Grid sizes vary across the four models but are dependent on data support. The methodology of creating structural grids is common practice for the estimation of coal deposits. Fault blocks have been modelled separately, and then appended together along three-dimensional fault surfaces.</li> <li>• Block model extents vary depending on modelling extents and can overlap.</li> <li>• A standardised block model schema has been used, with a standardised set of variables, with associated default values.</li> <li>• The latest validated survey “original” topo surfaces and structural grids are used to create an empty block model, with 20m by 20m blocks with a minimum thickness of 0.5m (for coal seams). The parent block size is approximately one fifth the average drill spacing to ensure the mineralisation is well represented by the blocks. For Mt. William North a standardised block model was created, with a standardised set of variables, with associated default values that has been used for the nearby Stockton and Cypress deposits. The topography surface and grids surfaces were used to flag blocks within the model. The seam blocks are 10m (x) by 10m (y) by 0.5m (z) blocks with a minimum thickness of 0.5m (for coal seams).</li> <li>• The drilling database is used to create a set of 0.5m thick composites from the assay results, which is then used to estimate the coal qualities for the blocks within the coal seams. Multiple estimation runs are completed to ensure all blocks are populated.</li> <li>• All coal blocks have been estimated using the inverse distance methodology, with a power of 2, for the standard set of coal qualities (ash, sulphur, swell, inherent moisture, volatile matter).</li> <li>• Coal Quality Estimation parameters used during coal quality estimation have been standardised between models: <ul style="list-style-type: none"> <li>○ Search ranges used are 250 x 250 x 0.5m, 500 x 500 x 0.5m, 1000 x 1000 x 0.5m.</li> <li>○ 2000 x 2000 x 0.5m, 4000 x 4000 x 0.5m.</li> <li>○ Samples used are a minimum of 2 and a maximum of 5.</li> <li>○ A maximum of 2 samples from any one drillhole is allowed.</li> <li>○ Block discretisation of 4,4,1 was applied.</li> <li>○ Using the Vulcan “tetra unfolding” methodology, along the modelled coal seam surfaces.</li> </ul> </li> <li>• At each stage of the process (initial data points, new surfaces, and final block model) the new data is validated back to the previous model, to ensure consistency.</li> <li>• Standard Block model validation was completed using visual and numerical methods.</li> <li>• No selective mining units were assumed in the estimate.</li> </ul>
<b>Moisture</b>	<ul style="list-style-type: none"> <li>• All moisture values are reported on an air-dried basis, using air-dried ply results to estimated moisture. Inherent moisture is measured for all drillholes samples.</li> <li>• Tonnages are estimated on an air-dried dry basis.</li> </ul>
<b>Cut-off parameters</b>	<ul style="list-style-type: none"> <li>• A minimum seam thickness cut-off for all modelled seams is 0.50m. As this is what is currently considered as recoverable using open cast methods.</li> <li>• A maximum ash cut-off of 25% has been applied to all coal seams except where seam continuity is required, which may include intervals with greater than 25% ash.</li> <li>• Coal with ash &lt;8% is considered “bypass” coal and does not require any further processing. Coal with ash &gt;8% needs to be processed through the company’s Coal Handling and Processing Plant (CHPP).</li> </ul>

Criteria	Commentary
	<ul style="list-style-type: none"> <li>Coal tonnes are only reported from the M1 and M2 seams and their respective splits (no M3 tonnes are reported).</li> <li>All resources blocks are reported within the 2019 Whittle pit optimisation 1.2 revenue factor (RF) pit shell.</li> </ul>
<b>Mining factors or assumptions</b>	<ul style="list-style-type: none"> <li>Selected mining method chosen from long term experience of local conditions at nearby Cypress and Stockton mines.</li> <li>Geotechnical parameters for cut slope design were developed based on historical cut slope performance, slope back analysis and laboratory testing of material strength parameters. Slopes are designed to comply with a Factor of Safety that exceeds 1.2 with its related probability of failure and potential failure dimensions.</li> <li>Minimum recoverable coal thickness is 0.5m, with the expectation to extract 100% of the in situ coal.</li> </ul>
<b>Metallurgical factors or assumptions</b>	<ul style="list-style-type: none"> <li>Contaminated coal from mining will be processed via the company's Coal Handling and Processing Plant (CHPP). The CHPP removes the dilutant material and a small portion of coal to provide a more saleable product. The plants performance has been routinely monitored since its inception.</li> <li>Although not included in the resource estimate, studies have been conducted on the properties of the coal pertaining to combustion potential, ash fusion temperatures and Hardgrove Grindability Index.</li> <li>Small parcels of coal have been sent to customers for evaluation and testwork.</li> </ul>
<b>Environmental factors or assumptions</b>	<ul style="list-style-type: none"> <li>Cypress and Mt. William North are fully consented.</li> <li>Currently no Resource Consents exist for the southern portion of the Upper Waimangaroa deposit.</li> <li>A number of lithological units will be exposed during the mining process which will likely generate acid metal drainage. This will require engineering of water containment and treatment.</li> </ul>
<b>Bulk density</b>	<ul style="list-style-type: none"> <li>The relative density value is calculated using the available ash-density data (248 samples) to define an ash-density curve.</li> <li>Non-coal units are assigned default density value based upon the lithology type.</li> </ul>
<b>Classification</b>	<ul style="list-style-type: none"> <li>The resource has been classified into the Inferred/Indicated/Measured status by analysing three factors upon which the geological confidence is based: <ul style="list-style-type: none"> <li>Number of informing drillholes used.</li> <li>Proximity to major faults.</li> <li>Proximity to sub crop position.</li> </ul> </li> <li>The Competent Person has reviewed the results of the resource classification process and made adjustments where necessary and or required.</li> <li>The input data is comprehensive in its coverage of the coal seams and does not miss-represent the in situ coal seams.</li> <li>The results of the validation of the block model exhibit a good correlation of the input data to the estimated grades</li> <li>All resources are within the 2019 Whittle pit optimisation 1.2 revenue factor (RF) pit shell.</li> <li>The Competent Person has taken into account all relevant factors in undertaking this estimation and considers the estimate to be a true reflection of the current understanding of the deposit.</li> </ul>
<b>Audits or reviews</b>	<ul style="list-style-type: none"> <li>Regular internal reviews of the resource modelling process have been undertaken internally by the Competent Person; all issues raised have been addressed.</li> <li>Palaris completed an external review of this estimation in May 2016 as part of Solid Energy's Vendor Due Diligence process. No substantial issues were raised. No further estimation has taken place within this part of the Mining Permit since this review.</li> </ul>
<b>Discussion of relative accuracy/confidence</b>	<ul style="list-style-type: none"> <li>Based on the data available, the degree of accuracy of this statement is considered high for the Upper Waimangaroa deposit. The process for calculation has used: Standards, Guidelines and the JORC Code along with industry best practice where available to define the Resource estimates provided to confirm search estimation ranges and drillhole spacing for each resource classification.</li> </ul>

## Section 4 Estimation and Reporting of Coal Reserves

Criteria	Commentary
<b>Mineral Resource estimate for conversion to Ore Reserves</b>	<ul style="list-style-type: none"> <li>The Mineral Resource estimates are those undertaken by Stockton Geology Team employed by BT Mining Limited at the Cypress Mine located within the Upper Waimangaroa Mining Permit area (MP41515) as outlined in Section 1-3.</li> <li>Coal Resources are inclusive of Coal Reserves.</li> <li>The Coal Reserve estimates are for a long-term operating site.</li> <li>Drillholes are validated then coded to create a structural grid model using Vulcan software by BT Mining Limited. This structural model forms the framework that a 3D block model is created from by the site geologists. The resource block model includes topography, seam structure and coal qualities used for in situ Coal Resource delineation. BT Mining Limited has a robust and stable modelling process in place.</li> <li>Tonnages reported, model mining modifying factors including surface mining extraction, loss and dilution, plant yields and economics have been reviewed and reconciled against actual performance.</li> <li>An overall decrease in the previously reported run of mine Coal Reserves is attributed to an update to the Pit Designs taking to account new geotechnical constraints. Also model depletion due to mining.</li> </ul>
<b>Site visits</b>	<ul style="list-style-type: none"> <li>The Competent Person for this Coal Reserve Statement is Ian Harvey, a full-time employee of BT Mining Limited based at Stockton.</li> <li>The Competent Person has almost 20 years' experience working at Stockton in various roles, including resource modelling and mine planning, as well as coal quality management and mine/market planning.</li> </ul>
<b>Study status</b>	<ul style="list-style-type: none"> <li>Cypress mine is an operating mine.</li> <li>Material Modifying Factors have been considered.</li> <li>The reportable Coal Reserve is based on actual site performance and costs that have been determined to be economically viable in a cashflow analysis conducted by BT Mining.</li> <li>There are other Coal Resources under evaluation in the MP41515 area; however, these studies are at a scoping or preliminary assessment level and therefore been excluded from the Coal Reserves.</li> </ul>
<b>Cut-off parameters</b>	<ul style="list-style-type: none"> <li>A maximum ash cut-off of 25% has been applied to all coal seams except where seam continuity is required, which may include intervals with greater than 25% ash.</li> <li>Coal with ash &lt;8% is considered "bypass" coal and does not require any further processing.</li> <li>Coal with ash &gt;8% "wash" coal needs to be processed through the company's Coal Handling and Processing Plant (CHPP). The CHPP feed cut-off grade is &lt;35% ash.</li> <li>The minimum mineable seam thickness is 0.5 m based on recovery by surface mining methods used at the site.</li> <li>Coal Reserves are only reported from the M2 and M3 coal seam horizons.</li> </ul>
<b>Mining factors or assumptions</b>	<ul style="list-style-type: none"> <li>The mining method is conventional drill and blast, load and haul open pit mining operation. This utilises truck and excavator for waste movement, while coal is loaded using a combination of loaders and excavators with haulage to the Run of Mine (ROM) stockpiles, directly to the CHPP, or to other intermediate stockpiles using dump trucks. The operations are supported by additional equipment including dozers, graders and watercarts.</li> <li>Geotechnical parameters are based on geotechnical studies undertaken by the Stockton engineering geologists. Different parameters are applied to each pit. Pit designs have been based on geotechnical constraints and parameters. The typical highwall configuration is a batter height of 15 m with batter angles between 30°- 63° using minimum 8.5 m wide benches. Maximum of 10% gradient and a 23 m wide running surface is being used for in pit ramps and roads.</li> <li>Minimum recoverable in situ thickness is 0.5 m.</li> <li>Reserve tonnages have been estimated using a density value calculated using approximated in-ground moisture values (Preston and Sanders method). As such, all tonnages quoted in this report are wet tonnes.</li> <li>All coal qualities quoted are on an Air-Dried Basis (adb).</li> </ul>

Criteria	Commentary																								
	<ul style="list-style-type: none"> <li>Pit design extents were established using standard Lerchs-Grossman (LG) pit design techniques and based on preliminary economic and geotechnical inputs.</li> <li>Pit limits are based on pit optimisation studies with restrictions for current land and mineral access determined by mining permits and granted consent limits.</li> <li>BT Mining completed an updated LG optimisation assessment in May 2019, the updated pit designs have been published for this years report. BT Mining informed Golder Associates (NZ) Limited of the results.</li> <li>Mine design strips by bench were applied to develop a mine schedules and used as a basis for reporting reserves.</li> <li>Reserve estimates include consideration of material modifying factors including: the status of environmental approvals; other governmental factors and infrastructure requirements for selected open pit mining methods and coal transportation to market (per JORC Code 2012).</li> <li>Grade control drill is undertaken as defined in Section 1 to 3.</li> <li>Allowances for mining dilution and recovery has been applied to the block model. The mining loss, contamination and dilution is based on the rock mass lithology above the coal roof and below the coal floor as follows in metres for each mineable horizon: <table border="1" data-bbox="402 701 889 961"> <thead> <tr> <th></th> <th colspan="2">Thickness (m)</th> </tr> <tr> <th></th> <th>Roof</th> <th>Floor</th> </tr> </thead> <tbody> <tr> <td><b>Mudstone Lost:</b></td> <td>0.10</td> <td>0.05</td> </tr> <tr> <td><b>Mudstone Contaminated</b></td> <td>0.05</td> <td>0.10</td> </tr> <tr> <td><b>Mudstone Dilution:</b></td> <td>0.25</td> <td>0.25</td> </tr> <tr> <td><b>Other Lost:</b></td> <td>0.05</td> <td>0.05</td> </tr> <tr> <td><b>Other Contaminated:</b></td> <td>0.10</td> <td>0.10</td> </tr> <tr> <td><b>Other Dilution:</b></td> <td>0.05</td> <td>0.05</td> </tr> </tbody> </table> </li> </ul> <ul style="list-style-type: none"> <li>An additional modifying factor was added in 2017 to the Cypress North pit area to account for mining dilution introduced from a combination of sheeting and soft seam floor contacts. The dilution is estimated at the bench level on 3 m mining horizons, this factor was extended into the Cypress South Pit area in 2018.</li> <li>Minimum mining widths are dependent on volumes to be excavated and the size of the fleet to be used. Typically for the bulk excavator and truck fleet this is approximately 30m. For the small excavators and trucks this is approximately 15m.</li> <li>Current mining methods require the following infrastructure: Haul Roads, Drainage, dewatering and transfer pumps, sumps and dam structures, Lime Dosing Plants, coal stockpile areas, CHPP, coal load out and bins, aerial ropeway, train load out and bins, workshop, offices, store, maintenance and contractor facilities. Most of this infrastructure is in place with the main new infrastructure required being sumps, dams and water control as the mine expands into undisturbed areas.</li> </ul>		Thickness (m)			Roof	Floor	<b>Mudstone Lost:</b>	0.10	0.05	<b>Mudstone Contaminated</b>	0.05	0.10	<b>Mudstone Dilution:</b>	0.25	0.25	<b>Other Lost:</b>	0.05	0.05	<b>Other Contaminated:</b>	0.10	0.10	<b>Other Dilution:</b>	0.05	0.05
	Thickness (m)																								
	Roof	Floor																							
<b>Mudstone Lost:</b>	0.10	0.05																							
<b>Mudstone Contaminated</b>	0.05	0.10																							
<b>Mudstone Dilution:</b>	0.25	0.25																							
<b>Other Lost:</b>	0.05	0.05																							
<b>Other Contaminated:</b>	0.10	0.10																							
<b>Other Dilution:</b>	0.05	0.05																							
<b>Metallurgical factors or assumptions</b>	<ul style="list-style-type: none"> <li>Coal with ash &lt;8% is considered “bypass” coal and does not require any further processing.</li> <li>Coal with ash &gt;8% “Wash” coal needs to be processed through the company’s Coal Handling and Processing Plant (CHPP). The feed cut-off grade depends on the ash source, being either &gt;8% and &lt;35% if ash is in situ, or &gt;8% and &lt;50% ash, if contaminated with non-coal material (e.g. ash introduced due to previous underground extraction).</li> <li>An estimated 25% of total ROM Coal Reserve tonnes require washing to make a marketable product.</li> <li>Wash coal won is processed at the adjacent Stockton mine that has a CHPP in operation to produce a marketable product.</li> <li>Online analysers are utilised for identifying coal that is out of specification.</li> <li>Additional samples are sent for petrographic analysis (Romax).</li> <li>The processes used are standard for the coal industry and so are well tested technologies.</li> <li>This has also been backed up by bulk samples being taken and tested for washability, yield and recovery factors.</li> <li>Historical plant performance was used to review these factors applied in the model, and these modifying factors updated in the block model 2017.</li> </ul>																								



Criteria	Commentary
<b>Environmental</b>	<ul style="list-style-type: none"> <li>• All mining approvals, consents, permits and license to operate have been granted for Cypress Mine area in MP41515.</li> <li>• The Cypress mine operates in a sensitive environment and has a complex set of consent conditions that require diligent management. Environmental planning and management is fully integrated with coal mining at Cypress and the mine has annual rehabilitation targets.</li> <li>• Developing an area for mining includes systems to divert clean surface water around the area and ensure any water from the work site which is carrying sediment is collected and channelled into the mine's water treatment infrastructures.</li> <li>• Soil and vegetation are carefully lifted and taken to a holding area or immediately placed in an area of the mine undergoing rehabilitation.</li> <li>• Red tussock and Herb fields are carefully lifted and transported to specially design storage areas to allow them to be transplanted back in Cypress pit once the pit has been mined then backfilled to the original ground level.</li> <li>• Environmental impacts that have been identified can be mitigated to meet permitting requirements.</li> </ul>
<b>Infrastructure</b>	<ul style="list-style-type: none"> <li>• Cypress is an operating satellite mine area of the greater Stockton mine with existing infrastructure in place to support the operation. Most of this is based at the nearby Stockton mine (CML37150). This includes a network of haul roads, CHPP, ROM stockpile area, water treatment plant, lime dosing plant, workshop, offices, aerial ropeway, train load out facility, water treatment structures and intermediate coal stockpiles, waste rock dumps, weighbridge area, contractors laydown yard, power station and explosives storage.</li> <li>• Labour is primarily sourced from the nearby town of Westport.</li> <li>• Accommodation for the labour source is off-site in the small nearby towns but primarily in Westport.</li> </ul>
<b>Costs</b>	<ul style="list-style-type: none"> <li>• Cypress is an operating mine and majority of the capital has already been spent. Some additional capital expenditure is required to maintain existing structures, mobile fleet replacement and also to develop additional water infrastructure as required for future mining areas (e.g. Resource definition).</li> <li>• Operating costs are reviewed annually. These are based on historical actual's and forecasting for the following financial year. This is made up of equipment costs, fuel consumption, construction, fixed costs, administration costs, environmental costs and transport costs.</li> <li>• Annual Budget prices for major consumables and infrastructure is used.</li> <li>• The CHPP is owned by BT Mining Limited and costs are based on the demand for wash product in the annual budget.</li> <li>• Mine Rescue levy, License and Inspection levy, Energy Resources levy, Crown royalty, Coal Mining Licence fees, FME carbon and land rates are applied as per appropriate NZ legislation.</li> </ul>
<b>Revenue factors</b>	<ul style="list-style-type: none"> <li>• Coal price assumptions applied in the 2015 optimisation study were assumed: <ul style="list-style-type: none"> <li>○ Hard Coking Coal (HCC) prices were based on Wood Mackenzie April 2015 (long term forecast).</li> <li>○ All other prices derived from HCC based on agreed company ratios (semi-hard (SHCC) 87%, semi-soft (SSCC) 70%).</li> <li>○ Exchange rates Bloomberg (April 2015 forward curve 10 years).</li> </ul> </li> <li>• BT Mining conducted an updated optimisation in May 2019 based on prices derived from consensus on published benchmark HCC sale price and agreed updated company ratios (SHCC 78%, SSCC 62%, coal with sulphur &gt;2% discounted to 38%) and using consensus published short term exchange rates, PricewaterhouseCoopers and other publicly available forecasts.</li> <li>• Thermal coal is uneconomic at the current sale price and excluded from the 2019 Coal Reserve tonnes. Minor amounts of thermal coal extracted as part of mining process is currently being stockpiled for potential future sales.</li> <li>• Discount rate is reviewed annually based on BT Mining company real rate.</li> </ul>
<b>Market assessment</b>	<ul style="list-style-type: none"> <li>• The supply and demand situation for coal is affected by a wide range of factors, and coal consumption changes with economic development and circumstances. BT Mining has sales agreements in place with some existing customers. Established external forecast analysts have provided guidance to assess the long term market and sales of coal.</li> </ul>

Criteria	Commentary
	<ul style="list-style-type: none"> <li>Coal product types are classified into Semi-hard and Semi-soft based on product specifications and further separated into low sulphur &lt; 4% adb and high sulphur &gt; 4% adb. Approximately 4% of the Coal Reserve has a sulphur content &gt; 4% and requires a blend partner to make a marketable product.</li> <li>BT Mining Limited Marketing team is regularly in talks with new customers and investigate potential new markets.</li> </ul>
<b>Economic</b>	<ul style="list-style-type: none"> <li>For the optimisation carried out June 2015 and May 2019 the following inputs have been taken into consideration: mining, processing, civils, administration, haulage, aerial ropeway, rail, port costs and licenses and levy's as per appropriate NZ legislation.</li> <li>Pit optimisation was carried out using a revenue factor (RF) range of 0.4 to 2.0 in 0.1 intervals. The incremental RFs allow for the generation of different pit shells, allowing different stages to be chosen rather than just mining the ultimate pit. RFs &gt; 1 provide an indication of the possible size of a pit with potential price increases and designate likely infrastructure or waste rock storage areas.</li> <li>Sensitivity analysis has been completed by Golder Associates (NZ) Limited in 2015 and by BT Mining in May 2019 on commodity price variations which is the primary driver for the Cypress pits.</li> <li>The reported Coal Reserve is based on economic viability determined by a BT Mining conducted cashflow analysis using actual site performance, costs, mine plans and BT's marketing studies for sales and pricing, and Golder Associates (NZ) Limited informed of the results.</li> </ul>
<b>Social</b>	<ul style="list-style-type: none"> <li>BT Mining Limited currently holds the required DOC Permits for Mining and access to mine the Cypress Region.</li> <li>The Cypress region requires additional permits to operate covering vegetation disturbance, wild life (kiwis, etc.), water discharge</li> <li>As a part of resource consenting process and general site operations, regular communication and consultation has taken place with the local communities including the local Iwi.</li> </ul>
<b>Other</b>	<ul style="list-style-type: none"> <li>BT Mining Limited acquired the Cypress deposit and adjacent Stockton Mine assets from Solid Energy New Zealand Ltd on 1 September 2017.</li> <li>All material legal agreements, marketing arrangements and government approvals are in place and active for the existing operation.</li> <li>Geotechnical stability can impact Coal Reserves if not continually managed, instability in the north highwall occurred in 2020 that removed 70 thousand tonne from the Coal Reserve and required redesign of the pit. In Cypress South Pit the redesign took out 634 thousand tonnes. The mine employs specific geotechnical staff and has well defined geotechnical standards to mitigate the risk. The highwall requires ongoing monitoring.</li> <li>There are no other currently identified material naturally occurring risks that could impact the project or estimated Coal Reserves.</li> </ul>
<b>Classification</b>	<ul style="list-style-type: none"> <li>Coal Reserves are based upon resources classified as either Measured or Indicated from the Coal Resource estimation and classification process.</li> <li>The Coal Reserve classification results appropriately reflect the Competent Persons view of the deposits.</li> <li>2% of Probable Coal Reserves are derived from Measured Coal Resources.</li> <li>Coal tonnes with &gt;4% sulphur require blending with low sulphur coal from the Bathurst Resources Limited (BRL, parent company) owned projects or other unidentified external sources to make a marketable product and have been classified as Probable.</li> </ul>
<b>Audits or reviews</b>	<ul style="list-style-type: none"> <li>In 2008 a study was undertaken to assess coal washability and based on the results the current CHPP constructed and remains in use at the site.</li> <li>Palaris undertook a review of the Cypress reserve model in 2013.</li> <li>Internal review of the Pit Optimisation Study was undertaken in 2014.</li> <li>A Pit Optimisation study was completed in June 2015 by Golder Associates.</li> <li>Palaris Pty undertook a review of the Cypress reserve model in 2016 as part of a vendor due diligence for Solid Energy New Zealand Ltd.</li> <li>The mining and CHPP performance were reconciled in 2017 with actuals. Golder recommends</li> </ul>

Criteria	Commentary
	<p>that at a minimum there is annual reconciliation performed.</p> <ul style="list-style-type: none"> <li>• A 2019 reconciliation on a mined block in Cypress North pit area by the BT Mining site coal quality geologist, showed the overall marketable coal recovery was consistent with that modelled even though the actual proportion of Bypass to Wash coal won was lower than modelled by approximately 10%.</li> </ul>
<p><b><i>Discussion of relative accuracy/confidence</i></b></p>	<ul style="list-style-type: none"> <li>• Mineral Resources have been reported in accordance with the guidelines of the 2012 edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves and reflects the relative accuracy of the Mineral Resource estimates.</li> <li>• The statements relate to global estimates of tonnes and grade.</li> <li>• Accuracy and confidence of modifying factors are generally consistent with the current operation. Modifying factors applied to the Cypress Reserves are Mining Losses, Dilution and Contamination to Roof, Floor and at 3 m bench intervals of the coal seam. The amount of losses, dilution and contamination are dependent on the lithology of the rock in the roof and floor, weather and mining method. Dilution requires careful management and can result in higher percentages of coal that requires beneficiation to make a saleable product. There is a coal wash plant available. Plant performance data sets are still limited and require reconciliation on at least an annual basis.</li> <li>• Marketable coal tonnes are reported on the basis of in-ground moisture only, further data and assessment is required to report product on a total moisture basis.</li> <li>• The accuracy of the Coal Reserve estimate is primarily dependent on the ability to sell the coal at the estimated prices and the actual site operating costs. Site operating costs have been reviewed internally and reconciled against actual performance.</li> </ul>

Appendix A:

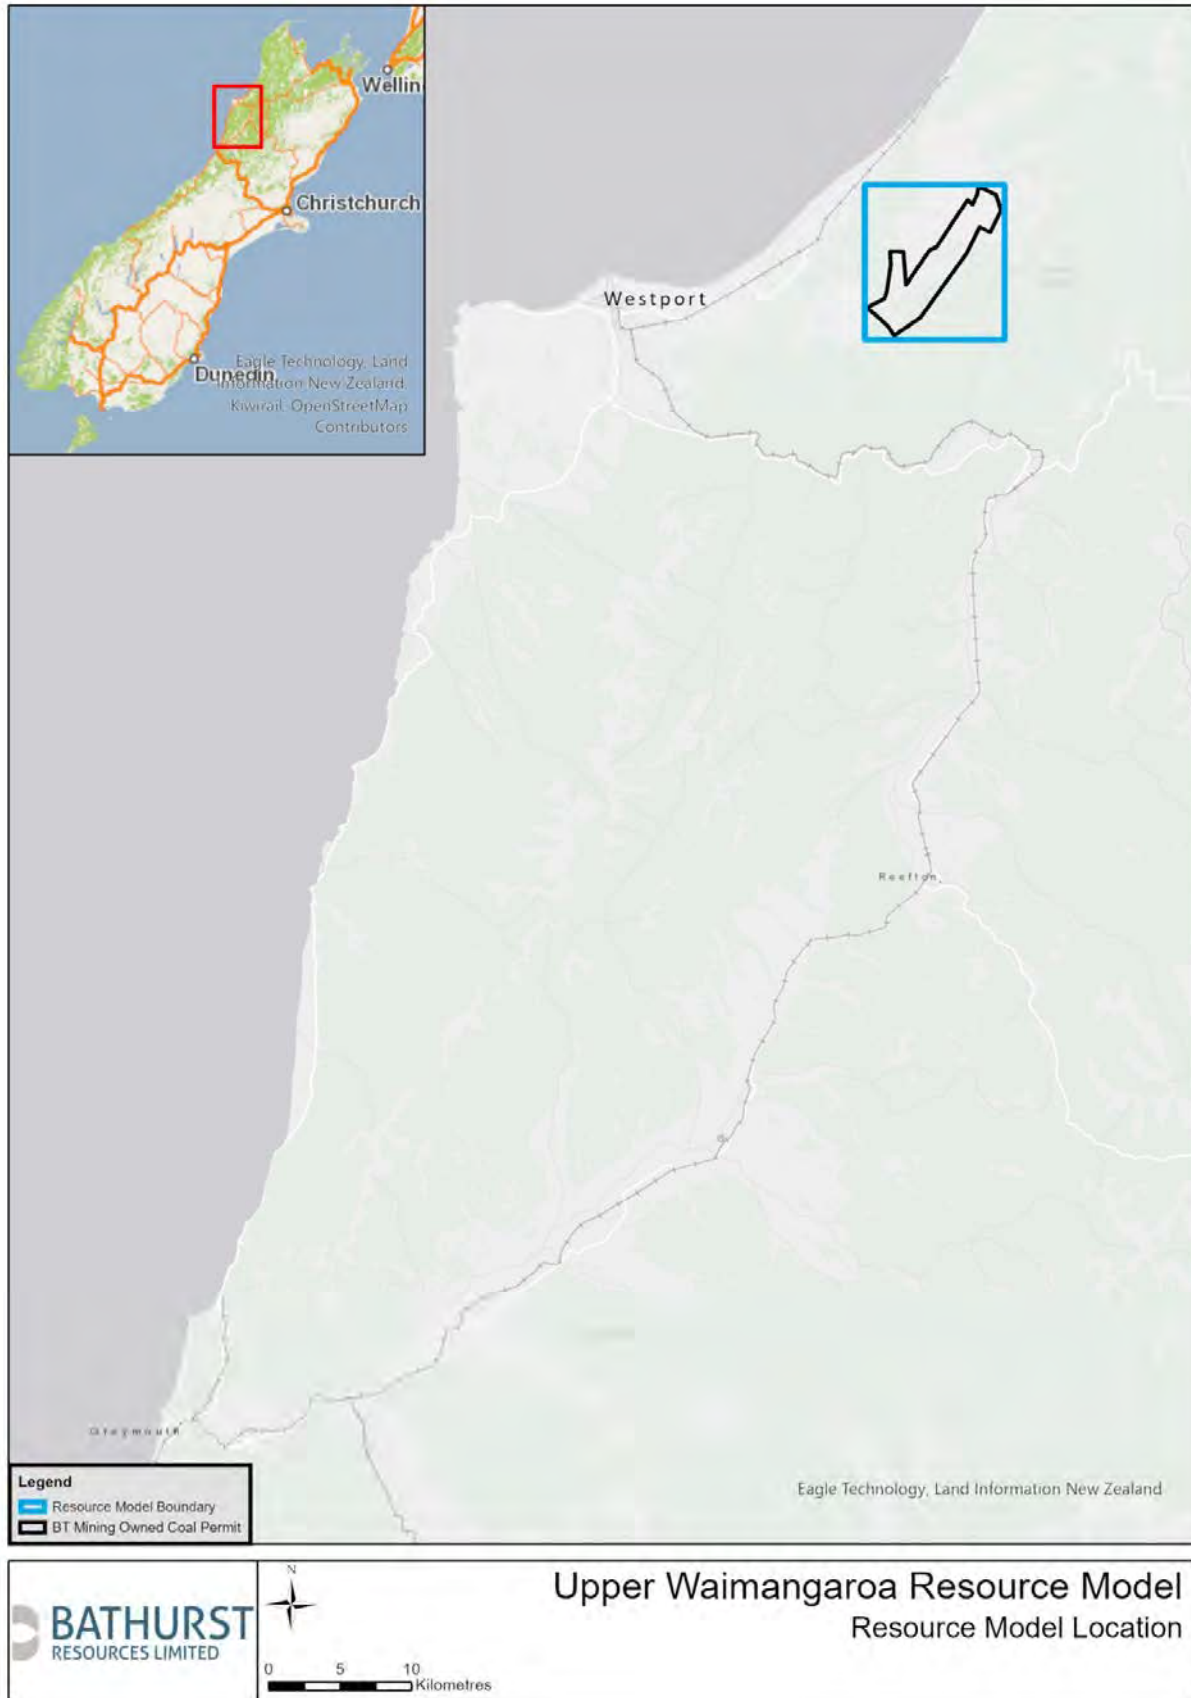


Figure 1: Location Plan

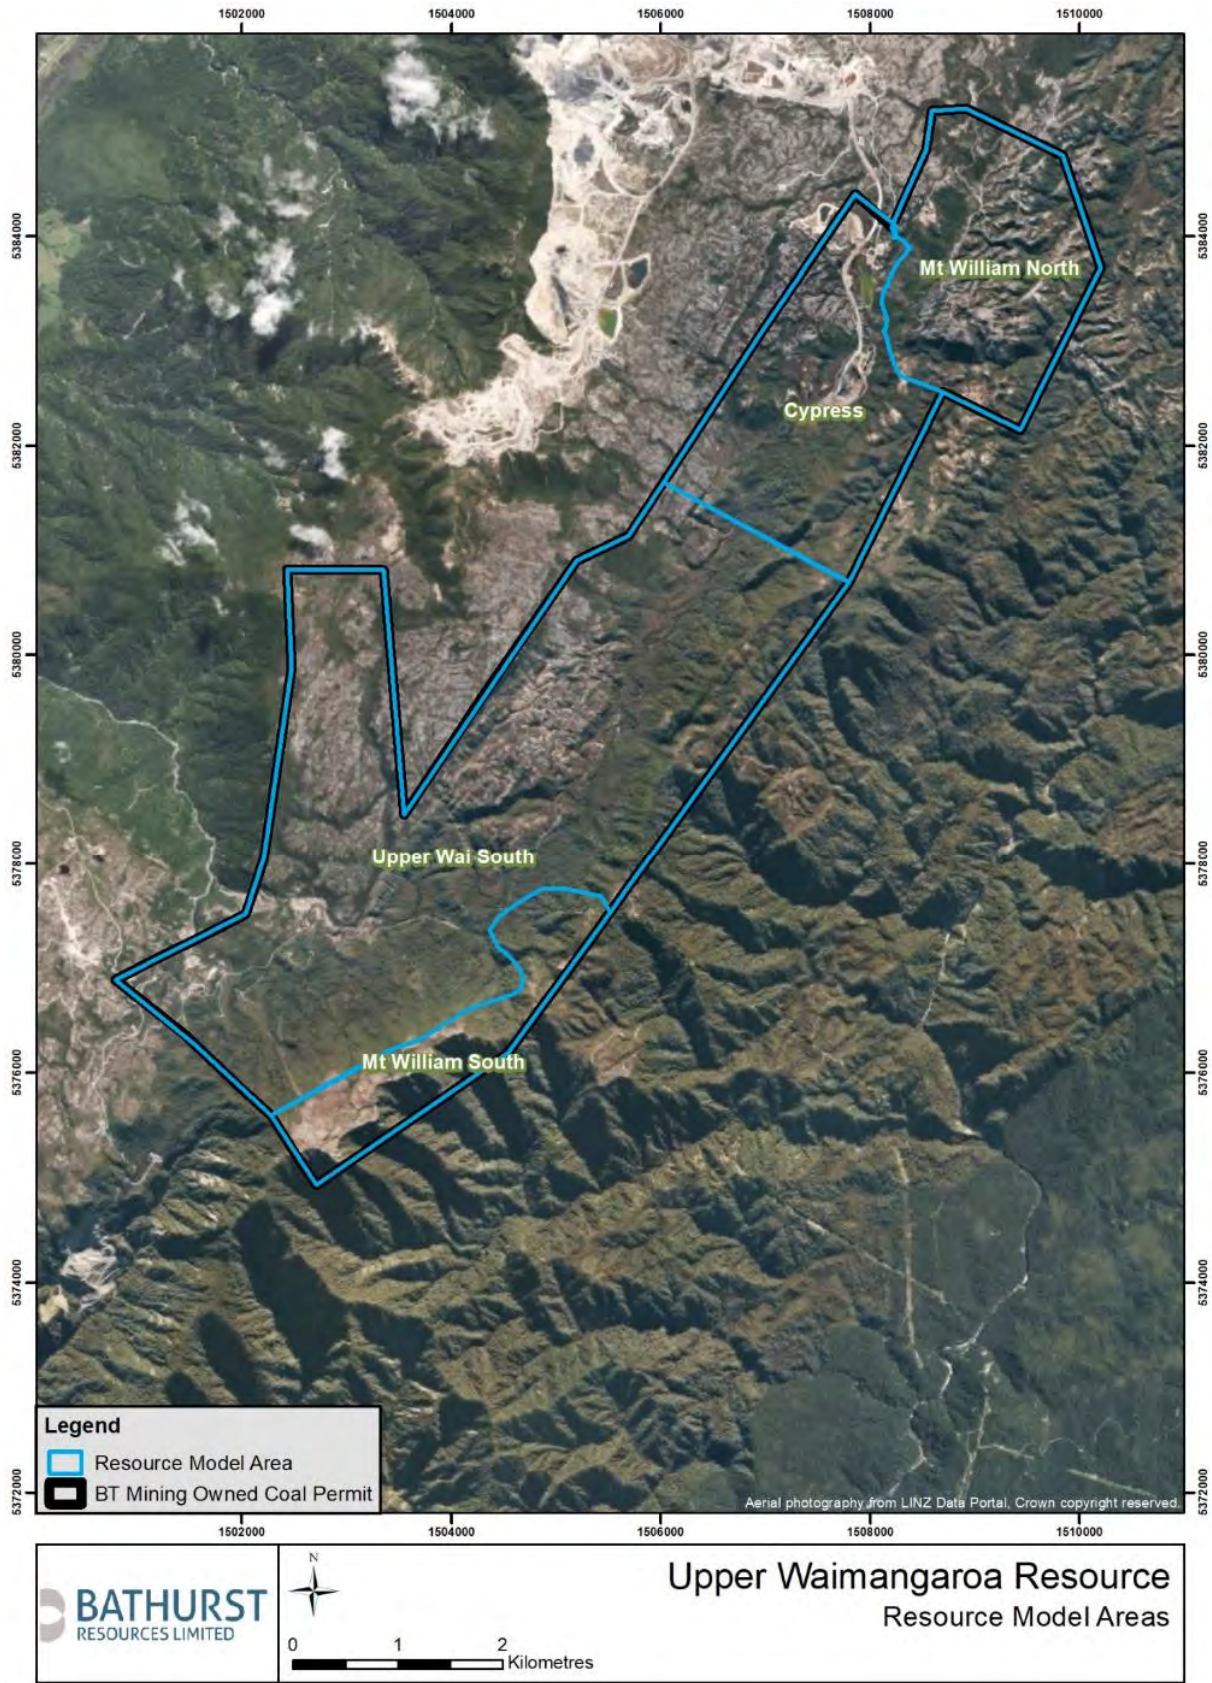


Figure 2: Resource Model Areas

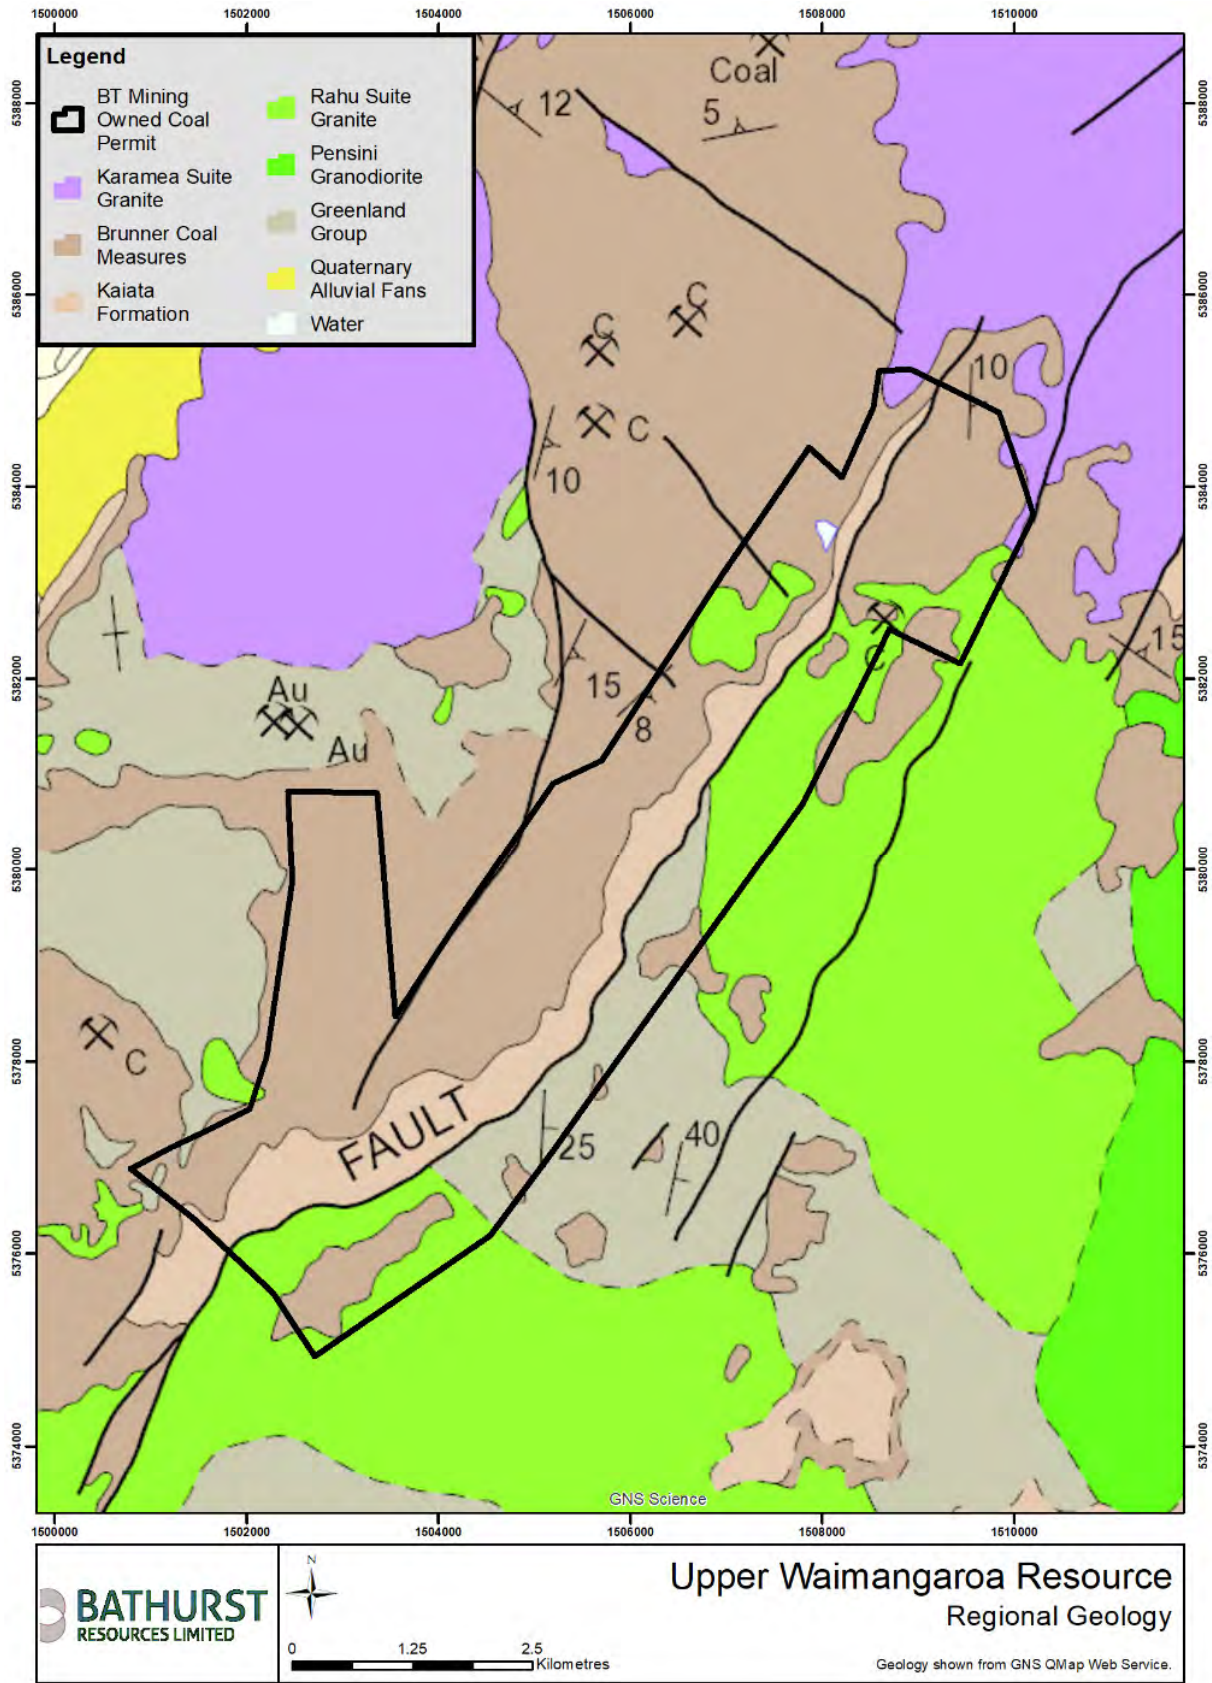


Figure 3: Regional Geology

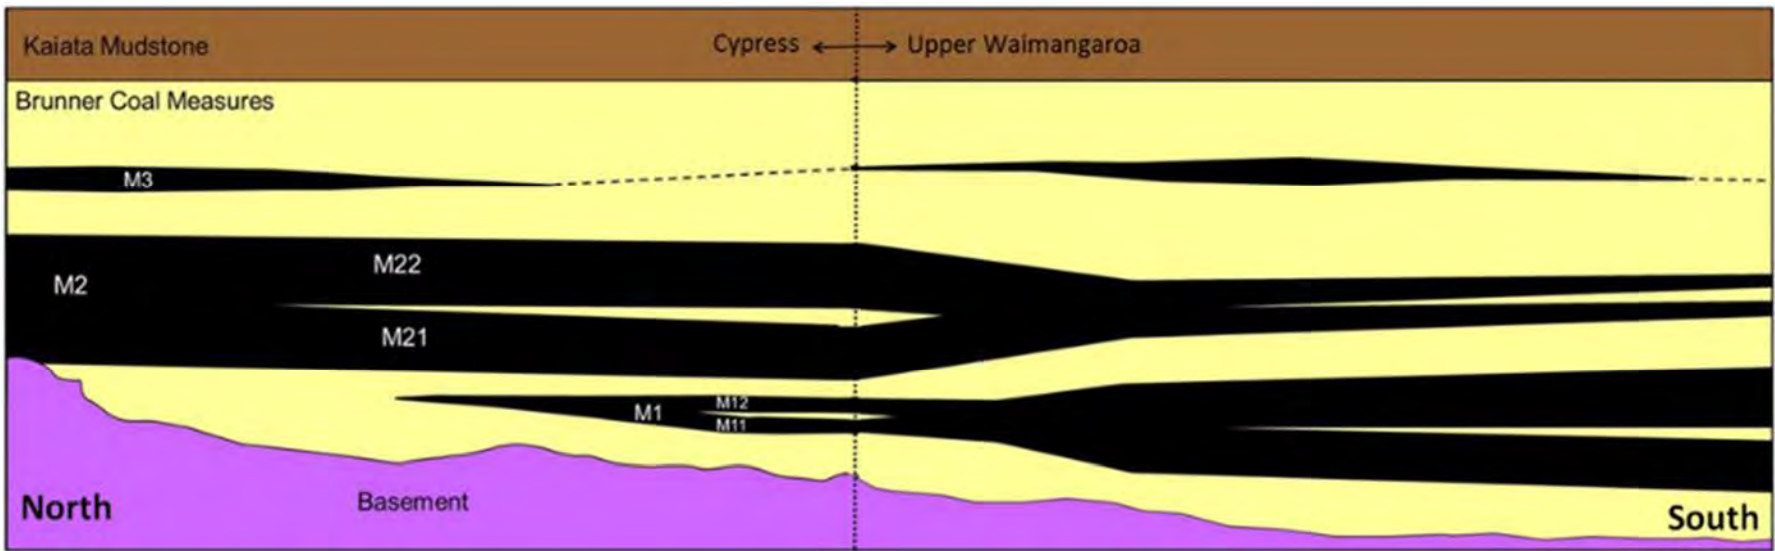


Figure 4: Schematic diagram of Upper Waimangaroa Coal Seam naming convention and correlation alongside that of the Cypress deposit to the north

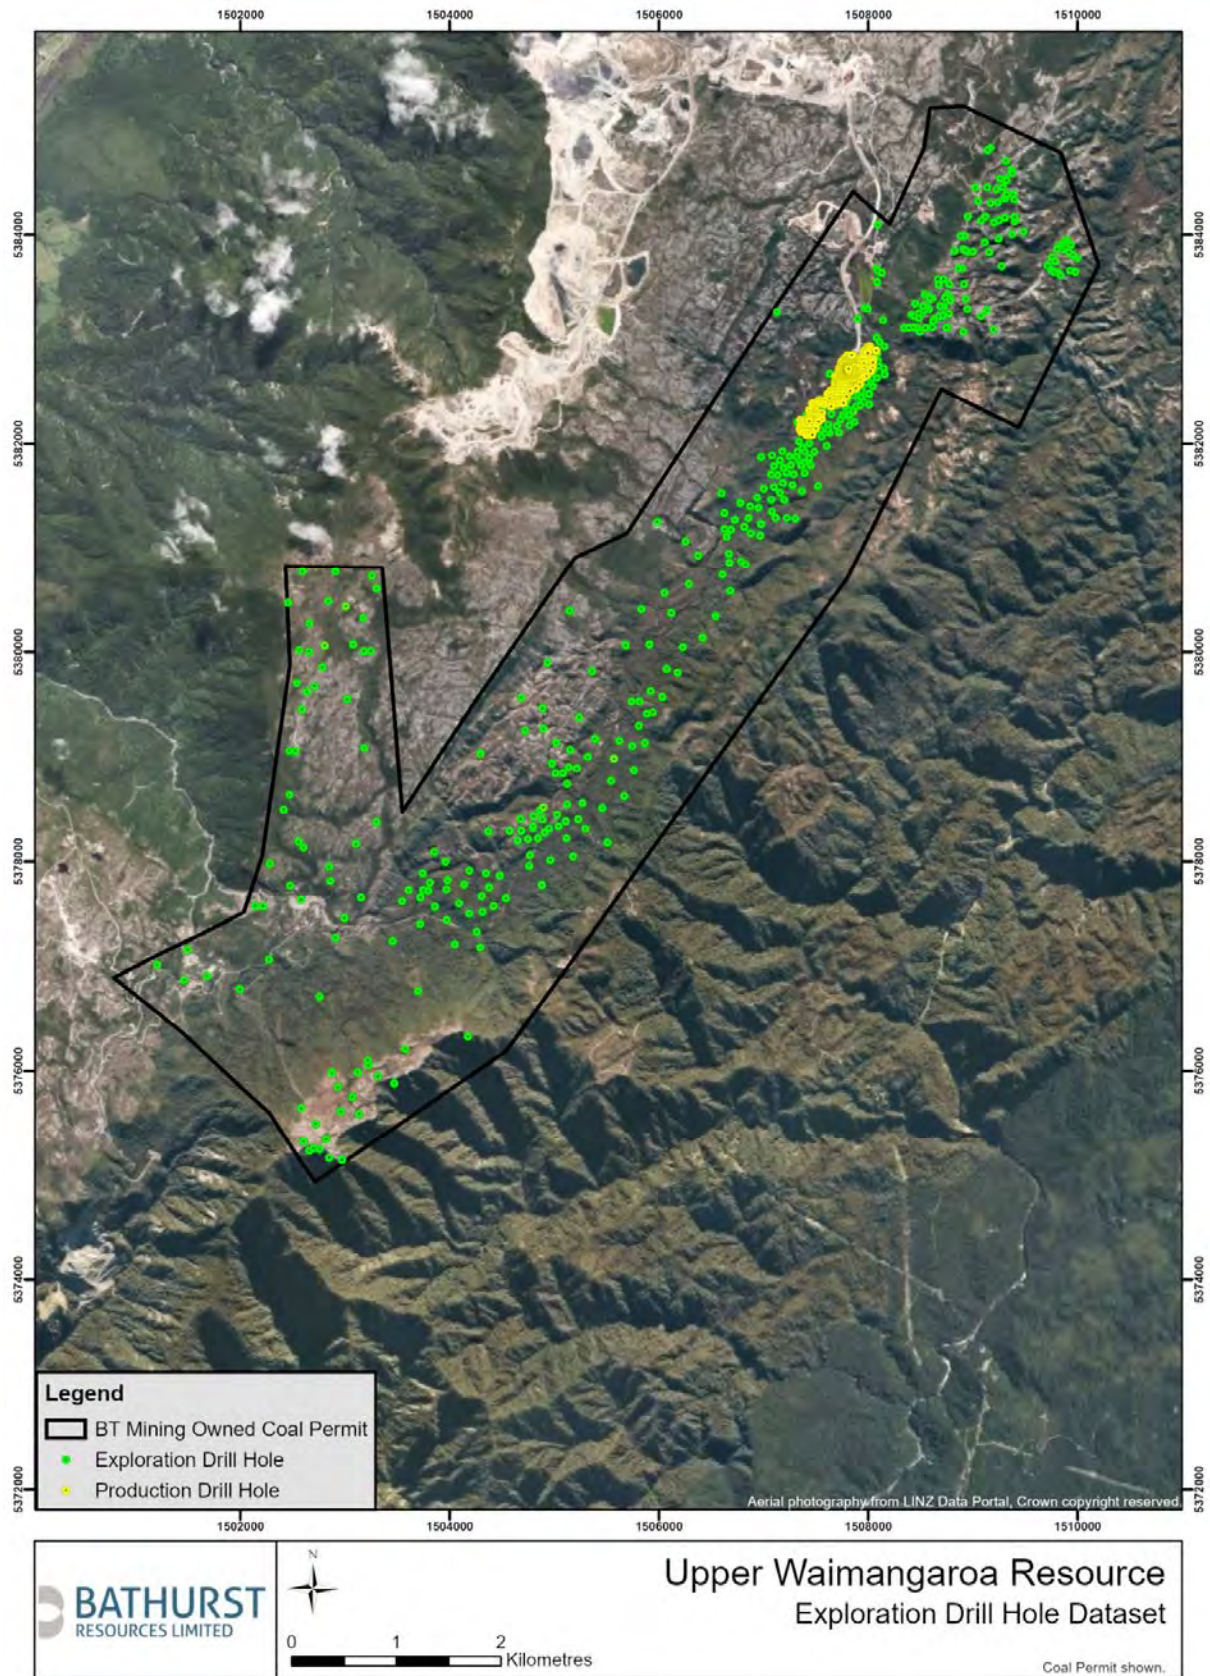


Figure 5: Plan showing the drilling dataset used to produce the resource model



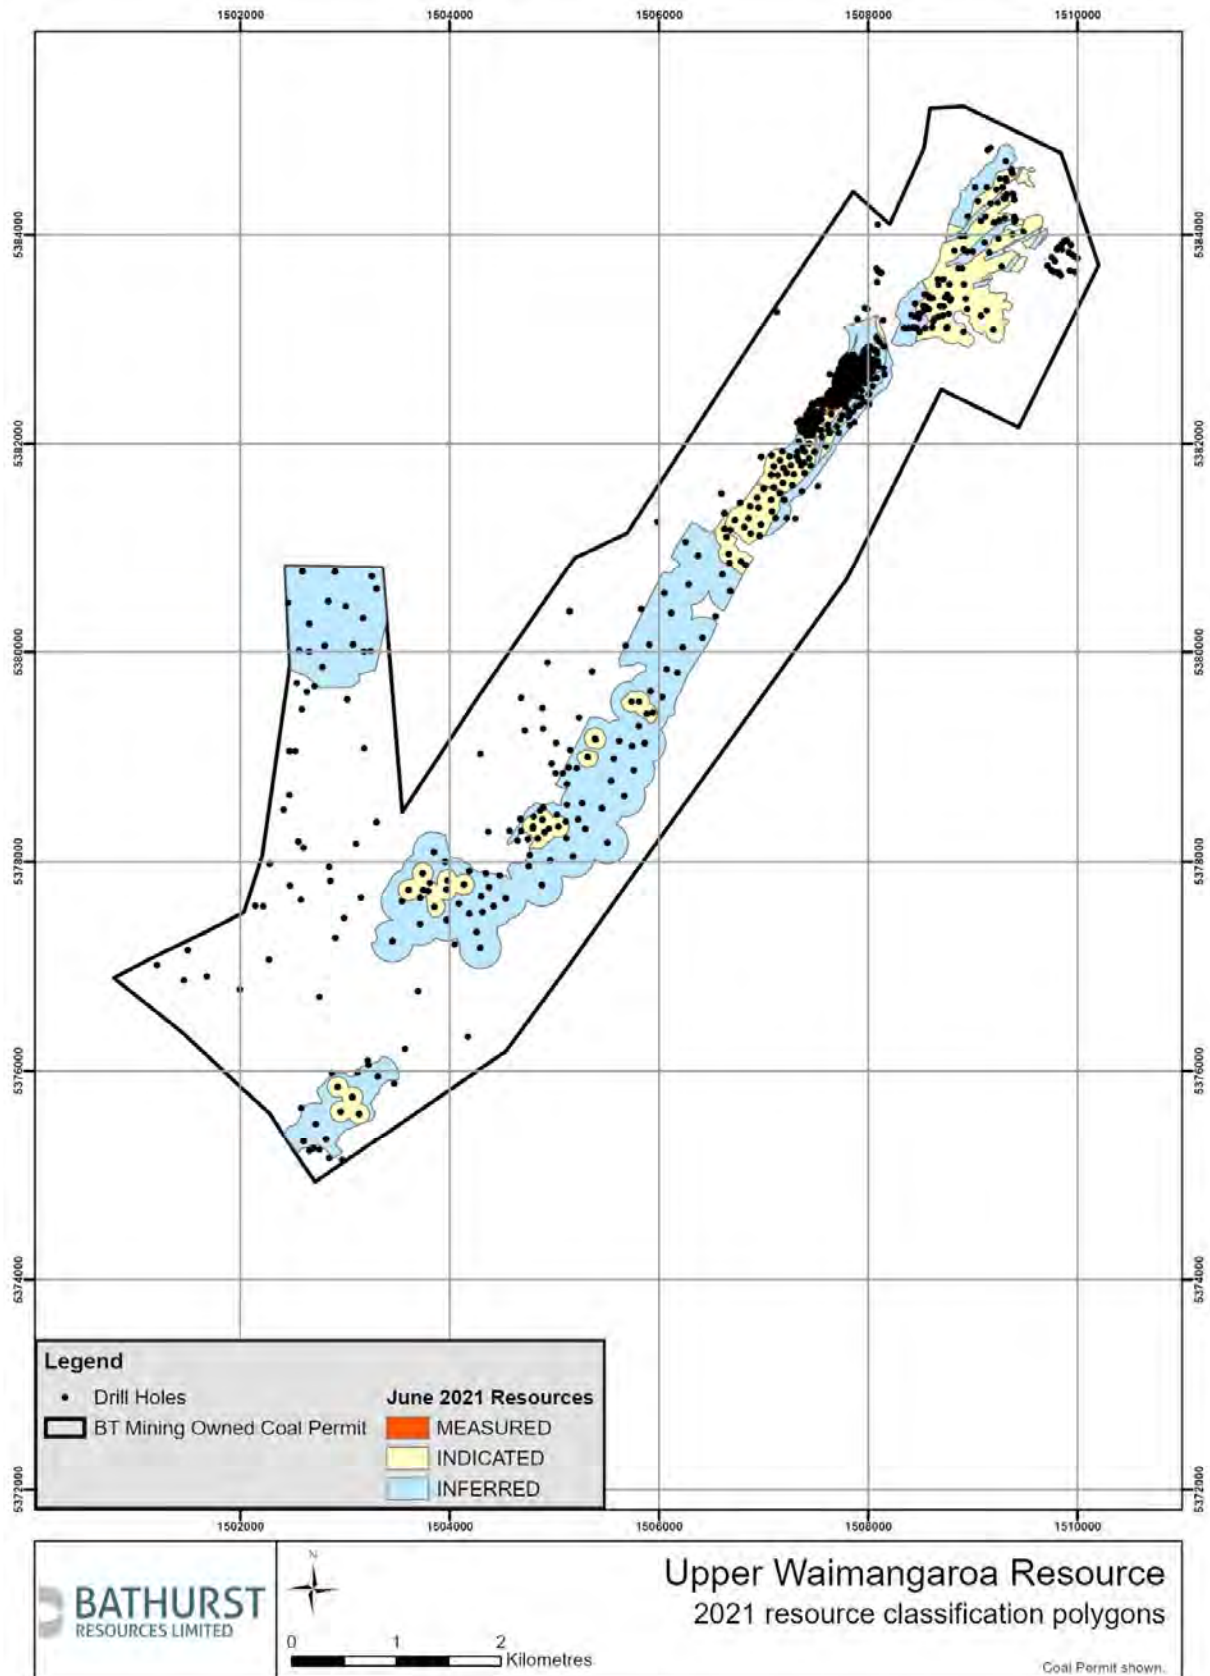


Figure 6: Plan showing the 2021 drillhole coverage and resource classification polygons

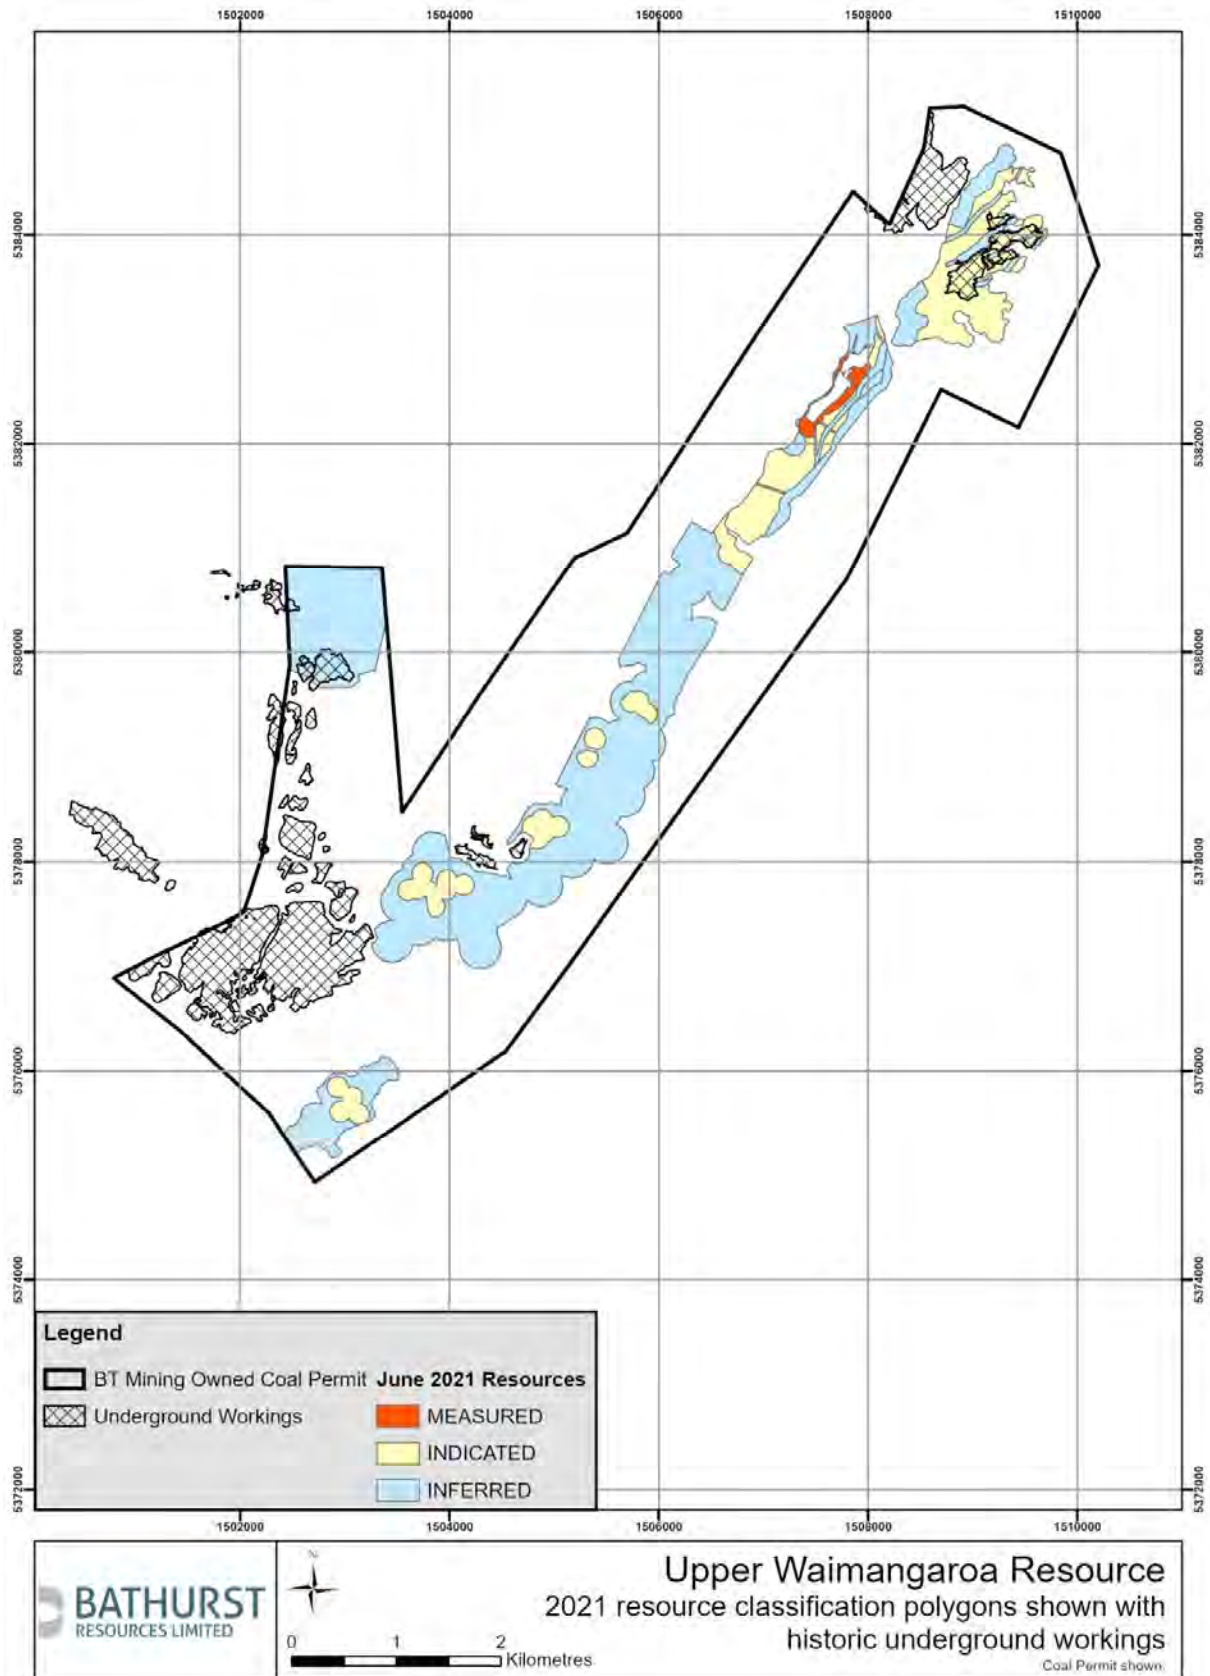


Figure 7: Extent of Underground Workings and 2021 resource classification

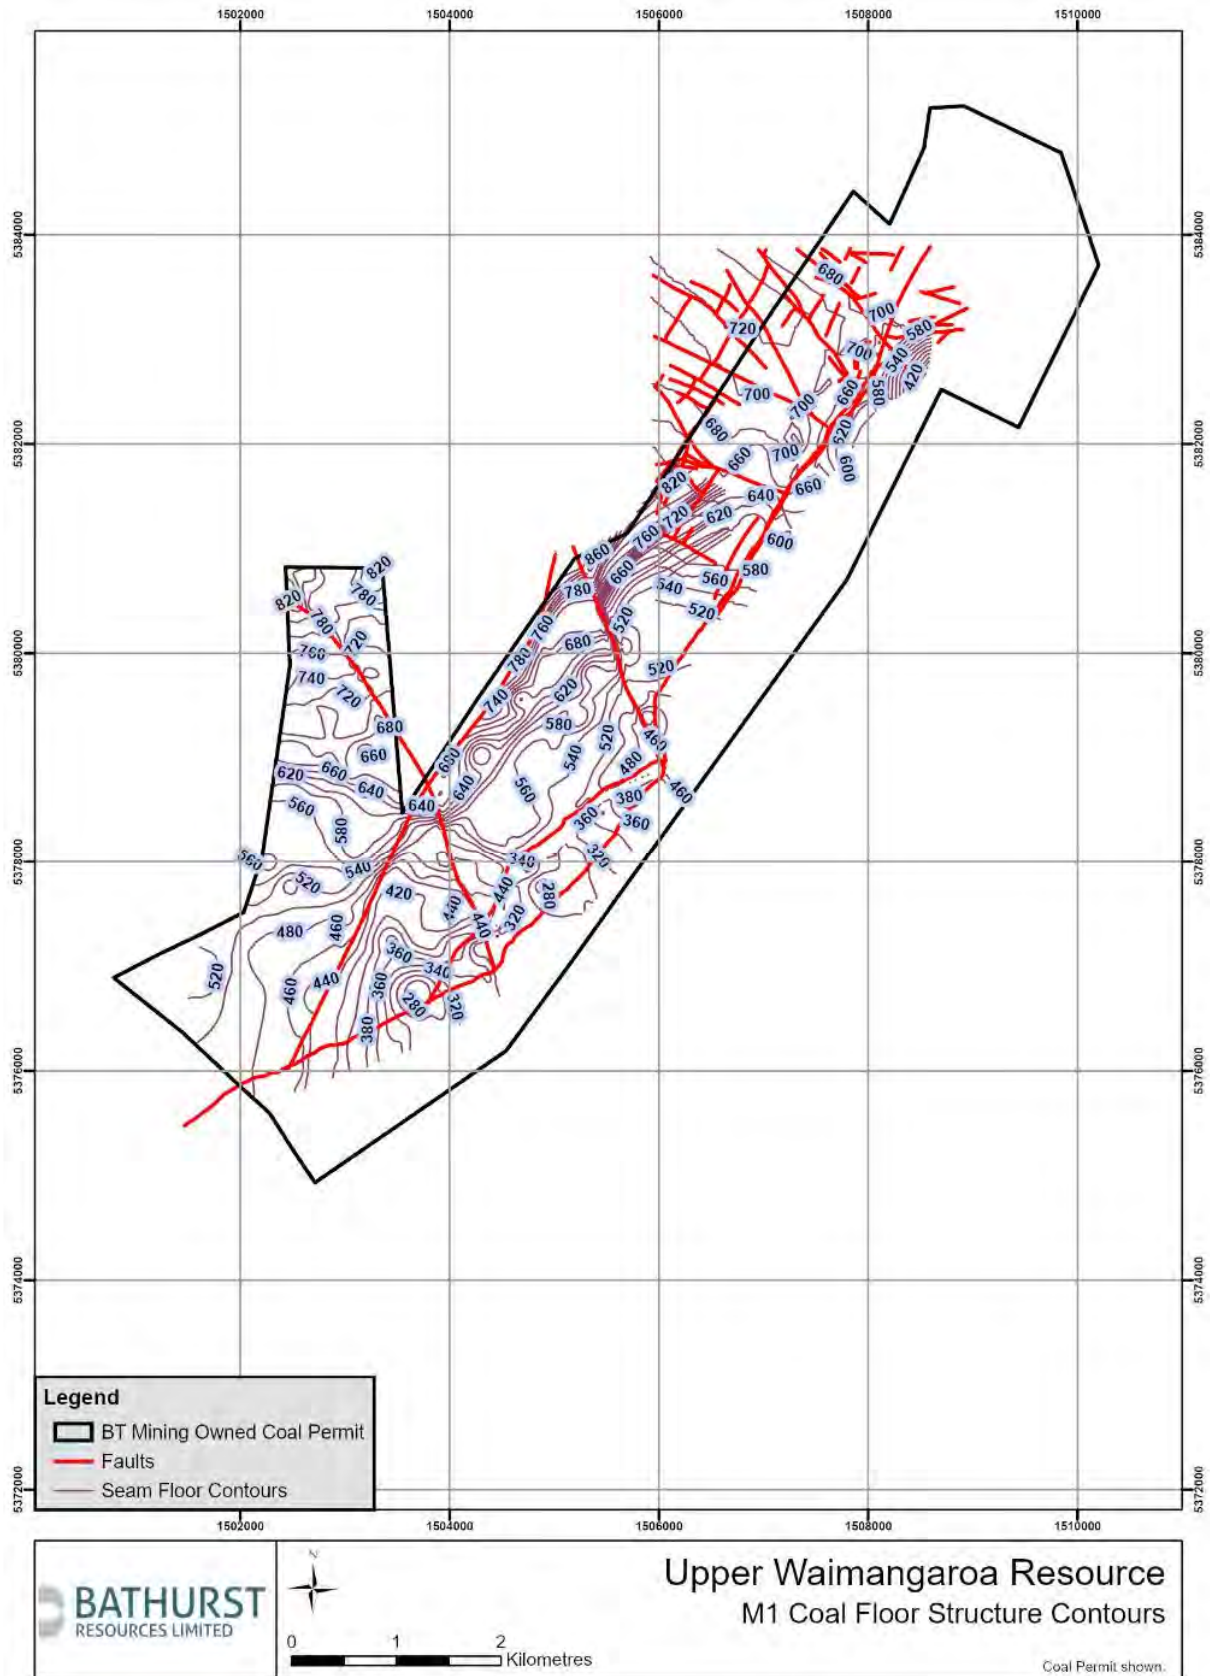


Figure 8: Plan showing the structure contours of coal seam floor

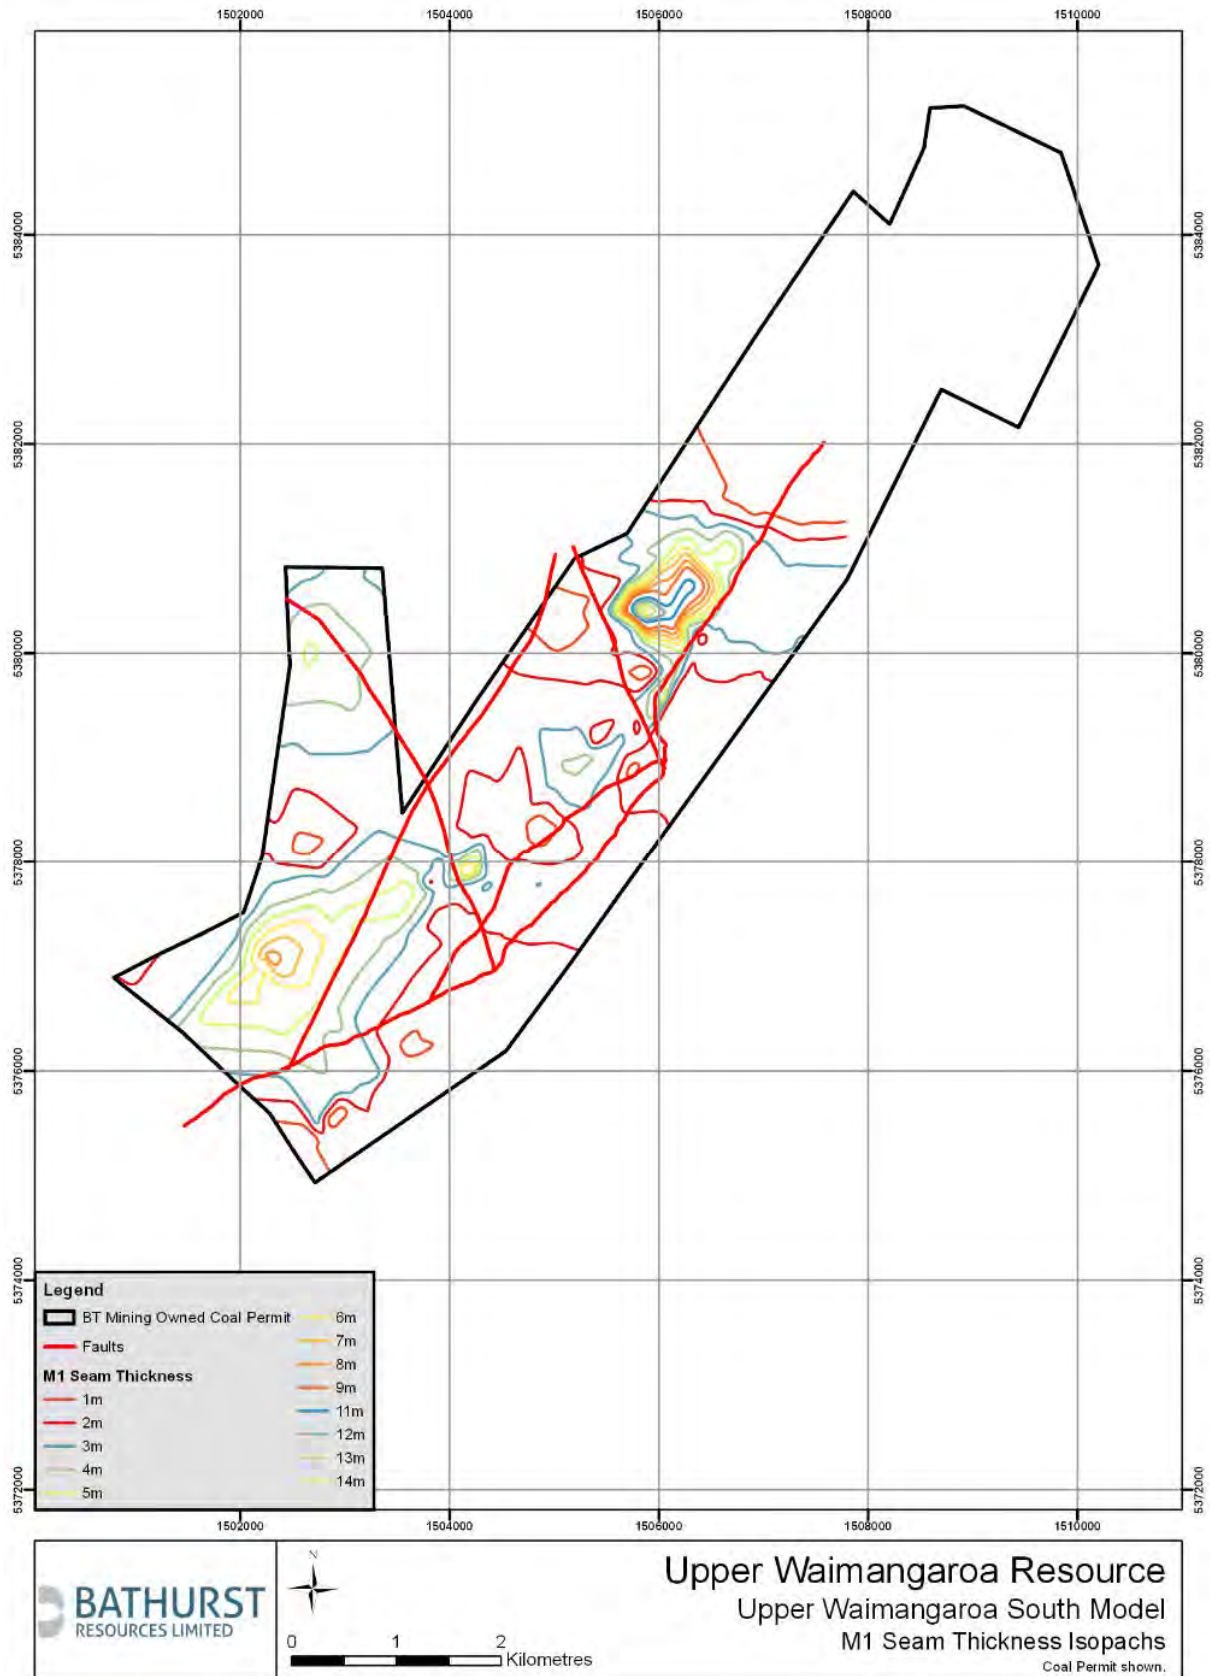


Figure 9: Plan showing full seam thickness (M1 Coal Seam) contours for the Upper Wiamangaroa South area

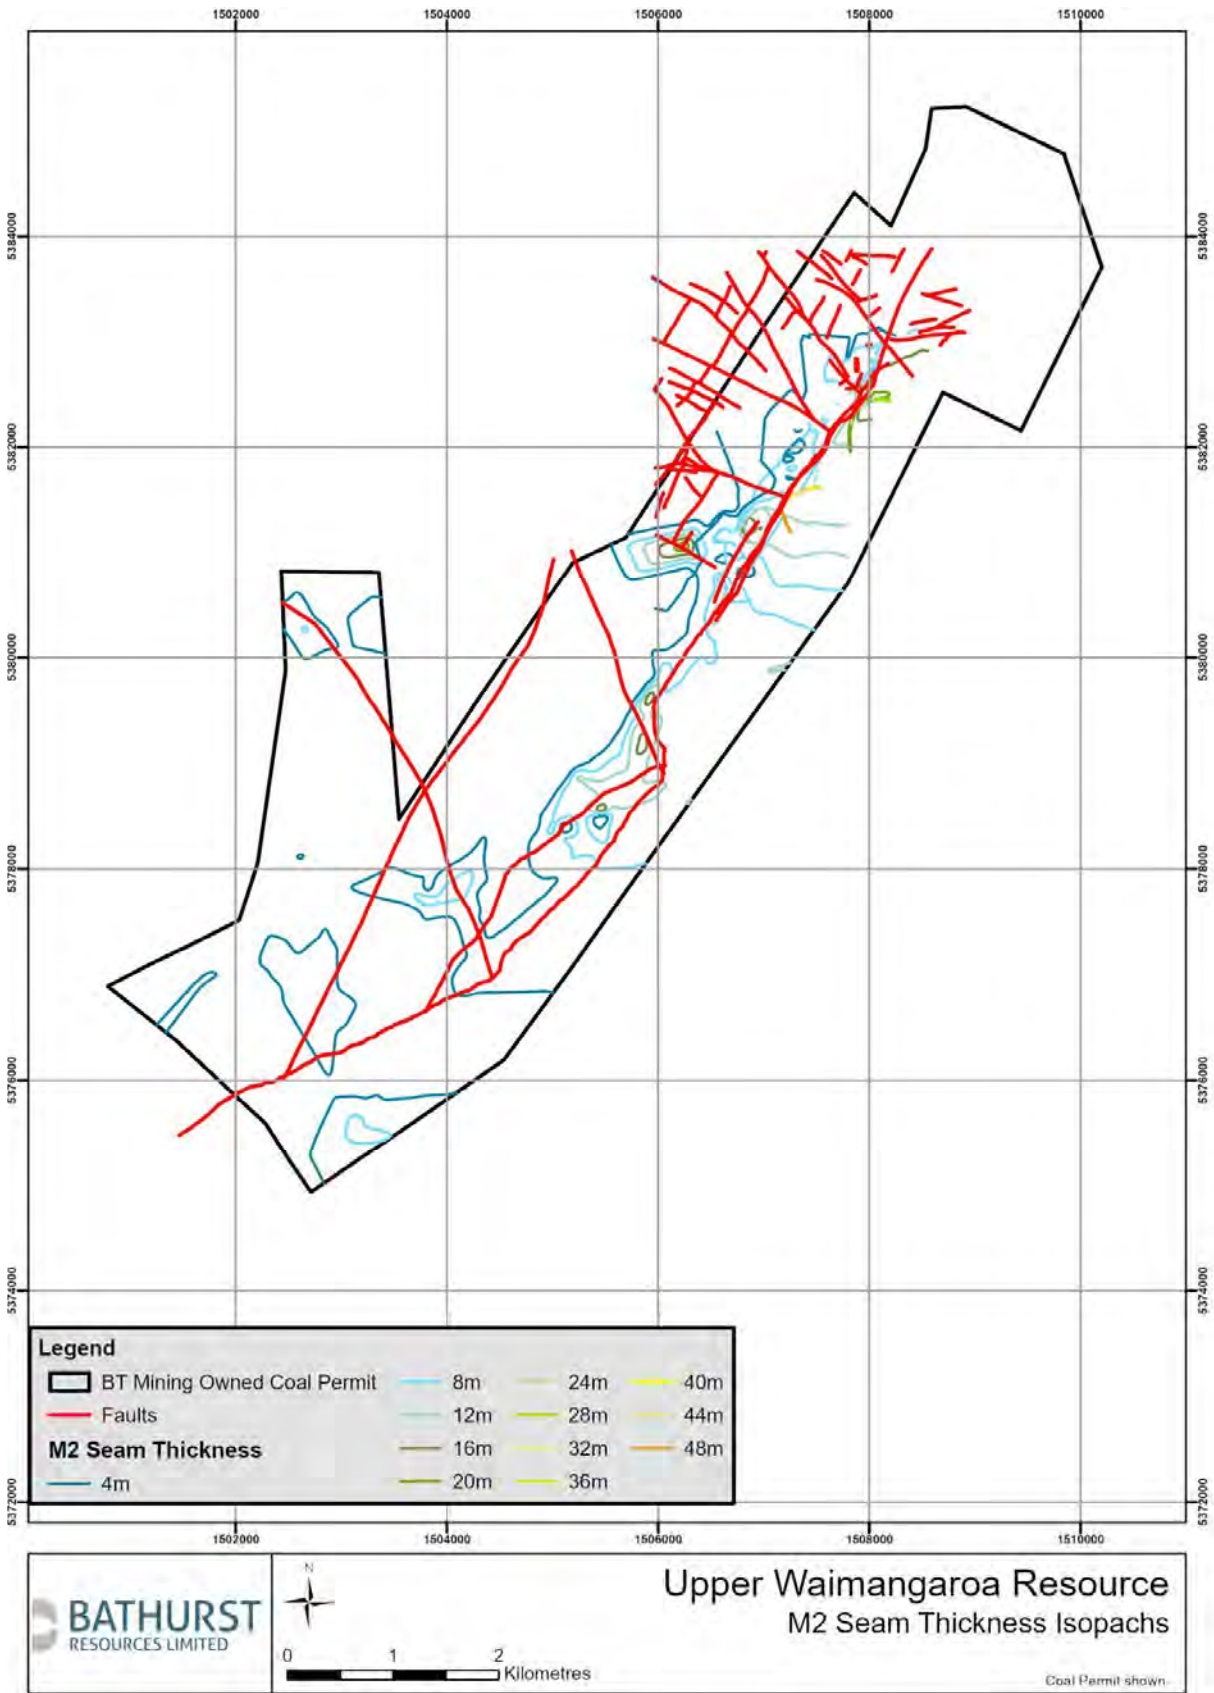


Figure 10: Plan showing full seam thickness (M2 Coal Seam) contours



Figure 11: Plan showing in-situ full M1 seam ash on an air dried basis across the Upper Waimangaroa South resource

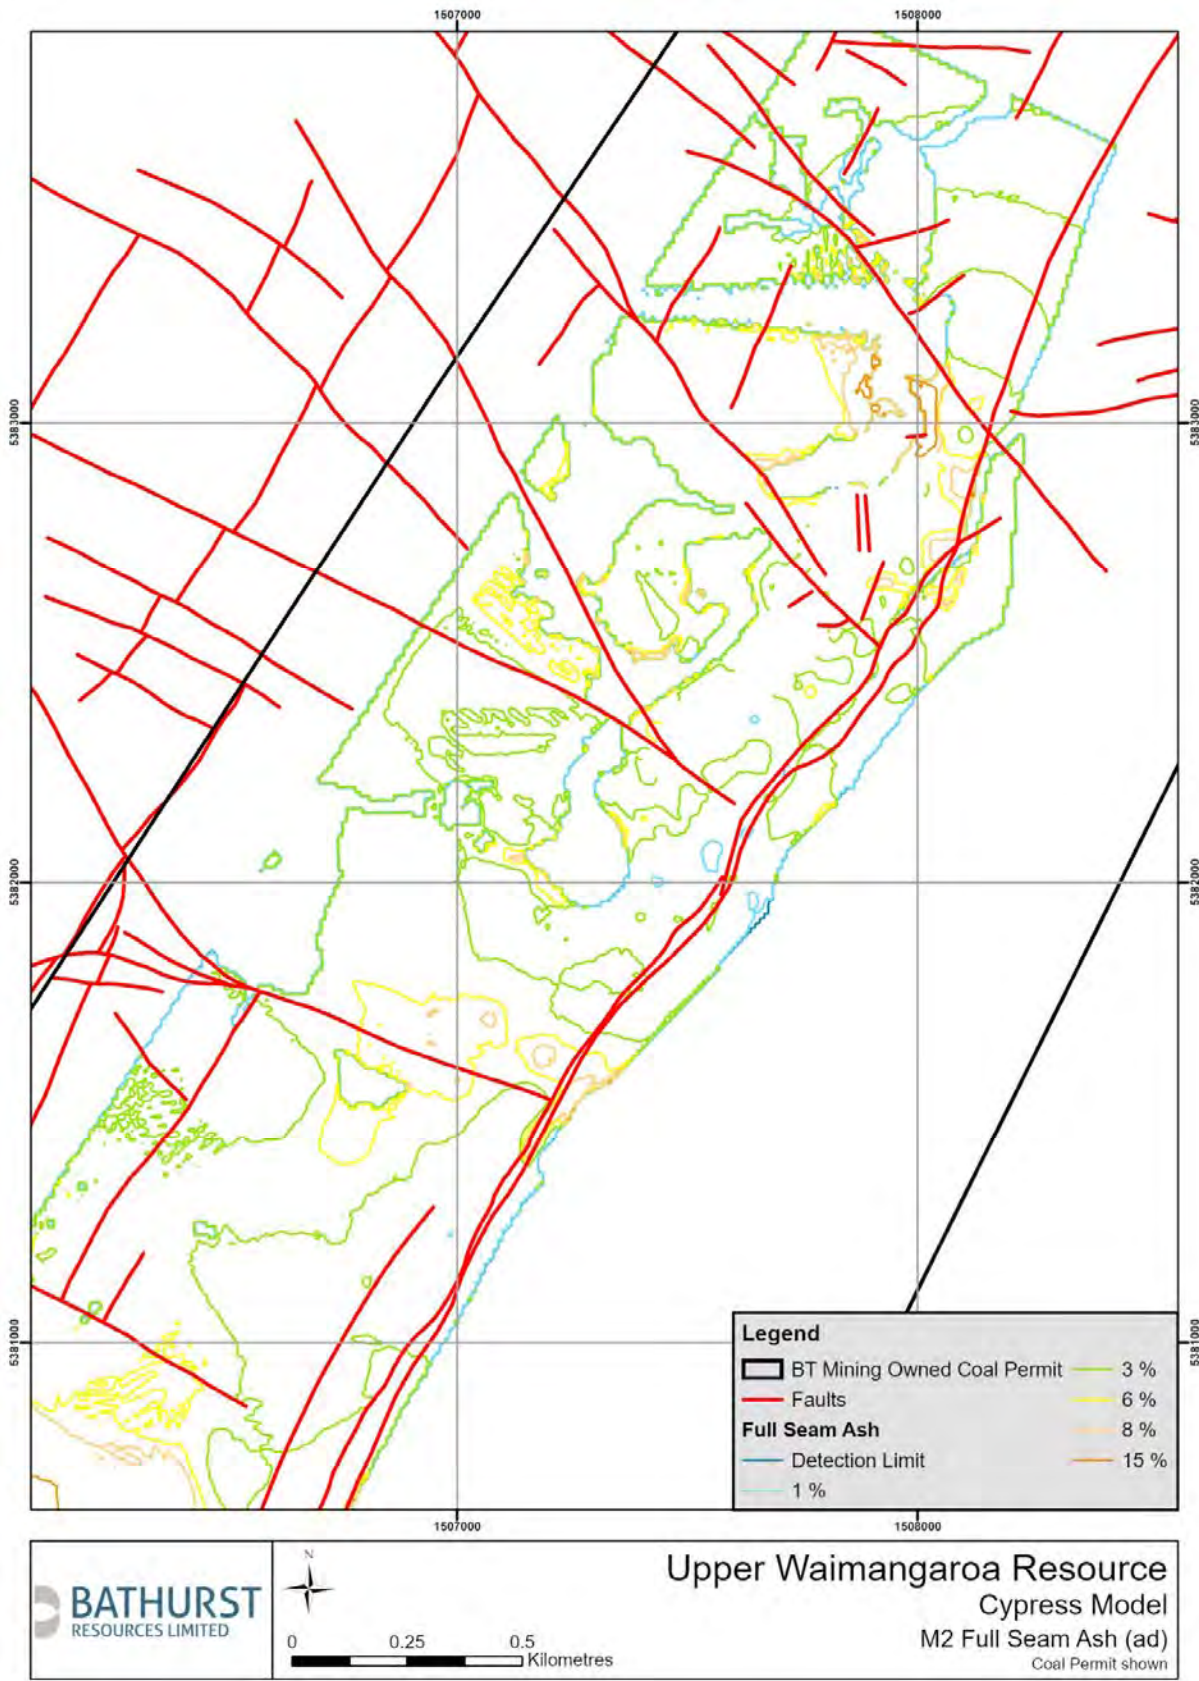


Figure 12: Plan showing in-situ full M2 seam ash on an air dried basis across the Cypress resource area

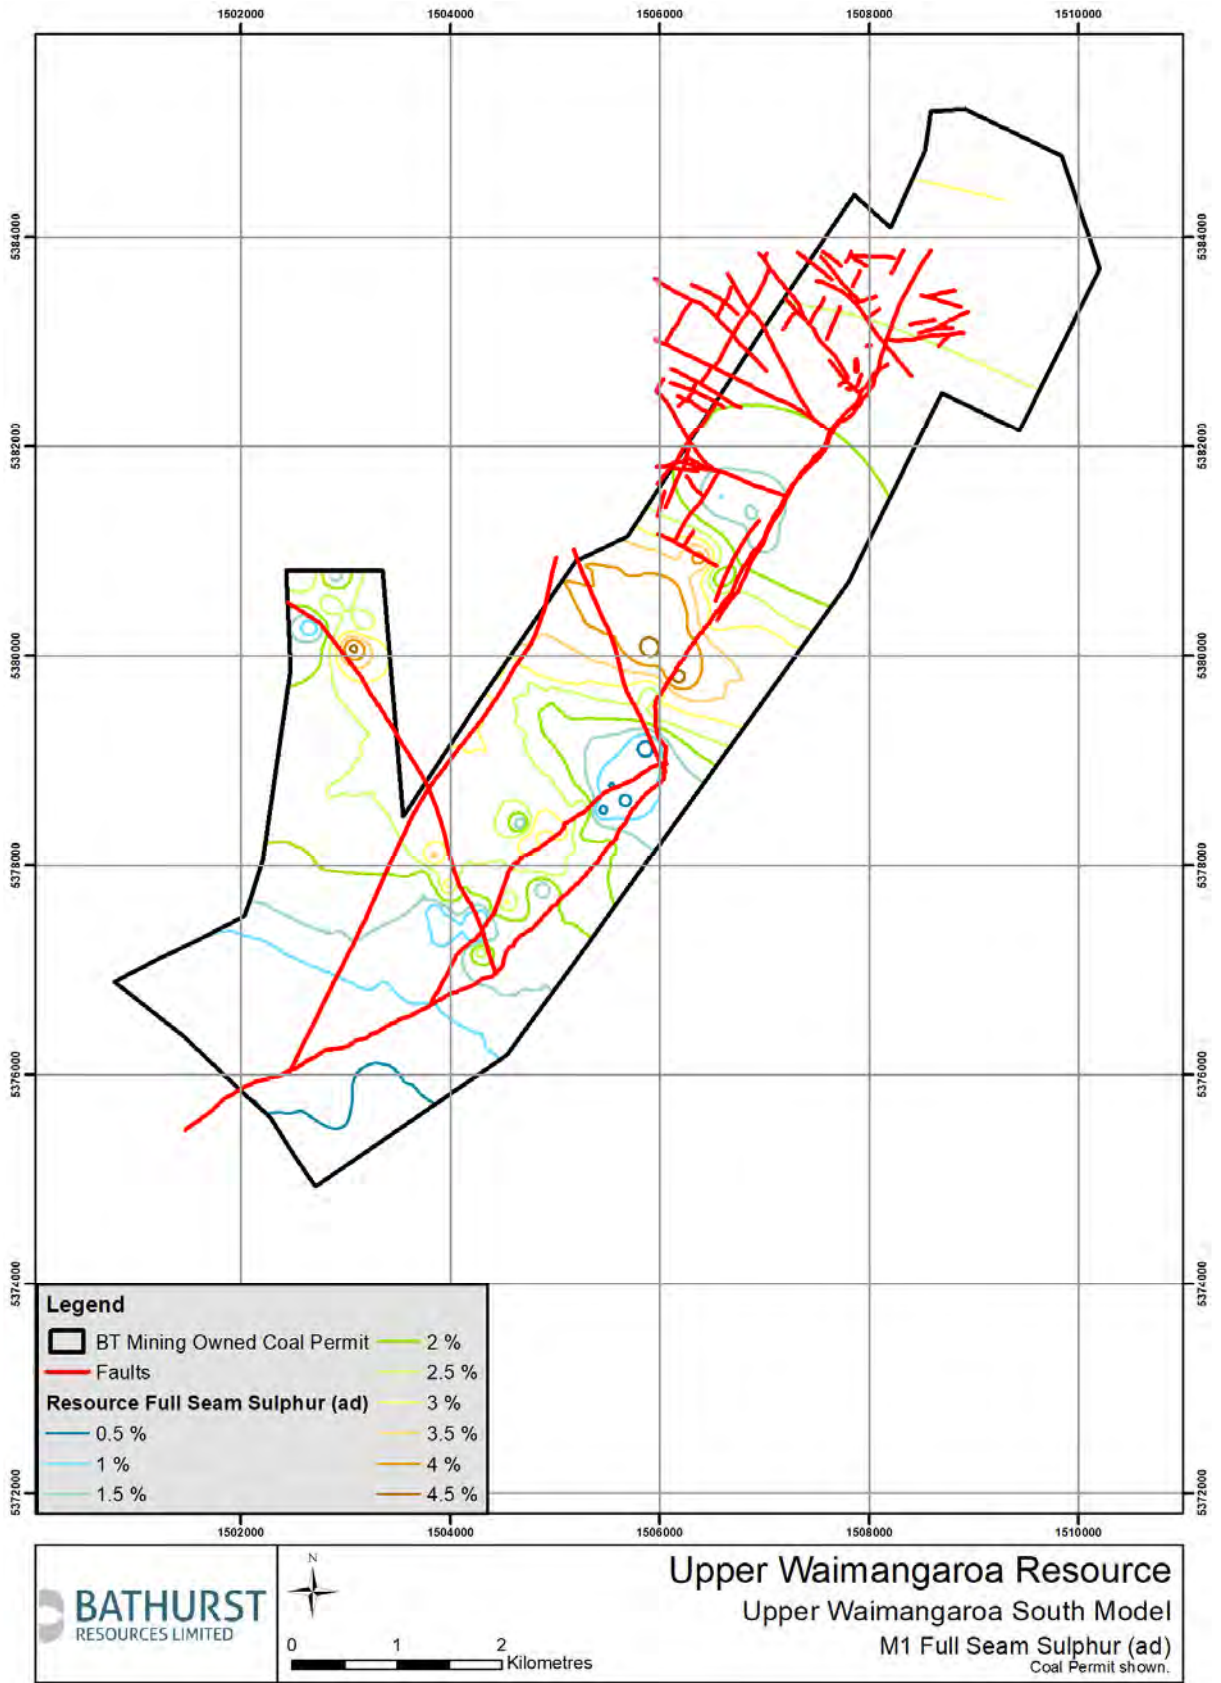


Figure 13: Plan showing full M1 seam sulphur on an air dried basis across the Upper Wiamangaroa South resource



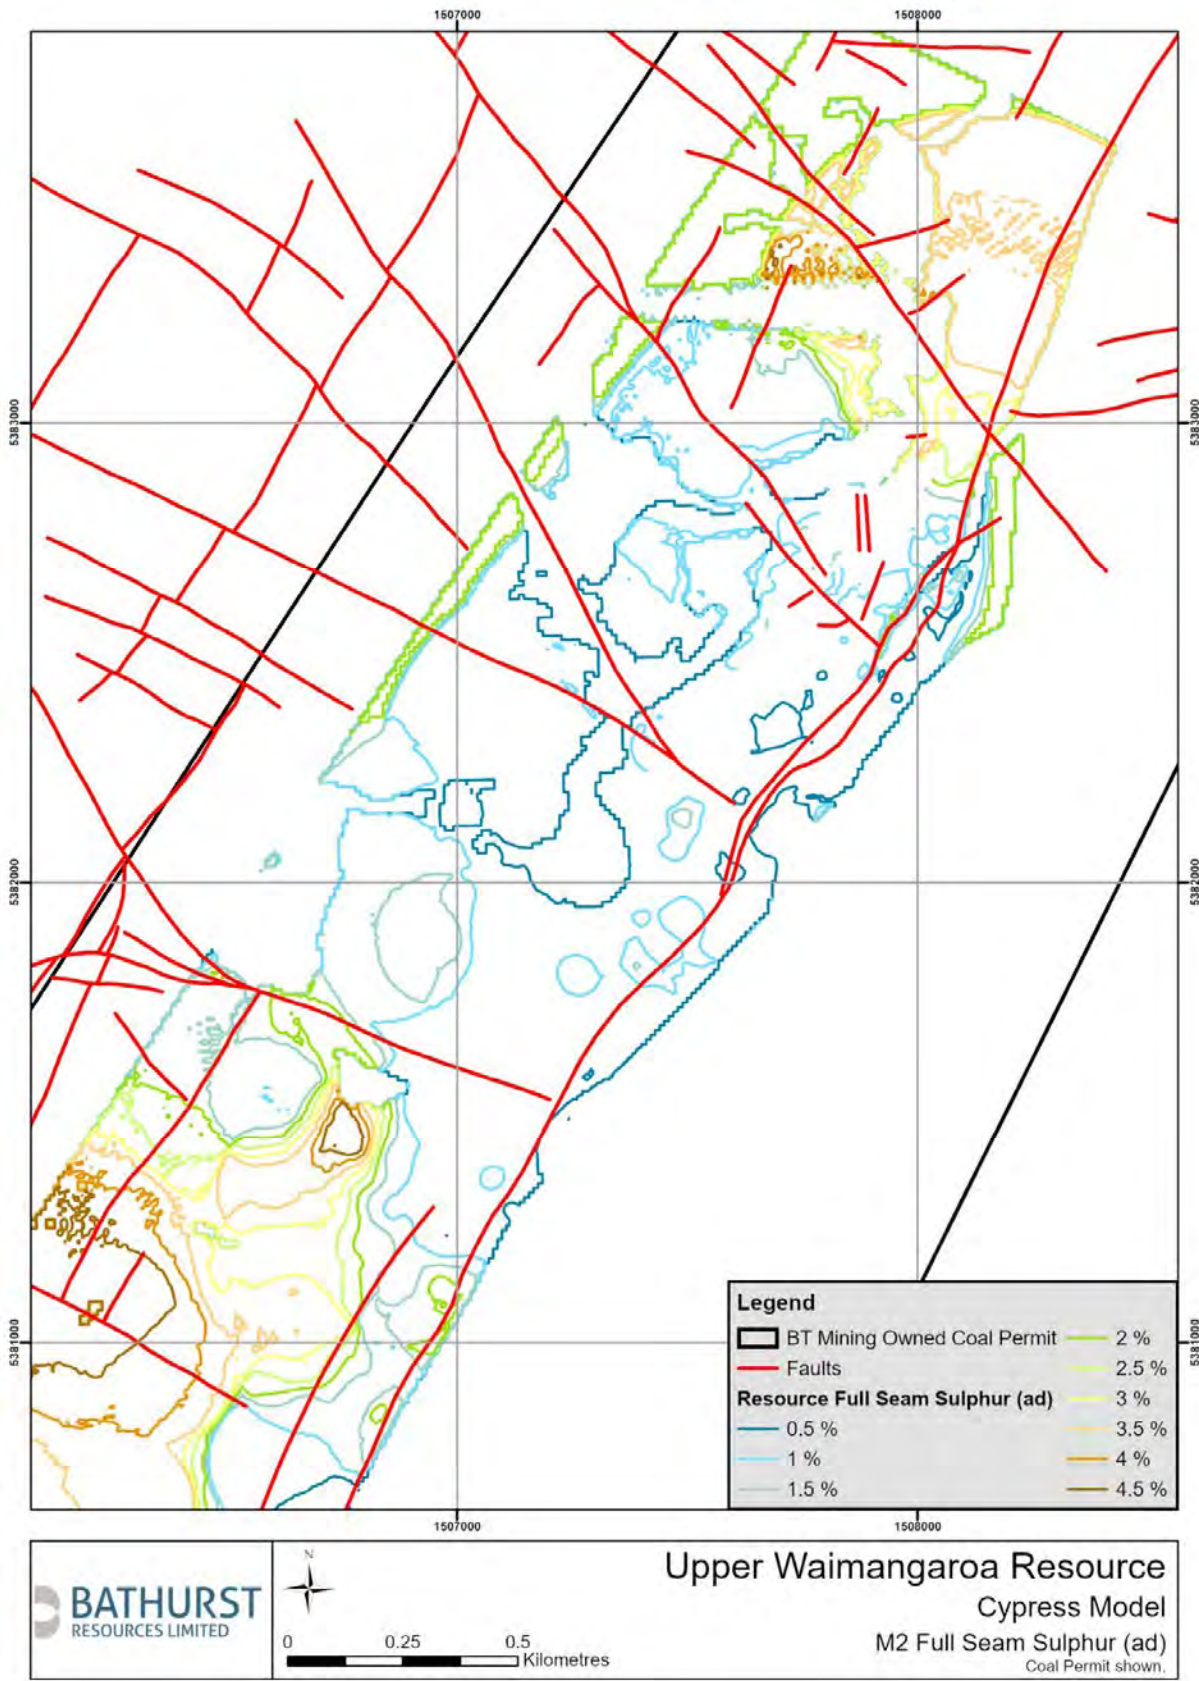


Figure 14: Plan showing full M2 seam sulphur on an air dried basis across the Cypress resource



Figure 15: Plan showing full M1 seam Volatile Matter on an air dried basis across the Upper Wiamangaroa South resource

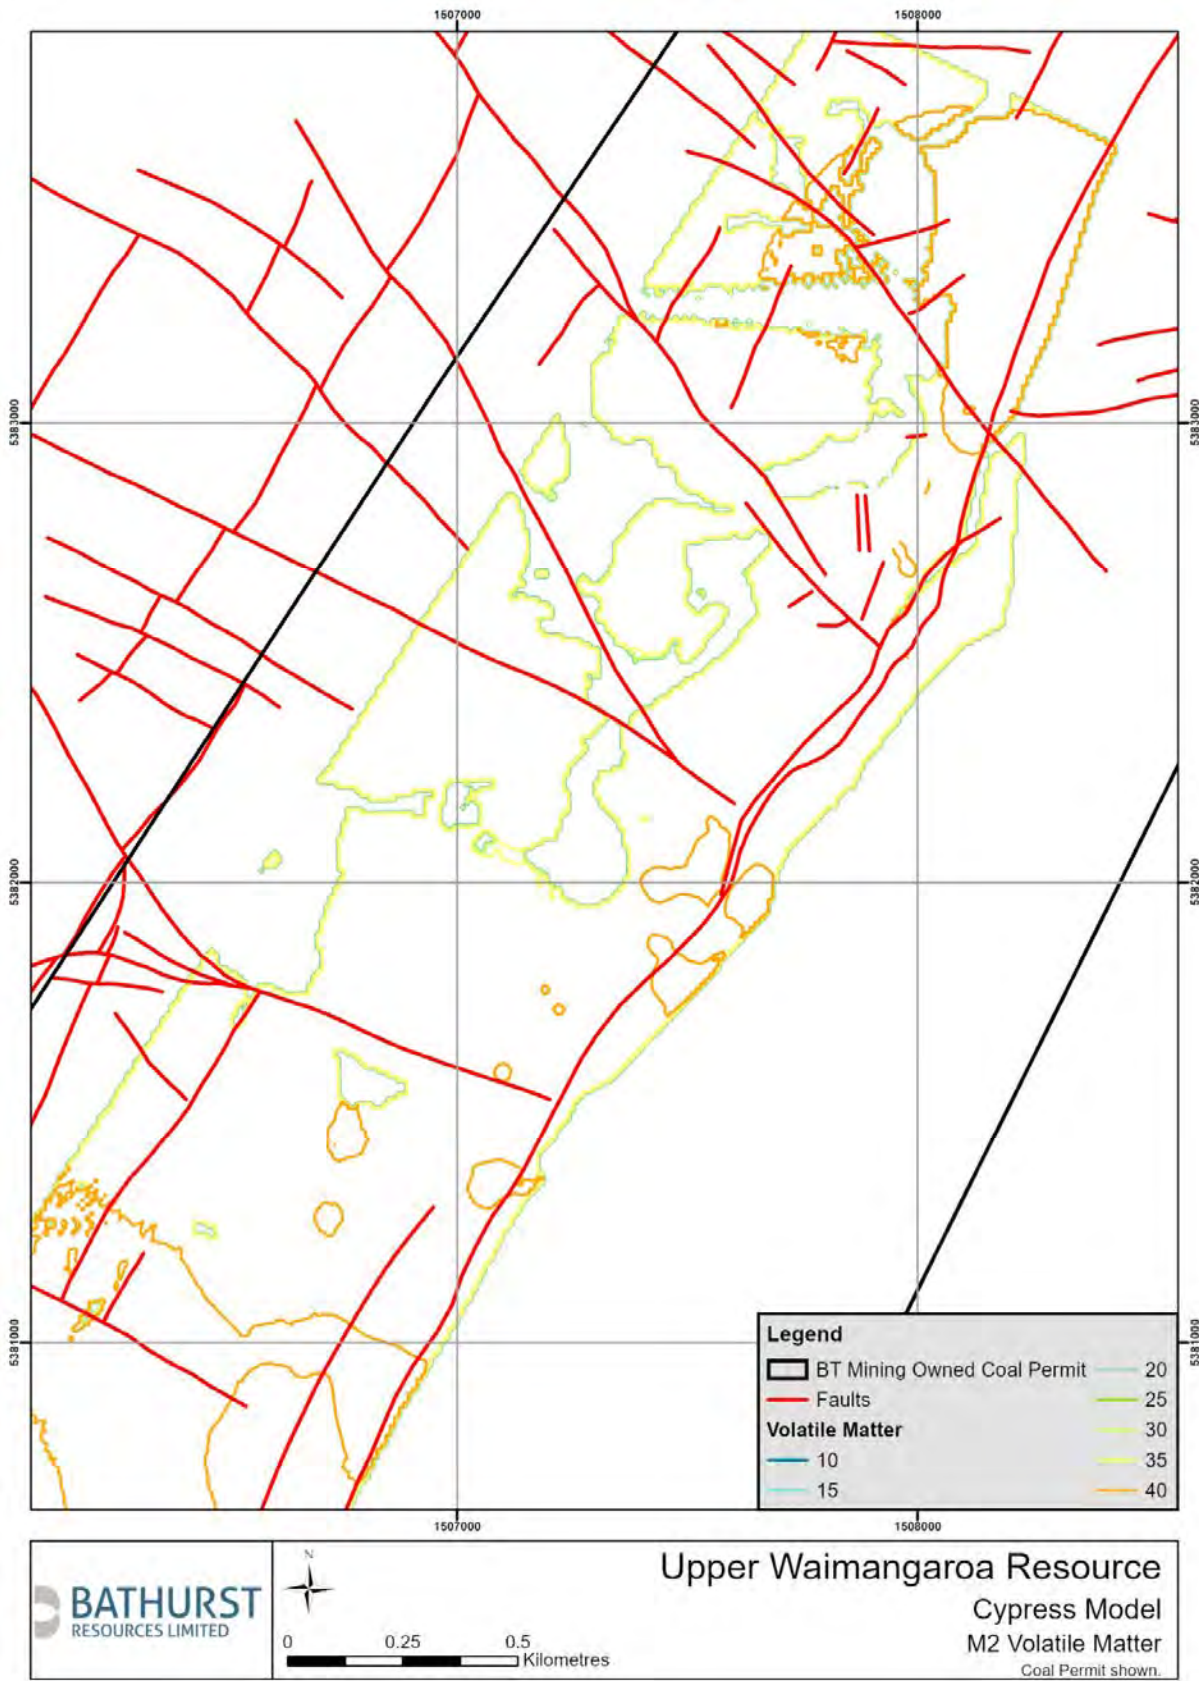


Figure 16: Plan showing full M2 seam Volatile Matter on an air dried basis across the Cypress resource

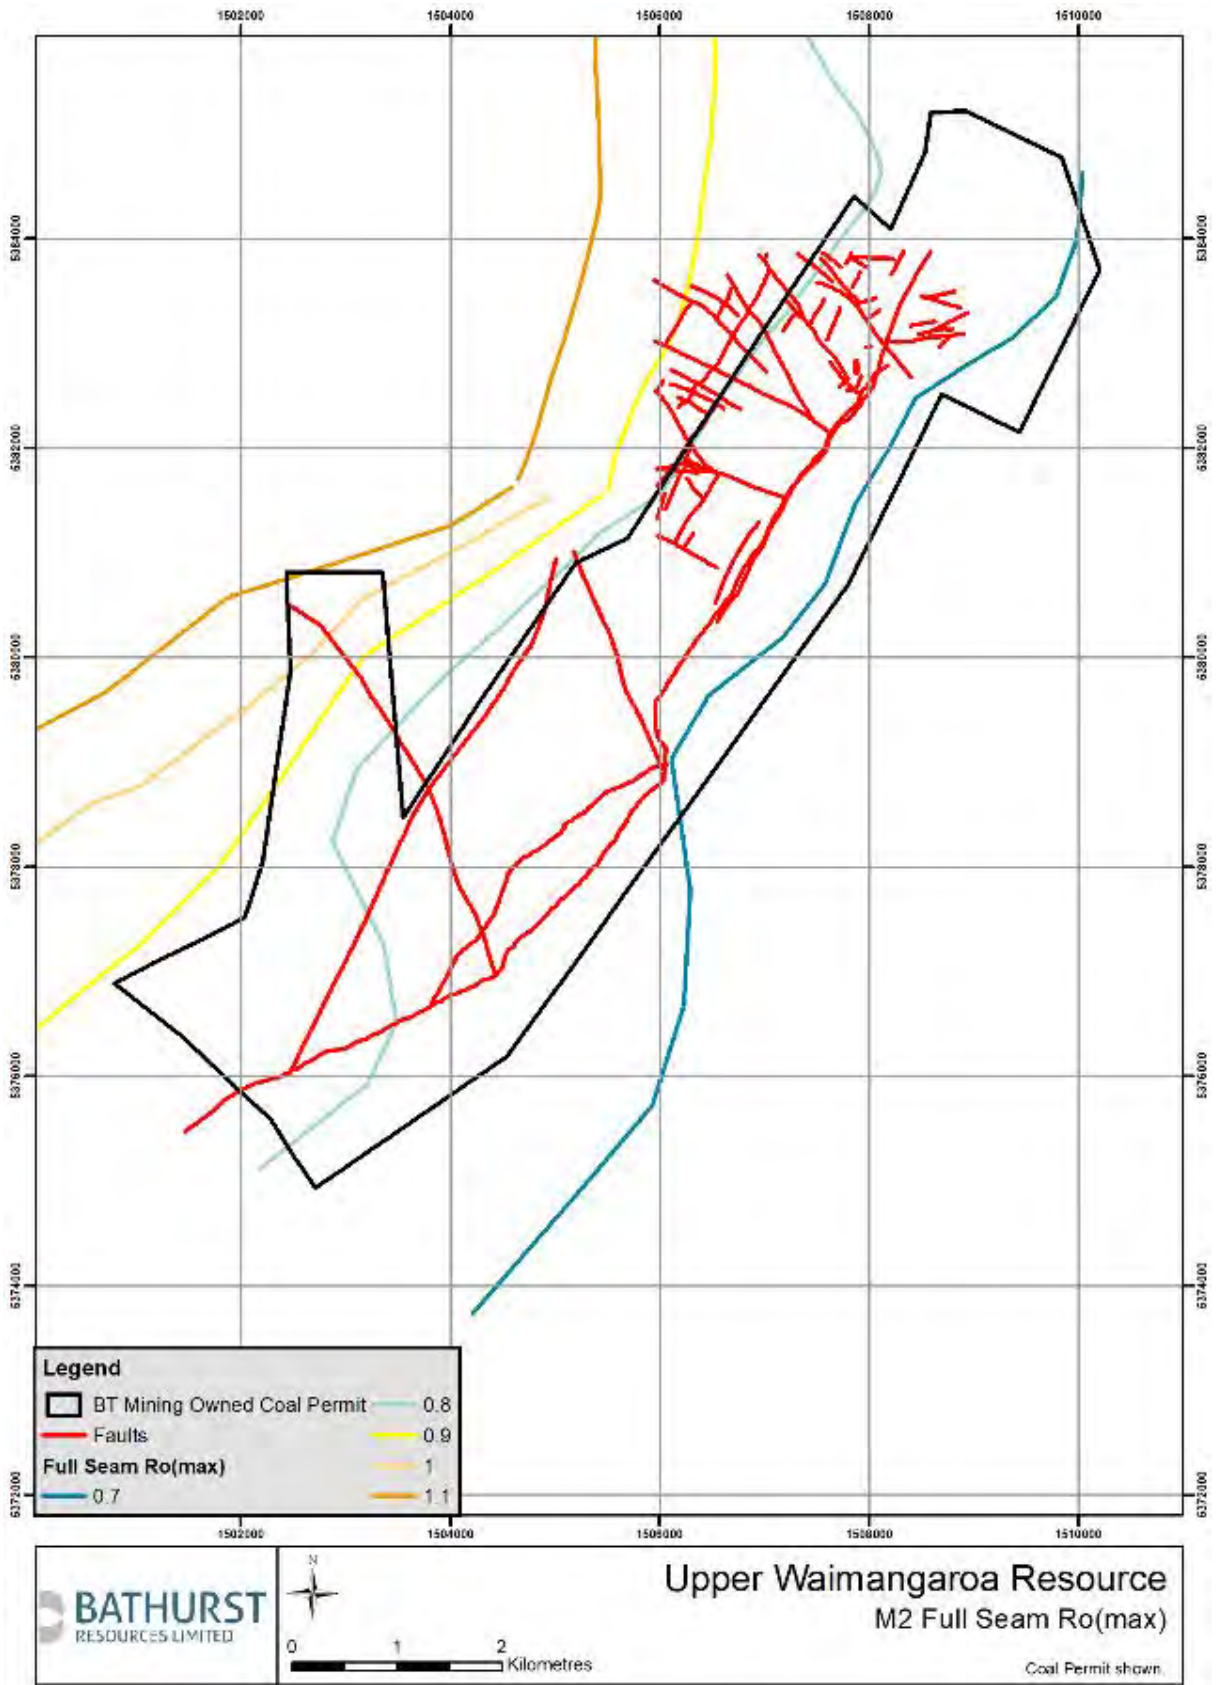


Figure 17: Plan showing the Romax for the M2 Coal Seam

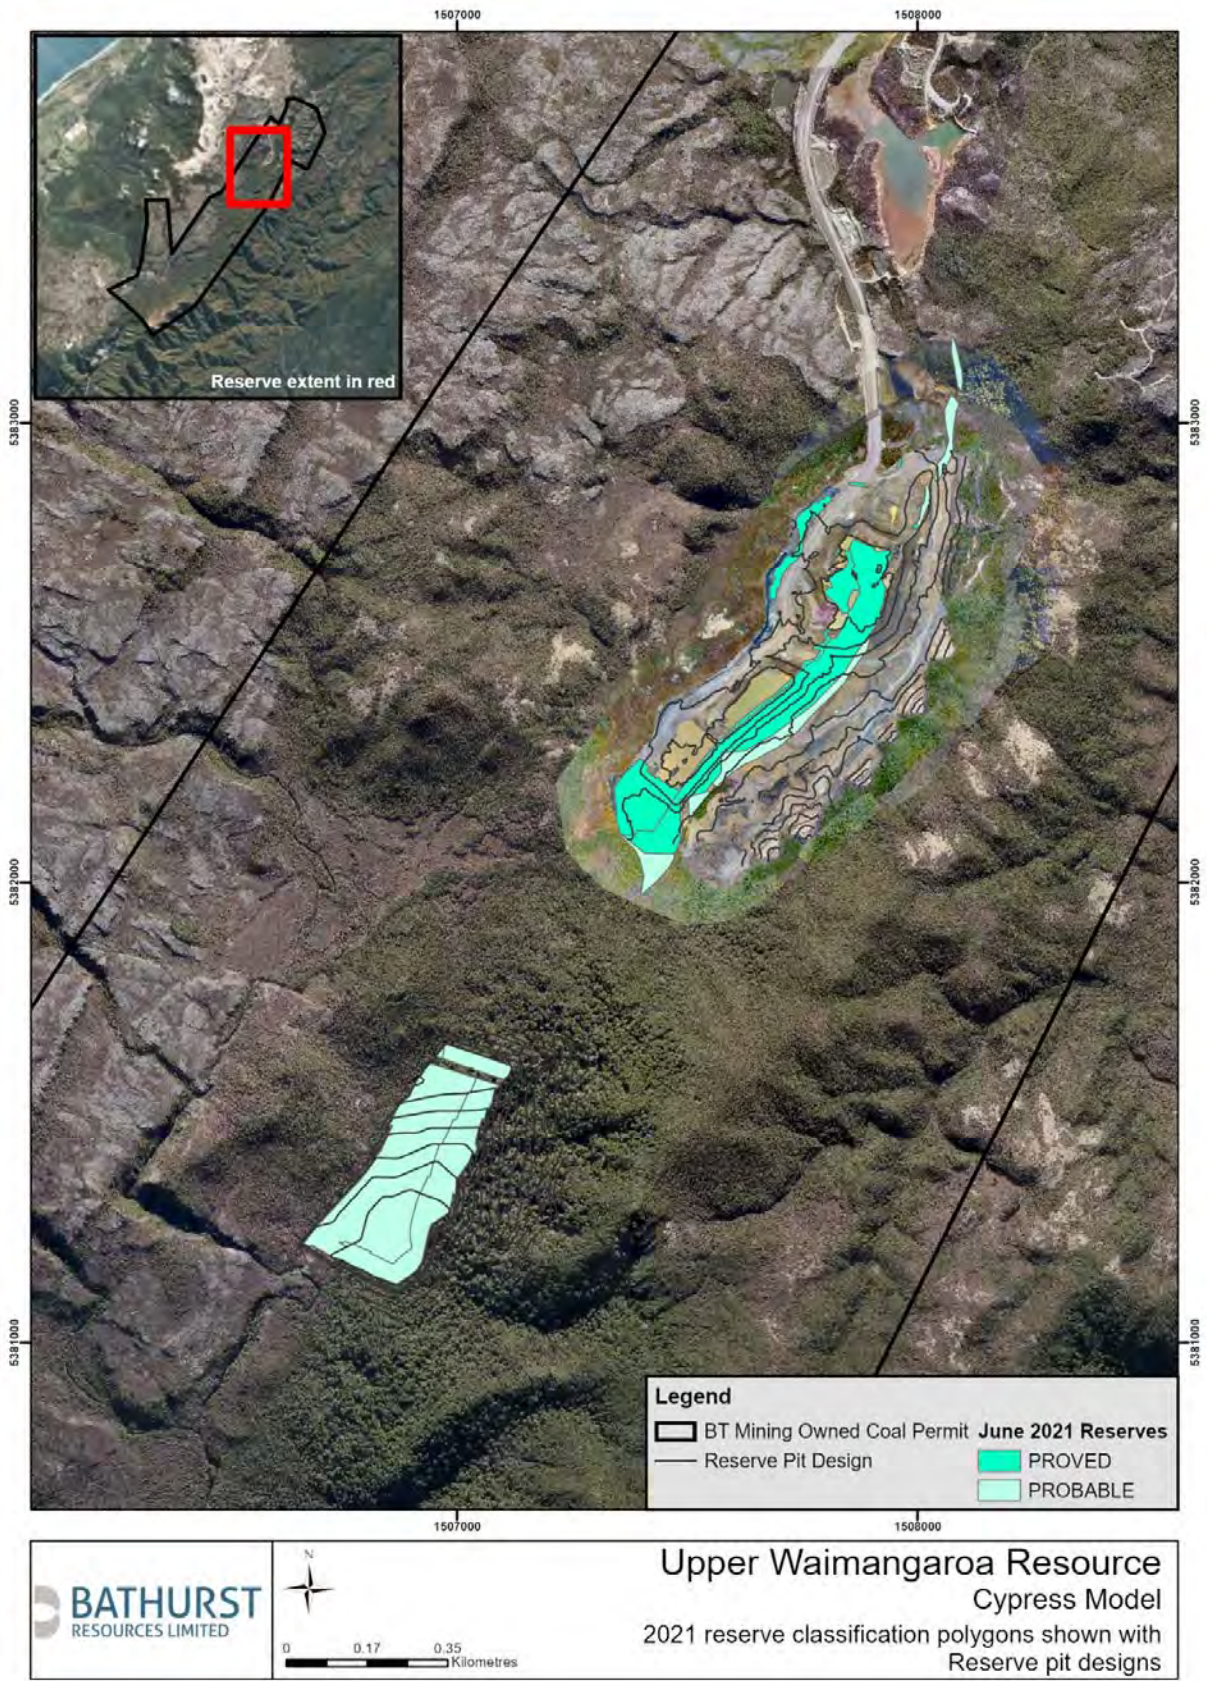


Figure 18: Upper Waimangaroa reserves pit shells

# JORC Code, 2012 Edition – Table 1 Report for the North Buller Project 2021

## Section 1 Sampling Techniques and Data

Criteria	Commentary
<b>Sampling techniques</b>	<ul style="list-style-type: none"> <li>North Buller is an historic mining district, with recorded coal production spanning over a century. Historic exploration data of varying quality is available for much of the area.</li> <li>Modern exploration campaigns include data obtained since 2009:               <ul style="list-style-type: none"> <li>3 HQ Triple Tube core (TTC) holes drilled by L&amp;M Ltd in 2009.</li> <li>96 PQ TTC holes, reduced to HQ where necessary. Drilled from 2012 – 2013.</li> <li>3 outcrop trenches.</li> </ul> </li> <li>Drilling has aimed to infill areas around zones of historic workings that are lacking quality data and to test reliability of historic data. Drilling has been concentrated on a few key areas primarily due to ease of access and prospects for development.</li> <li>Coal sampling was based on the Bathurst Resources Ltd (BRL) Coal Sampling procedures.</li> <li>Coal quality ply samples have been selected on all coal logged by a geologist where the geologist had 95% confidence that the ash will fall below 50%. Material with an estimated ash over 50% was not sampled unless the material was a parting of &lt; 0.1m in thickness within a coal seam whereby it would be included within a larger ply sample.</li> <li>Ply samples were generally taken over intervals no greater than 0.5m.</li> <li>All analytical data has been assessed and verified before inclusion into the resource model.</li> </ul>
<b>Drilling techniques</b>	<ul style="list-style-type: none"> <li>BRL managed drilling campaigns have utilised the following drilling methods:               <ul style="list-style-type: none"> <li>Full PQ triple tube core (TTC), in many cases overlying strata was open-holed through.</li> <li>HQ triple tube core only where necessary.</li> <li>Washed drilled overburden where applicable.</li> </ul> </li> <li>Historic drilling techniques included:               <ul style="list-style-type: none"> <li>PQ triple tube core.</li> <li>HQ triple tube core.</li> <li>NQ triple tube core.</li> <li>Washed drilled.</li> </ul> </li> <li>All exploration drillholes were collared vertically.</li> <li>Recent drilling campaigns utilised PQ sized drilling to maximize core recovery.</li> </ul>
<b>Drill sample recovery</b>	<ul style="list-style-type: none"> <li>Core recovery was measured by the logging geologist for each drillers run (usually 1.5m) in each drillhole. If recovery of coal intersections dropped below 85% the drillholes required a re-drill. Drillers were paid an incentive if coal recovery was above 90%.</li> <li>In some instances the recovery of thin rider seams (&lt; 0.5m) has been poor due to the soft friable nature of the coal. Therefore the sample dataset for the rider seams and lower seam is not as evenly spatially distributed as the main seam.</li> <li>Average total core recovery over the recent drilling campaigns in North Buller was 93%.</li> <li>Where small intervals of coal were lost, and where geophysics indicated strongly that coal was lost, ash values were estimated using the results of overlying and underlying ply samples and the relative response of the open-hole density trace.</li> </ul>
<b>Logging</b>	<ul style="list-style-type: none"> <li>BRL has developed a standardised core logging procedure and all core logging completed by BRL has followed this standard.</li> <li>All modern drill core has been geologically and geotechnically logged by geologists under the supervision and guidance of a team of experienced exploration geologists.</li> <li>As much data as possible has been logged and recorded including geotechnical and rock strength data.</li> <li>All core was photographed prior to sampling. Depth metre marks and ply intervals are noted on core in each photograph.</li> <li>Down-hole geophysical logs were used to aid core logging.</li> <li>BRL aimed to geophysically log every drillholes that intersected coal providing that downhole conditions and operational constraints allowed. The standard suite of tools run included density,</li> </ul>

Criteria	Commentary						
	<p>dip meter, sonic, and natural gamma.</p> <ul style="list-style-type: none"> <li>Where drillhole conditions were poor or mine workings were intersected only in-rods density was acquired. In-rods density produced a reliable trace for use in seam correlation and depth adjustment but was not used for ash correlations.</li> <li>Down-hole geophysics were used to correlate coal seams, to confirm depths and thickness of coal seams and to validate drillers' logs. Geophysics were also used to accurately calculate recovery rates of coal.</li> <li>The geophysical logging company maintained and calibrated all tools as per their internal calibration procedures. Additionally, geophysics equipment was calibrated and tested using a calibration hole on the Denniston Plateau with known depth to coal, thickness and quality. These calibration methods are deemed to be sufficient as both sites host the same Brunner Coal Measures.</li> </ul>						
<p><b>Sub-sampling techniques and sample preparation</b></p>	<ul style="list-style-type: none"> <li>For all exploration data acquired by BRL, an in-house detailed sampling procedure was used.</li> <li>Sampling and sample preparation are consistent with international coal sampling methodology.</li> <li>Ply samples include all coal recovered for the interval of the sample. Core was not cut or halved. Ply sample intervals were generally 0.5m unless dictated by thin, split or parting thickness.</li> <li>All drilling in the recent campaigns have been completed using triple tube cored holes. No chip or RC samples were taken in these campaigns.</li> <li>Assay samples were completed at the core repository after transport from drill site in core boxes. Coal intervals were wrapped at the drill site prior to transport.</li> <li>Samples were taken as soon as practicable and stored in a chiller until transported to the coal quality laboratory.</li> <li>A series of random duplicate samples representing 4% of the total number of samples from North Buller has been completed by CRL Energy Ltd. The results of this duplicate testing were comparable to that reported by SGS New Zealand Limited (SGS).</li> <li>Geochemical sampling for overburden characterisation has been completed by taking representative samples of core at set 5m intervals above the coal seam in a subset of drillholes.</li> </ul>						
<p><b>Quality of assay data and laboratory tests</b></p>	<ul style="list-style-type: none"> <li>All coal quality testing completed for BRL has been carried out by accredited laboratory SGS.</li> <li>SGS have used the following standards for their assay test work: <ul style="list-style-type: none"> <li>Proximate analysis (ASTM 7582)</li> <li>Ash (ISO 1171)</li> <li>Volatile matter (ISO 562)</li> <li>Inherent moisture (ISO 5068)</li> <li>Total sulphur analysis (ASTM 4239)</li> <li>Crucible swell tests (ISO 501)</li> <li>Calorific value (ISO 1928)</li> <li>Loss on drying data (ISO 13909-4)</li> <li>Relative density (AS 1038.21.1.1)</li> </ul> </li> <li>CRL completed much of the assay test work for samples collected prior to BRL taking over the projects.</li> <li>CRL used the following standards for their test work: <ul style="list-style-type: none"> <li>Inherent moisture (ISO 117221)</li> <li>Ash (ISO 1171)</li> <li>Volatile matter (ISO 562)</li> <li>Calorific value (ISO 1928)</li> <li>Crucible swelling index (ISO 501)</li> </ul> </li> <li>Both SGS and CRL are accredited laboratories.</li> <li>All analysis was undertaken and reported on an air-dried basis unless stated otherwise.</li> <li>BRL has completed a total of 11 composite coal quality samples. Composite samples have been tested using the following standards: <table border="1" data-bbox="402 1843 1198 1957"> <thead> <tr> <th data-bbox="402 1843 889 1885">Test Work</th> <th data-bbox="889 1843 1198 1885">Standard Followed</th> </tr> </thead> <tbody> <tr> <td data-bbox="402 1885 889 1927">Loss on air drying</td> <td data-bbox="889 1885 1198 1927">(ISO 13909-4)</td> </tr> <tr> <td data-bbox="402 1927 889 1957">Inherent Moisture</td> <td data-bbox="889 1927 1198 1957">(ASTM D 7582 mod)</td> </tr> </tbody> </table> </li> </ul>	Test Work	Standard Followed	Loss on air drying	(ISO 13909-4)	Inherent Moisture	(ASTM D 7582 mod)
Test Work	Standard Followed						
Loss on air drying	(ISO 13909-4)						
Inherent Moisture	(ASTM D 7582 mod)						

Criteria	Commentary																														
	<table border="1"> <tr> <td><b>Ash</b></td> <td>(ASTM D 7582 mod)</td> </tr> <tr> <td><b>Volatile Matter</b></td> <td>(ASTM D 7582 mod)</td> </tr> <tr> <td><b>Fixed Carbon</b></td> <td>by difference</td> </tr> <tr> <td><b>Sulphur</b></td> <td>(ASTM D 4239)</td> </tr> <tr> <td><b>Swelling Index</b></td> <td>(ISO 501)</td> </tr> <tr> <td><b>Calorific Value</b></td> <td>(ISO 1928)</td> </tr> <tr> <td><b>Mean Maximum Reflectance All Vitrinite (RoMax)</b></td> <td>Laboratory Standard</td> </tr> <tr> <td><b>Chlorine in Coal</b></td> <td>(ASTM D4208)</td> </tr> <tr> <td><b>Hardgrove Grindability Index</b></td> <td>(ISO 5074)</td> </tr> <tr> <td><b>Gieseler Plastometer</b></td> <td>(ASTM D 2639)</td> </tr> <tr> <td><b>Audibert Arnu Dilatometer</b></td> <td>(ISO 349)</td> </tr> <tr> <td><b>Forms of Sulphur</b></td> <td>(AS 1038 Part 11)</td> </tr> <tr> <td><b>Ash Fusion Temperatures</b></td> <td>(ISO 540)</td> </tr> <tr> <td><b>Ash Constituents (XRF)</b></td> <td>(ASTM D 4326)</td> </tr> <tr> <td><b>Ultimate Analysis</b></td> <td>Laboratory Standard</td> </tr> </table>	<b>Ash</b>	(ASTM D 7582 mod)	<b>Volatile Matter</b>	(ASTM D 7582 mod)	<b>Fixed Carbon</b>	by difference	<b>Sulphur</b>	(ASTM D 4239)	<b>Swelling Index</b>	(ISO 501)	<b>Calorific Value</b>	(ISO 1928)	<b>Mean Maximum Reflectance All Vitrinite (RoMax)</b>	Laboratory Standard	<b>Chlorine in Coal</b>	(ASTM D4208)	<b>Hardgrove Grindability Index</b>	(ISO 5074)	<b>Gieseler Plastometer</b>	(ASTM D 2639)	<b>Audibert Arnu Dilatometer</b>	(ISO 349)	<b>Forms of Sulphur</b>	(AS 1038 Part 11)	<b>Ash Fusion Temperatures</b>	(ISO 540)	<b>Ash Constituents (XRF)</b>	(ASTM D 4326)	<b>Ultimate Analysis</b>	Laboratory Standard
<b>Ash</b>	(ASTM D 7582 mod)																														
<b>Volatile Matter</b>	(ASTM D 7582 mod)																														
<b>Fixed Carbon</b>	by difference																														
<b>Sulphur</b>	(ASTM D 4239)																														
<b>Swelling Index</b>	(ISO 501)																														
<b>Calorific Value</b>	(ISO 1928)																														
<b>Mean Maximum Reflectance All Vitrinite (RoMax)</b>	Laboratory Standard																														
<b>Chlorine in Coal</b>	(ASTM D4208)																														
<b>Hardgrove Grindability Index</b>	(ISO 5074)																														
<b>Gieseler Plastometer</b>	(ASTM D 2639)																														
<b>Audibert Arnu Dilatometer</b>	(ISO 349)																														
<b>Forms of Sulphur</b>	(AS 1038 Part 11)																														
<b>Ash Fusion Temperatures</b>	(ISO 540)																														
<b>Ash Constituents (XRF)</b>	(ASTM D 4326)																														
<b>Ultimate Analysis</b>	Laboratory Standard																														
<b>Verification of sampling and assaying</b>	<ul style="list-style-type: none"> <li>• Sample assay results have been cross referenced and compared against lithology logs and downhole geophysics data. Results are also inspected by experienced geologists and compared with expected values utilising known coal quality relationships for the North Buller coalfield.</li> <li>• Anomalous assay results were investigated, and where necessary the laboratory was contacted and a retest undertaken from sample residue.</li> <li>• Three twinned holes have been drilled at the project with consistent results obtained between drillholes.</li> <li>• Laboratory data is imported directly into an acQuire database with no manual data entry at either the SGS laboratory or at BRL.</li> <li>• Assay results files are securely stored on a backup server. Once validated, drillhole information is 'locked' in an acQuire database to ensure the data is not inadvertently compromised.</li> </ul>																														
<b>Location of data points</b>	<ul style="list-style-type: none"> <li>• Modern drillholes positions have been surveyed using Trimble RTK survey equipment.</li> <li>• Historic mine plans have been georeferenced by locating and surveying historic survey marks, and mine portals drawn on mine plans. Some historic mine plans are poorly controlled spatially and a large variance from the current georeferenced images is possible.</li> <li>• New Zealand Trans Mercator 2000 Projection is used by BRL for most of its project areas. NZTM is considered a standard coordinate system for general mapping within New Zealand. Historic data has been converted from various local circuits and map grids using NZ standard cadastral conversions.</li> <li>• A LiDAR survey was carried out over the North Buller area in December 2012. This LiDAR data provides very accurate topographic data used in the model. Contractor's specifications state that, for the choice of sensor and operating settings used for this project, the LiDAR sensor manufacturer's specification states 0.15m (1-sigma) horizontal accuracy and 0.1m (1-sigma) as the open ground elevation accuracy.</li> <li>• Surveyed elevations of drillholes collars are validated against the LiDAR topography and ortho-corrected aerial photography. Historic hole collar elevations have been compared to the LiDAR surface and most are within 1m to 2m of the surface. There are however a small number of historic holes with a large discrepancy in the RL of the collar and the LiDAR surface. This discrepancy may be due in part to earthworks.</li> </ul>																														
<b>Data spacing and distribution</b>	<ul style="list-style-type: none"> <li>• Drillhole spacing in North Buller is not homogenous. Recent drilling has targeted areas surrounding historic underground workings and where land access has been available. This has produced three areas of relatively high density drilling, namely Charming Creek, Chasm Creek Central and Coal Creek blocks.</li> <li>• Data spacing for the three drilling areas has been estimated by calculating the radius required to fill the total area of each project divided by number of drillholes within that area. Average drillholes spacing for these areas is summarised below.</li> </ul>																														



Criteria	Commentary
	<ul style="list-style-type: none"> <li>○ Charming Creek has an estimated average spacing of 125m.</li> <li>○ Chasm Creek Central has an estimated average spacing of 100m.</li> <li>○ Coal Creek area has an estimated average drillholes spacing of 125m.</li> <li>• Average drillholes spacing for the entire project area is approximately 210m.</li> <li>• Drillholes spacing is not the only measurement used by BRL to establish the degree of resource uncertainty and therefore the resource classification. BRL uses a multivariate approach to resource classification.</li> <li>• The current drillholes spacing is deemed sufficient for coal seam correlation and resource estimation purposes within targeted areas.</li> <li>• Geostatistics has been applied to the North Buller dataset but variography results were poor due to the uneven distribution of drillholes and structural complexity of parts of the deposit. Full seam variography of ash indicated a maximum distance correlation of ~500m and therefore no resources have been classified where distance to nearest samples are greater than 500m.</li> <li>• The samples database is composited to 0.5m sample length prior to grade estimation. Any samples with composited length of less than 0.1m are not included in the estimation. Compositing starts at the top of seam and small samples are not distributed or merged.</li> </ul>
<b>Orientation of data in relation to geological structure</b>	<ul style="list-style-type: none"> <li>• All exploration drilling has been completed with a vertical orientation. Down hole deviation data was acquired by BRL during modern campaigns and showed little to no deviation in those holes. Holes without deviation plots are assumed to be vertical.</li> <li>• Any deviation from vertical is not expected to have a material effect on geological understanding as the average drillholes depth in the dataset is 45m with the deepest coal intersection of 116m. At a depth of 60m a 1° deviation would produce a horizontal deviation of 1m at the end of hole and a negligible thickness deviation.</li> <li>• The majority of the deposit presents a shallow seam dip between 5° – 10°.</li> <li>• Vertical drilling is considered to be the most suitable drilling method of assessing the coal resource at North Buller.</li> </ul>
<b>Sample security</b>	<ul style="list-style-type: none"> <li>• Stringent sample preparation and handling procedures have been followed by BRL. Ply samples are taken and recorded from drill core, bagged and placed within a locked chiller prior to being dispatched for analysis.</li> <li>• It is not considered likely that individual coal samples face a risk of theft or sabotage as coal is a bulk commodity with little value for small volumes of coal from drill core.</li> </ul>
<b>Audits or reviews</b>	<ul style="list-style-type: none"> <li>• BRL has reviewed the geological data available and considers the data used to produce the resource model reliable and suitable for the purposes of generating a resource estimate.</li> <li>• Results of a duplicate sample testing programme comparing SGS and CRL showed a strong correlation between labs.</li> <li>• Senior BRL geologists undertake audits of the sample collection and analysis.</li> </ul>

## Section 2 Reporting of Exploration Results

Criteria	Commentary						
<b>Mineral tenement and land tenure status</b>	<ul style="list-style-type: none"> <li>• BRL owns and operates two coal exploration permits in the North Buller area, northwest of Westport, New Zealand.</li> <li>• BRL has 100% ownership in the following coal permits: <table border="1" data-bbox="592 1633 1214 1717"> <thead> <tr> <th>Permit</th> <th>Operation</th> <th>Expiry</th> </tr> </thead> <tbody> <tr> <td>Mining Permit 56233</td> <td>Coal Creek</td> <td>22/03/2031</td> </tr> </tbody> </table> </li> <li>• BRL has applied for an extension of land (EOL 56233.03) from Mining Permit 56233 to replace Exploration Permit 40628 in the North Buller area and it is reasonably expected that this permit application will be granted.</li> <li>• The acquisition of the EP40628 and EP51078 permits (and any subsequent permits over the same area) from L&amp;M includes a life of mine royalty based on a fixed percentage of FOB revenue. MP 56233 and the EOL 56233.03 are subsequent permits.</li> <li>• The majority of the land in the North Buller area is Crown land administered by the Department</li> </ul>	Permit	Operation	Expiry	Mining Permit 56233	Coal Creek	22/03/2031
Permit	Operation	Expiry					
Mining Permit 56233	Coal Creek	22/03/2031					

Criteria	Commentary																																																																																																																																								
	<p>of Conservation (DoC) as Ecological Areas (Section 21 Conservation act 1987) and Stewardship Areas (Part V Section 25 Conservation Act 1987). These areas are managed to protect the natural and historic values of the areas. Stewardship areas can be disposed of, but disposal is subject to a public process and it must be clear that their retention and continued management would not materially enhance the conservation or recreational values of adjacent land.</p> <ul style="list-style-type: none"> <li>Another large landowner within the study area is Ngai Tahu. BRL currently has an agreement with Ngai Tahu to provide access to land for exploration purposes and it is reasonably expected that access for mining would be able to be negotiated.</li> </ul>																																																																																																																																								
<b>Exploration done by other parties</b>	<ul style="list-style-type: none"> <li>Historic geological investigations and reports for the North Buller area have been compiled spanning the past 120 years.</li> <li>The historic drilling database includes the following drillholes compiled from historical data records.</li> </ul> <table border="1"> <thead> <tr> <th>Years</th> <th>Agency</th> <th>Range of Collar ID</th> <th># Holes</th> <th>Drilling Method</th> <th># Holes in structure model</th> <th># Holes in quality model</th> <th>Geophysics Available</th> </tr> </thead> <tbody> <tr> <td>1907</td> <td>NZ State Coal - Seddonville Colliery</td> <td>431 - 436</td> <td>6</td> <td>unknown</td> <td>4</td> <td>0</td> <td>0</td> </tr> <tr> <td>1910 - 1912</td> <td>Mines Department</td> <td>415 - 430</td> <td>16</td> <td>unknown</td> <td>16</td> <td>0</td> <td>0</td> </tr> <tr> <td>circa 1918</td> <td>Harbour Board</td> <td>403, 437, 438</td> <td>3</td> <td>unknown</td> <td>3</td> <td>0</td> <td>0</td> </tr> <tr> <td>1896 - 1936</td> <td>Westport - Cardiff Coal Co.</td> <td>*</td> <td>7</td> <td>unknown</td> <td>7</td> <td>0</td> <td>0</td> </tr> <tr> <td>1931-1932</td> <td>Cardiff Bridge Co-op Party</td> <td>*</td> <td>3</td> <td>Diamond Core</td> <td>1</td> <td>0</td> <td>0</td> </tr> <tr> <td>unknown</td> <td>unknown</td> <td>401 - 402</td> <td>2</td> <td>unknown</td> <td>1</td> <td>0</td> <td>0</td> </tr> <tr> <td>Pre 1953</td> <td>Charming Creek Mine</td> <td>439 - 450</td> <td>12</td> <td>unknown</td> <td>11</td> <td>0</td> <td>0</td> </tr> <tr> <td>Pre 1968</td> <td>Charming Creek Mine</td> <td>451 - 462</td> <td>12</td> <td>unknown</td> <td>10</td> <td>0</td> <td>0</td> </tr> <tr> <td>unknown</td> <td>Cardiff or Coronation Coal</td> <td>463 - 469</td> <td>7</td> <td>unknown</td> <td>6</td> <td>0</td> <td>0</td> </tr> <tr> <td>unknown</td> <td>Cardiff Holdings</td> <td>470 - 474</td> <td>5</td> <td>unknown</td> <td>1</td> <td>0</td> <td>0</td> </tr> <tr> <td>circa 1964</td> <td>Coal Creek Mine</td> <td>475 - 481</td> <td>7</td> <td>unknown</td> <td>4</td> <td>0</td> <td>0</td> </tr> <tr> <td>Unknown</td> <td>unknown</td> <td>491 - 493</td> <td>3</td> <td>unknown</td> <td>3</td> <td>0</td> <td>0</td> </tr> <tr> <td>Pre 1952</td> <td>unknown</td> <td>404 - 413</td> <td>10</td> <td>unknown</td> <td>7</td> <td>0</td> <td>0</td> </tr> <tr> <td>Pre 1952</td> <td>shaft</td> <td>414</td> <td>1</td> <td>unknown</td> <td>1</td> <td>0</td> <td>0</td> </tr> <tr> <td>1986</td> <td>Ministry of Energy</td> <td>1432, 1442 - 1445</td> <td>5</td> <td>HQ core</td> <td>5</td> <td>4</td> <td>5</td> </tr> <tr> <td>1978</td> <td>MWD</td> <td>482 - 490</td> <td>10</td> <td>Diamond Core</td> <td>9</td> <td>0</td> <td>0</td> </tr> </tbody> </table> <ul style="list-style-type: none"> <li>All historic data has been validated against original source documents by L&amp;M, Golder Associates (NZ) Ltd and again by BRL staff post acquisition of the project. Where data was deemed unreliable it was removed from the relevant resource model dataset.</li> <li>BRL is continuing to source further historic plans and reports from a number of data libraries around New Zealand.</li> </ul>	Years	Agency	Range of Collar ID	# Holes	Drilling Method	# Holes in structure model	# Holes in quality model	Geophysics Available	1907	NZ State Coal - Seddonville Colliery	431 - 436	6	unknown	4	0	0	1910 - 1912	Mines Department	415 - 430	16	unknown	16	0	0	circa 1918	Harbour Board	403, 437, 438	3	unknown	3	0	0	1896 - 1936	Westport - Cardiff Coal Co.	*	7	unknown	7	0	0	1931-1932	Cardiff Bridge Co-op Party	*	3	Diamond Core	1	0	0	unknown	unknown	401 - 402	2	unknown	1	0	0	Pre 1953	Charming Creek Mine	439 - 450	12	unknown	11	0	0	Pre 1968	Charming Creek Mine	451 - 462	12	unknown	10	0	0	unknown	Cardiff or Coronation Coal	463 - 469	7	unknown	6	0	0	unknown	Cardiff Holdings	470 - 474	5	unknown	1	0	0	circa 1964	Coal Creek Mine	475 - 481	7	unknown	4	0	0	Unknown	unknown	491 - 493	3	unknown	3	0	0	Pre 1952	unknown	404 - 413	10	unknown	7	0	0	Pre 1952	shaft	414	1	unknown	1	0	0	1986	Ministry of Energy	1432, 1442 - 1445	5	HQ core	5	4	5	1978	MWD	482 - 490	10	Diamond Core	9	0	0
Years	Agency	Range of Collar ID	# Holes	Drilling Method	# Holes in structure model	# Holes in quality model	Geophysics Available																																																																																																																																		
1907	NZ State Coal - Seddonville Colliery	431 - 436	6	unknown	4	0	0																																																																																																																																		
1910 - 1912	Mines Department	415 - 430	16	unknown	16	0	0																																																																																																																																		
circa 1918	Harbour Board	403, 437, 438	3	unknown	3	0	0																																																																																																																																		
1896 - 1936	Westport - Cardiff Coal Co.	*	7	unknown	7	0	0																																																																																																																																		
1931-1932	Cardiff Bridge Co-op Party	*	3	Diamond Core	1	0	0																																																																																																																																		
unknown	unknown	401 - 402	2	unknown	1	0	0																																																																																																																																		
Pre 1953	Charming Creek Mine	439 - 450	12	unknown	11	0	0																																																																																																																																		
Pre 1968	Charming Creek Mine	451 - 462	12	unknown	10	0	0																																																																																																																																		
unknown	Cardiff or Coronation Coal	463 - 469	7	unknown	6	0	0																																																																																																																																		
unknown	Cardiff Holdings	470 - 474	5	unknown	1	0	0																																																																																																																																		
circa 1964	Coal Creek Mine	475 - 481	7	unknown	4	0	0																																																																																																																																		
Unknown	unknown	491 - 493	3	unknown	3	0	0																																																																																																																																		
Pre 1952	unknown	404 - 413	10	unknown	7	0	0																																																																																																																																		
Pre 1952	shaft	414	1	unknown	1	0	0																																																																																																																																		
1986	Ministry of Energy	1432, 1442 - 1445	5	HQ core	5	4	5																																																																																																																																		
1978	MWD	482 - 490	10	Diamond Core	9	0	0																																																																																																																																		
<b>Geology</b>	<ul style="list-style-type: none"> <li>The North Buller project is located in the Buller Coalfield, New Zealand.</li> <li>The Buller Coalfield is at the northern end of the Paparoa Trough, a north northeast trending</li> </ul>																																																																																																																																								

Criteria	Commentary
	<p>half-graben that subsided in the Eocene and was subsequently uplifted in the Cenozoic.</p> <ul style="list-style-type: none"> <li>• The defined resource is contained within the Eocene aged Brunner Coal Measures. The coal measures consist of a fluvial sequence of fine to very coarse sandstones, siltstone, mudstone and coal seams. The deposit generally contains a single seam deposited in elongate pods with some localised splitting of the seam and, in some areas, a pronounced rider seam package. The coal thickness can be up to 11m but generally averages 3-4m in thickness.</li> <li>• The coal measures thin towards the east and thicken to the west where a thick conglomerate forms the base of the formation.</li> <li>• Overlying the coal measures in most areas is the Kaiata Formation which consists of marine, slightly carbonaceous and calcareous mudstones.</li> <li>• Quaternary river gravel deposits are scattered throughout the project area.</li> <li>• Overburden thickness is generally around 30-40m but depths range from zero at the outcrop to over 300m in the northern extent of the model.</li> </ul>
<b><i>Drillholes Information</i></b>	<ul style="list-style-type: none"> <li>• Individual drillhole results are not tabulated and presented in this report; however, all drillhole data that pertains to the target coal seams has been loaded and modelled in the geological computer model used to estimate coal resources.</li> <li>• The exclusion of this information from this report is considered to not be material to the understanding of the deposit.</li> <li>• Incorporation of deviation data is not considered necessary, due to the gentle dips found in the area and shallow drilling methods resulting in insignificant deviation recorded in the exploration boreholes.</li> </ul>
<b><i>Data aggregation methods</i></b>	<ul style="list-style-type: none"> <li>• The maximum ash cut-off for building the North Buller structure model was set at 50%; however, due to various reasons, some thin assay samples where ash is greater than 50% are included in the coal quality dataset due to the structure model including the interval within a coal seam.</li> <li>• Resources have been reported with an ash cut-off of 25%.</li> <li>• Seams have been sampled on a ply-by-ply basis with ply boundaries determined by reconciliation against down hole geophysics.</li> </ul>
<b><i>Relationship between mineralisation widths and intercept lengths</i></b>	<ul style="list-style-type: none"> <li>• All exploration drillholes have been drilled vertically and the coal seams are generally gently dipping. Therefore the reported seam intercept thickness is representative of the true seam thickness.</li> <li>• Dip meter and deviation plots are available for some holes. For those without this data it is assumed that a vertical orientation is achieved and, as most coal intersections are less than 100m in depth, any deviation from vertical would produce only a very minor effect on the reported depth to coal and coal thickness.</li> </ul>
<b><i>Diagrams</i></b>	<ul style="list-style-type: none"> <li>• Diagrams can be found in the Appendix A for each of the following: <ul style="list-style-type: none"> <li>○ Location map</li> <li>○ Map showing Mining Permits</li> <li>○ Map showing mineral ownership</li> <li>○ Map showing land rights</li> <li>○ Map of historic workings</li> <li>○ Map showing drillhole dataset</li> <li>○ Map of Resource Classification</li> <li>○ Map of coal seam floor contours</li> <li>○ Map of coal seam thickness contours</li> <li>○ Map of coal seam ash contours</li> <li>○ Map of coal seam sulphur contours</li> </ul> </li> </ul>
<b><i>Balanced reporting</i></b>	<ul style="list-style-type: none"> <li>• Exploration drilling results have not been reported. This has avoided any issues with unbalanced or biased reporting.</li> <li>• The Competent Person does not believe that the exclusion of this comprehensive exploration data within this report detracts from the understanding of this report or the level of information provided.</li> </ul>
<b><i>Other substantive</i></b>	<ul style="list-style-type: none"> <li>• Geotechnical logs and samples were taken by the geologist during all exploration by BRL. Geotechnical logs identified defect types, angles and character through cored intervals.</li> </ul>

Criteria	Commentary
<b>exploration data</b>	<ul style="list-style-type: none"> <li>BRL has tested 45 samples for overburden classification for acid forming and neutralising potential in North Buller. These tests indicate that the majority of overburden is acid neutralising.</li> <li>Further overburden characterisation testing will be conducted prior to any mining proposal.</li> </ul>
<b>Further work</b>	<ul style="list-style-type: none"> <li>BRL has been granted an access arrangement from the Department of Conservation (DoC) for drilling activities on land administered by DoC in the North Buller project area. BRL is currently focusing resources on its Escarpment project and therefore no drilling is planned for North Buller in the near future.</li> <li>Field mapping is continuing in North Buller to confirm future drilling targets outside of the current resource areas.</li> <li>A bulk sample is planned to be taken from within the North Buller project area for marketing purposes.</li> </ul>

### Section 3 Estimation and Reporting of Mineral Resources

Criteria	Commentary
<b>Database integrity</b>	<ul style="list-style-type: none"> <li>All historic and legacy datasets have been thoroughly validated against original logs and results tables.</li> <li>BRL utilises an acQuire database to store and maintain its geological exploration dataset.</li> <li>The acQuire database places explicit controls on certain data fields as they are entered or imported into the database such as overlapping intervals, coincident samples, illegal sample values, standardised look-up tables for logging codes etc.</li> <li>Manual data entry of assay results is not required as results are imported directly.</li> </ul>
<b>Site visits</b>	<ul style="list-style-type: none"> <li>Mark Lionnet (the Competent Person) has worked as a geologist for over 10 years in the Buller coalfield and has a full-time role with Bathurst Resources Limited as the Export Project Manager.</li> <li>Mr. Lionnet is familiar with the local and regional geology and style of deposit within the North Buller region.</li> </ul>
<b>Geological interpretation</b>	<ul style="list-style-type: none"> <li>BRL has confidence in the geological model and the interpretation of the available data. Confidence varies for different areas and this is reflected by the resource classification.</li> <li>BRL uses a multivariate approach to resource classification which takes into account a number of variables.</li> <li>BRL considers the amount of geological data sufficient to estimate the resource.</li> <li>Uncertainty surrounds the historic mine workings, both in the quality and quantity of coal extracted and surveying and positioning of underground workings. This is reflected in the resource classification.</li> <li>BRL has used a total of 10 synthetic holes in the structure model which are based on historic drillholes where geo-referencing of the collar locations is poor.</li> <li>Quaternary river gravel deposits overly the coal measures as an unconformity over the northern portion of the project area. Some uncertainty surrounds the depth of weathering and the extent of the gravel deposits. A conservative approach to modeling this Quaternary erosional surface has been used in the model.</li> </ul>
<b>Dimensions</b>	<ul style="list-style-type: none"> <li>The main coal seam varies in thickness from less than 1m thick up to 11m thickness locally.</li> <li>Depth of cover varies from 0m at outcrop to over 300m at the northern boundary of the model. <ul style="list-style-type: none"> <li>Inferred resources include coal to 118m below surface.</li> <li>Indicated resources include coal to 102m below surface.</li> <li>Measured resource includes coal down to 64m below surface.</li> </ul> </li> <li>The deposit roughly covers a 6km by 5km area. The deposit is bounded by the Mokihinui River to the north, and the Glasgow Fault to the east and the Lamplough Fault to the west.</li> </ul>
<b>Estimation and modeling techniques</b>	<ul style="list-style-type: none"> <li>All available and reliable exploration data has been used to create a geological block model which has been used for resource estimation and classification.</li> <li>All exploration drilling data is stored in acQuire and exported into a Vulcan drillhole database. All Mapping data is stored in acQuire and exported in various Vulcan layers. Interpretive data is stored within Vulcan in various layers.</li> <li>A coal horizons definition has been developed and is used in the stratigraphic modeling process.</li> </ul>

Criteria	Commentary								
	<ul style="list-style-type: none"> <li>• Vulcan 8.2.1 was used to build the structure model. Grid spacing is 10m x 10m. This spacing was selected to be 1/5 of the minimum drill spacing of a targeted area.</li> <li>• Vulcan's stacking method was used to produce the structure model. This method triangulates a reference surface (coal roof) and then stacks the remaining horizons by adding structure thickness using inverse distance.</li> <li>• The maximum triangle length for the reference surface was set to 2,000m.</li> <li>• Based on geostatistics for full seam thickness, the maximum search radius for inverse distance is 2,000m. The inverse distance power is set to 2, with maximum samples set to 8.</li> <li>• Structure grids are checked and validated before being used to construct the resource block model.</li> <li>• Vulcan 8.2.1 is used to build the block model and to grade estimate. The process is automated using a Lava script.</li> <li>• The coal structure surfaces, along with LiDAR topography surfaces and quaternary unconformity surfaces are used to build the block model. The block dimensions are constructed at 10m x 10m. Vertical thickness for coal blocks is 0.5m, whilst overburden blocks are set to 5m maximum thickness.</li> <li>• Grade estimation is performed utilising Vulcan's Tetra Projection Model. The main seam, and two discontinuous rider seams are estimated for ash, sulphur, air-dried moisture and in situ moisture, volatile matter, crucible swell index, and calorific value. All qualities are estimated simultaneously. A total of 10 search passes are used to grade estimate the model.</li> <li>• Geostatistics has been performed on the coal quality dataset to examine and define the estimation search parameters for each quality. The maximum search radius is set to the maximum range of influence found in the semi-variogram for each variable.</li> <li>• Grade estimation is computed using an inverse distance squared function.</li> <li>• Various methods have been used to check the validity of the block estimation. This includes manual inspection of the model, QQ plots of block model qualities versus the coal quality database and other comparison tools.</li> <li>• Resource tonnages within the model have been discounted where the resource falls within an historic underground workings area. The primary mining method utilised historically in North Buller area is Bord and Pillar mining, however the Charming Creek mine and other mines used a hydro extraction method beginning in the mid-1950s. Three different classifications have been attributed to the historic workings, with each classification having a different extraction rate. Historic extraction rates are estimated using mining extraction reports and tonnage reports. The extraction rates used to discount coal tonnages in the resource model are as follows: <table border="1" data-bbox="440 1297 927 1457"> <thead> <tr> <th data-bbox="440 1297 667 1339">Mining Method</th> <th data-bbox="667 1297 927 1339">Extraction Rate</th> </tr> </thead> <tbody> <tr> <td data-bbox="440 1339 667 1381">First worked</td> <td data-bbox="667 1339 927 1381">35%</td> </tr> <tr> <td data-bbox="440 1381 667 1423">Pillars extracted</td> <td data-bbox="667 1381 927 1423">53%</td> </tr> <tr> <td data-bbox="440 1423 667 1457">Undifferentiated</td> <td data-bbox="667 1423 927 1457">50%</td> </tr> </tbody> </table> </li> </ul>	Mining Method	Extraction Rate	First worked	35%	Pillars extracted	53%	Undifferentiated	50%
Mining Method	Extraction Rate								
First worked	35%								
Pillars extracted	53%								
Undifferentiated	50%								
<b>Moisture</b>	<ul style="list-style-type: none"> <li>• Resource tonnages are reported using natural bed moisture, calculated from air-dried density, air-dried moisture and in situ moisture using the Preston Sanders equation.</li> <li>• Block air-dried density is calculated from the block air-dried ash value using the ash-density relationship derived from the project dataset.</li> </ul>								
<b>Cut-off parameters</b>	<ul style="list-style-type: none"> <li>• Structure grids have been developed based on a 50% ash cut-off. Some higher ash samples are retained within the coal quality dataset to allow simplification of the seam model where higher ash partings become more abundant.</li> <li>• No lower cut-off has been applied. There is an inherent minimum limit to ash samples in modern results due to a laboratory lower detection limit of 0.17%.</li> <li>• Coal resources are reported down to a seam thickness of 0.5m (one block) with an ash cut-off of 25%.</li> </ul>								
<b>Mining factors or assumptions</b>	<ul style="list-style-type: none"> <li>• Minimum seam thickness is set at 0.5m or one block in height. An ash cutoff of 25% is used for reporting resources.</li> <li>• No other mining factors such as strip ratios, mining losses and dilutions have been applied when developing the resource model.</li> </ul>								

Criteria	Commentary
<b>Metallurgical factors or assumptions</b>	<ul style="list-style-type: none"> <li>BRL understands that as the majority of the reported resource has a high sulphur content, the North Buller coal will likely require blending with a low sulphur coal before a saleable product is obtained.</li> <li>No other metallurgical assumptions have been applied in estimating the resource.</li> </ul>
<b>Environmental factors or assumptions</b>	<ul style="list-style-type: none"> <li>Any open pit mining and coal transport will be conducted amid environmentally and culturally sensitive areas. The project area is a likely habitat for endangered snail and kiwi species. High rainfall rates, potentially acid-generating overburden and historical acid mine drainage are all items that will have to be considered in future prefeasibility studies.</li> <li>Environmental values of the project area ranges from low to high. Low values relate to de-vegetated and exotic forest areas owned and managed by Ngai Tahu, and terrace and river flat pastoral farming operations. Areas of high environmental values incorporate the DoC managed Ecological Areas (Section 21 Conservation act 1987) and the Charming Creek Walkway.</li> <li>Current overburden characterisation testing has shown that the majority of Kaiata Mudstone overburden is acid-neutralising. This material could be used to counteract any acid forming material derived from the Brunner Coal Measures.</li> <li>No other environmental assumptions have been applied in developing the resource model.</li> </ul>
<b>Bulk density</b>	<ul style="list-style-type: none"> <li>A total of 108 relative density (air-dried) sample results are available for the North Buller project area taken from 19 drillholes.</li> <li>The relative density samples are not well distributed throughout the project area however the sample set covers a full range of ash values from 0.92% to 61.6%.</li> <li>From this dataset an ash-density curve was generated with a coefficient of determination of <math>R^2=0.8982</math>.</li> </ul> <div data-bbox="396 905 1313 1514" data-label="Figure"> <p style="text-align: center;"><b>North Buller Ash vs Relative Density</b></p> <p>Relative Density (air dried basis)</p> <p>ASH (air dried basis)</p> <p>Legend: Ash_density (yellow circles), Poly. (Ash_density) (black line)</p> <p>Equation: <math>y = 1E-04x^2 + 0.0048x + 1.314</math> <math>R^2 = 0.8982</math></p> </div> <p>Figure 1: Ash – Density relationship for North Buller project area.</p> <ul style="list-style-type: none"> <li>After grade estimation, density was calculated using the block ash value and the derived density equation.</li> <li>An in situ density value was then computed using the Preston Saunders method.</li> <li>In situ moisture determinations have been collected from drill core ply samples.</li> </ul>
<b>Classification</b>	<ul style="list-style-type: none"> <li>BRL classifies resources using a multivariate approach.</li> <li>Coal resources have been classified on the basis of geological and grade continuity balanced by relative uncertainties surrounding historic underground extraction and proximity to faults.</li> <li>Closely spaced drilling with valid samples increases the confidence in resource assessments.</li> <li>The confidence is reduced by: <ul style="list-style-type: none"> <li>A block being within an underground worked area due to extraction rate uncertainty.</li> <li>A block being within 20m of an underground worked area due to uncertainty with historic survey of the workings and georeferencing of mine plans.</li> </ul> </li> </ul>

Criteria	Commentary
	<ul style="list-style-type: none"> <li>○ A block being in an area of steep structure dip, usually in areas of large faults.</li> <li>○ A block lies within an area of thin or splitting seam resulting in uncertainty of geological continuity.</li> <li>• If an area is within an historically worked area the resource is considered as Inferred as a minimum.</li> </ul>
<b><i>Audits or reviews</i></b>	<ul style="list-style-type: none"> <li>• A comprehensive internal review of the resource model has been carried out by BRL.</li> </ul>
<b><i>Discussion of relative accuracy/confidence</i></b>	<ul style="list-style-type: none"> <li>• Statistical comparisons between the resource block model and the coal quality data set have been carried out and are within expected ranges. Some anomalies exist due to non-normal data distribution. Techniques utilised include QQ plots and probability plots.</li> <li>• No coal production is currently taking place within the resource area and therefore no reconciliation is available at this time to test the accuracy of the resource model.</li> </ul>

Appendix A:

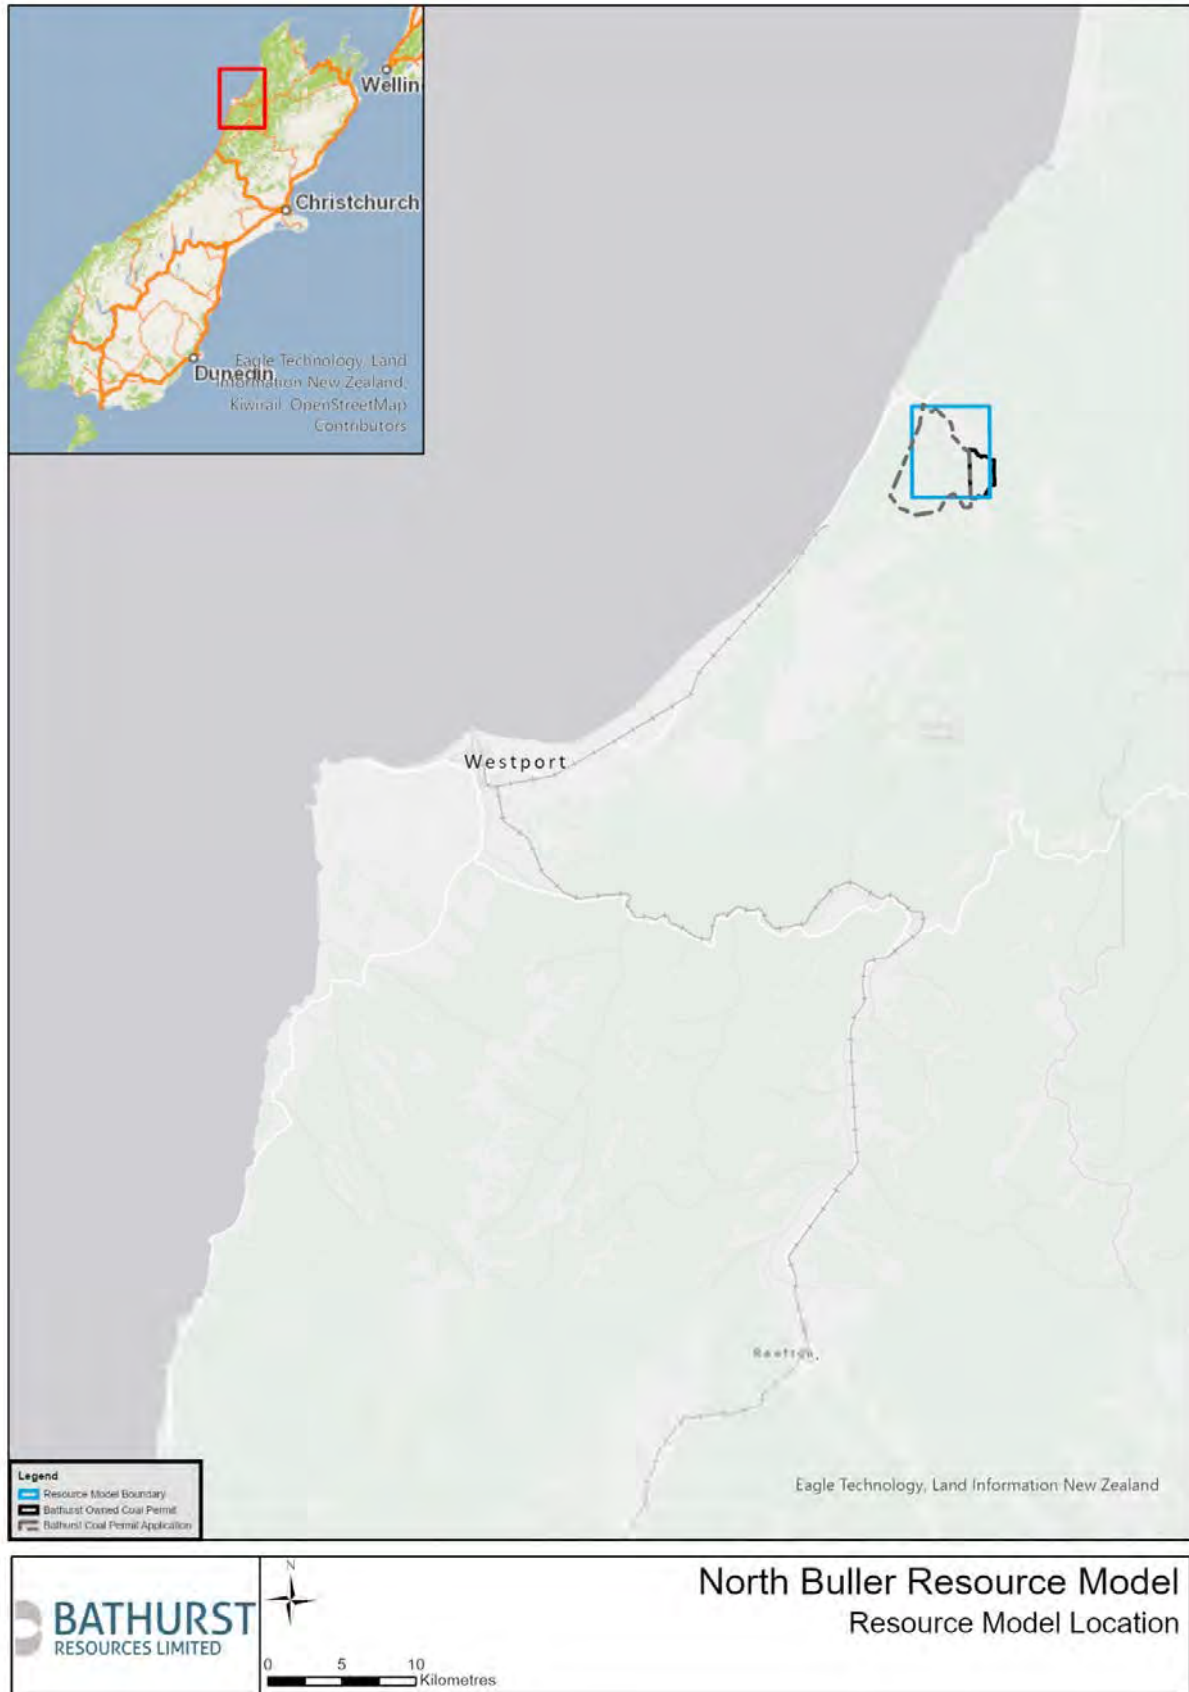


Figure 2: Location of North Buller project and the resource model boundary



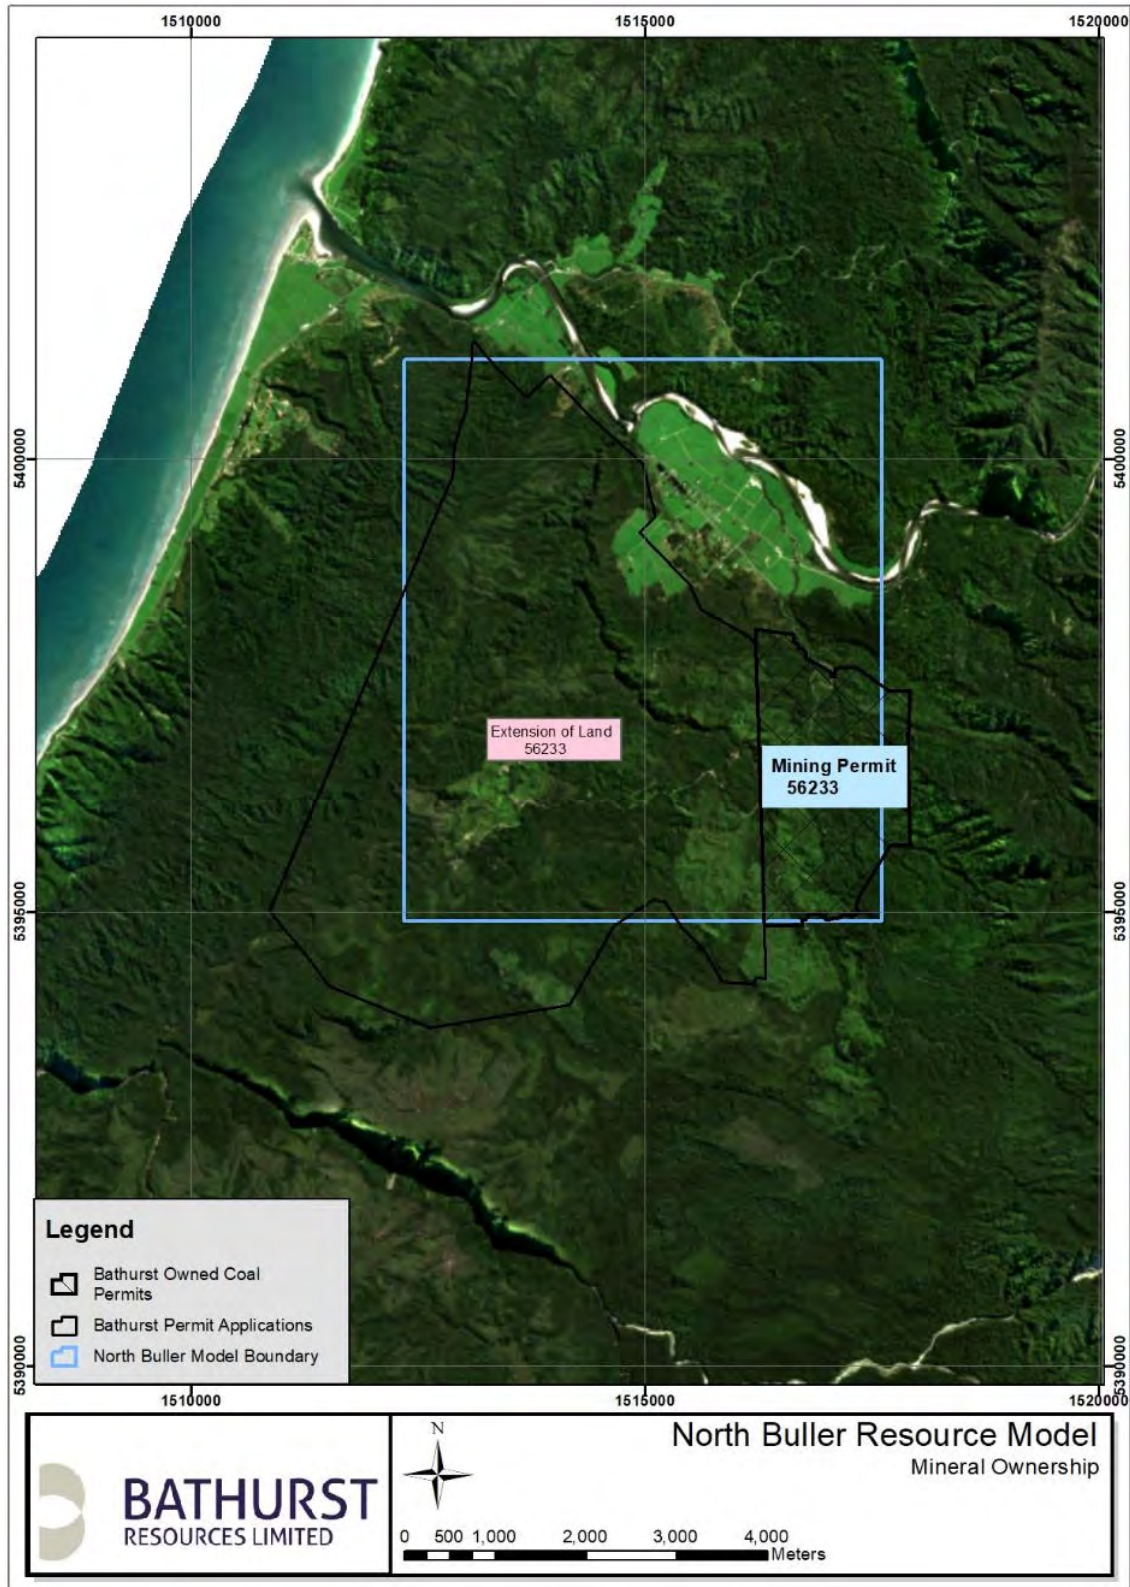


Figure 3: Plan showing BRL owned coal permits in North Buller

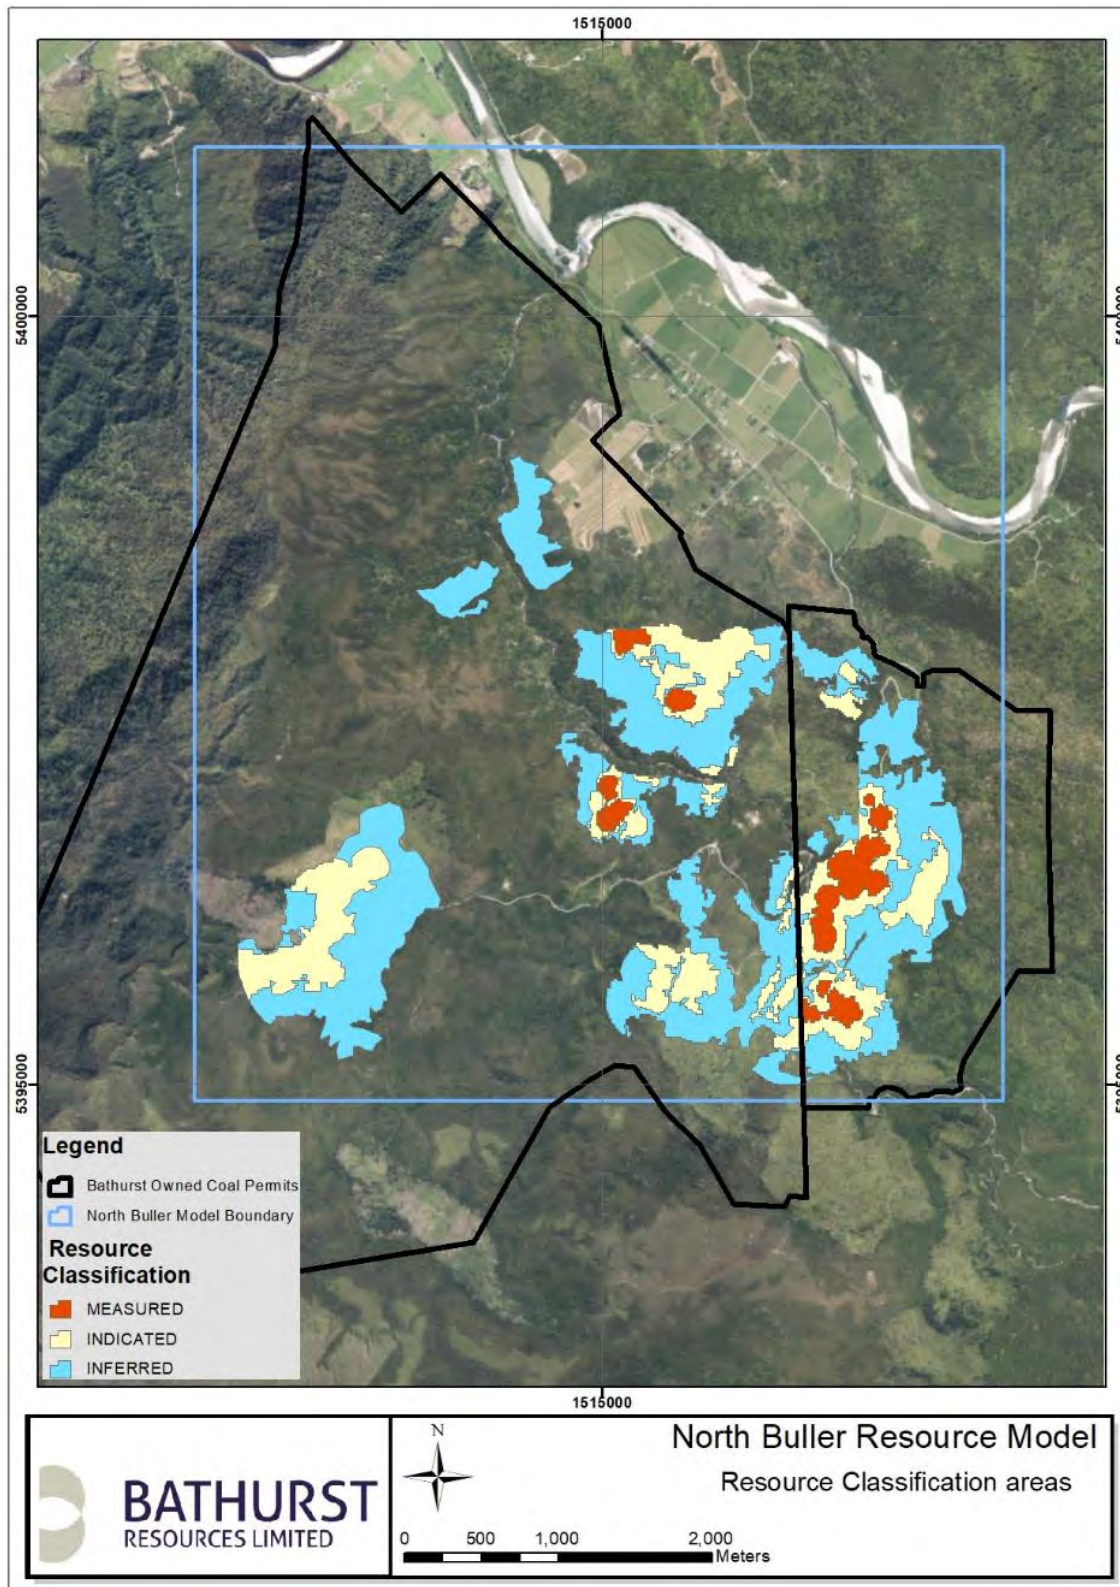


Figure 4: Plan showing the mineral ownership and resource areas for the North Buller project

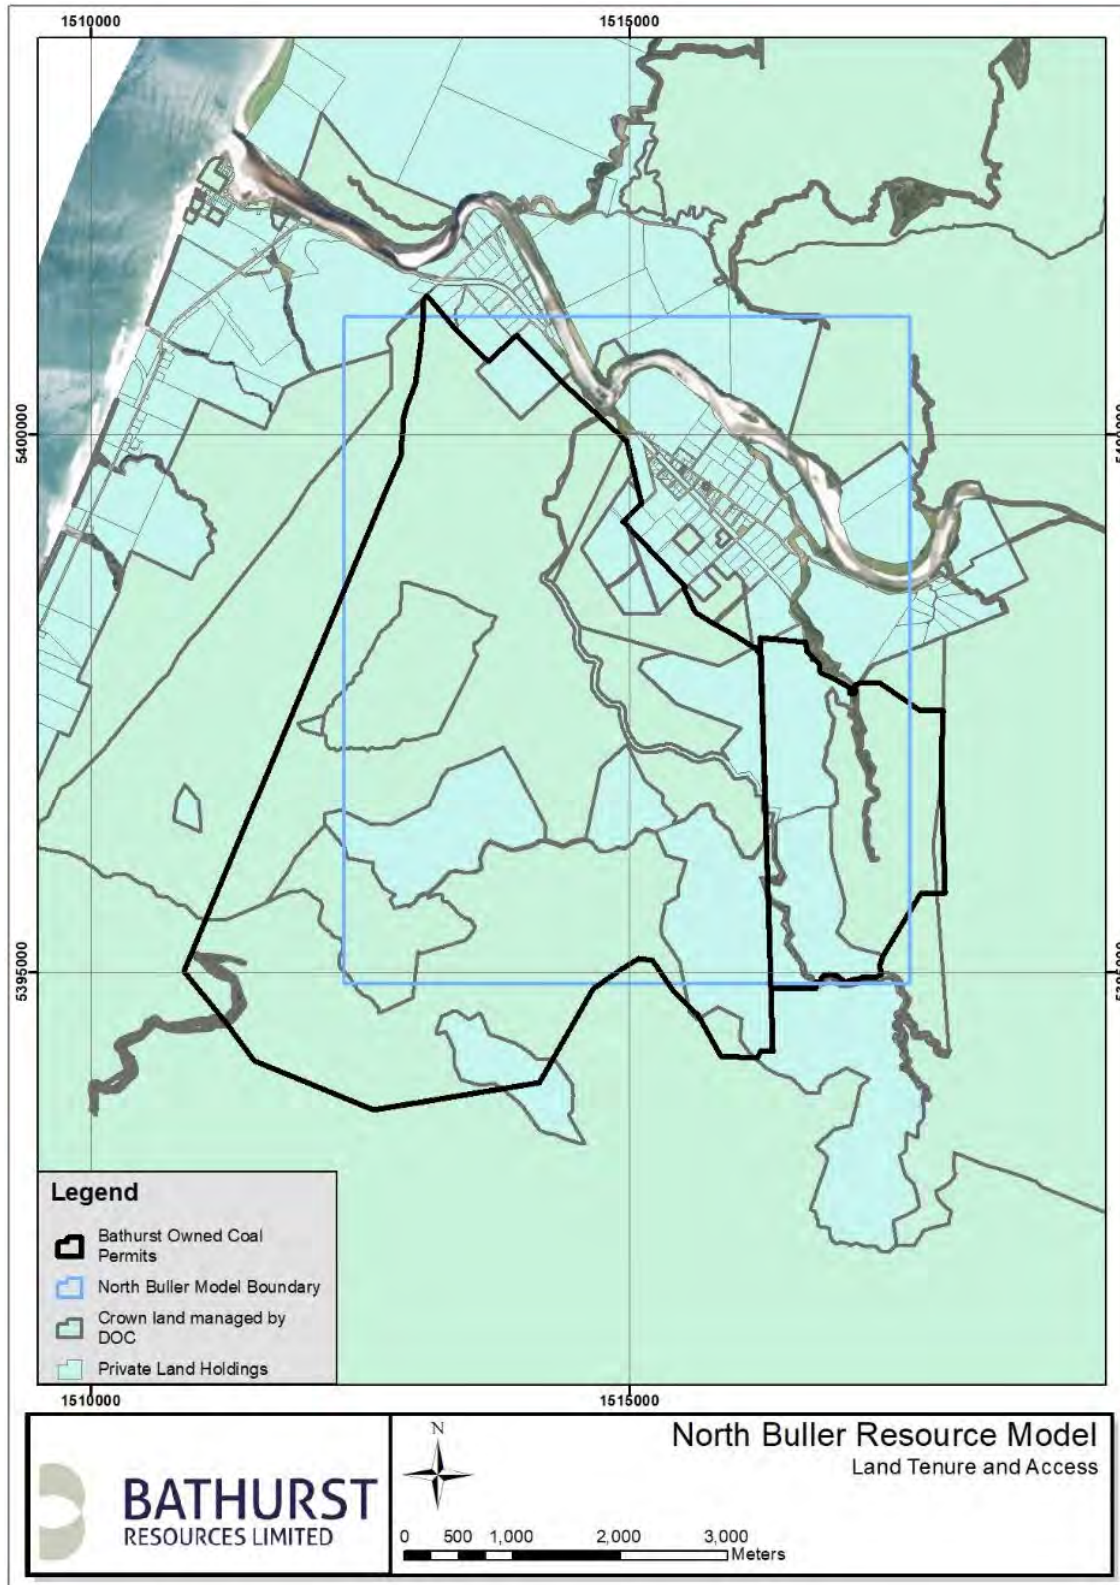


Figure 5: Land ownership in the North Buller project area. BRL has had access arrangements in place with both DOC and Ngai Tahu for exploration activities.

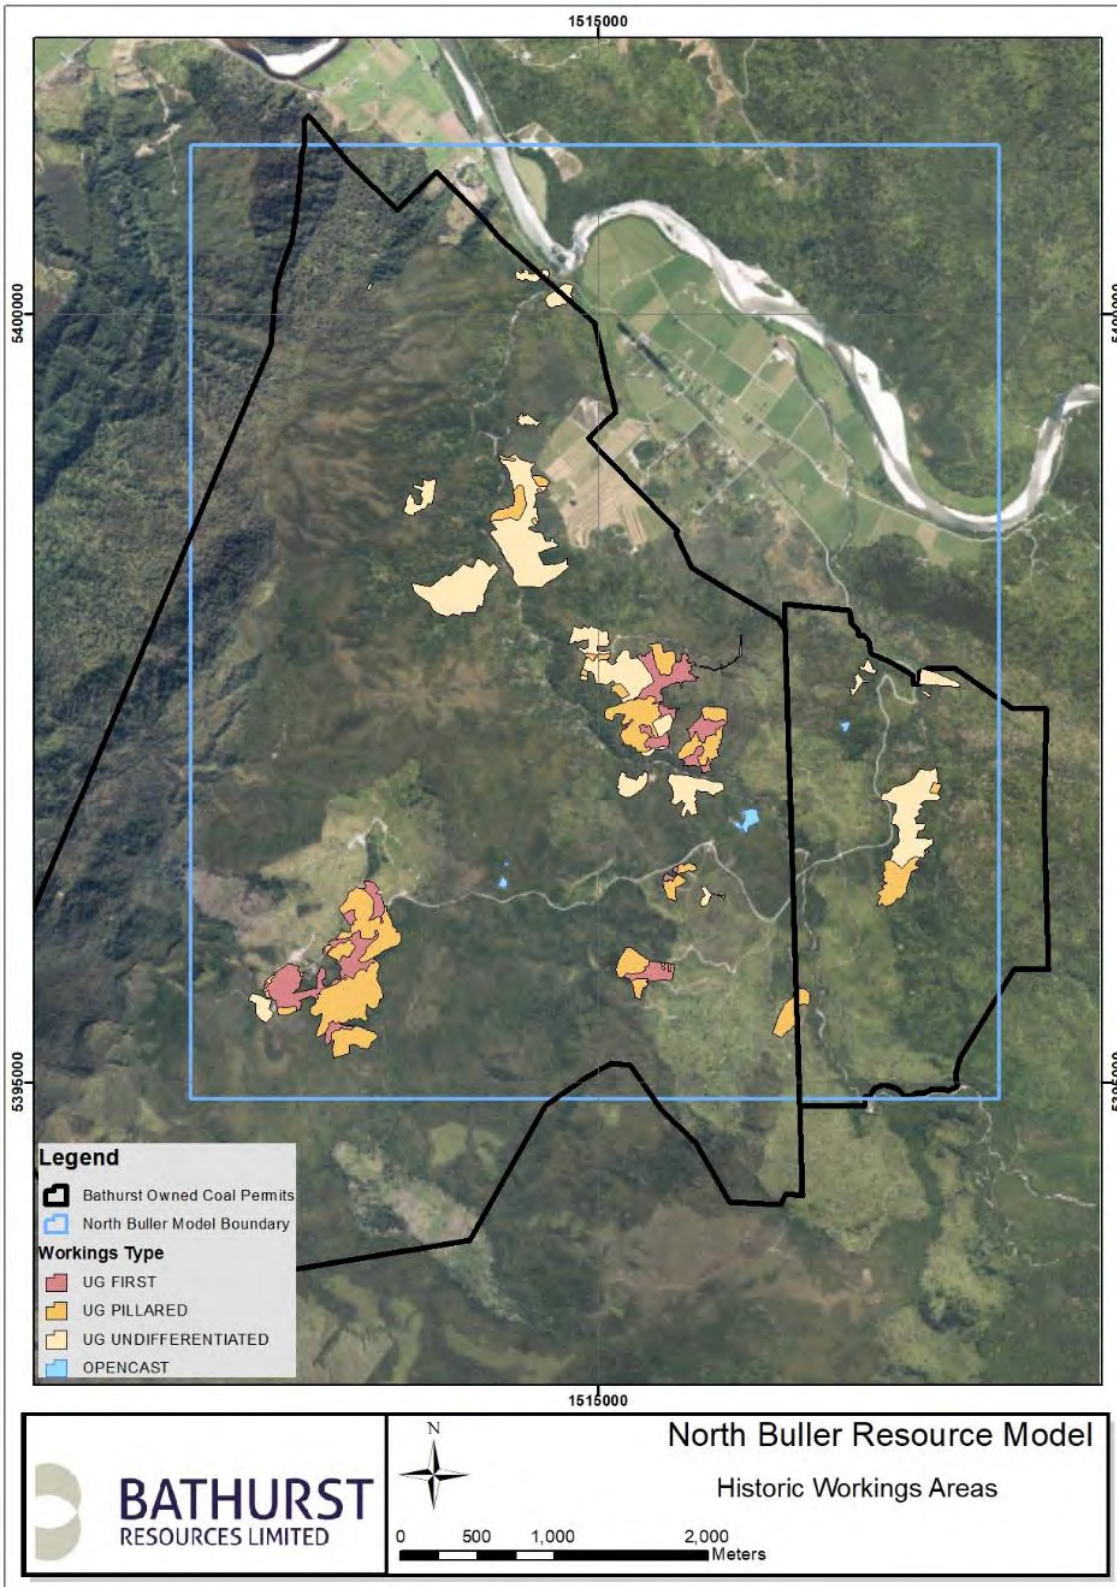


Figure 6: There is a rich history of coal mining in the Seddonville area. This plan shows the extents of historic mining within project area

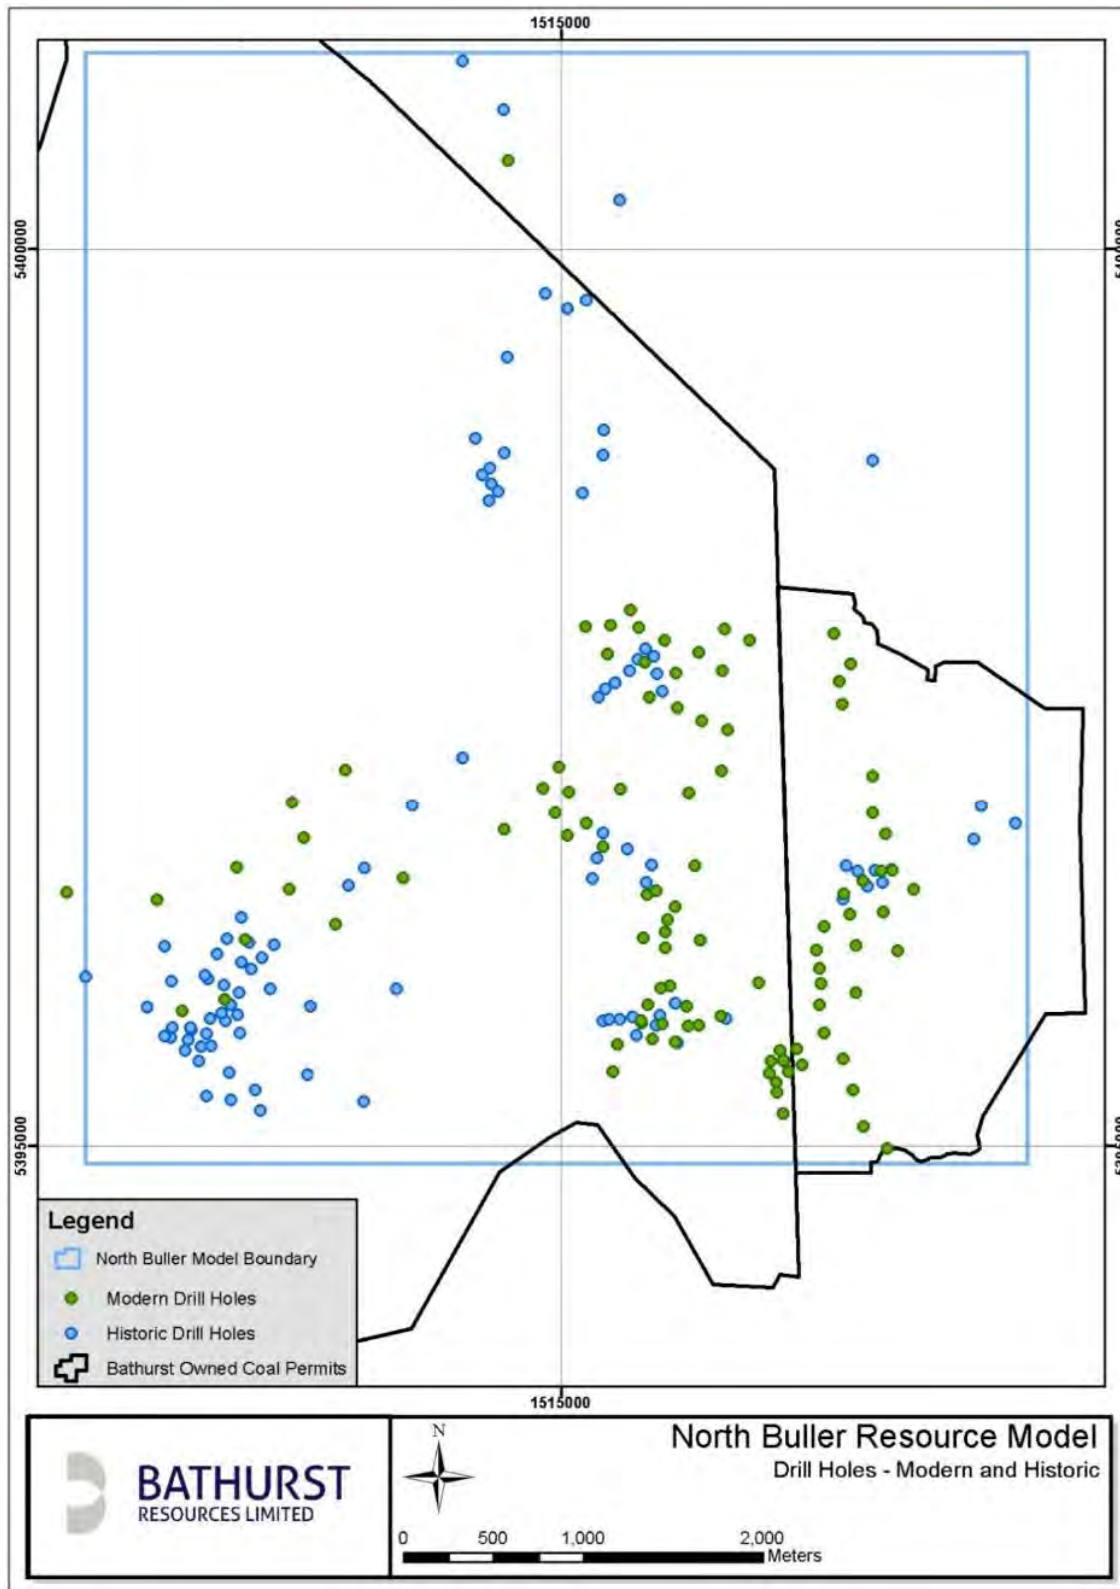


Figure 7: Plan showing the drillholes dataset used to build the North Buller resource model

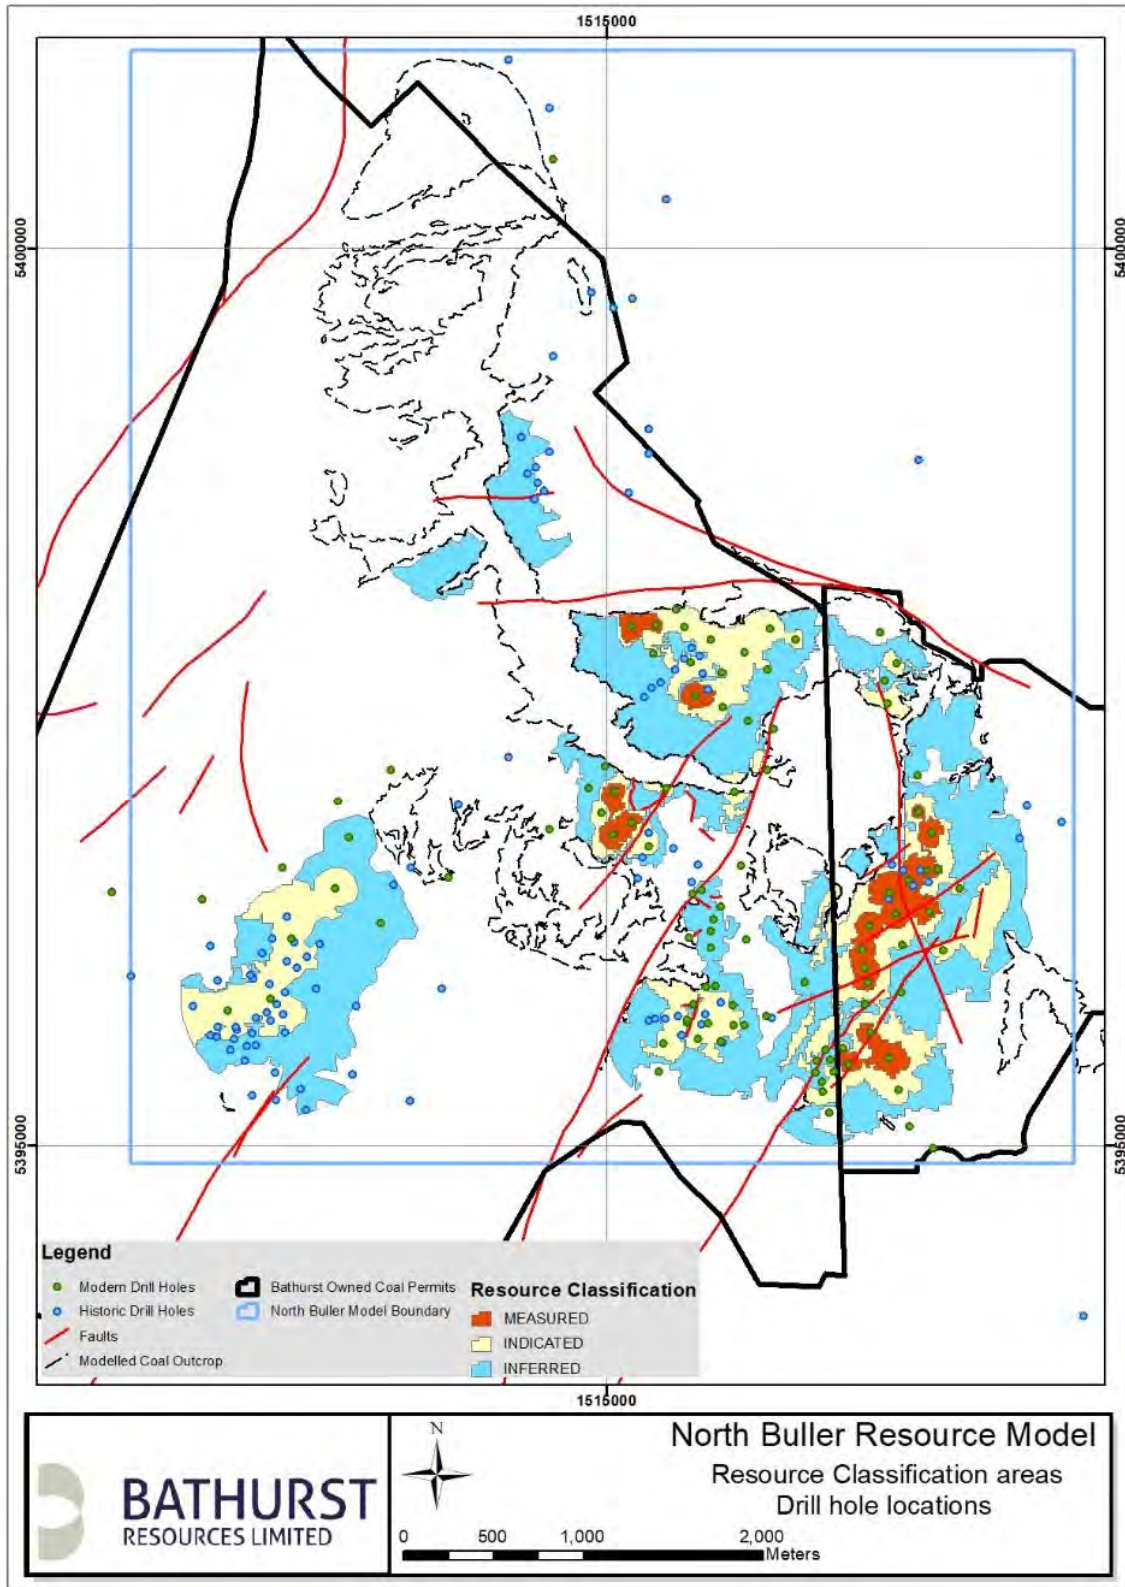


Figure 8: Plan showing the resource classification polygons. Modelled outcrop, faults and drillholes are also shown.

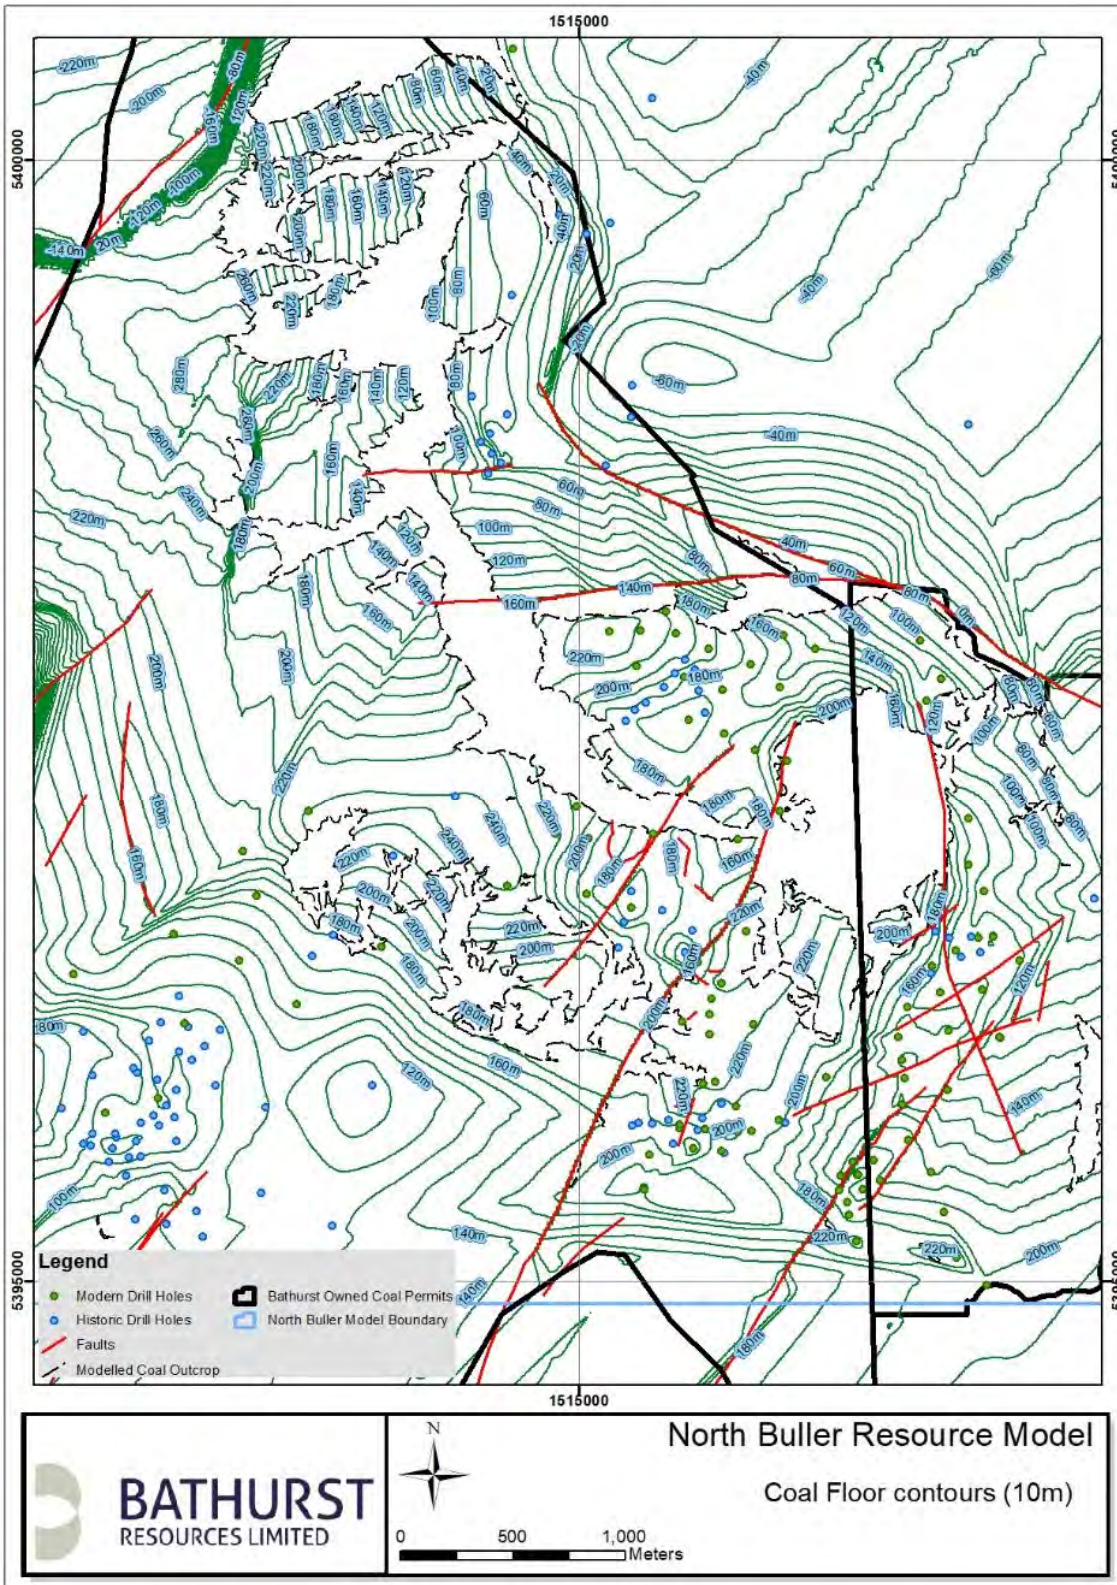


Figure 9: Plan showing the coal floor structure contours. Contours are shown at 10m levels.

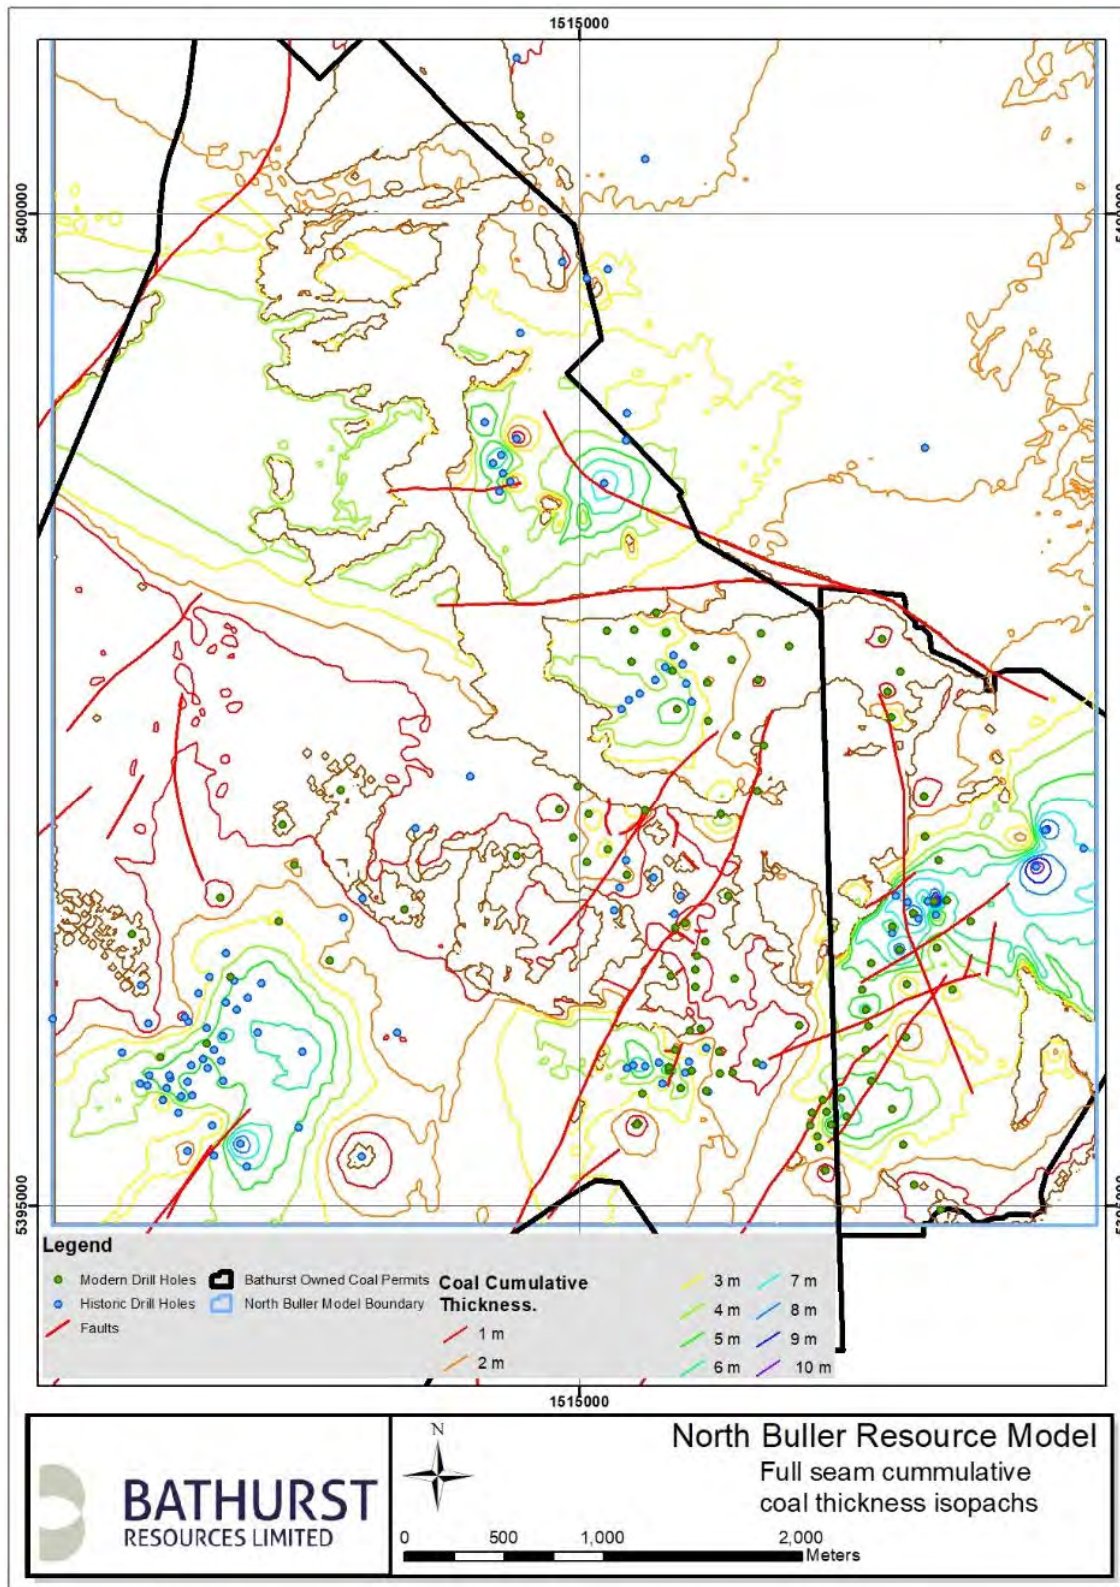


Figure 10: Plan showing the aggregate coal thickness over the project area. Modelled coal outcrop and faults are also shown.



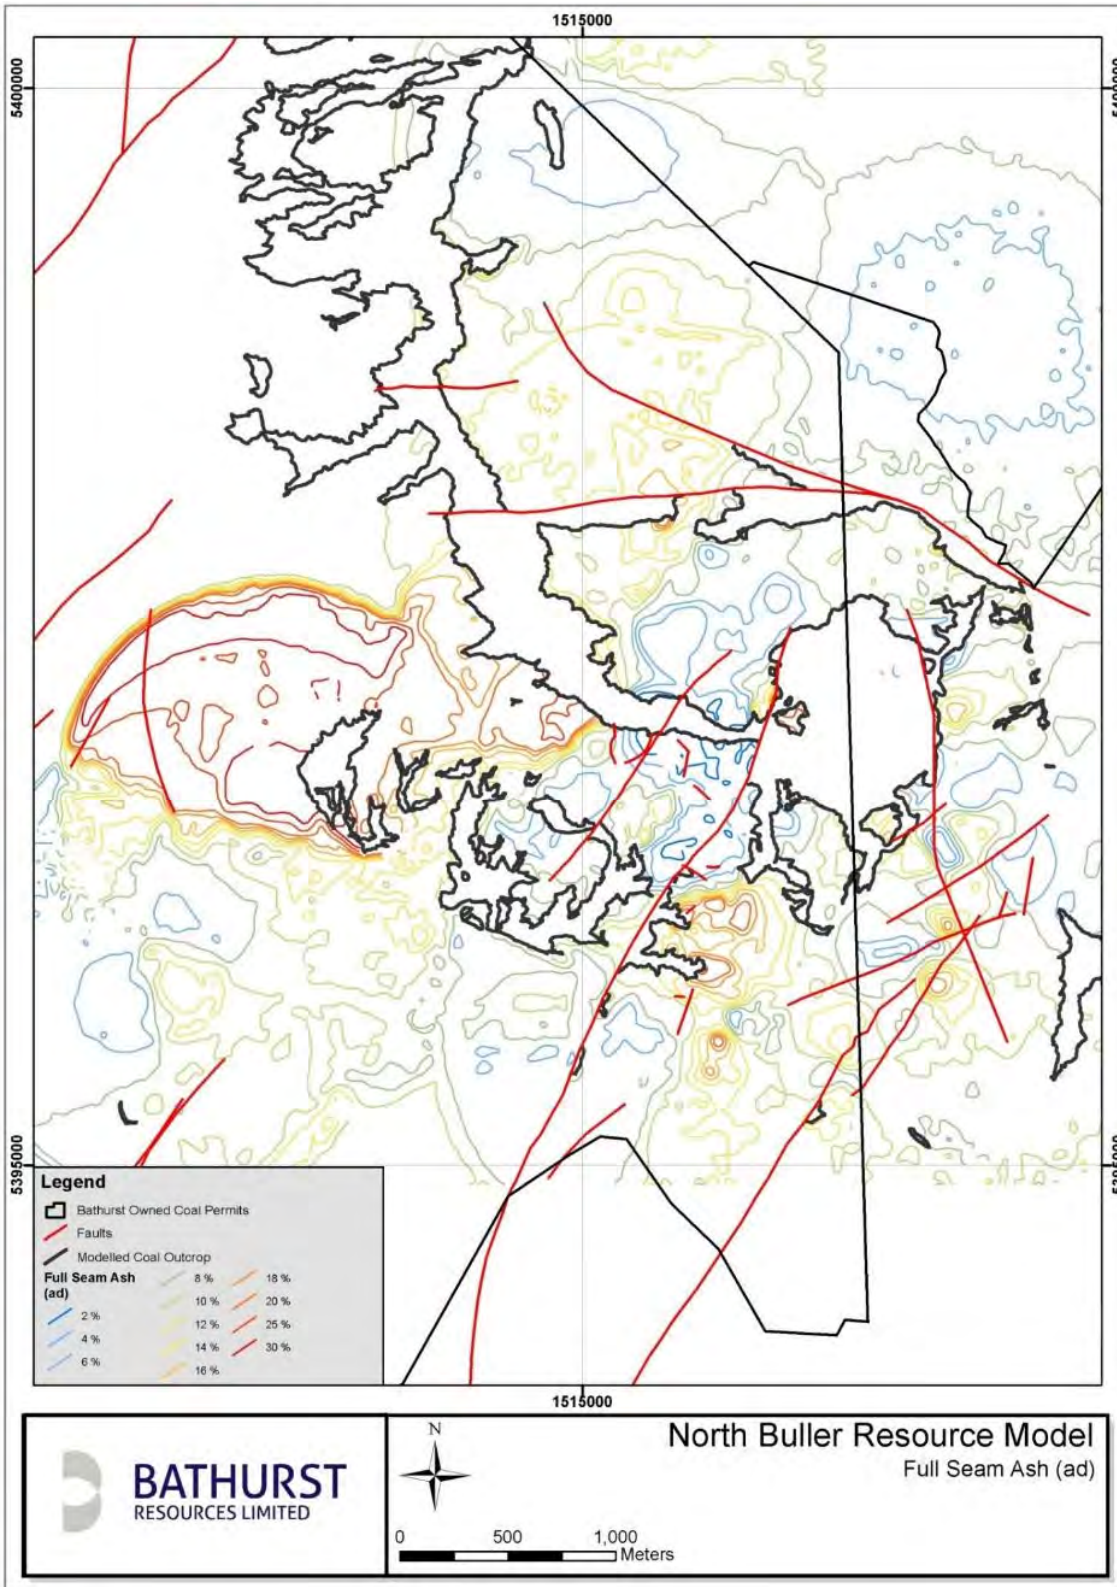


Figure 11: Plan showing the aggregate coal seam ash on an air-dried basis

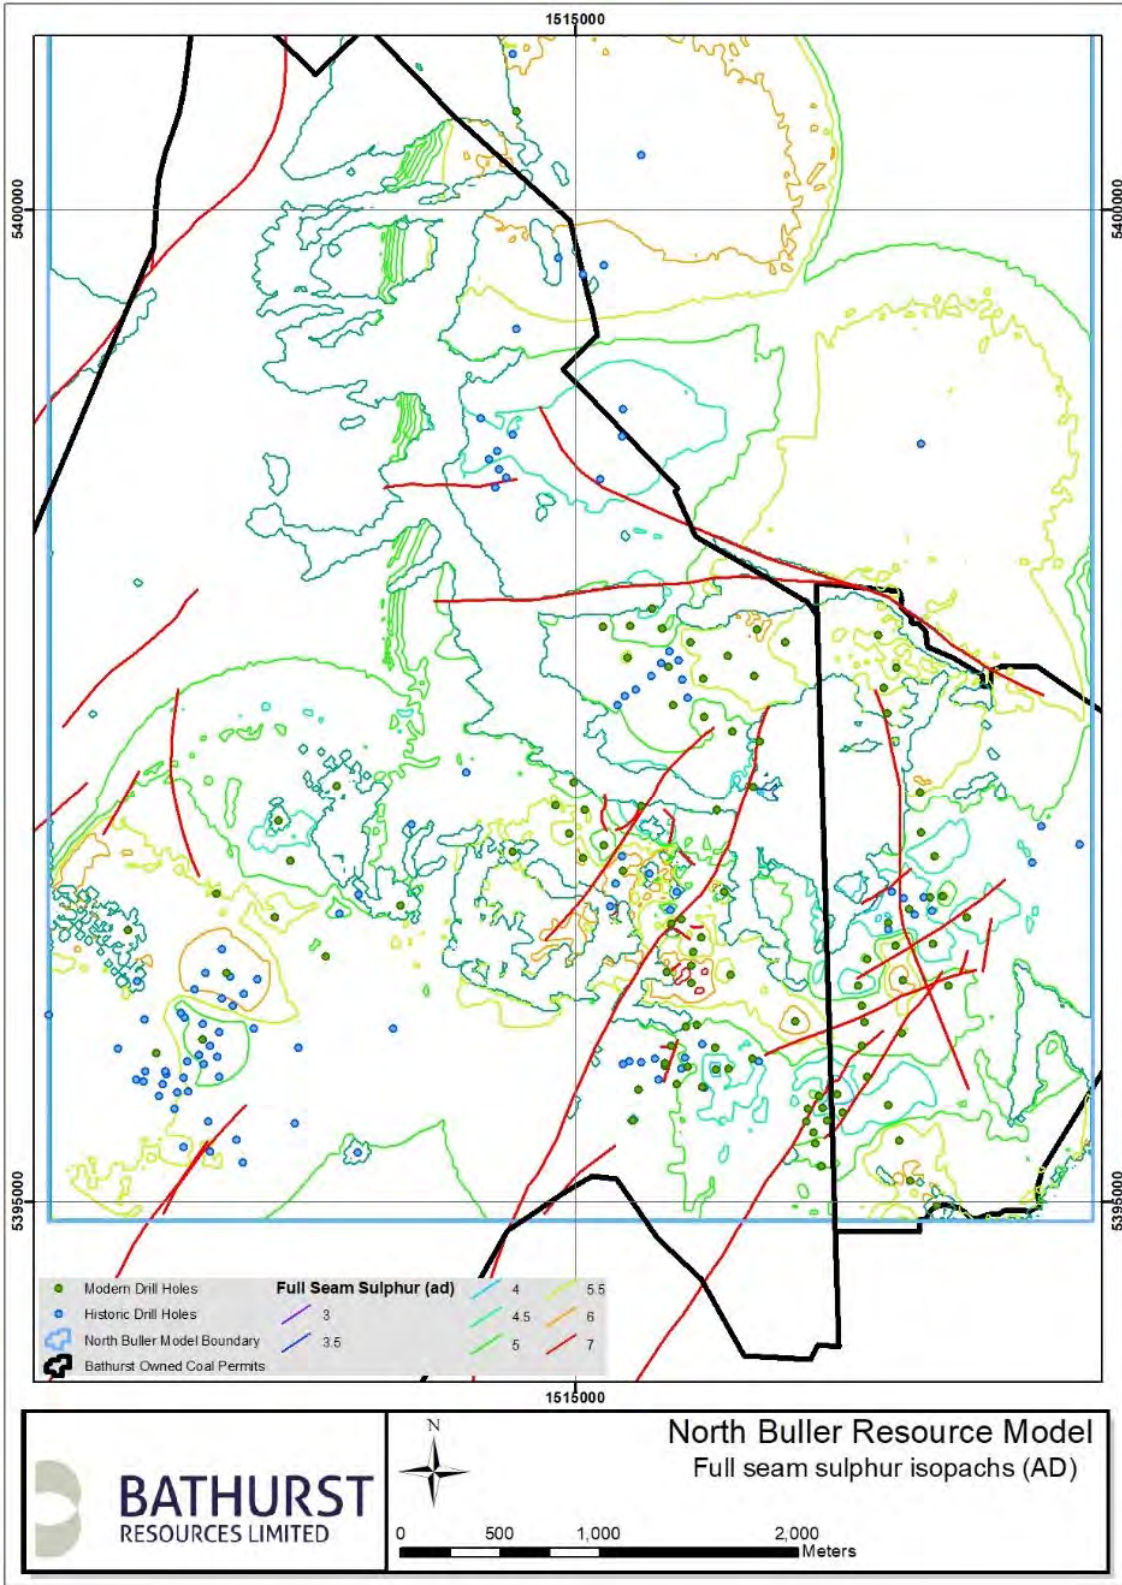


Figure 12: Plan showing the aggregate coal seam sulphur on an air-dried basis

# JORC Code, 2012 Edition – Table 1 Report for the New Brighton Project 2021

## Section 1 Sampling Techniques and Data

Criteria	Commentary
<b>Sampling techniques</b>	<ul style="list-style-type: none"> <li>• Multiple campaigns of data acquisition have been conducted in the Ohai Coalfield over the past century.</li> <li>• Drill holes included within the New Brighton exploration dataset include drill holes drilled outside of Exploration Permit (EP) 40625.</li> <li>• A combination of open hole (wash drilled), Reverse Circulation (RC), and cored drilling techniques has been used. Some logged and sampled trenching (channel sampling) has also been used.</li> <li>• Bathurst Resources Ltd (BRL) managed exploration campaigns include data from 2013, 2015 and 2019. Drilling consists of: <ul style="list-style-type: none"> <li>○ 4 Wash Drilled (WD) drill holes</li> <li>○ 16 HQ/PQ (63.5/85 mm) triple tube core (TTC) diamond drill holes</li> <li>○ 8 Trenches</li> </ul> </li> <li>• Previous drilling dataset includes: <ul style="list-style-type: none"> <li>○ JY Series (2011) – 8 holes</li> <li>○ MR Series (2011) – 5 holes</li> <li>○ NBC Series (2011) – 11 holes</li> <li>○ TWB drill hole (2009) – 1 hole</li> <li>○ NBR Series (2007, 2008) – 5 holes</li> <li>○ ECMBDH Series (2007) – 4 holes</li> <li>○ OM Series (2005, 2007, 2009, 2011) – 7 holes</li> <li>○ LMC Series (2005, 2007,2008) – 19 holes</li> <li>○ LMR Series (2005) – 15 holes</li> <li>○ PIT Series (2005) – 19 trenches</li> <li>○ TP Series (1995) – 2 holes</li> <li>○ 300 Series (1984, 1986) – 9 holes</li> <li>○ 800 Series (1986) – 5 holes</li> <li>○ Historical data of various vintages – 45 holes</li> </ul> </li> <li>• Recent BRL managed drilling has aimed to infill areas to improve confidence and to test the reliability of the legacy dataset. Two drill holes were drilled as twins to LMC Series drill holes to obtain coal for marketing purposes.</li> <li>• Downhole geophysical logs are available for 11 of the BRL managed drill holes.</li> <li>• Where available, downhole geophysical logs were used to correlate coal seams, confirm depths and thickness of coal seams, and to validate drillers' logs. Downhole geophysical logs were also used to accurately calculate recovery rates of coal intersections.</li> <li>• Coal samples were generally taken over intervals no greater than 0.5 m in length and included the full core sample.</li> <li>• Outcrop trench and channel data is entered into the drilling database in a form that replicates a drill hole at that location. Coal seam thickness and partings between coal seams were measured vertically.</li> <li>• All analytical data has been assessed and verified prior to inclusion in the resource model. Unreliable data was omitted.</li> </ul>
<b>Drilling techniques</b>	<ul style="list-style-type: none"> <li>• All BRL managed drilling campaigns have utilised the following drilling methods: <ul style="list-style-type: none"> <li>○ Full PQ TTC.</li> <li>○ Full HQ TTC.</li> <li>○ Combination WD/TTC.</li> </ul> </li> <li>• Legacy drilling techniques include: <ul style="list-style-type: none"> <li>○ HQ TTC.</li> <li>○ RC 133 mm.</li> </ul> </li> </ul>

Criteria	Commentary
	<ul style="list-style-type: none"> <li>○ WD using tricone/blade/strata bits.</li> <li>○ Rotary wash, fishtail bit.</li> <li>● Excavated trenches with logged intersections comprise 10-15% of the primary sample dataset.</li> </ul>
<b>Drill sample recovery</b>	<ul style="list-style-type: none"> <li>● Core recovery was measured as the length of core recovered divided by the length of the driller's run (typically 1.5 m in length) and noted by the core logging geologist.</li> <li>● If recovery of coal intersections dropped below 90% the drill hole required a re-drill. For the 2013 drilling program drillers were paid an incentive if coal recovery was above 90%.</li> <li>● Mean total core recovery over BRL managed drilling campaigns was 83.5% with core recovery of coal at 90.4% (this increases to 95.5% when drill hole NC085 is excluded, which may have intersected the edge of underground mine workings).</li> <li>● Where downhole geophysical logging indicated that coal was lost, raw ash values were estimated using the results of overlying and underlying coal ply samples and the relative response of the downhole density trace.</li> <li>● Little core recovery data is available for historical drill holes and those of previous operators.</li> </ul>
<b>Logging</b>	<ul style="list-style-type: none"> <li>● BRL has developed standardised core logging procedures (BRL Coal Logging Procedures), and all core logging completed by BRL has followed these procedures. <ul style="list-style-type: none"> <li>○ All recent drill core has been geologically and geotechnically logged by logging geologists under the supervision and guidance of a team of experienced exploration and geotechnical geologists.</li> <li>○ Drill core was photographed prior to sampling. Depth meter marks and coal ply intervals are noted on the drill core in each photograph.</li> <li>○ Down-hole wireline geophysical logs were used to aid core logging to ensure true downhole depths were recorded where applicable.</li> </ul> </li> <li>● The standard of logging varies for legacy drilling campaigns.</li> </ul>
<b>Sub-sampling techniques and sample preparation</b>	<ul style="list-style-type: none"> <li>● For all exploration data acquired by BRL, an in-house detailed sampling procedure was used (BRL Coal Sampling Procedures). Sampling and sample preparation are consistent with internationally accepted coal sampling and sample preparation methodologies. <ul style="list-style-type: none"> <li>○ Ply samples include all coal recovered for the interval of the sample. Core was not cut or halved.</li> <li>○ The TTC core was lithologically logged and the lithology intervals were used to determine actual coal ply sample depth at the drill site or in the core shed.</li> <li>○ All TTC core samples were collected as soon as practicable after drilling and double bagged then sent to the SGS New Zealand Limited (SGS) Minerals Laboratory in Ngakawau where they were crushed and split.</li> </ul> </li> <li>● Some legacy campaigns did cut/halve coal ply samples.</li> <li>● The legacy drilling campaigns vary in the standard of sampling processes, some of which are unknown.</li> </ul>
<b>Quality of assay data and laboratory tests</b>	<ul style="list-style-type: none"> <li>● SGS has been the predominant IANZ accredited laboratory used by BRL for coal quality testing on exploration drill holes used in the resource model.</li> <li>● SGS has used the following standards for their assay test work: <ul style="list-style-type: none"> <li>○ Proximate Analysis is carried out to the ASTM 7582 standard.</li> <li>○ Ash has also used the standard ISO 1171.</li> <li>○ Volatile matter has also used the standard ISO 562.</li> <li>○ Inherent moisture has also used the ISO 5068.</li> <li>○ Total sulphur analysis is carried out to the ASTM 4239 standard.</li> <li>○ Calorific value results are obtained using the ISO 1928 standard.</li> <li>○ Loss on drying data is completed using the ISO 13909-4 standard.</li> <li>○ Relative Density is calculated using the standard AS 1038.21.1.1.</li> </ul> </li> <li>● CRL Energy Ltd (CRL) are an IANZ accredited laboratory which completed much of the assay test work for samples collected prior to BRL's acquisition of the projects.</li> <li>● CRL used the following standards for their assay test work: <ul style="list-style-type: none"> <li>○ Inherent Moisture tests utilised the ISO 117221 standard.</li> <li>○ Ash tests utilised the ISO 1171 standard.</li> <li>○ Volatile matter tests utilised the ISO 562 standard.</li> </ul> </li> </ul>

Criteria	Commentary
	<ul style="list-style-type: none"> <li>○ Calorific value tests utilised the ISO 1928 standard.</li> <li>• All analysis was carried out and reported on an air-dried basis unless stated otherwise.</li> </ul>
<b>Verification of sampling and assaying</b>	<ul style="list-style-type: none"> <li>• Sample coal quality results have been cross-referenced and compared against lithology logs and downhole geophysical data. Results are also inspected by experienced geologists and compared with expected values utilising known coal quality relationships for the Nightcaps/Ohai Coalfield.</li> <li>• Anomalous assay results are investigated, and where necessary the laboratory is contacted and a re-test was undertaken from sample residue.</li> <li>• Laboratory data is imported directly into an acQuire database with no manual data entry at either the laboratory or at BRL.</li> <li>• Geophysical data has been used to establish coal seam thickness and depths on the margins of coal seams in RC drill holes, where sampling uncertainty inherent in RC drilling made coal sample and intersection depths less reliable.</li> </ul>
<b>Location of data points</b>	<ul style="list-style-type: none"> <li>• New Zealand Transverse Mercator 2000 Projection (NZTM) is used by BRL for the New Brighton project area. NZTM is considered a standard co-ordinate system for general mapping within New Zealand. Historical data has been converted from various local circuits and map grids using NZ standard cadastral conversions.</li> <li>• LiDAR and digital imagery was acquired in April 2013 using an Optech M200 LiDAR system and CS8900 medium format digital camera.</li> <li>• The data was collected flying 1,300 m above the lowest ground and using a scanner field of view of 44°. Outgoing pulse rate was set at 70kHz and minor scan frequency 33.5Hz.</li> <li>• The topographic surface used to build the model is derived from a combination of LiDAR data, and LINZ topographical data where LiDAR coverage in outer areas is unavailable.</li> <li>• Historical data has been converted from various local circuits and map grids to NZTM.</li> <li>• Surveyed elevations of drill hole collars are validated against the LiDAR topography.</li> </ul>
<b>Data spacing and distribution</b>	<ul style="list-style-type: none"> <li>• Drill hole spacing for the New Brighton Project has been calculated by finding the radius required to fill the total area of the EP40625 permit divided by the number of drill holes within that area. The central area of the permit has a lower average drill hole spacing.</li> <li>• The project has an average primary sample spacing of 240 m; however, New Brighton Central has an average primary sample spacing of 112 m.</li> <li>• Drill hole spacing is not the only measurement used by BRL to establish the degree of resource uncertainty and therefore resource classification. BRL uses a multivariate approach to resource classification which is explained further in Section 3: Classification.</li> <li>• The current drill hole spacing is sufficient for coal seam correlation purposes in the majority of the project areas. Difficulties lie in seam correlation due to the abundant seams and often complex structural mechanisms such as faults and unconformities.</li> <li>• Many drill holes have not been to sufficient depth to intersect all coal seams in the stratigraphic sequence or have not completed diagnostic tests confirming Ohai Group or Nightcaps Group coal measures.</li> <li>• Only 75% of drill holes have had downhole geophysical logging completed, which is important for coal seam correlations.</li> <li>• The samples database is composited to 0.4 m sample length prior to grade estimation. This is the mean sample length from BRL managed drilling.</li> <li>• Compositing starts at the top of the coal seam and small samples are not distributed or merged.</li> </ul>
<b>Orientation of data in relation to geological structure</b>	<ul style="list-style-type: none"> <li>• All modern exploration drilling has been completed on a vertical orientation.</li> <li>• All historical drill holes are vertical except one. Those without deviation plots are assumed to be vertical. OM07b was drilled as a coal seam gas drill hole (250 m west of EP 40625) and was deviated towards horizontal to drill through a thick coal seam to intersect OM05. OM07b is not used in the resource modelling process.</li> <li>• Any deviation from vertical is not expected to have a material effect on shallow, open pit resources. Average drill hole total depth in the dataset is 96 m; however, 18 drill holes have a total depth &gt;200 m.</li> <li>• Most of the deposit presents a moderate seam dip between 10 and 20°, although some</li> </ul>

Criteria	Commentary
	<p>localized steep dips do exist near fault traces.</p> <ul style="list-style-type: none"> <li>Vertical drilling is the most suitable drilling method of assessing the coal resource at the New Brighton Project.</li> </ul>
<b>Sample security</b>	<ul style="list-style-type: none"> <li>Rigorous sample preparation and handling procedures have been followed by BRL. Coal samples are taken and recorded from drill core, sealed in plastic bags, and securely stored prior to being dispatched to the laboratory for analysis.</li> <li>It is not considered likely that individual coal samples face a risk of theft or sabotage as coal is a bulk commodity with little value for small volumes of coal from drill core.</li> </ul>
<b>Audits or reviews</b>	<ul style="list-style-type: none"> <li>Golder and BRL have reviewed the geological data available and consider the data used to produce the resource model reliable and suitable for the purposes of generating a Coal Resource estimate to the extent that the Coal Resource estimate has been classified.</li> <li>BRL senior geologists have undertaken audits of the sample collection and analysis processes.</li> </ul>

## Section 2 Reporting of Exploration Results

Criteria	Commentary																
<b>Mineral tenement and land tenure status</b>	<ul style="list-style-type: none"> <li>The New Brighton Project resource model includes two exploration permits owned by BRL and privately held land coal rights attached to land titles in and around the Ohai Township and to the west and east of EP 40625. An area of open ground exists to the east of EP 40625 and is included in the resource model area. Coal Resources have only been reported within EP 40625.</li> <li>Exploration Permit Application (EPA) 60642 was lodged to cover the area of EP 51260 when it expired in early 2020. The EPA covers an area of 690.51 hectares and contains a portion of the resource area. It is reasonably expected that this EPA will be granted.</li> <li>EP 40625 covers an area of 658.37 hectares. This permit has expired and a subsequent Mining Permit Application (MPA) 60400 was lodged with NZ Petroleum and Minerals (NZPAM). It is considered that there are reasonable prospects to convert all or part of the EP to a Mining Permit.</li> </ul> <table border="1" data-bbox="474 1087 1330 1209"> <thead> <tr> <th>Permit/Rights</th> <th>Operation</th> <th>Mining Type</th> <th>Expiry</th> </tr> </thead> <tbody> <tr> <td><b>Exploration Permit Application 60642</b></td> <td>Ohai</td> <td>N/A</td> <td>N/A</td> </tr> <tr> <td><b>Exploration Permit 40625</b></td> <td>Ohai</td> <td>Opencast,</td> <td>02/09/2017</td> </tr> <tr> <td><b>Mining Permit Application 60400</b></td> <td>Ohai</td> <td>Opencast,</td> <td>N/A</td> </tr> </tbody> </table> <p>It is considered that there are reasonable prospects to negotiate access arrangements for mining with landowners covering the reported resource areas.</p>	Permit/Rights	Operation	Mining Type	Expiry	<b>Exploration Permit Application 60642</b>	Ohai	N/A	N/A	<b>Exploration Permit 40625</b>	Ohai	Opencast,	02/09/2017	<b>Mining Permit Application 60400</b>	Ohai	Opencast,	N/A
Permit/Rights	Operation	Mining Type	Expiry														
<b>Exploration Permit Application 60642</b>	Ohai	N/A	N/A														
<b>Exploration Permit 40625</b>	Ohai	Opencast,	02/09/2017														
<b>Mining Permit Application 60400</b>	Ohai	Opencast,	N/A														
<b>Exploration done by other parties</b>	<ul style="list-style-type: none"> <li>Exploration drilling for the New Brighton Project was carried out by the L&amp;M Group of companies between 2005 and 2011.</li> <li>Historical data has been traced back to original reports and logs held at Archives NZ storage centres. Historical data has been thoroughly investigated for reliability and quality and where the integrity of the data is limited it has been omitted from the resource model. Historical data includes historical underground mine workings plans, geological reports and drilling logs.</li> </ul>																
<b>Geology</b>	<ul style="list-style-type: none"> <li>The project is located in the Ohai Coalfield, New Zealand.</li> <li>The Ohai Coalfield is a fault bounded basin containing Cretaceous sub-bituminous coal.</li> <li>The defined Coal Resource is contained within the New Brighton, Morley and Beaumont Formations.</li> <li>The Cretaceous Ohai Group contains three formations – the Wairio, New Brighton and Morley Formations.</li> <li>The Eocene Nightcaps Group contains two formations – the Beaumont and Orauea Formations.</li> <li>The two groups are separated by an unconformity clearly distinguishable by micro-flora.</li> <li>The majority of historical production has come from coal seams in the Morley Formation, which tend to contain higher quality coal. Coal seams are faulted and folded into complex structures. Coal seam thickness and extent varies as coal seams are often lenticular and split or washed</li> </ul>																

Criteria	Commentary
	<p>out by fluvial sand channels and syndepositional faulting and folding are indicated.</p> <ul style="list-style-type: none"> <li>• Morley Coal Measures of the Ohai Group have a combined vertical coal seam thickness which averages 4.1 m; however, 50 m thick coal seams have been recorded in drill hole OM05, located 250 m west of the permit.</li> <li>• Coal ranks range from sub-bituminous A to high volatile bituminous C.</li> <li>• Eocene Beaumont Coal Measures of the Nightcaps Group have a combined vertical coal seam thickness which averages 1.4 m; however, 7 m thick coal seams have been recorded within the Coaldale Pit. The Coal rank varies from sub bituminous C to sub bituminous B.</li> <li>• The Nightcaps Group Beaumont Formation Coal Measures are conformably overlain by Eocene Orauea Formation mudstone.</li> </ul>

Drill hole Information	Table 1 Showing summary of drilling data available within the resource model area							
	Years	Agency	Range of Collar ID	Number of Holes	Drilling Method	# Holes in Structure Model	# Holes in Coal Quality Model	Geophysics Available
	1923 - 1955	Various	Various	45	unknown	24	2	0
	1984	State Coal Mines	351 - 355	3	TTC	3	1	3
	1986	Lime & Marble Ltd	371 - 379	6	TTC	6	5	6
	1986	Mines Department	882 - 886	5	TTC, OH	5	5	5
	1995	Southgas Resources Ltd	TP05-06	2	OH	2	0	2
	2005	Kenham Holdings Ltd (L&M)	PIT01 - PIT18, PIT_4m	19	Trench	8	3	0
	2005	L&M	LMR05 - LMR19	15	RC	14	8	9
	2005	L&M	LMC01 - LMC03	3	HQ TTC	3	3	0
	2005	L&M	OM1	1	TTC, OH	1	1	0
	2007	Eastern Corporation	ECMBDH01 - ECMBDH05	4	Trench	4	0	4
	2007	L&M	LMC04 - LMC11	8	TTC, OH, RC	8	7	8
	2007 - 2011	L&M	OM2 - OM7, OM7a, OM7b	6	OH	3	0	3
	2007 - 2008	L&M	NBR01 - NBR06	5	TTC	5	1	0
	2008	L&M	LMC13 - LMC21	8	TTC	8	4	6
	2009	L&M (Nightcaps Contracting)	TWB-01	1	OH	1	0	1
	2011	L&M	NBC11-1 to NBC11-23	11	HQ TTC	9	4	6
	2011	L&M	MR1 - MR5	5	TTC	5	1	5
	2011	L&M	JY2 - JY9	8	TTC	8	6	6
	2013	Bathurst Resources Ltd	NC079 - NC085	7	TTC	5	5	3
	2015	Bathurst Resources Ltd	NBT001 - NBT008	8	Trench	2	2	0
	2015	Bathurst Resources Ltd	NC119 - NC129	11	TTC, OH	7	6	8
	2019	Bathurst Resources Ltd	NC220-NC221	2	TTC, OH	2	2	0

Criteria	Commentary
	<ul style="list-style-type: none"> <li>Exploration drilling results for individual drill holes have not been reported.</li> <li>As coal is a bulk commodity the exclusion of detailed exploration data from this document is considered to not be material to the understanding of the Table 1.</li> </ul>
<b>Data aggregation methods</b>	<ul style="list-style-type: none"> <li>The nominal cut-off for ash (adb) for constructing the New Brighton structure model is set at 35%.</li> <li>The resource model is built as a block model with 0.5 m block thicknesses for coal. Coal ply data is used to grade estimate the block model.</li> <li>Coal ply data is composited into 0.4 m samples for estimation. No weighting is used in compositing.</li> </ul>
<b>Relationship between mineralisation widths and intercept lengths</b>	<ul style="list-style-type: none"> <li>All exploration drill holes have been drilled vertically and the coal seam is generally gently dipping.</li> <li>Reported and modelled seam intercept thickness is representative of true seam thickness.</li> </ul>
<b>Diagrams</b>	<ul style="list-style-type: none"> <li>Diagrams can be found in the Appendix A for each of the following: <ul style="list-style-type: none"> <li>Location map.</li> <li>Map showing coal ownership rights.</li> <li>Map showing exploration drill holes.</li> <li>Map showing historical mine workings.</li> </ul> </li> <li>Coal quality isopach plots and coal structure contour plots for New Brighton, Morley and Beaumont coal are presented in Figure 5 to 16.</li> </ul>
<b>Balanced reporting</b>	<ul style="list-style-type: none"> <li>As coal is a bulk commodity detailed exploration drilling results and coal intersections have not been reported.</li> <li>The exclusion of this information from this report is considered to not be material to the understanding of the deposit.</li> </ul>
<b>Other substantive exploration data</b>	<ul style="list-style-type: none"> <li>Exploration drilling results have not been reported in detail.</li> <li>Some coal composite samples for full seam, minable sections have been taken for thorough analysis including ash constituents, forms of sulphur, ash fusion temperatures, and ultimate analysis. These composite samples are not used in grade estimation.</li> <li>A bulk sample of ~5,000 tonnes was taken in 2013 from the New Brighton Central prospect. Coal quality results from this sample on an as received basis were 4.7% ash and CV of 21.6 MJ/kg.</li> </ul>
<b>Further work</b>	<ul style="list-style-type: none"> <li>Project evaluation is currently being undertaken.</li> </ul>

### Section 3 Estimation and Reporting of Mineral Resources

Criteria	Commentary
<b>Database integrity</b>	<ul style="list-style-type: none"> <li>BRL utilises an acQuire database to store and maintain its exploration dataset.</li> <li>All historical and legacy datasets have been thoroughly checked and validated against original logs and results tables.</li> <li>The acQuire database places explicit controls on certain data fields as they are entered or imported into the database, such as overlapping intervals, coincident samples, out of range sample values, standardised look-up tables for logging codes.</li> <li>Manual data entry of coal quality results is not required as results are imported directly from laboratory results files.</li> <li>The database is automatically backed up on an offsite server.</li> </ul>
<b>Site visits</b>	<ul style="list-style-type: none"> <li>Henry Dillon (the Competent Person) has visited the area on numerous occasions over the past 10 years and is familiar with the site and is very familiar with the geology of the Ohai and Nightcaps Coalfields.</li> </ul>
<b>Geological interpretation</b>	<ul style="list-style-type: none"> <li>Golder has reviewed the modelling processes in use by BRL to develop their resource model and Coal Resource estimates.</li> </ul>



Criteria	Commentary
	<ul style="list-style-type: none"> <li>• Golder has confidence in the methodologies used by BRL for geological modelling and the interpretation of the available Nightcaps Project data. Confidence varies for different areas, and this is reflected in the resource classification.</li> <li>• Dry, mineral matter and sulphur free volatile matter is the principal quality used to differentiate and correlate Beaumont and Morley coal seams.</li> <li>• Golder considers the quantity of geological data sufficient to estimate and report Coal Resources.</li> <li>• BRL considers the quantity of geological data sufficient to estimate and report Coal Resources; however, an increased data density may increase confidence in some areas.</li> <li>• Uncertainty surrounds the historical mine workings, both in the quality and quantity of coal extracted and the surveying of underground workings. This is reflected in the resource classification.</li> <li>• Some residual uncertainty of quality and confidence of legacy drilling data remains despite thorough evaluation of the logs and drill locations.</li> </ul>
<b>Dimensions</b>	<ul style="list-style-type: none"> <li>• Several coal seams are present in the stratigraphic sequence. Up to three coal seams exist in each of the Beaumont, Morley and New Brighton Formations, with one existing in the Wairio Coal Measures. The total combined coal thickness varies from less than 1 m thick up to 50 m locally (gas drill hole OM05).</li> <li>• The resource model covers an area 4.8 km by 4.85 km.</li> <li>• A single primary prospect area exists within EP 40625. The New Brighton Central area covers an approximate area of 1.5 km by 0.5 km.</li> <li>• The deepest Coal Resources estimated and reported are located 130 m below surface. All Coal Resources are contained within a Revenue Factor (RF) 1.0 optimised pit shell using current mining costs at Takitimu and based on appropriate economics for the New Zealand domestic coal market.</li> </ul>
<b>Estimation and modelling techniques</b>	<ul style="list-style-type: none"> <li>• All available exploration data has been validated and, where considered reliable, has been used to develop a 3D geological block model for Coal Resource estimation and classification.</li> <li>• All exploration drilling data is stored in an acquire database and exported to a Maptek Vulcan™ (Vulcan) drill hole database.</li> <li>• Interpretive design data is stored within Vulcan in various design layers.</li> <li>• Due to the presence of two unconformable coal bearing formations, the model is sub-divided into two separate domains for modelling (Ohai Group and Nightcaps Group). The Ohai Group coal seams are truncated by the overlying unconformable Beaumont Coal Measures.</li> <li>• A horizons definition was developed and used to define the coal seams to be modelled in the stratigraphic modelling process.</li> <li>• Vulcan is used to build the structure model. Grid spacing is 25 m x 25 m.</li> <li>• Maptek's Integrated Stratigraphic Model (ISM) module is used to produce the structure model. The stacking method is used which triangulates a reference surface and then stacks the remaining horizons by adding structure thickness. Thickness grids are created using an inverse distance (ID) modelling algorithm. Design data from other horizons is incorporated into the final grid structure.</li> <li>• Modelling parameters for the two structural modelling passes are as follows: <ul style="list-style-type: none"> <li>• Ohai Group - Reference grid surface (BOB Floor) by Stacking: <ul style="list-style-type: none"> <li>○ Method is Triangulation.</li> <li>○ Trend Order is 1 (Linear).</li> <li>○ Smoothing is 9.</li> <li>○ The maximum triangle length is 1,500 m.</li> <li>○ Surfaces are splined.</li> </ul> </li> <li>• Ohai Group - Reference grid thickness modelling by Stacking: <ul style="list-style-type: none"> <li>○ Method is Inverse Distance.</li> <li>○ Power is 2.</li> <li>○ Maximum number of interpretive points is 10.</li> <li>○ Trend Order is 0 (Horizontal Planar).</li> <li>○ Smoothing is 9.</li> <li>○ Search Radius is 1,500 m.</li> </ul> </li> </ul> </li> </ul>

Criteria	Commentary						
	<ul style="list-style-type: none"> <li>○ Surfaces are splined.</li> <li>• Nightcaps Group - Reference grid surface (UM11 floor) by Stacking: <ul style="list-style-type: none"> <li>○ Method is Triangulation.</li> <li>○ Trend Order is 1 (Linear).</li> <li>○ Smoothing is 9.</li> <li>○ The maximum triangle length is 1,500 m.</li> <li>○ Surfaces are splined.</li> </ul> </li> <li>• Nightcaps Group - Reference grid thickness modelling by Stacking: <ul style="list-style-type: none"> <li>○ Method is Inverse Distance.</li> <li>○ Power is 3.</li> <li>○ Maximum number of interpretive points is 8.</li> <li>○ Trend Order is 0 (Horizontal Planar).</li> <li>○ Smoothing is 9.</li> <li>○ Search Radius is 1,500 m.</li> <li>○ Surfaces are splined.</li> </ul> </li> <li>• Structure grid models are checked and validated visually before being used to construct the resource block model.</li> <li>• Vulcan is used to build the resource block model and to estimate grade. The process is automated using a Lava script.</li> <li>• The stratigraphic structure grid models for each domain, along with LiDAR topographic surface, and Beaumont unconformity surface were used to build the block model. The block dimensions were constructed at 10 m x 10 m. Vertical thickness for the coal blocks is 0.5 m.</li> <li>• Block Grade estimation is performed in Vulcan using the Tetra Projection unfolding methodology.</li> <li>• Coal qualities are estimated on an air-dried basis except bed moisture. Ash, sulphur, inherent and total moisture, volatile matter, and calorific value are estimated simultaneously.</li> <li>• Grade estimation is computed using an ID function with power of 2.5.</li> <li>• Three estimation passes are used to populate the grades in the model. Search ranges are circular at 150 m, 400 m, and 1,000 m.</li> <li>• Various methods have been used to check the validity of the block estimation. This includes manual inspection of the model, Quantile Quantile (QQ) plots of the model qualities vs coal quality database and other comparison tools.</li> <li>• Resource tonnages within the model have been discounted where the resource falls within historical underground workings areas. The primary mining method utilised historically in the New Brighton and Mossbank areas is bord and pillar mining and opencast mining. Historical extraction rates are estimated using historical mining extraction reports, and tonnage reports. The extraction rates used to discount coal tonnages in the resource model are as follows: <table border="1" data-bbox="440 1392 948 1509"> <thead> <tr> <th data-bbox="451 1398 630 1423">Mining Method</th> <th data-bbox="732 1398 915 1423">Extraction Rate</th> </tr> </thead> <tbody> <tr> <td data-bbox="451 1434 597 1459">Underground</td> <td data-bbox="732 1434 915 1459">50% of all seams</td> </tr> <tr> <td data-bbox="451 1470 558 1495">Opencast</td> <td data-bbox="732 1470 932 1495">100% of all seams</td> </tr> </tbody> </table> </li> </ul>	Mining Method	Extraction Rate	Underground	50% of all seams	Opencast	100% of all seams
Mining Method	Extraction Rate						
Underground	50% of all seams						
Opencast	100% of all seams						
<b>Moisture</b>	<ul style="list-style-type: none"> <li>• Moisture, both on an air-dried and total moisture basis, is estimated in the resource model from</li> </ul>						

Criteria	Commentary
	<p>the sample database after using a cut-off envelope to cut samples that vary excessively from the norm. Natural variability in bed moisture is amplified by excessive variability in the sampling process, and laboratory testing methods between labs and over time.</p> <ul style="list-style-type: none"> <li>Where ply sample results do not include moisture, moisture is calculated using a derived relationship of moisture vs ash.</li> <li>Coal Resource tonnages are reported using natural bed moisture, calculated using the Preston and Sanders equation.</li> </ul>
<b>Cut-off parameters</b>	<ul style="list-style-type: none"> <li>Structure grid models have been developed based on a 35% ash cut-off. Some higher ash intervals are retained within the coal quality dataset to allow simplification of the seam model.</li> <li>No lower ash cut-off has been applied.</li> <li>Coal Resources are reported down to a seam thickness of 0.5 m (one block) with an ash cut-off of 25%.</li> <li>Coal Resources have been defined as economic by using a breakeven Lerchs-Grossman optimised opencast pit shell. The RF1.0 shell from the optimization has been used. No Coal Resources have been reported outside of this pit shell. This optimised pit shell is used to determine Reasonable Prospects for Eventual Economic Extraction (RPEEE).</li> </ul>
<b>Mining factors or assumptions</b>	<ul style="list-style-type: none"> <li>No mining factors such as mining losses and dilutions have been applied when developing the resource model.</li> <li>Current economic and mining parameters for domestic coal sales were used to define the RF1.0 optimised pit shell which was used to define coal that has RPEEE.</li> </ul>
<b>Metallurgical factors or assumptions</b>	<ul style="list-style-type: none"> <li>No metallurgical assumptions have been applied in estimating the resource. It is not known if a wash plant would be required for coal processing.</li> </ul>
<b>Environmental factors or assumptions</b>	<ul style="list-style-type: none"> <li>No environmental assumptions have been applied in developing the resource model.</li> <li>It is assumed that overburden is not acid forming as is the case at other mines in the Ohai coalfield.</li> </ul>
<b>Bulk density</b>	<ul style="list-style-type: none"> <li>At the time of development of the resource model, a total of 66 relative density (air-dried) sample results are available for the New Brighton Project.</li> <li>The samples are distributed throughout the Takitimu-Coaldale-Black Diamond project area and the sample set covers a range of ash values from 1.7 to 56.2%.</li> <li>From this dataset an ash-density curve was generated with a coefficient of determination of <math>R^2=0.98</math> for New Brighton coal, <math>R^2=0.92</math> for Morley coal, and <math>R^2=0.84</math> for Beaumont coal.</li> <li>Air-dried density is calculated using the air-dried block ash value and the derived density equations. <ul style="list-style-type: none"> <li>New Brighton coal: <math>Density(ad) = (0.0091 * ash) + 1.3181.</math></li> <li>Morley coal: <math>Density(ad) = (0.0097 * ash) + 1.2944.</math></li> <li>Beaumont coal: <math>Density(ad) = (0.0105 * ash) + 1.25.</math></li> </ul> </li> <li>An in situ bulk density value is computed using the Preston and Sanders method; <math display="block">Density(ps) = (RD * (100 - mo_{ad})) / (100 + RD * (mo_{ar} - mo_{ad}) - mo_{ar})</math> </li> <li>Where RD is relative density on an air-dried basis, mo_ad is inherent moisture, and mo_ar is total moisture.</li> </ul>
<b>Classification</b>	<ul style="list-style-type: none"> <li>BRL classifies resources using a multivariate approach.</li> <li>Coal Resources have been classified on the basis of geological and grade continuity balanced by relative uncertainties surrounding historical underground extraction and proximity to faults and unconformities.</li> <li>Closely spaced drill holes with valid coal quality samples (points of observation) increase the confidence in resource assessments.</li> <li>The confidence is reduced by: <ul style="list-style-type: none"> <li>A block being within an area of historical underground workings due to extraction rate uncertainty.</li> <li>A block being within 20 m of historical underground workings due to uncertainty with historical survey of the workings and georeferencing of mine plans.</li> <li>A block is in an area where structure dip is greater than 20° due to proximity to large faults. Faulting can impact coal thickness and quality and some faults are poorly</li> </ul> </li> </ul>

Criteria	Commentary
	<p>constrained.</p> <ul style="list-style-type: none"> <li>○ A block lying within an area with thin seams resulting in uncertainty of geological continuity. Where a seam is thin or is splitting, a small change in thickness can have a large impact to reported coal tonnages and qualities.</li> <li>○ A block being within an area close to a possible erosional 'washout' of Morley coal as indicated by historical underground mine plans and extents.</li> <li>○ A block is less than 2 m below the modelled regional unconformity between Beaumont and Morley formations due to uncertainties in unconformity surface topology.</li> </ul> <ul style="list-style-type: none"> <li>● Essentially, in an area that is not affected by the above conditions, a distance to nearest sample of less than 75 m would be classified as Measured, less than 120 m is classified as Indicated and less than 300 m would be classified as Inferred.</li> </ul>
<b><i>Audits or reviews</i></b>	<ul style="list-style-type: none"> <li>● Previous iterations of the model were reviewed by BRL geological and mine engineering staff.</li> <li>● The currently reported model has been reviewed by the Competent Person.</li> </ul>
<b><i>Discussion of relative accuracy/confidence</i></b>	<ul style="list-style-type: none"> <li>● The Competent Person has reviewed the Coal Resource estimates and has visited the New Brighton project area. The Competent Person has examined the methodology used to estimate the resources and reserves and is satisfied that the processes have been properly conducted. The estimation methodology is generally in accordance with industry practice and the estimates can be regarded as requirements under the JORC 2012 code.</li> <li>● Statistical comparisons between the resource block model and the coal quality data set have been carried out and are within expected ranges. Techniques utilised include QQ plots and probability plots.</li> </ul>

Appendix A:

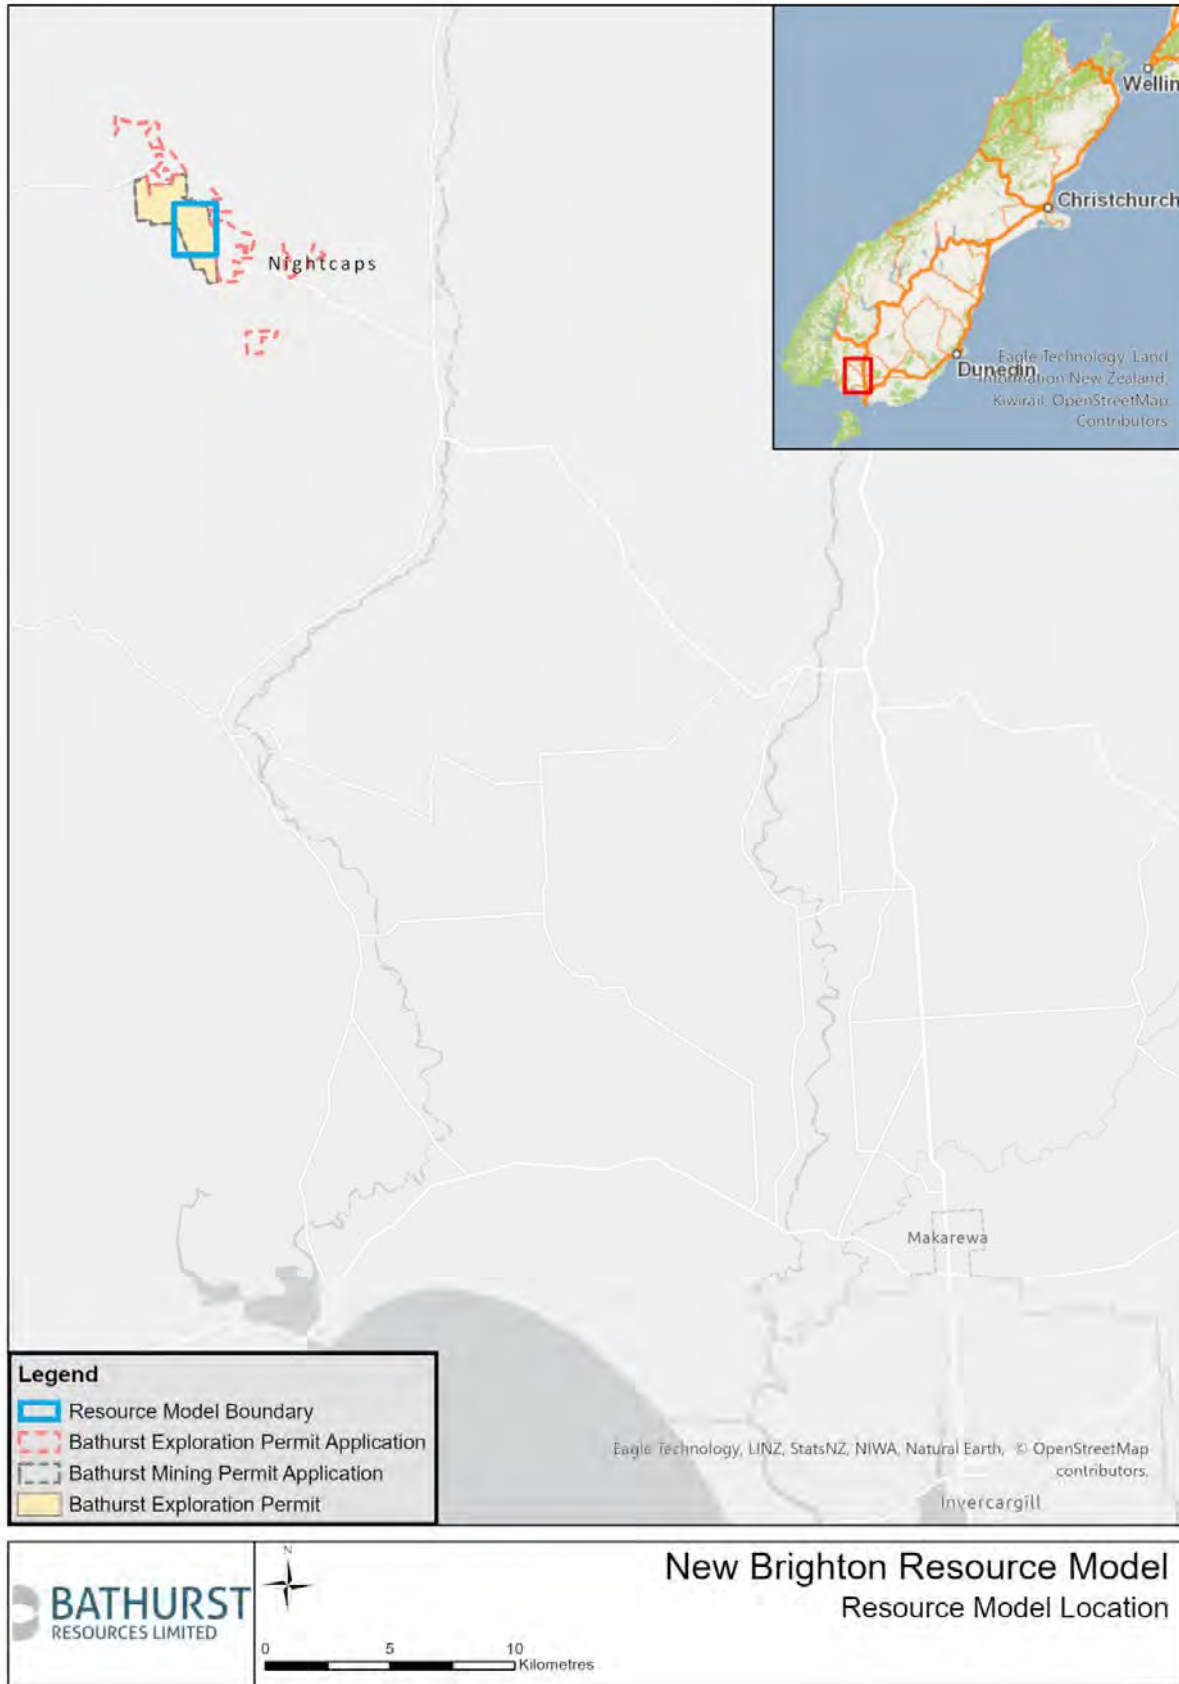


Figure 1: Location of New Brighton Project

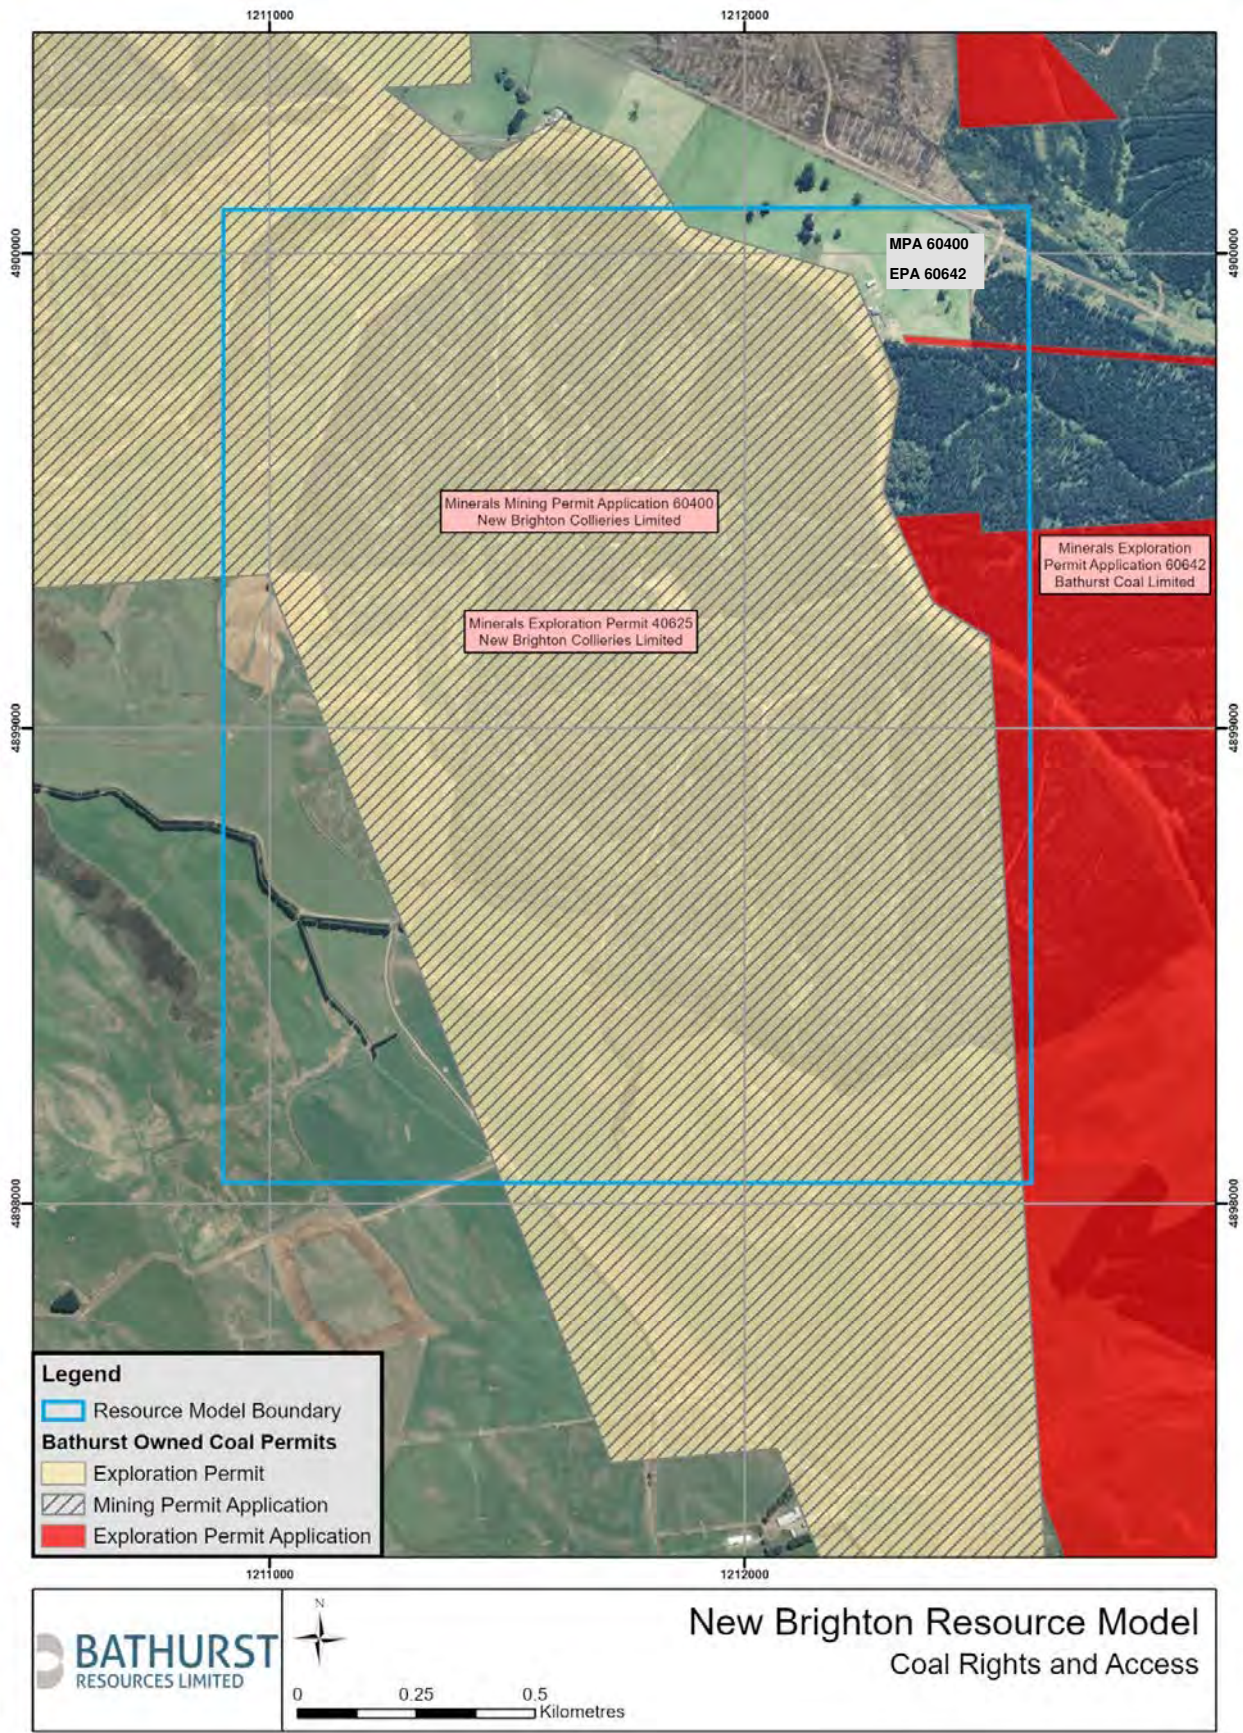


Figure 2: Shows BRL owned Coal Exploration Permits within the New Brighton resource model area

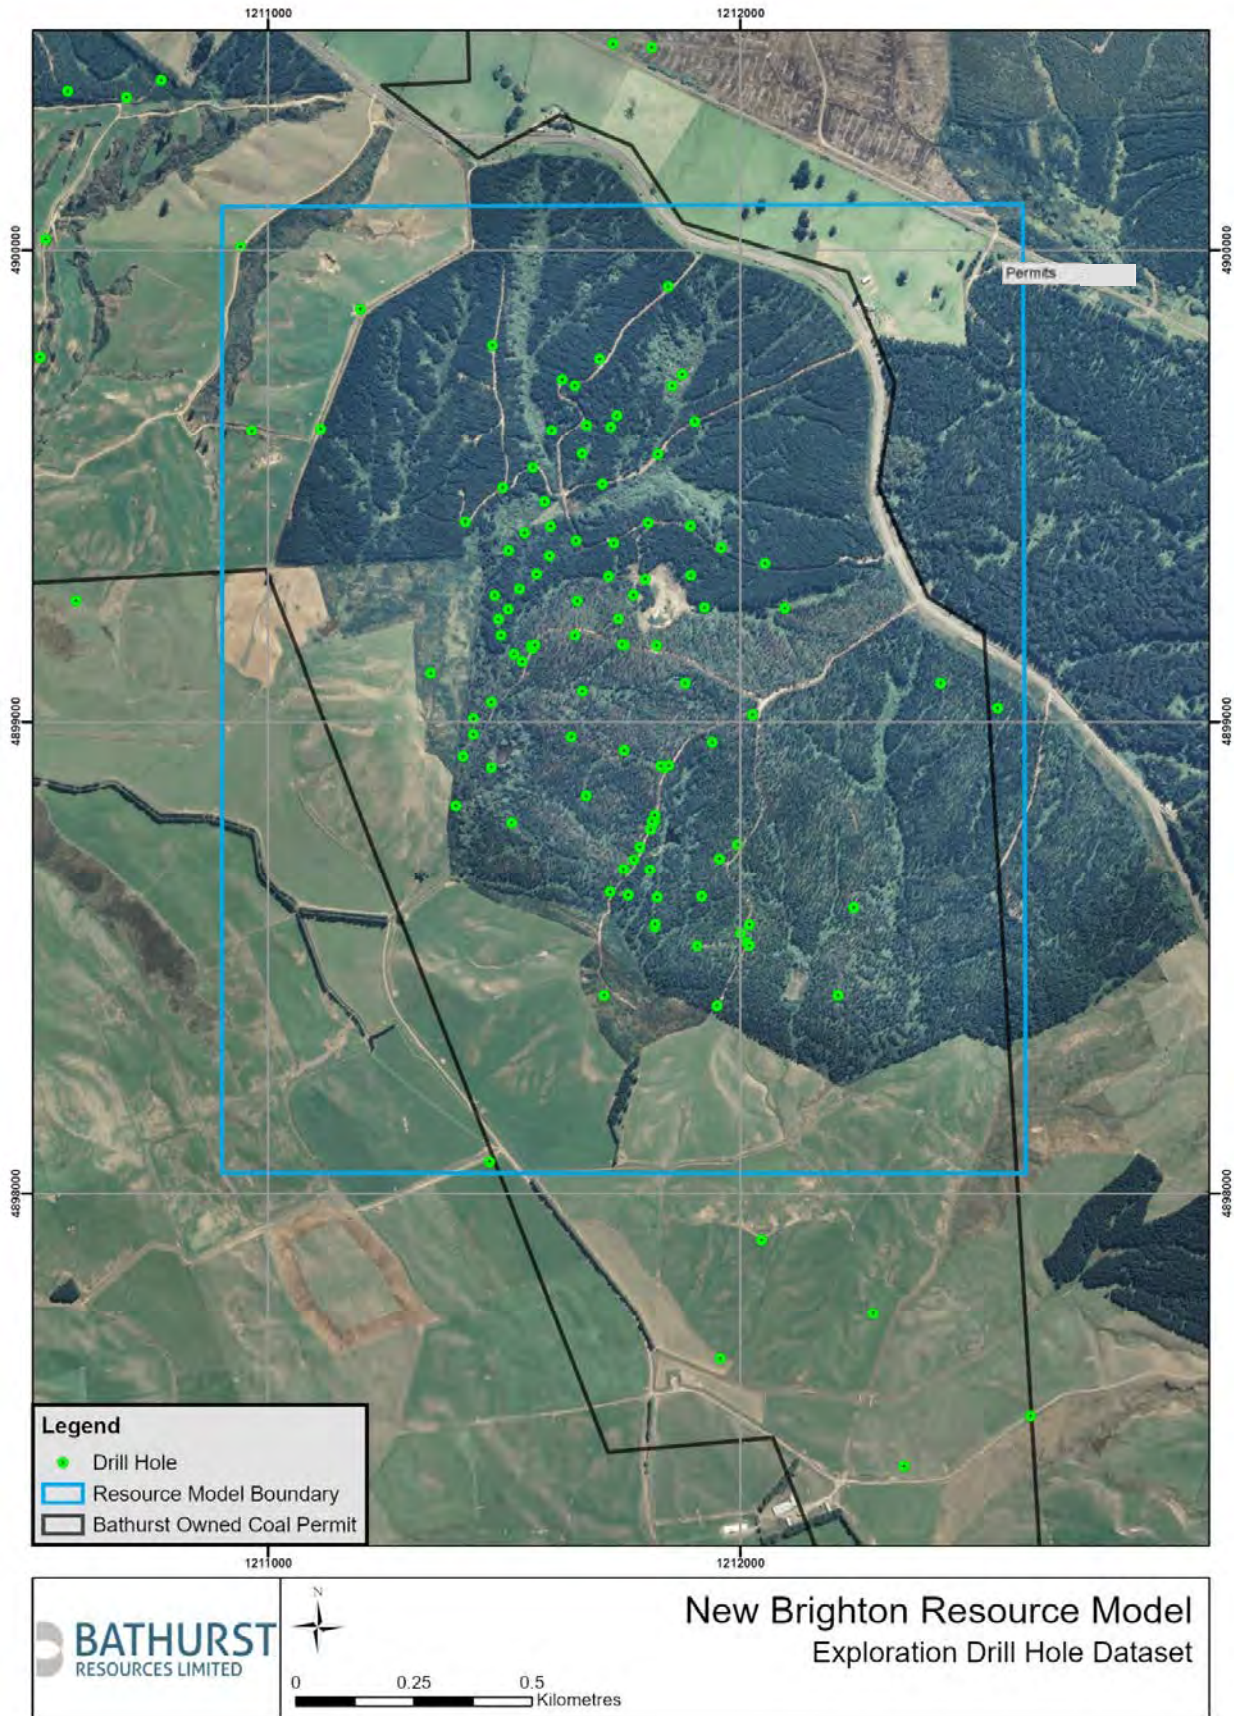


Figure 3: Location of drilling within Coal Resource area

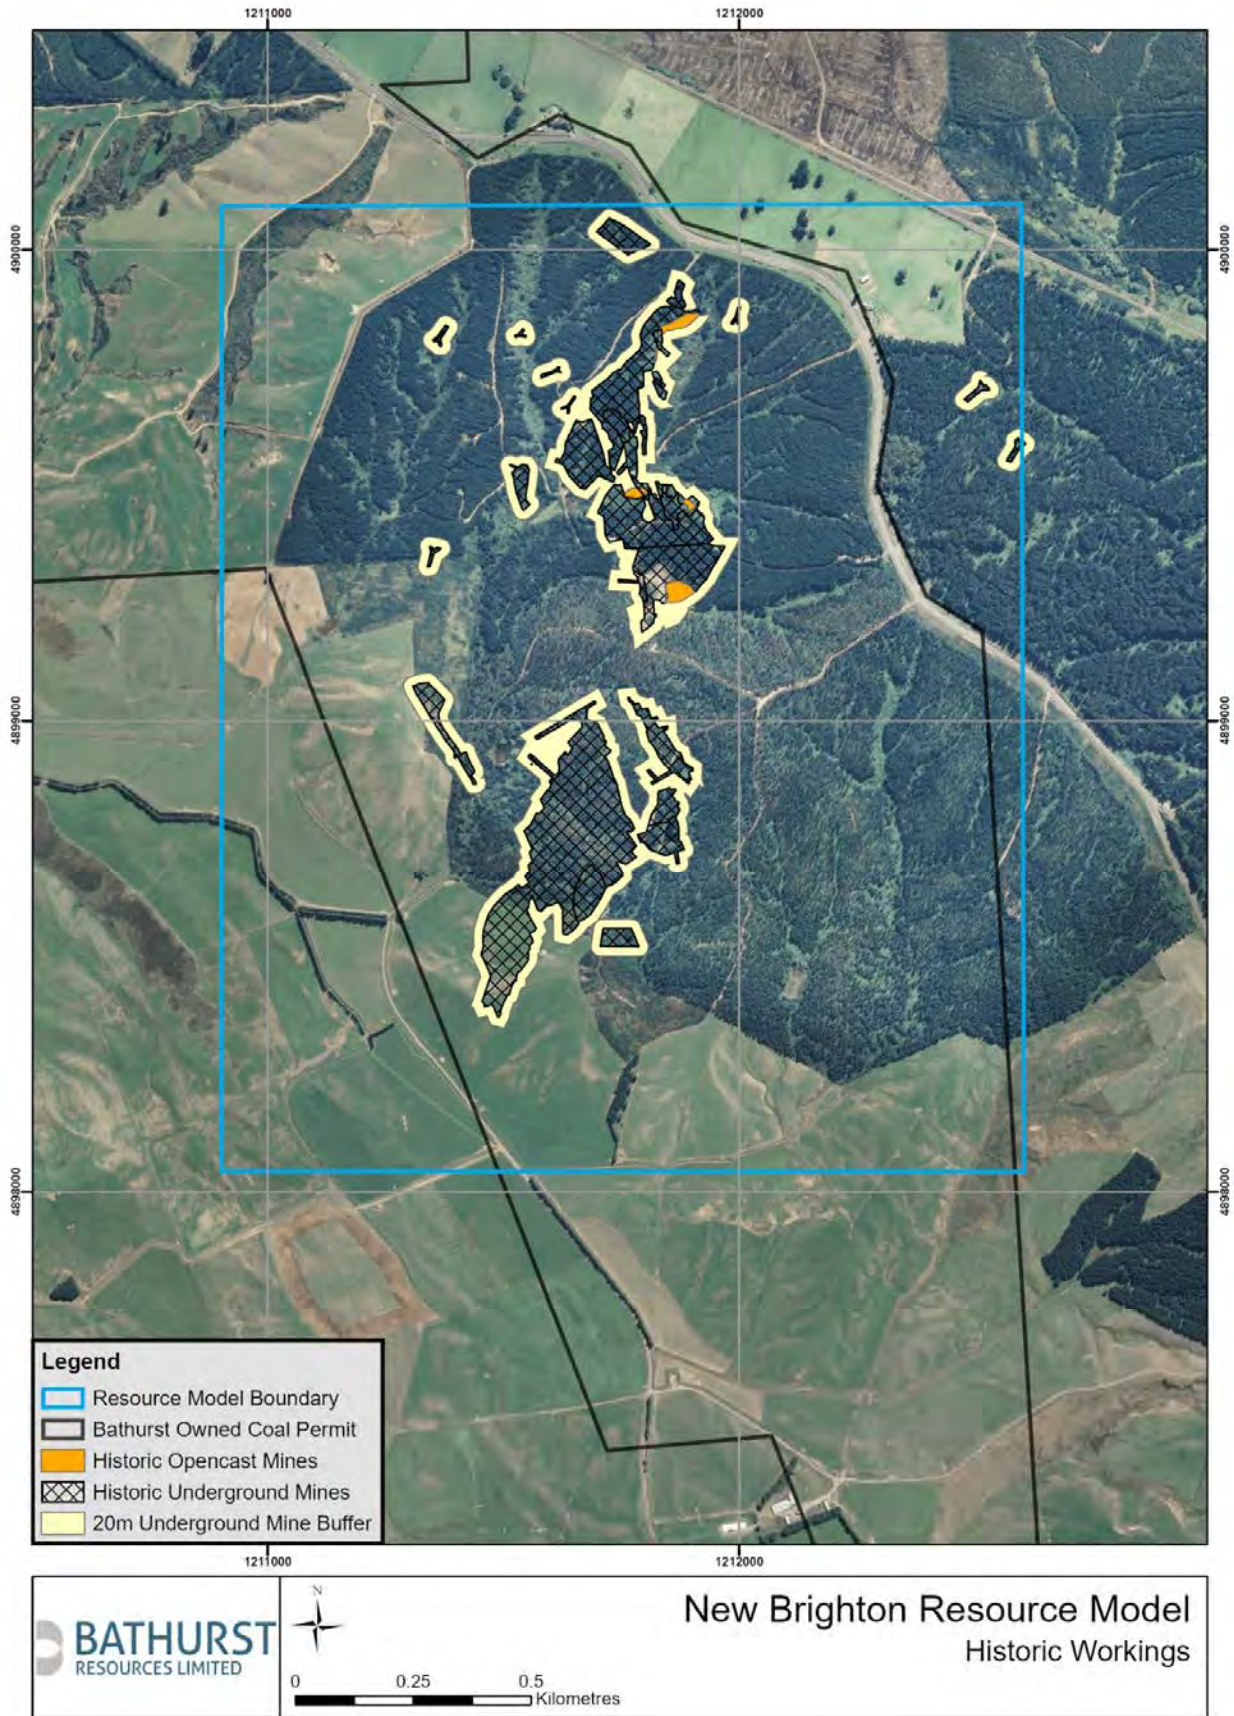


Figure 4: Location of historical mine workings. Note: recent opencast mined areas are not shown



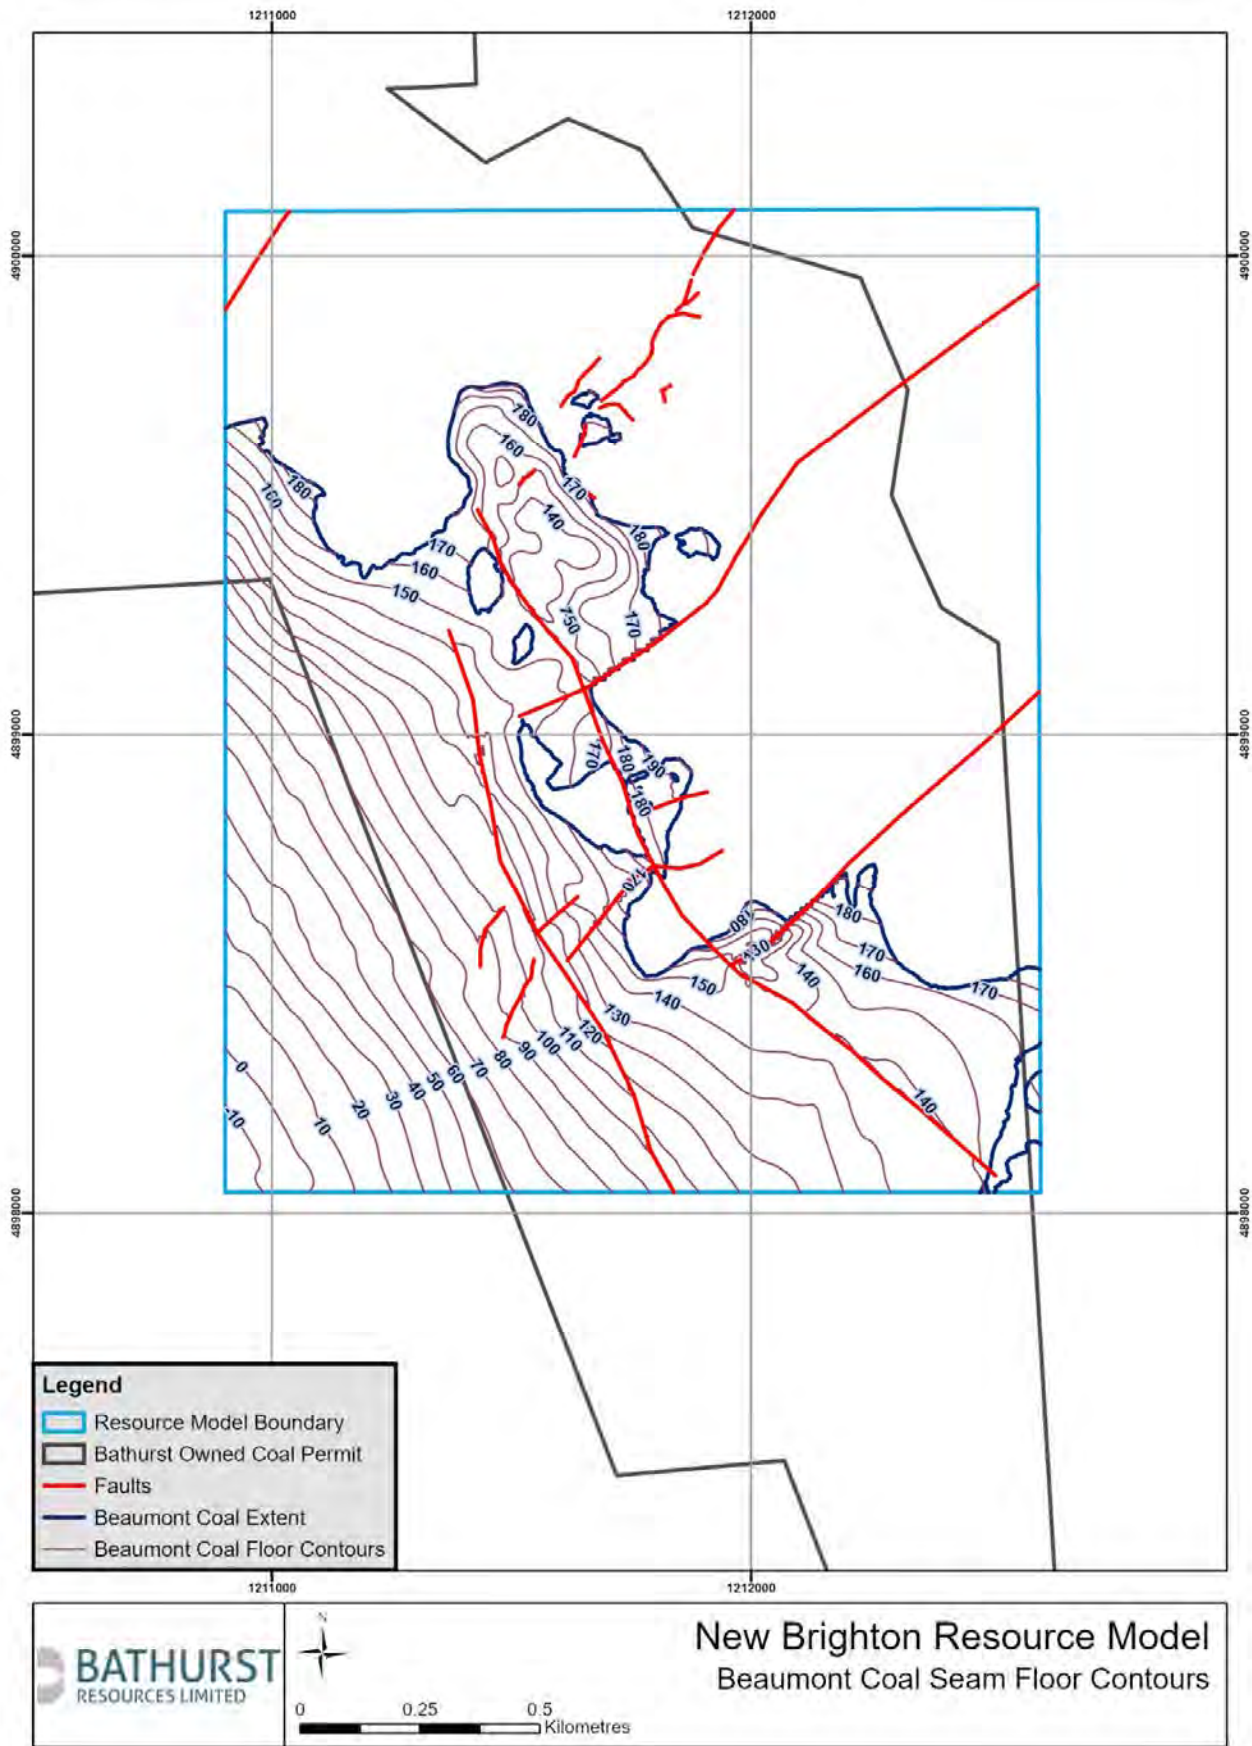


Figure 5: Beaumont Formation coal floor contours

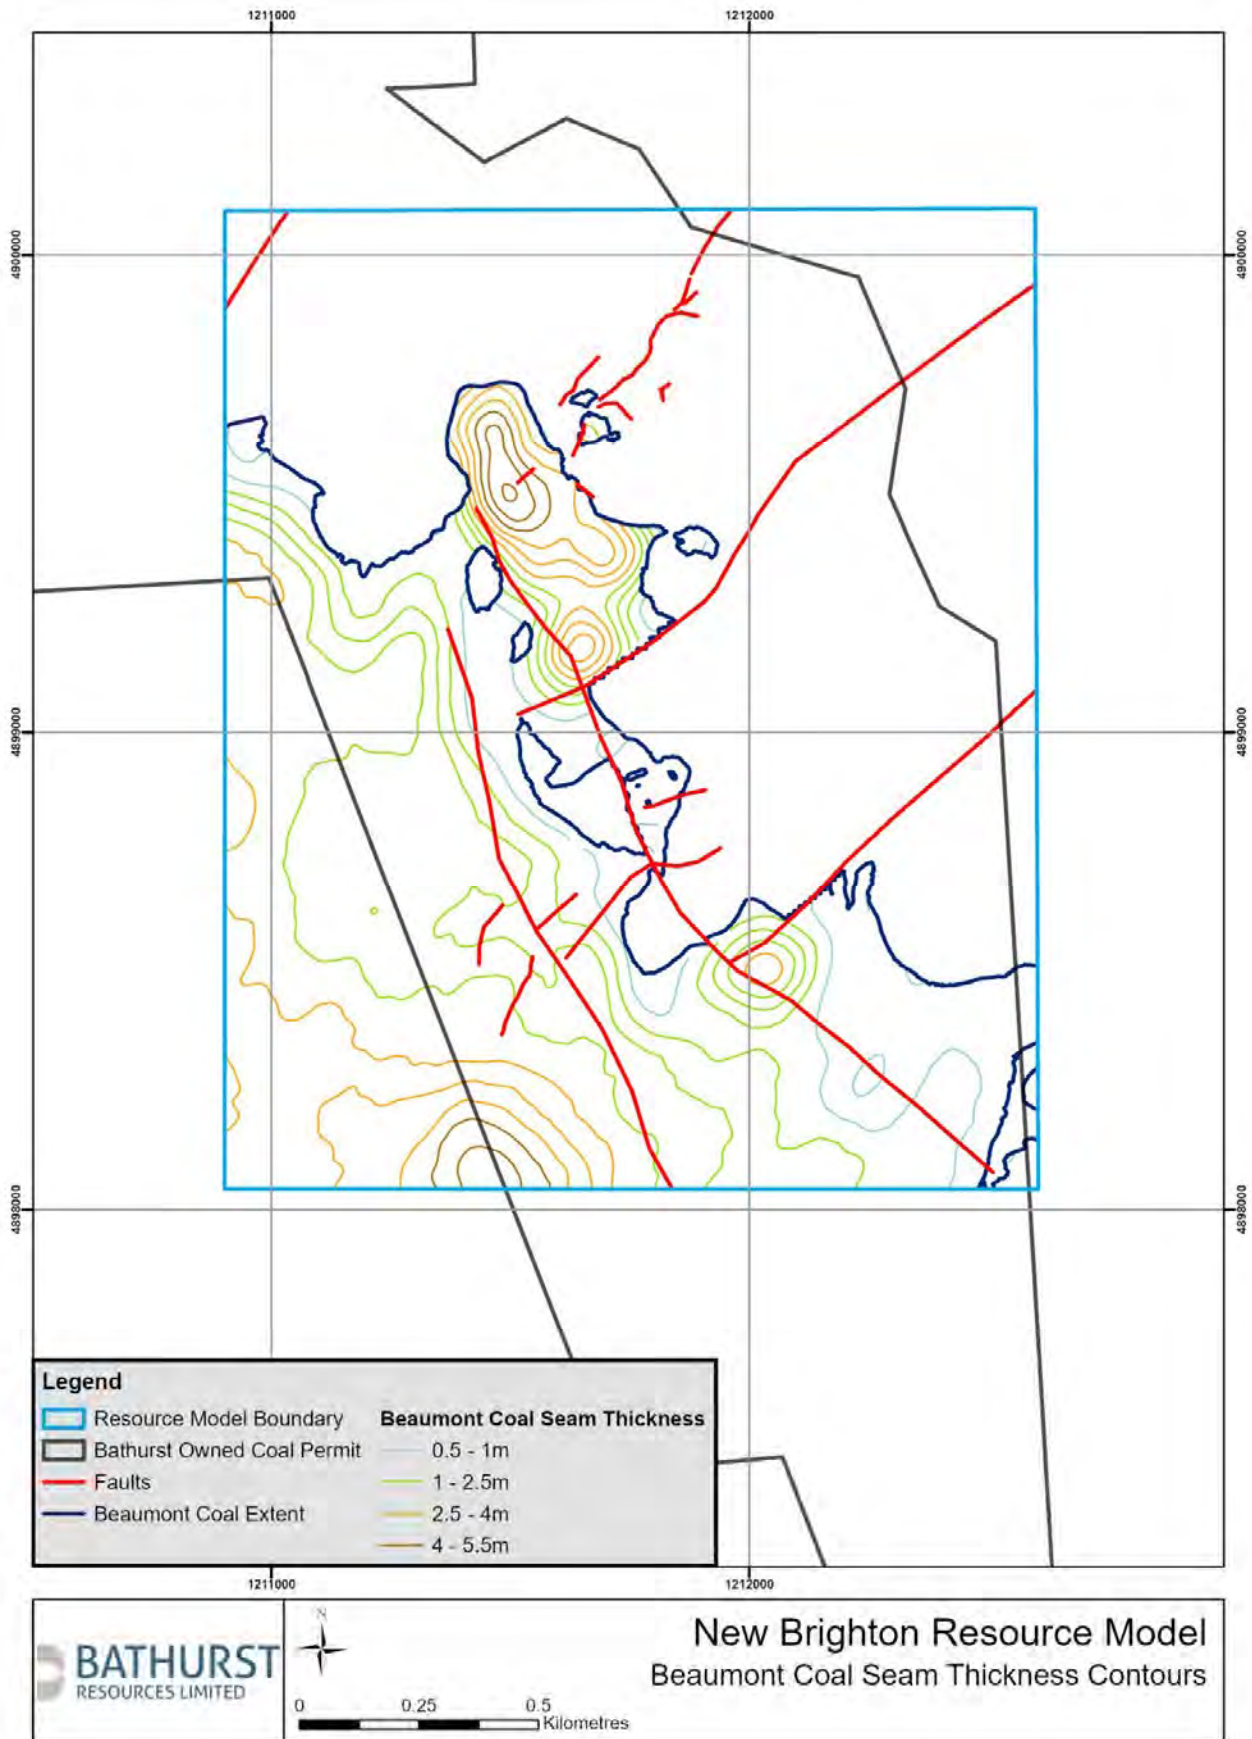


Figure 6: Beaumont Formation full seam cumulative thickness isopachs

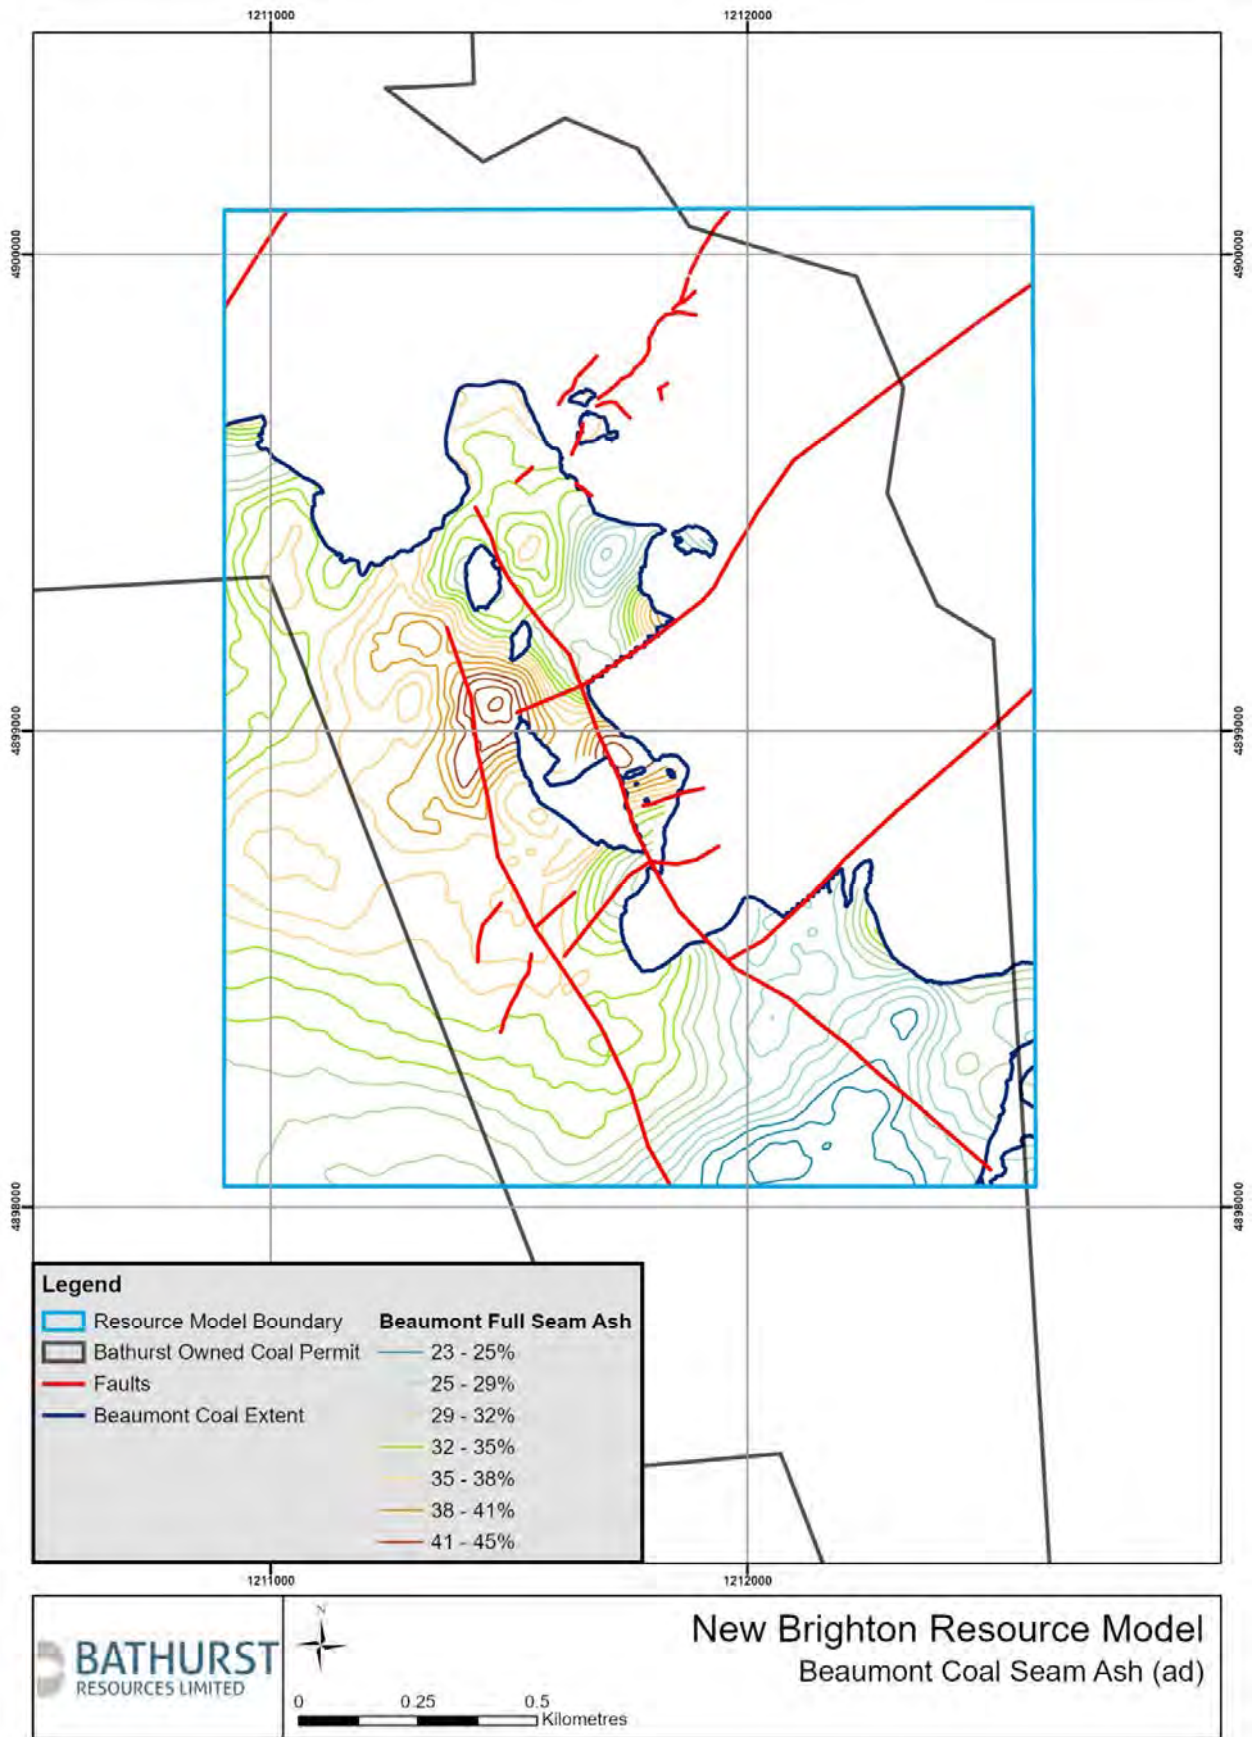


Figure 7: Beaumont Formation full seam ash isopachs

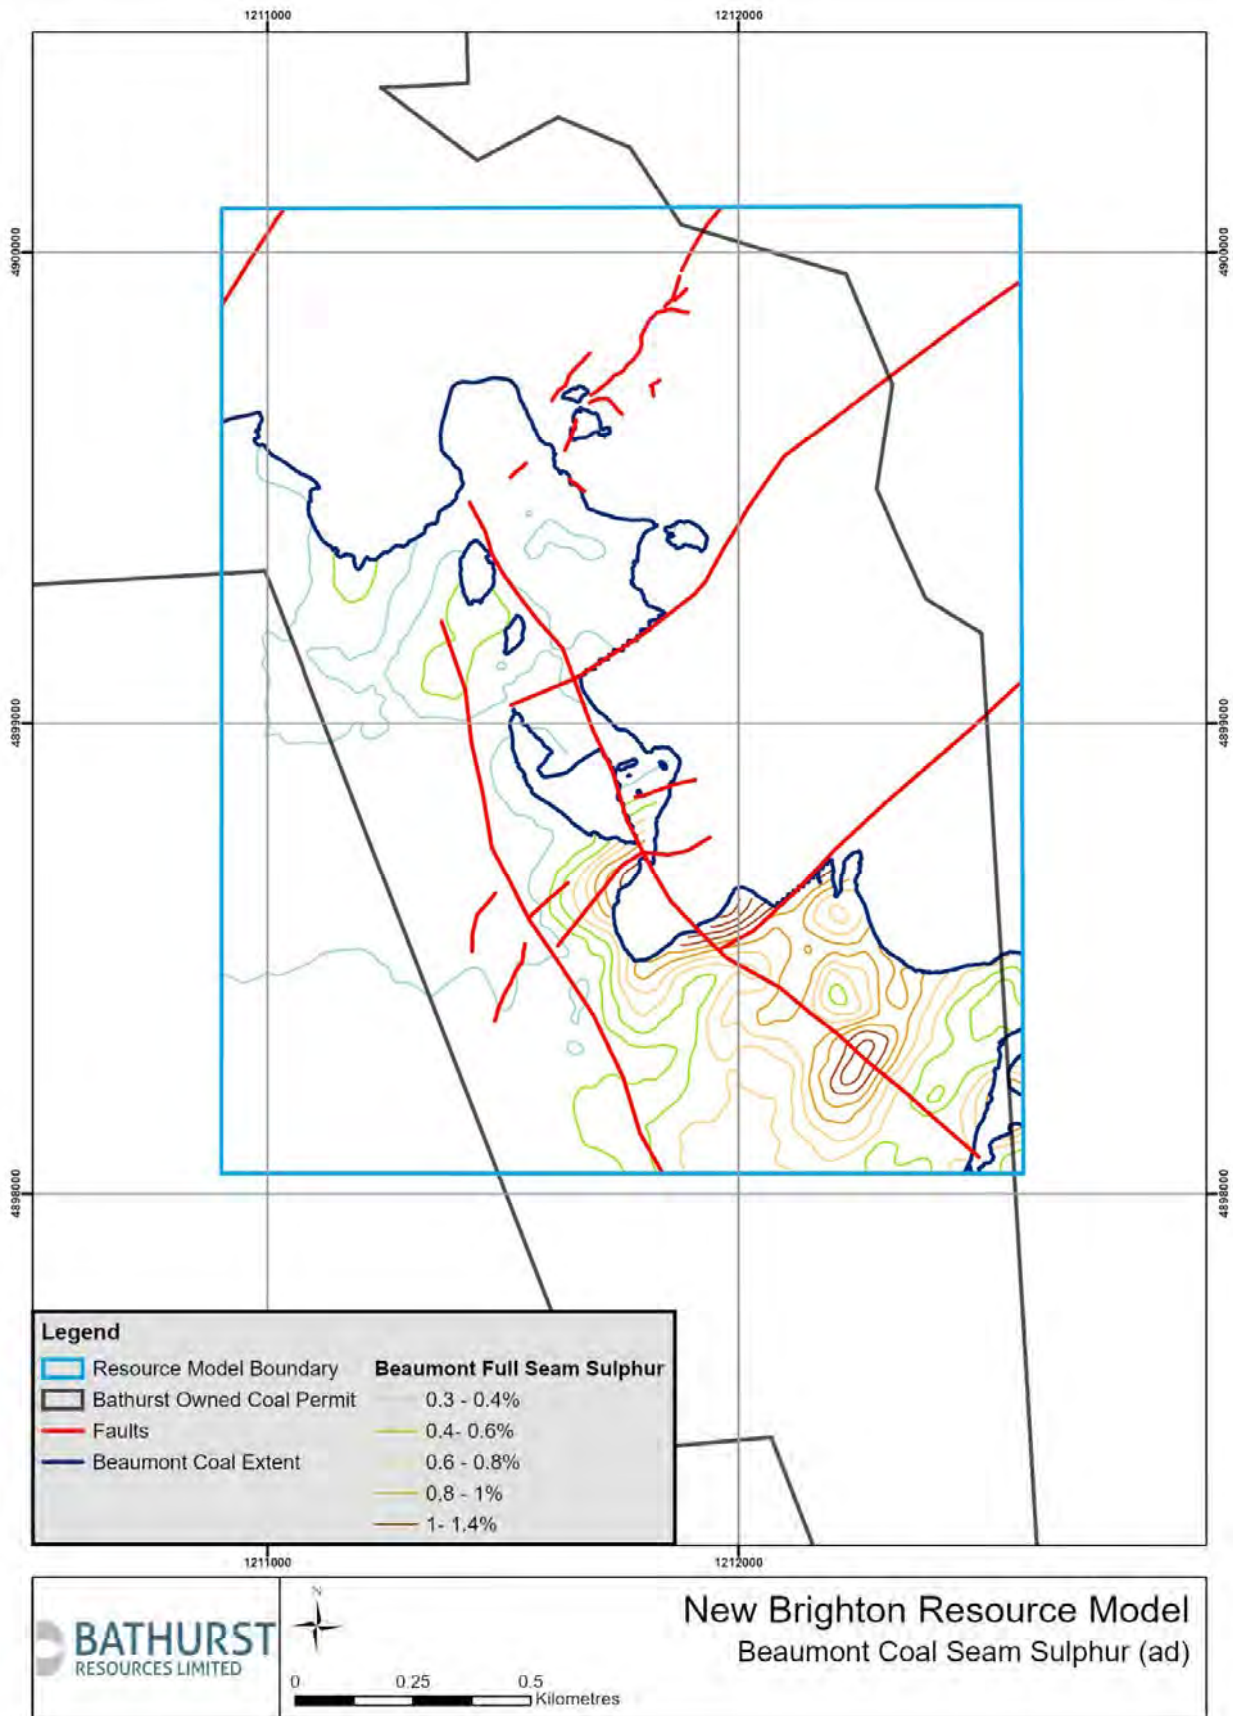


Figure 8: Beaumont Formation full seam sulphur isopachs

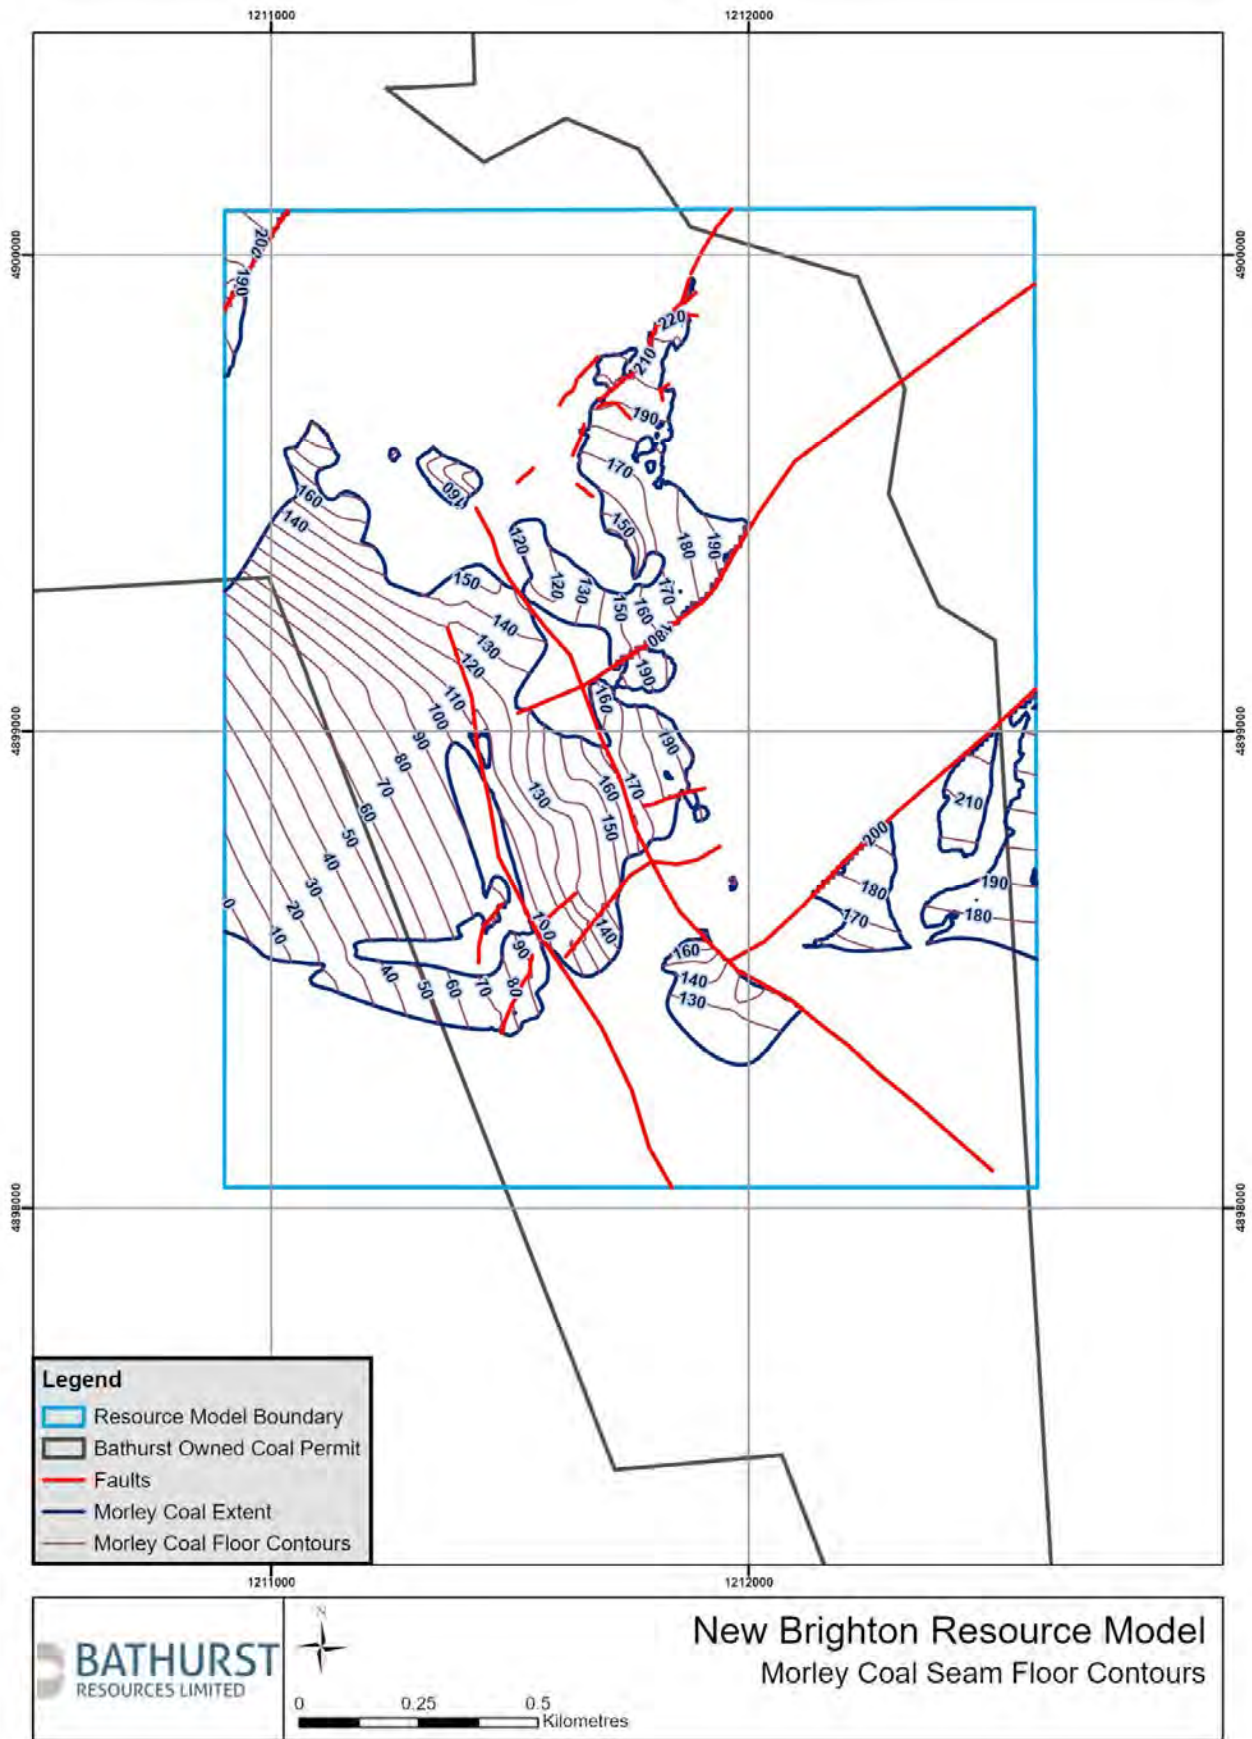


Figure 9: Morley UM1 seam coal floor contours

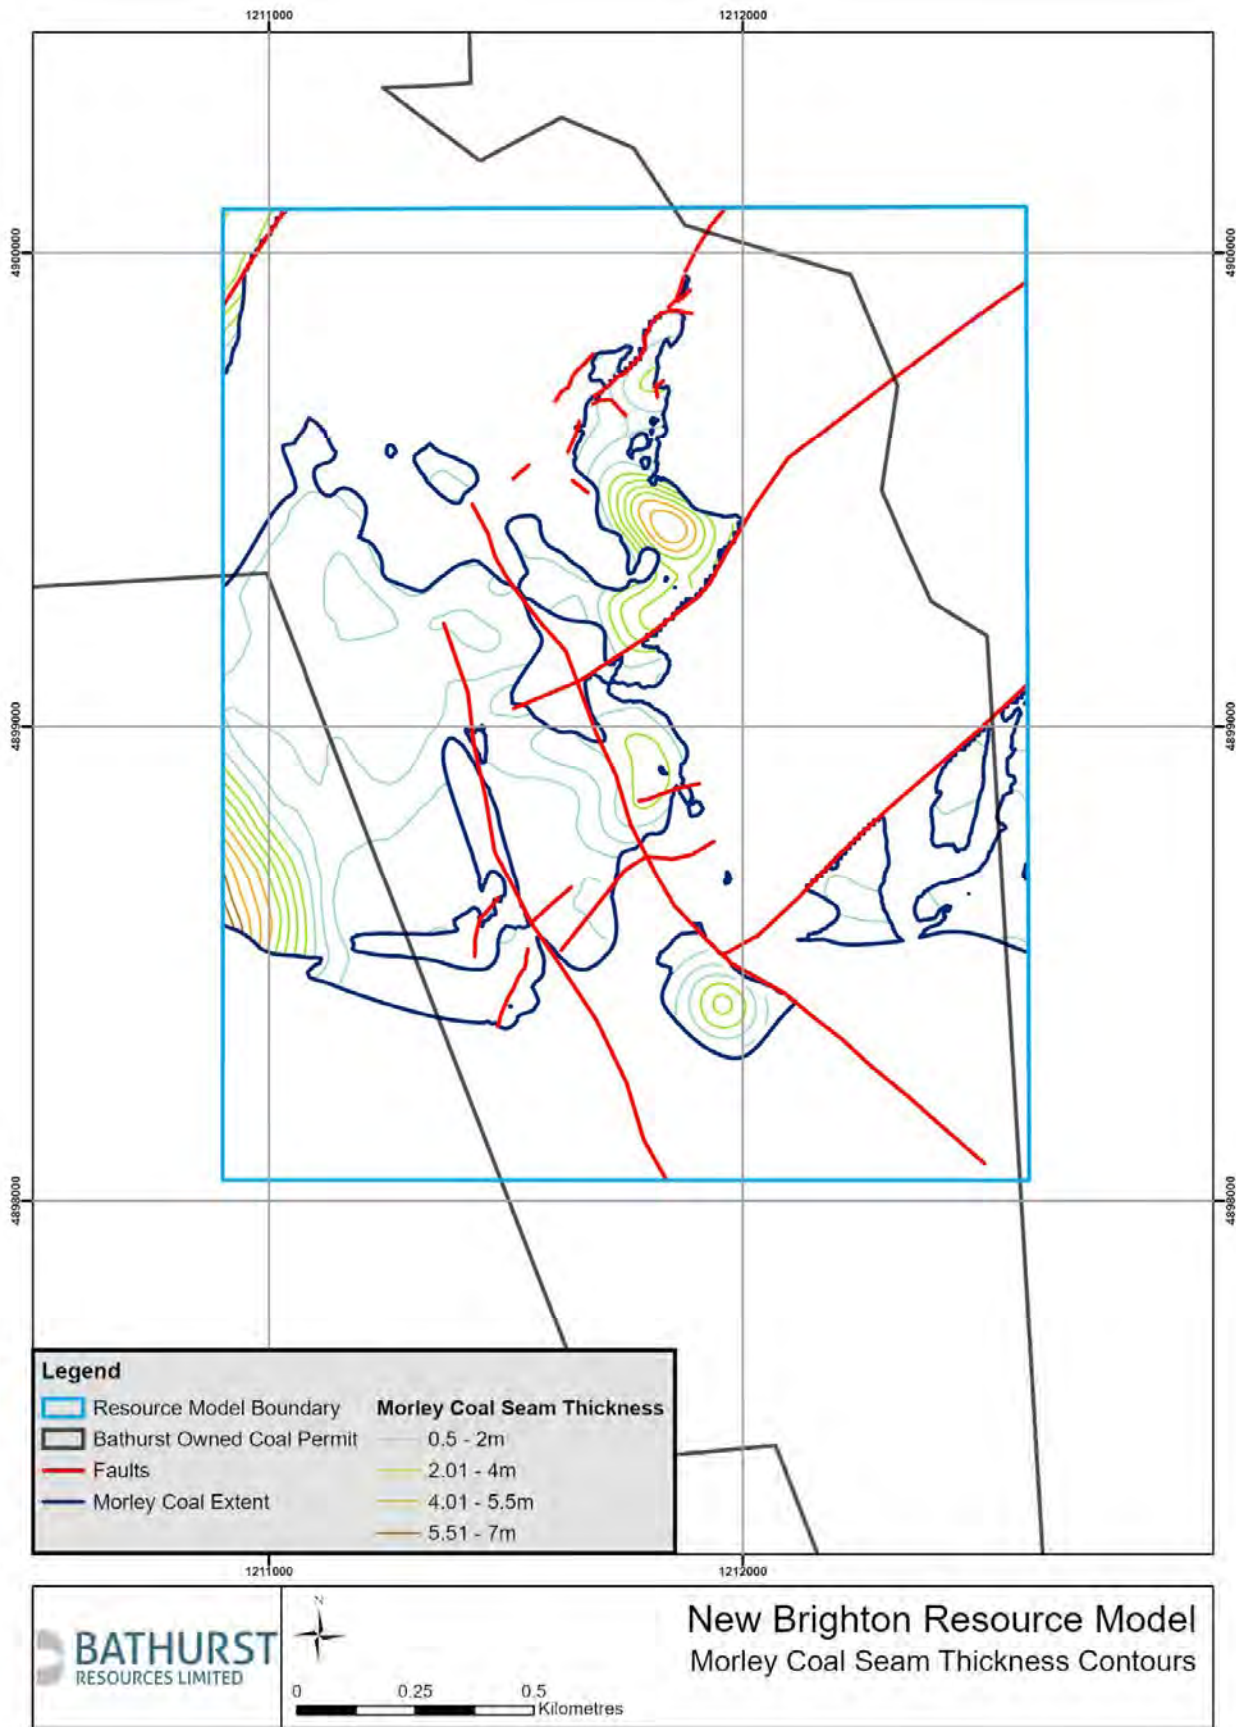


Figure 10: Morley Formation full seam cumulative coal thickness isopachs

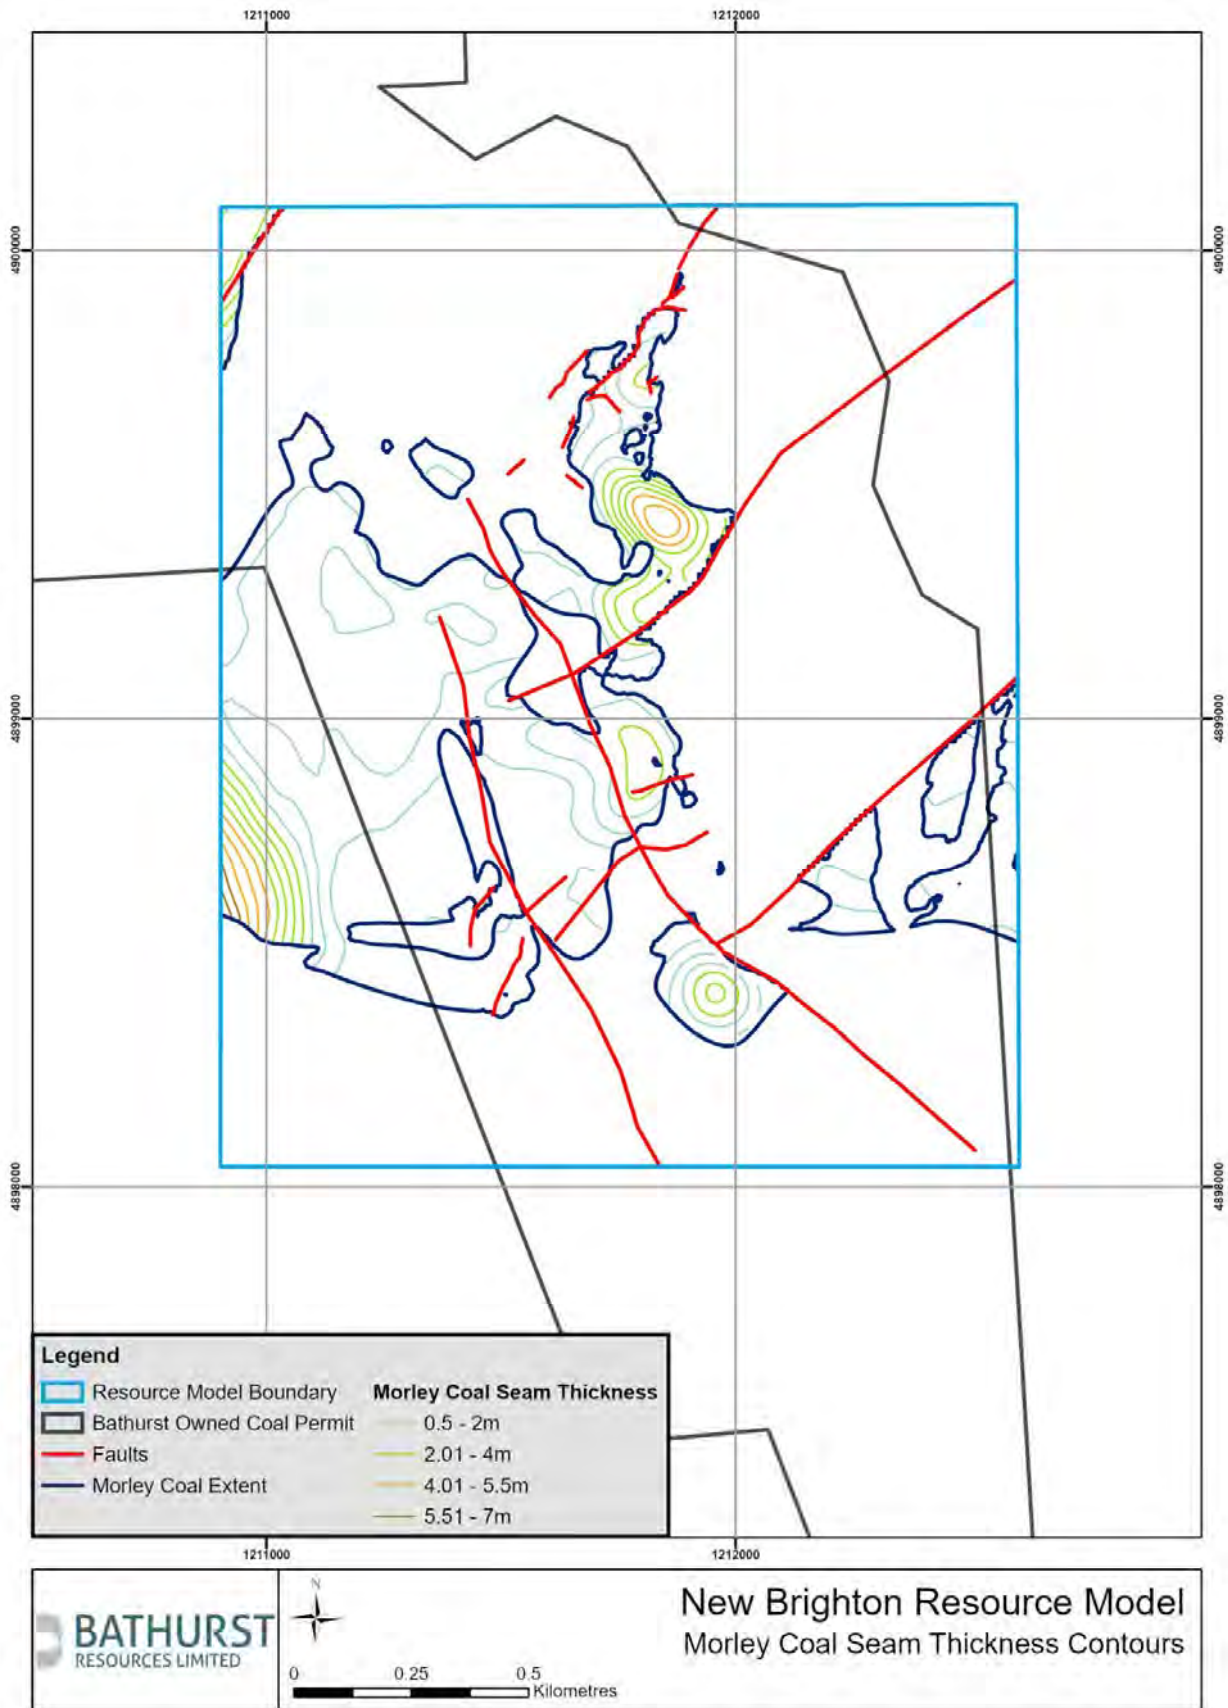


Figure 11: Morley Formation full seam ash isopachs

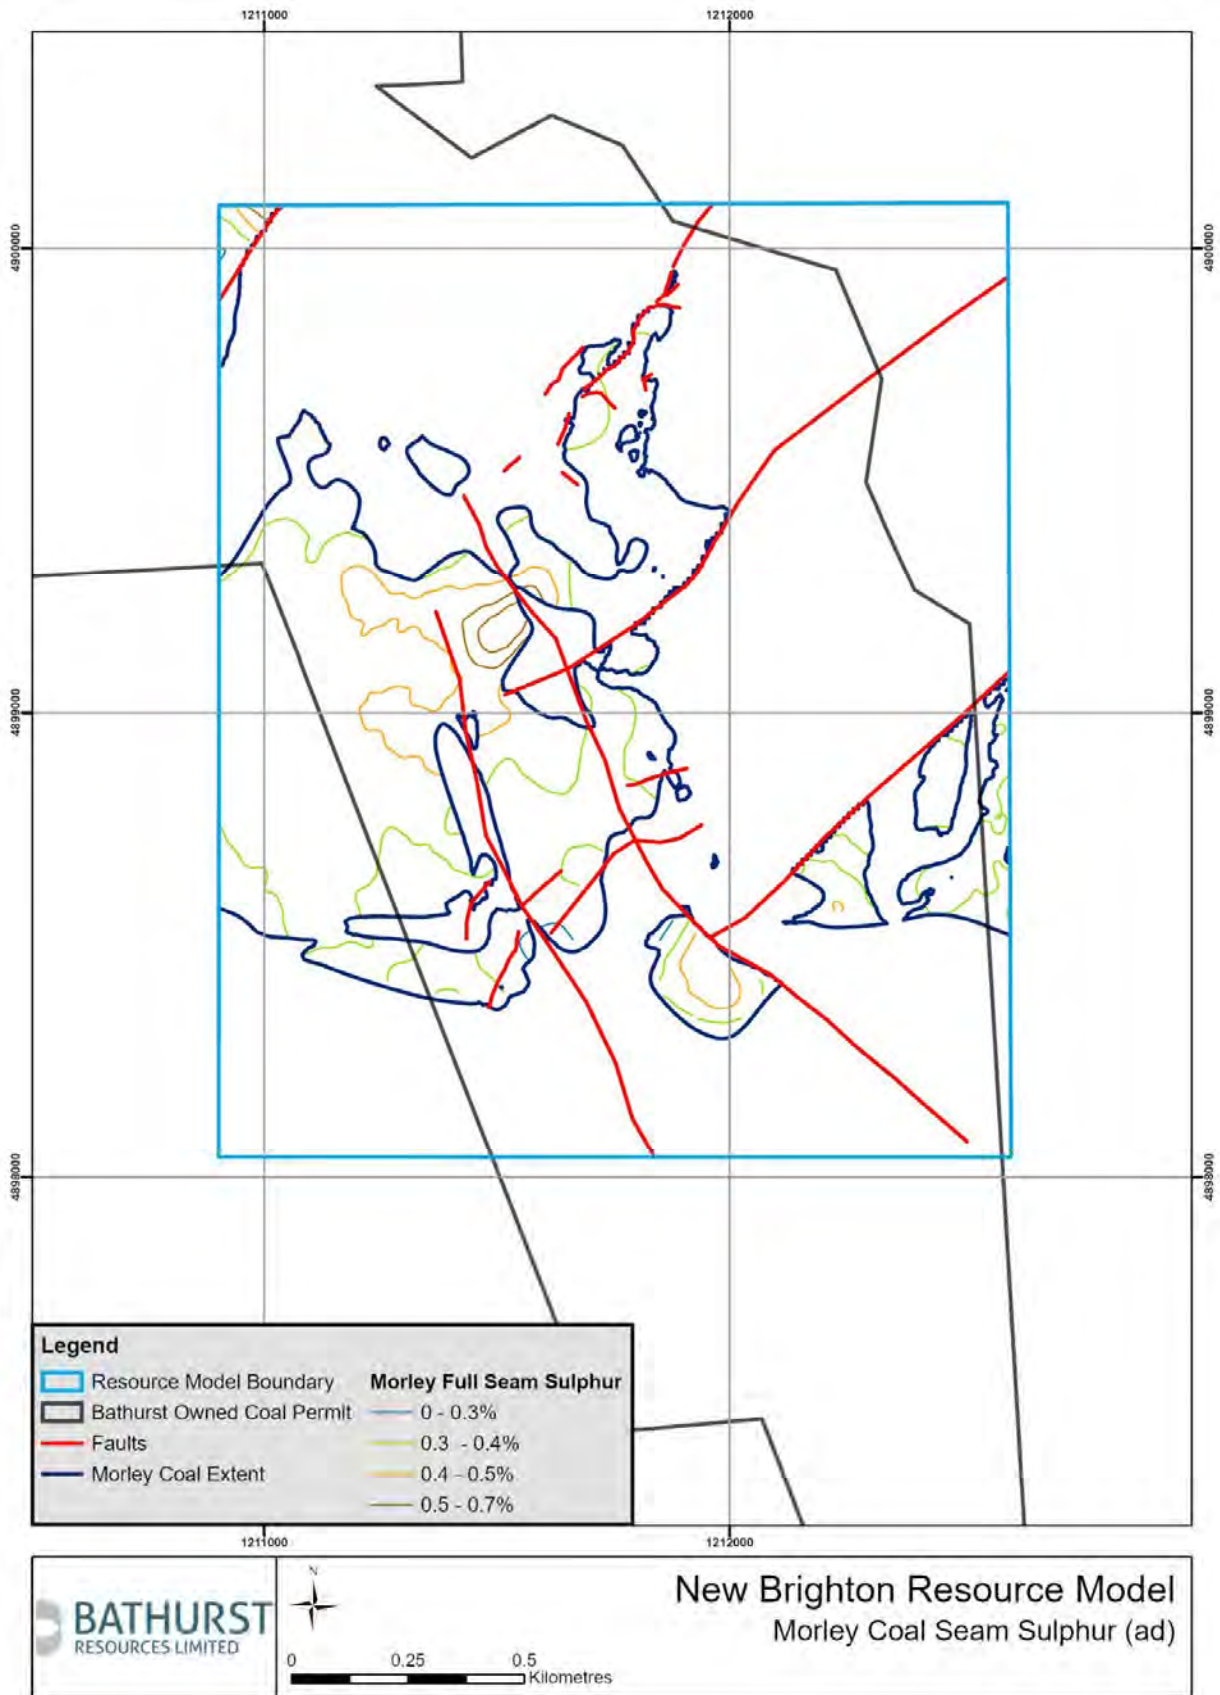


Figure 12: Morley Formation full seam sulphur isopachs



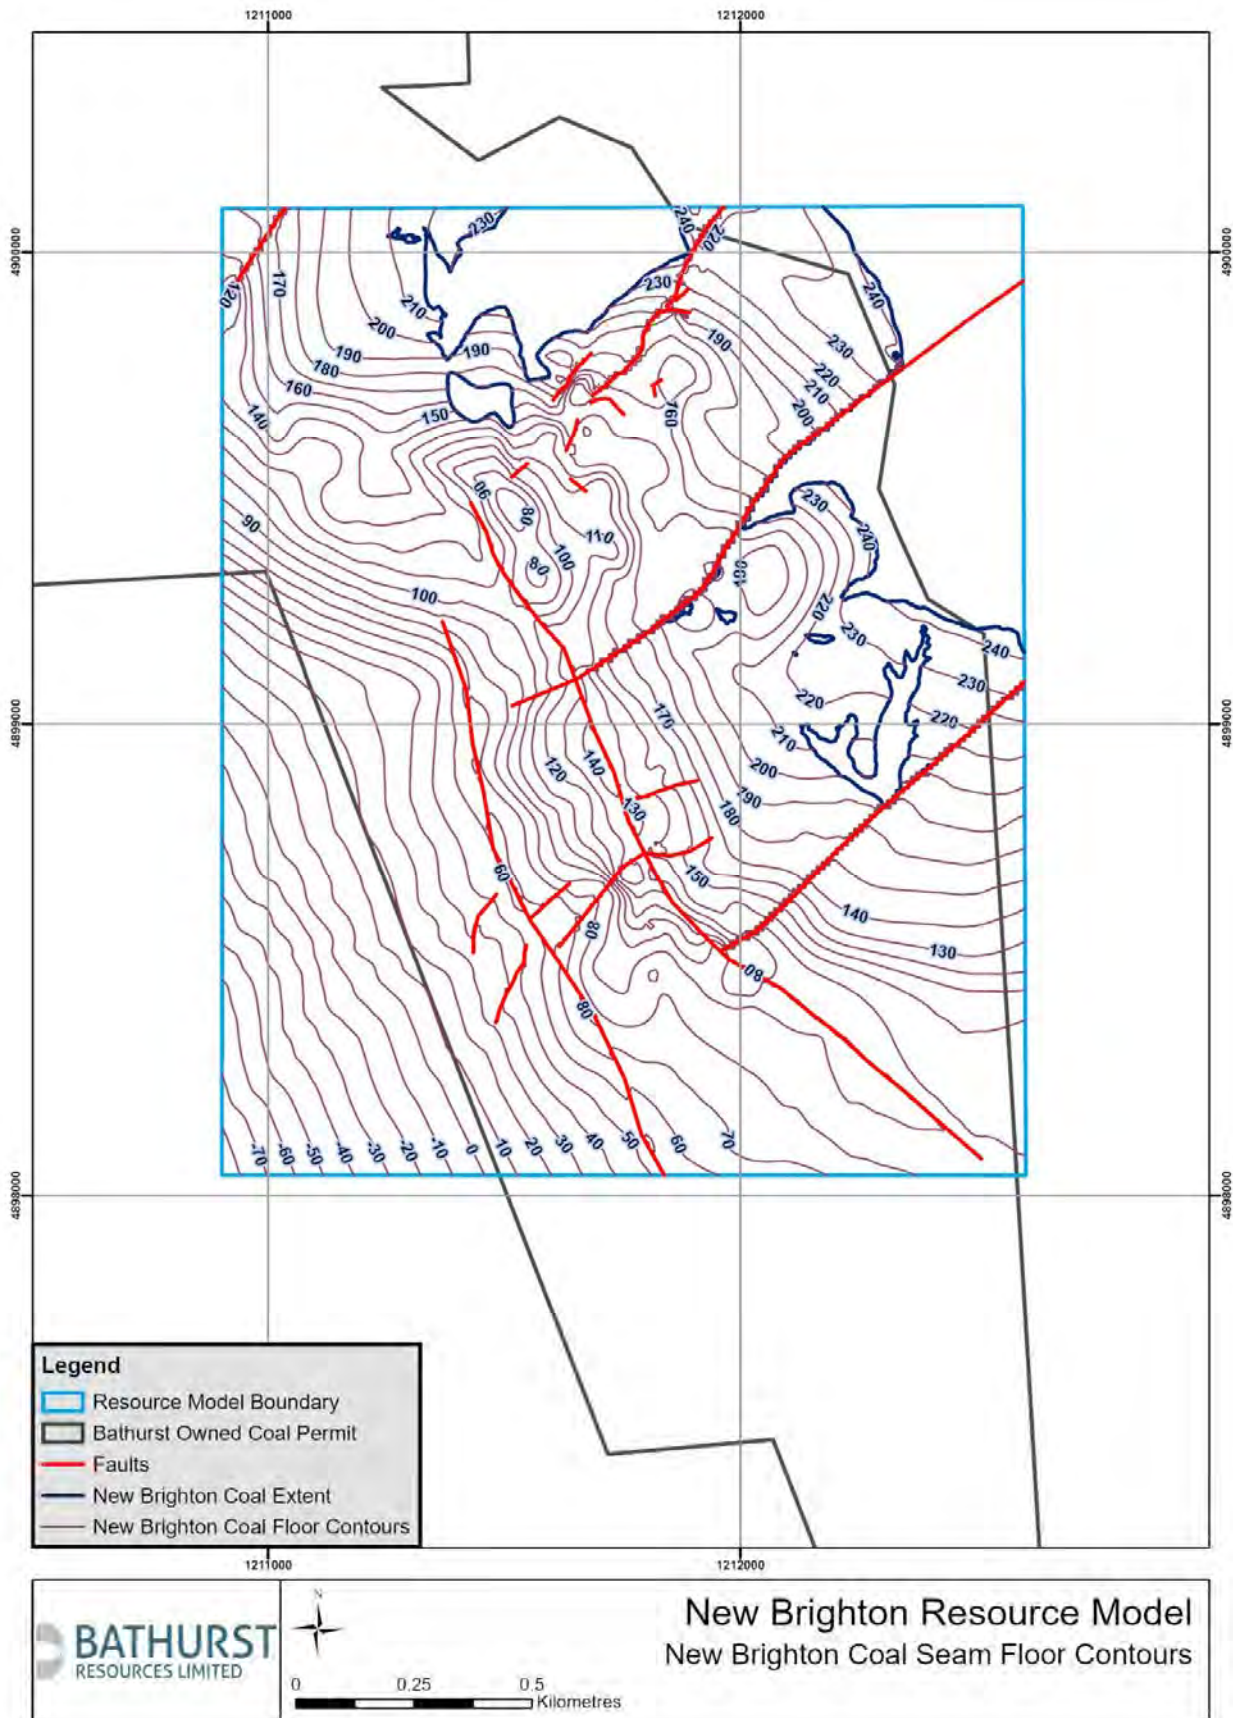


Figure 13: New Brighton (ON1 seam) coal floor contours

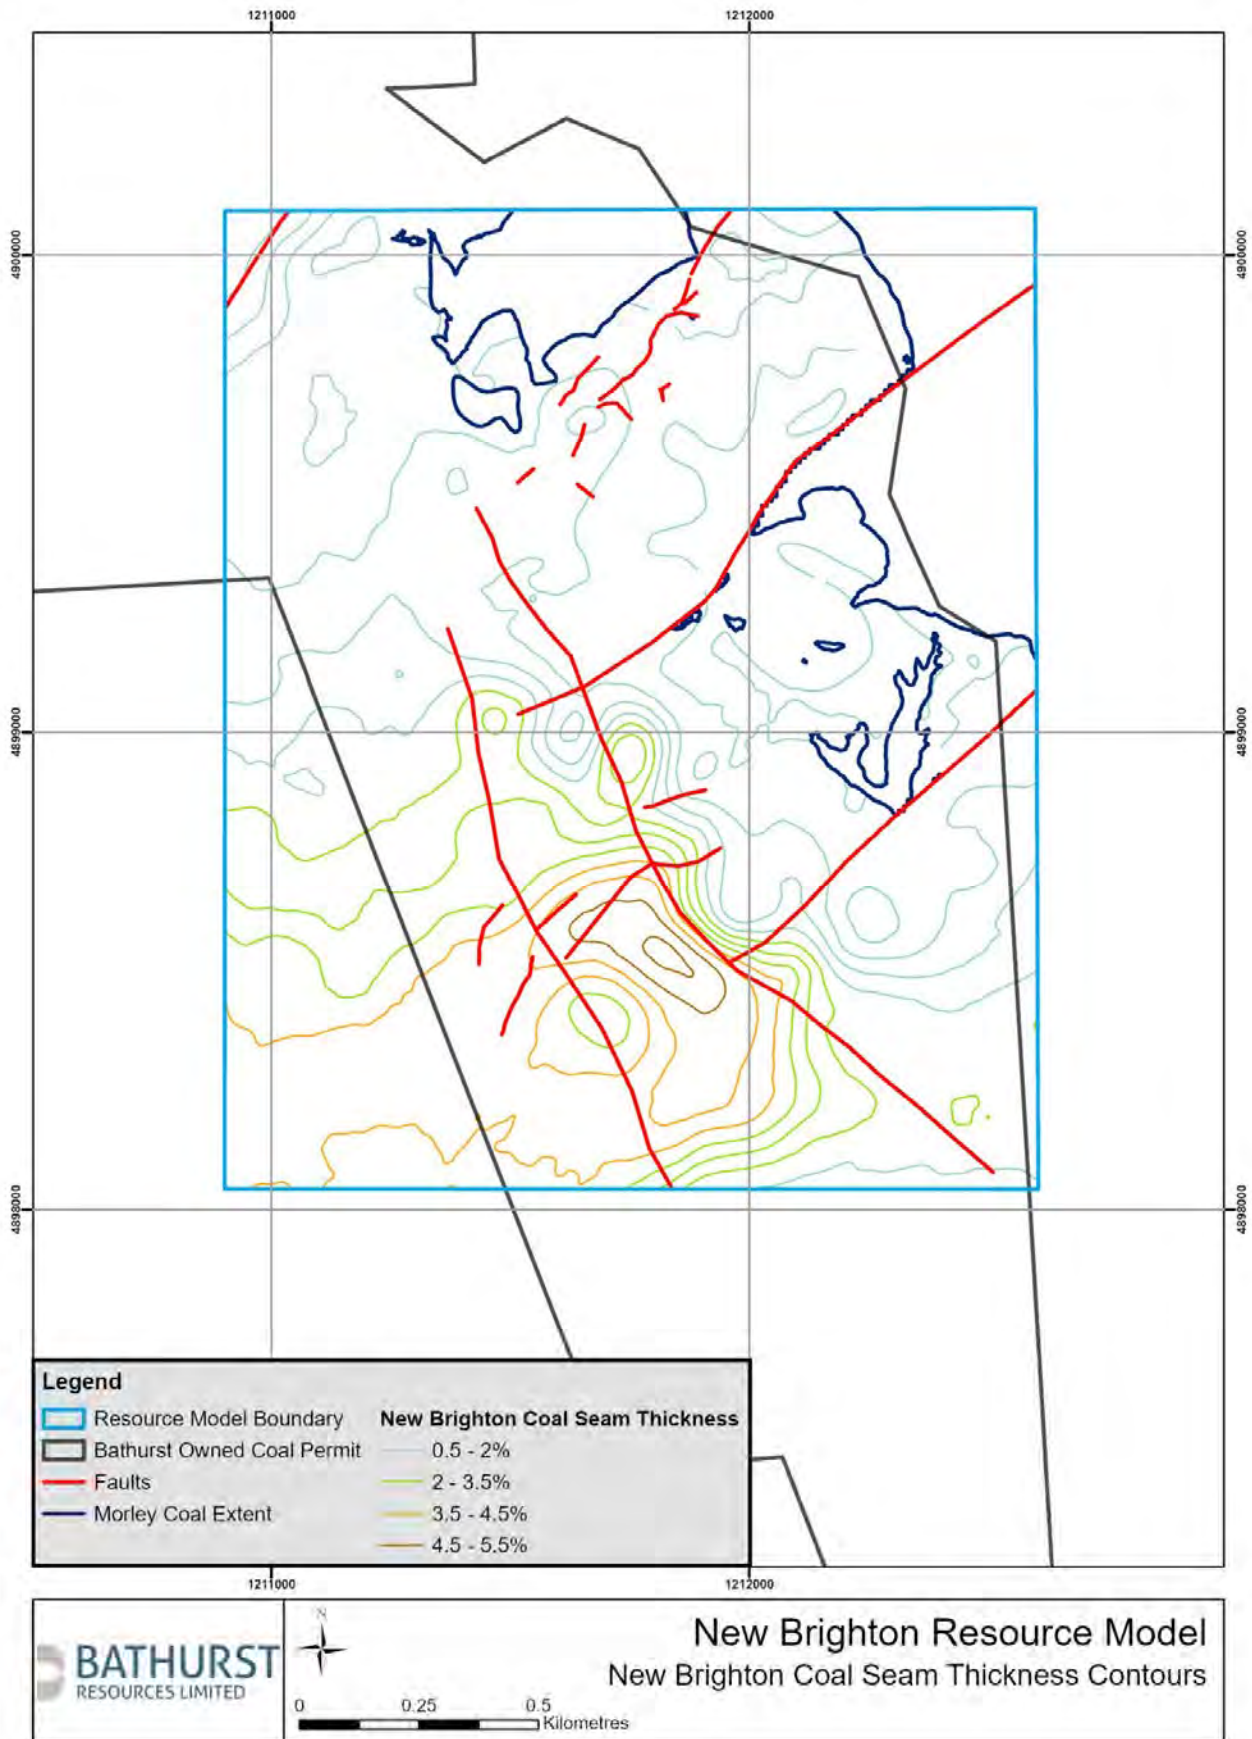


Figure 14: New Brighton Formation cumulative coal thickness isopachs

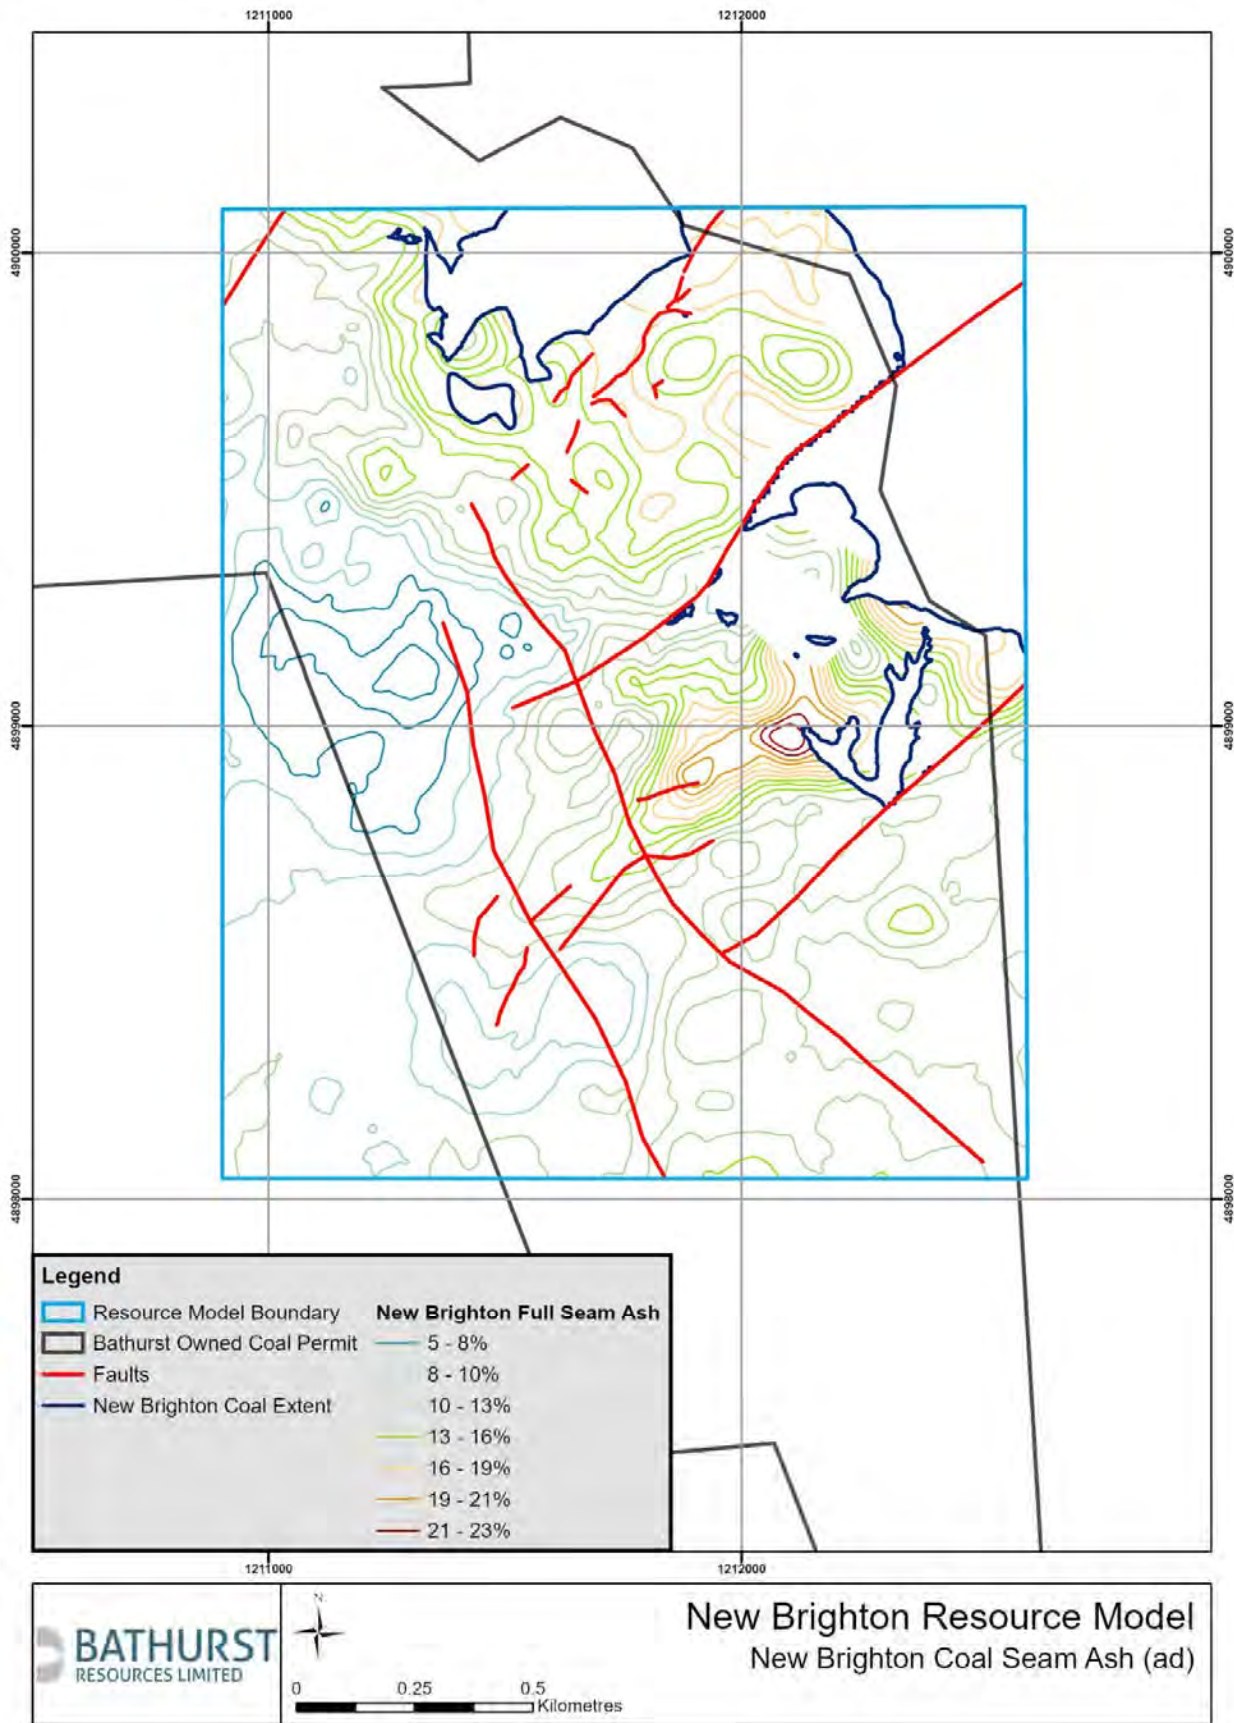


Figure 15: New Brighton Formation full seam ash isopachs

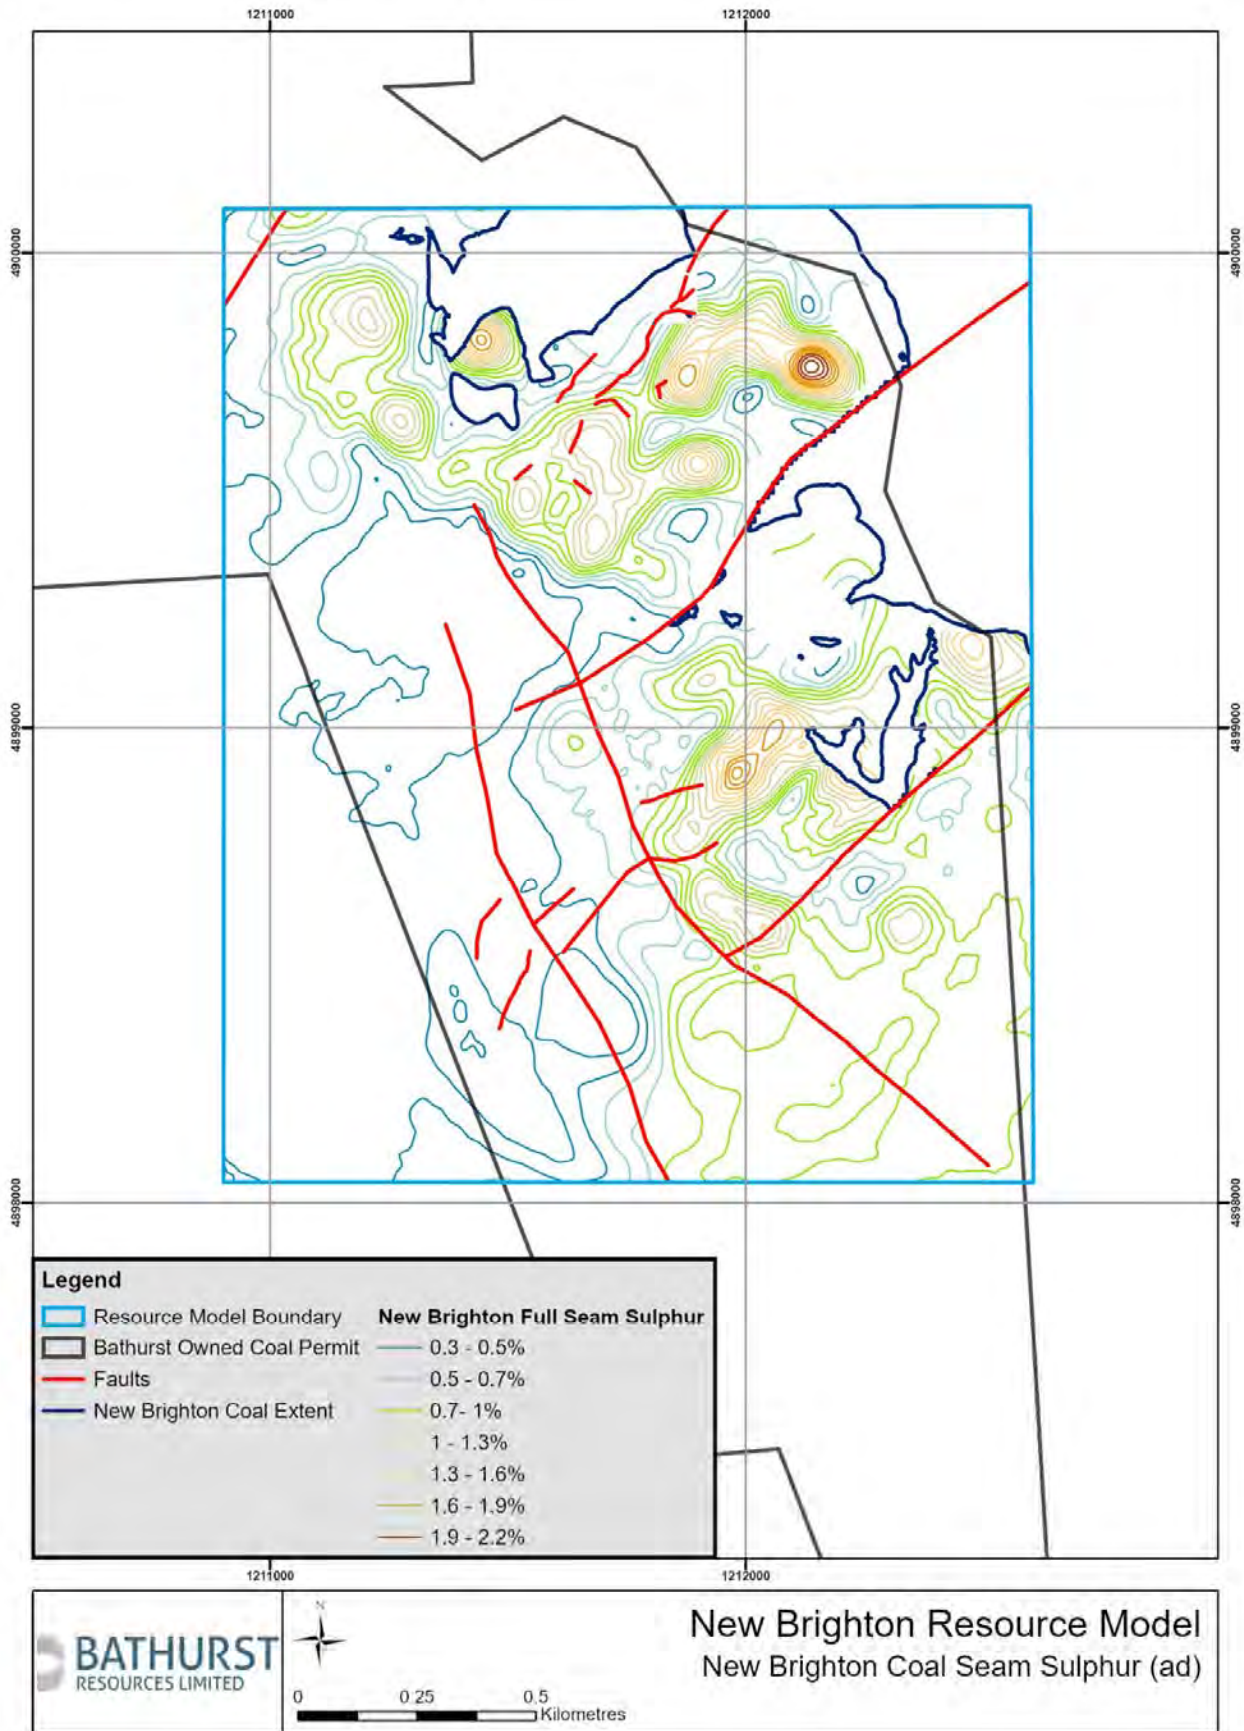


Figure 16: New Brighton Formation full seam sulphur isopachs

# JORC Code, 2012 Edition – Table 1 Report for the Albury Project 2021

## Section 1 Sampling Techniques and Data

Criteria	Commentary
<b>Sampling techniques</b>	<ul style="list-style-type: none"> <li>Albury, South Canterbury is a historical mining district, with recorded coal production from the 1880's. Limited historical exploration data of varying quality is available for parts of the area.</li> <li>Modern exploration includes: <ul style="list-style-type: none"> <li>7 HQ Triple Tube Core (TTC) drill holes.</li> <li>16 outcrop trenches and mapped seam intersections.</li> </ul> </li> <li>Coal sampling was based on Bathurst Resources Limited's (BRL) Coal Sampling Procedures. Coal quality ply samples have been selected from coal logged where the geologist had 95% confidence that the ash will fall below 50%. Material with an estimated ash greater than 50% was not sampled unless the material was a sandstone parting of &lt;0.1 m in thickness within a coal seam, where it would be included within a larger ply sample.</li> <li>Outcrop trench and channel samples represent a significant proportion of the sample dataset. Coal seam thickness and partings between seams were measured either vertically or as a true thickness. Trench data is entered into the drilling database using azimuth and dip orthogonal to seam dip.</li> <li>Outcrop coal samples were collected as channel samples through the coal seams.</li> <li>All analytical data has been assessed and verified before inclusion in the resource model.</li> <li>No deep drill holes (&gt;120 m) have been drilled in the project area and therefore no down dip information is available for the deposit. The maximum drill hole total depth is 62.5 m.</li> </ul>
<b>Drilling techniques</b>	<ul style="list-style-type: none"> <li>BRL managed exploration and drilling campaigns have utilised the following drilling methods: <ul style="list-style-type: none"> <li>Full HQ TTC.</li> <li>Trenches excavated using a 20-tonne excavator.</li> </ul> </li> <li>Exploration drill holes have been drilled vertically.</li> </ul>
<b>Drill sample recovery</b>	<ul style="list-style-type: none"> <li>Core recovery was measured as the length of core recovered divided by the length of the driller's run and noted by the core logging geologist. If recovery of coal intersections dropped below 90%, the drill hole may require a re-drill (no re-drills have yet been required).</li> <li>Recovery of coal seams in the Albury Deposit has been good due to the strong nature of the coal, with average coal recovery at 97.5%.</li> <li>Average total core recovery over the recent drilling campaigns in Albury was 89.5%; however, when broken down it shows that overlying soil, loess and burnt surface material recovery was 61.7%, while coal measure core was recovered at a rate of 91.7%.</li> </ul>
<b>Logging</b>	<ul style="list-style-type: none"> <li>BRL has developed standardised core logging procedures (BRL Coal Logging Procedures), and all core logging completed by BRL has followed these procedures.</li> <li>All drill core has been geologically and geotechnically logged by experienced geologists.</li> <li>As much data as practicable has been logged and recorded including geotechnical and rock strength data.</li> <li>All drill core was photographed prior to sampling. Depth meter marks and ply intervals are noted on core in each photograph.</li> </ul>
<b>Sub-sampling techniques and sample preparation</b>	<ul style="list-style-type: none"> <li>For all exploration data acquired by BRL, an in-house detailed sampling procedure was used (BRL Coal Sampling Procedures). Sampling and sample preparation are consistent with internationally accepted coal sampling and sample preparation methodologies.</li> <li>Drill core ply samples include all coal recovered for the interval of the sample. Core was not cut or halved. Ply sample intervals were generally 0.5 m in length unless dictated by thin split or parting thickness. Coal sample size is considered adequate to be representative of the coal seam quality.</li> <li>All recent sampled drilling has been completed using TTC drill holes. No chip or RC samples were collected as part of these campaigns.</li> <li>Trench samples were taken representatively from excavated and cleaned outcrop, and best efforts were made to prevent sampling of weathered coal or other contamination of the sample.</li> </ul>

Criteria	Commentary																																				
	<p>Sample intervals were measured vertically, orthogonal to the seam or at the angle of the trench plunge and were generally 0.5 m in length or less.</p> <ul style="list-style-type: none"> <li>No field sample duplicates have yet been taken or analysed. Sample sizes generally aim to be at least 1 kg of coal per 0.5 m of length sampled.</li> <li>All assay samples were collected on site. Samples are stored in sealed plastic bags and taken as soon as practicable to the coal quality laboratory.</li> </ul>																																				
<p><b>Quality of assay data and laboratory tests</b></p>	<ul style="list-style-type: none"> <li>All coal quality testing completed for BRL has been conducted by IANZ accredited laboratory SGS.</li> <li>SGS have used the following standards for coal quality testing: <ul style="list-style-type: none"> <li>Proximate analysis (ASTM 7582)</li> <li>Ash (ISO 1171)</li> <li>Volatile matter (ISO 562)</li> <li>Inherent moisture (ISO 5068)</li> <li>Total sulphur analysis (ASTM 4239)</li> <li>Crucible swell tests (ISO 501)</li> <li>Calorific value results (ISO 1928)</li> <li>Loss on drying data (ISO 13909-4)</li> <li>Relative density (AS 1038.21.1.1)</li> </ul> </li> <li>BRL has completed a total of 19 full seam composite samples. Composite samples have been tested using the following standards: <table border="1" data-bbox="402 831 1107 1541"> <thead> <tr> <th>Test Work</th> <th>Standard Followed</th> </tr> </thead> <tbody> <tr> <td>Loss on air drying</td> <td>(ISO 13909-4)</td> </tr> <tr> <td>Inherent Moisture</td> <td>(ASTM D 7582 mod)</td> </tr> <tr> <td>Ash</td> <td>(ASTM D 7582 mod)</td> </tr> <tr> <td>Volatile Matter</td> <td>(ASTM D 7582 mod)</td> </tr> <tr> <td>Fixed Carbon</td> <td>By difference</td> </tr> <tr> <td>Sulphur</td> <td>(ASTM D 4239)</td> </tr> <tr> <td>Swelling Index</td> <td>(ISO 501)</td> </tr> <tr> <td>Calorific Value</td> <td>(ISO 1928)</td> </tr> <tr> <td>Mean Maximum Reflectance All Vitrinite (RoMax)</td> <td>Laboratory Standard</td> </tr> <tr> <td>Chlorine in Coal</td> <td>(ASTM D4208)</td> </tr> <tr> <td>Hardgrove Grindability Index</td> <td>(ISO 5074)</td> </tr> <tr> <td>Gieseler Plastometer</td> <td>(ASTM D 2639)</td> </tr> <tr> <td>Audibert Arnu Dilatometer</td> <td>(ISO 349)</td> </tr> <tr> <td>Forms of Sulphur</td> <td>(AS 1038 Part 11)</td> </tr> <tr> <td>Ash Fusion Temperatures</td> <td>(ISO 540)</td> </tr> <tr> <td>Ash Constituents (XRF)</td> <td>(ASTM D 4326)</td> </tr> <tr> <td>Ultimate Analysis</td> <td>Laboratory Standard</td> </tr> </tbody> </table> </li> </ul>	Test Work	Standard Followed	Loss on air drying	(ISO 13909-4)	Inherent Moisture	(ASTM D 7582 mod)	Ash	(ASTM D 7582 mod)	Volatile Matter	(ASTM D 7582 mod)	Fixed Carbon	By difference	Sulphur	(ASTM D 4239)	Swelling Index	(ISO 501)	Calorific Value	(ISO 1928)	Mean Maximum Reflectance All Vitrinite (RoMax)	Laboratory Standard	Chlorine in Coal	(ASTM D4208)	Hardgrove Grindability Index	(ISO 5074)	Gieseler Plastometer	(ASTM D 2639)	Audibert Arnu Dilatometer	(ISO 349)	Forms of Sulphur	(AS 1038 Part 11)	Ash Fusion Temperatures	(ISO 540)	Ash Constituents (XRF)	(ASTM D 4326)	Ultimate Analysis	Laboratory Standard
Test Work	Standard Followed																																				
Loss on air drying	(ISO 13909-4)																																				
Inherent Moisture	(ASTM D 7582 mod)																																				
Ash	(ASTM D 7582 mod)																																				
Volatile Matter	(ASTM D 7582 mod)																																				
Fixed Carbon	By difference																																				
Sulphur	(ASTM D 4239)																																				
Swelling Index	(ISO 501)																																				
Calorific Value	(ISO 1928)																																				
Mean Maximum Reflectance All Vitrinite (RoMax)	Laboratory Standard																																				
Chlorine in Coal	(ASTM D4208)																																				
Hardgrove Grindability Index	(ISO 5074)																																				
Gieseler Plastometer	(ASTM D 2639)																																				
Audibert Arnu Dilatometer	(ISO 349)																																				
Forms of Sulphur	(AS 1038 Part 11)																																				
Ash Fusion Temperatures	(ISO 540)																																				
Ash Constituents (XRF)	(ASTM D 4326)																																				
Ultimate Analysis	Laboratory Standard																																				
<p><b>Verification of sampling and assaying</b></p>	<ul style="list-style-type: none"> <li>All analysis was undertaken and reported on an air-dried basis (adb) unless stated otherwise.</li> <li>Sample coal quality results have been cross-referenced and compared to lithology logs. Results are also inspected by experienced geologists and compared with expected values utilising known coal quality relationships for similar New Zealand Coalfields.</li> <li>Anomalous assay results were investigated, and where necessary the laboratory was contacted and a re-test was undertaken from sample residue.</li> <li>No twinned drill holes have been drilled at the project, and no field duplicate trench samples have been collected.</li> <li>Laboratory data is imported directly into an acQuire database with no manual data entry at either the SGS laboratory or at BRL.</li> <li>Assay results files are securely stored on a backup server and once validated, drill hole information is 'locked' in an acQuire database to ensure data is not inadvertently compromised.</li> </ul>																																				

Criteria	Commentary
	<ul style="list-style-type: none"> <li>BRL commissioned a series of duplicate samples to be completed by CRL Energy Ltd (CRL). These samples have repeated tests performed by SGS on a subset of ply samples selected at random. Results of the duplicate testing showed an average variation of 1.2% of the value for each quality showing good analytical precision.</li> </ul>
<b>Location of data points</b>	<ul style="list-style-type: none"> <li>New Zealand Transverse Mercator 2000 Projection (NZTM) is used by BRL for the Albury project area. NZTM is considered a standard coordinate system for general mapping within New Zealand. Historical data has been converted from various local circuits and map grids using NZ standard cadastral conversions.</li> <li>Drill hole and trench positions have been surveyed by contract surveyors using Real-Time Kinematic (RTK) survey equipment.</li> <li>Historical mine plans are poorly constrained spatially and a large variance from the current georeferenced images is possible.</li> <li>A LiDAR survey was carried out over the Albury area in March 2018. This LiDAR data provides very accurate topographic data used in the model. The contractor's specifications state that for the choice of sensor and operating settings used for this project the LiDAR sensor manufacturer's specification states 0.15 m (1-sigma) horizontal accuracy and 0.1 m (1-sigma) as the open ground elevation accuracy.</li> <li>Surveyed elevations of drill hole collars are validated against the LiDAR topography and ortho corrected aerial photography.</li> </ul>
<b>Data spacing and distribution</b>	<ul style="list-style-type: none"> <li>The exploration work has been concentrated along strike of the dipping coal measure sequence, and therefore produces a very linear dataset.</li> <li>Drill holes and trench sample locations are unable to be spaced equally or on a grid pattern due to the dipping nature of the deposit and limitation of site access.</li> <li>Primary sample spacing has not been estimated over the deposit. There are nine coal seam packages in the deposit and only a subset of these seams is intersected by each drill hole or trench, therefore the average sample spacing for each individual seam in the deposit varies.</li> <li>The current drill hole spacing is deemed sufficient for coal seam correlation purposes within targeted areas.</li> <li>Geostatistics of the Albury Project dataset has been examined but variography results for many seams were incomplete due to the uneven distribution of drill holes with coal qualities.</li> <li>Composite samples are not weighted.</li> <li>Any samples with composited length of less than 0.1 m are not utilised during estimation. Compositing starts at the top of seam and small samples are not distributed or merged.</li> </ul>
<b>Orientation of data in relation to geological structure</b>	<ul style="list-style-type: none"> <li>All recent exploration drilling has been completed on a vertical orientation. Any deviation from the vertical is not expected to have a material effect on geological understanding due to the shallow nature of project.</li> <li>Most of the deposit presents a shallow seam dip of between 3 and 15°.</li> <li>Vertical drilling is considered the most suitable drilling method for the Albury deposit to provide unbiased data.</li> <li>Trenches are usually orientated perpendicular to the strike of bedding. Surface intersections are surveyed and are then adjusted to simulate a drill hole. Trench data is logged in such a way as to simulate a drill hole drilled from the collar point of the trench.</li> </ul>
<b>Sample security</b>	<ul style="list-style-type: none"> <li>Rigorous sample preparation and handling procedures have been followed by BRL.</li> <li>Coal samples are taken and recorded from drill core, sealed in plastic bags, and securely stored prior to being dispatched to the laboratory for analysis.</li> <li>Samples are normally hand delivered to SGS by BRL staff, thus removing the potential for third parties to tamper with the samples.</li> <li>It is not considered likely that individual coal samples face a risk of theft or sabotage as coal is a bulk commodity with little value for small volumes of coal from drill core.</li> </ul>
<b>Audits or reviews</b>	<ul style="list-style-type: none"> <li>Golder and BRL have reviewed the geological data available and consider the data used to produce the resource model is reliable and suitable for the purposes of generating a Coal Resource estimate to the extent that the Coal Resource estimate has been classified.</li> <li>Results of a duplicate sample testing program across multiple projects comparing SGS and</li> </ul>

Criteria	Commentary
	<p>CRL assay results has shown little analytical error or bias between laboratories.</p> <ul style="list-style-type: none"> <li>BRL Senior geologists have undertaken audits of the sample collection and analysis processes.</li> </ul>

## Section 2 Reporting of Exploration Results

Criteria	Commentary						
<b>Mineral tenement and land tenure status</b>	<ul style="list-style-type: none"> <li>The Coal within the Albury Project area is owned by the Crown.</li> <li>The Albury resource model is located entirely within Exploration Permit (EP) 54846 owned by BRL.</li> </ul> <table border="1" data-bbox="565 552 1242 674"> <thead> <tr> <th>Permit/Rights</th> <th>Operation</th> <th>Expiry</th> </tr> </thead> <tbody> <tr> <td><b>Exploration Permit 54846</b></td> <td>Albury</td> <td>04/03/2023</td> </tr> </tbody> </table> <ul style="list-style-type: none"> <li>It is considered that there are reasonable prospects to negotiate access arrangements for mining with landowners covering the reported resource areas. BRL have not reported any resources for the Albury Project where land access and/or mineral rights have been withheld.</li> </ul>	Permit/Rights	Operation	Expiry	<b>Exploration Permit 54846</b>	Albury	04/03/2023
Permit/Rights	Operation	Expiry					
<b>Exploration Permit 54846</b>	Albury	04/03/2023					
<b>Exploration done by other parties</b>	<ul style="list-style-type: none"> <li>All exploration has been conducted by BRL.</li> </ul>						
<b>Geology</b>	<ul style="list-style-type: none"> <li>The project is located in the Albury Coalfield, South Island, New Zealand.</li> <li>The defined Coal Resource is contained within the Miocene aged White Rock Coal Measures, which forms a thin (700 m thick) band of coal measures striking NE/SE. The band is cut off by strike slip faults to the west and is unconformably covered by Pleistocene and Quaternary gravel to the south.</li> <li>The coal seams present in the area are reported to dip to the south at approximately 10°. Modelling has shown dips of between 3° and 15°.</li> <li>Glacial derived windblown loess deposits mantle much of the area.</li> <li>Generally, the project area is structurally simple. Coal seams are not greatly affected by cross cutting faults and no specific faults have been included in the modelled area.</li> </ul>						
<b>Drill hole Information</b>	<ul style="list-style-type: none"> <li>7 HQ TTC drill holes and 16 outcrop trenches and mapped seam intersections have been collected as part of recent exploration of the Albury Coalfield.</li> <li>No trench samples or logs were used in the generation of the Coal Resource Model. The model is based on the drill holes only.</li> </ul>						
<b>Data aggregation methods</b>	<ul style="list-style-type: none"> <li>Exploration drilling results have not been reported.</li> <li>The maximum ash cut off used for building the Albury Project structure model was set at 25%.</li> <li>The resource model is built as a block model with 0.5 m block thicknesses for coal. Coal ply data is used to grade estimate the block model.</li> <li>Coal ply data is composited into 0.5 m samples for estimation. No weighting is used in the compositing.</li> <li>Coal Resources have been reported with a block ash cut-off of 15%.</li> <li>A minimum coal seam vertical thickness cut-off of 0.5 m in length was used to remove thin coal seams from the resource model.</li> </ul>						
<b>Relationship between mineralisation widths and intercept lengths</b>	<ul style="list-style-type: none"> <li>Exploration drilling results have not been reported.</li> <li>Coal seams in the project area strike ~060° and dip between 3 and 12° to the southeast.</li> <li>All recent drill holes were drilled vertically.</li> <li>Coal seam thicknesses are reported as apparent thickness down hole.</li> <li>Reported and modelled seam intercept thickness is representative of the true seam thickness.</li> </ul>						
<b>Diagrams</b>	<ul style="list-style-type: none"> <li>Diagrams can be found in Appendix A for each of the following: <ul style="list-style-type: none"> <li>Location map.</li> <li>Map showing regional geology.</li> <li>Map showing exploration permit boundary.</li> </ul> </li> </ul>						



Criteria	Commentary
	<ul style="list-style-type: none"> <li>○ Map showing exploration data.</li> <li>○ Map showing G seam coal roof contours.</li> <li>○ Map showing resource confidence.</li> <li>○ Cross section through Albury deposit.</li> </ul>
<b>Balanced reporting</b>	<ul style="list-style-type: none"> <li>● No exploration results are being presented in this Table 1, rather this document is focused on an advanced project that has been defined by geological models with associated Coal Resource estimates completed.</li> <li>● The exclusion of this information from this report is considered to not be material to the understanding of the deposit.</li> </ul>
<b>Other substantive exploration data</b>	<ul style="list-style-type: none"> <li>● The Coal Resources reported in this Table 1 relate to the area in and around a historical coal mine.</li> <li>● Geotechnical logs and samples were taken by the geologist during all exploration by BRL. Geotechnical logs identified defect types, angles and character through cored intervals. Geotechnical samples were taken of seam roof, floor and overburden material.</li> </ul>
<b>Further work</b>	<ul style="list-style-type: none"> <li>● Further exploration is planned along strike both to the north and south of the historical opencast pit.</li> </ul>

### Section 3 Estimation and Reporting of Mineral Resources

Criteria	Commentary
<b>Database integrity</b>	<ul style="list-style-type: none"> <li>● BRL utilises an acquire database to store and maintain its geological exploration dataset.</li> <li>● The acquire database places explicit controls on certain data fields as they are entered or imported into the database, such as overlapping intervals, coincident samples, out of range sample values, standardised look-up tables for logging codes.</li> <li>● Manual data entry of coal quality results is not required as results are imported directly from laboratory results files.</li> <li>● The database is automatically backed up on an offsite server.</li> </ul>
<b>Site visits</b>	<ul style="list-style-type: none"> <li>● Henry Dillon (the Competent Person) has not visited this site as all of the exploration is in modified farmland and all exposures were covered after trench excavation.</li> </ul>
<b>Geological interpretation</b>	<ul style="list-style-type: none"> <li>● Golder has reviewed the modelling processes in use by BRL to develop their resource model and Coal Resource estimates.</li> <li>● Golder has confidence in the methodologies used by BRL for geological modelling and the interpretation of the available Albury Project data. Confidence varies for different areas, and this is reflected in the resource classification.</li> <li>● BRL considers the amount of geological data sufficient to estimate the resource.</li> <li>● Uncertainty surrounds historical underground mine workings. There is uncertainty in: <ul style="list-style-type: none"> <li>○ The quality and quantity of coal extracted.</li> <li>○ Which seam was mined.</li> <li>○ Surveying and spatial location of underground mine workings.</li> </ul> </li> <li>● Quaternary gravel deposits overlie the coal measures unconformably over the southern portion of the project area. Some uncertainty surrounds the depth of erosion and the extent of the quaternary deposits. A conservative approach to modelling this Quaternary erosional surface has been used in the model and is reflected within the resource classification.</li> </ul>
<b>Dimensions</b>	<ul style="list-style-type: none"> <li>● Depth of cover varies from 0m at outcrop to over 200m at the south-eastern boundary of the model. The strike length of the deposit is in excess of 2km.</li> </ul>
<b>Estimation and modelling techniques</b>	<ul style="list-style-type: none"> <li>● All available exploration data has been validated, and where considered reliable has been used to develop a 3D geological block model for Coal Resource estimation and classification.</li> <li>● All exploration drilling data is stored in an acquire database and exported to a Maptek Vulcan™ (Vulcan) drill hole database.</li> <li>● A horizons definition was developed and used to define the coal seams to be modelled in the stratigraphic modelling process.</li> <li>● Vulcan version 9.1.8 was used to build the structure model. Grid spacing is 10 m x 10 m. This</li> </ul>

Criteria	Commentary
	<p>spacing was selected to be 1/5 of the minimum data spacing of a targeted area.</p> <ul style="list-style-type: none"> <li>• Vulcan's Stacking method is used to produce the structure model. This method triangulates a reference surface and then stacks the remaining horizons by adding structure thickness grids. Thickness grids are created using inverse distance.</li> <li>• Modelling parameters for the structural modelling are as follows: <ul style="list-style-type: none"> <li>• Reference grid surface (NB21 roof) by Simple Stacking: <ul style="list-style-type: none"> <li>○ Method is Triangulation.</li> <li>○ Trend Order is 1 (Linear).</li> <li>○ Smoothing is 9.</li> <li>○ The maximum triangle length is 200 m.</li> <li>○ Surfaces are splined.</li> </ul> </li> <li>• Reference grid thickness modelling by Simple Stacking: <ul style="list-style-type: none"> <li>○ Method is Inverse Distance (ID).</li> <li>○ ID Power is 2.</li> <li>○ Maximum number of samples is 10.</li> <li>○ Trend Order is 1 (Linear).</li> <li>○ Smoothing is 9.</li> <li>○ Search Radius is 200 m.</li> <li>○ Surfaces are splined.</li> </ul> </li> </ul> </li> <li>• Structure grid models are checked and validated before being used to construct the resource block model.</li> <li>• Vulcan 9.1.8 is used to build the block model.</li> <li>• The coal structure surfaces, along with LiDAR topography surface, burnt surface unconformity. The block dimensions are constructed at 10 m x 10 m. Vertical thickness for coal blocks is 0.5 m, whilst overburden blocks have maximum thicknesses of 5 m.</li> <li>• Grade estimations have varying search distances. If a coal block is not estimated during the grade estimation process the blocks are not reported as resources.</li> <li>• Grade estimation is performed utilising Inverse Distance (ID) cubed estimation with Vulcan's Tetra Projection Model. Proximate and Sulphur coal qualities are estimated on an air-dried basis. Ash, moisture, volatile matter, and Calorific Value are estimated simultaneously.</li> <li>• Geostatistics of the coal quality dataset has been investigated to examine and define the estimation search parameters; however the results have been poor due to the linear distribution of the sample data along the strike of the deposit which dominates the orientation of variography.</li> <li>• Various methods have been used to check the validity of the block estimation. This includes manual inspection of the model, Quantile Quantile (QQ) plots of block model qualities vs the coal quality database and by visual comparison.</li> <li>• Resource tonnages within historical underground workings areas have been discounted by an estimated average extraction rate. The primary underground mining method utilised historically in the Albury area is bord and pillar mining.</li> <li>• Historical extraction rates vary however the rate used to discount coal tonnages within worked seams in the model is 50% of the original unmined tonnage.</li> </ul>
<b>Moisture</b>	<ul style="list-style-type: none"> <li>• Moisture, both on an air-dried and total moisture basis, is estimated into the resource model from the sample database.</li> <li>• Coal Resource tonnages are reported using natural bed moisture, calculated from air-dried density, air-dried moisture and in situ moisture using the Preston and Sanders equation.</li> </ul>
<b>Cut-off parameters</b>	<ul style="list-style-type: none"> <li>• Stratigraphic structure grids have been developed based on a 25% ash cut-off.</li> <li>• No lower cut-off has been applied. There is an inherent minimum limit to ash samples in modern results due to a laboratory lower detection limit of 0.17% (adb).</li> <li>• Coal resources are reported down to a seam thickness of 0.5 m (one block).</li> <li>• Resources have been defined as economic by using a Lerchs-Grossman optimized pit shell using budgeted mining costs and contracted coal sales values. The 0.6RF shell from the optimization has been used. No resources have been reported outside of this pit shell. This optimised pit shell is used to determine Reasonable Prospects for Eventual Economic</li> </ul>

Criteria	Commentary
	Extraction (RPEEE).
<b>Mining factors or assumptions</b>	<ul style="list-style-type: none"> <li>It is assumed that any future mining operation would have a minimum vertical daughter seam thickness of 0.5 m as a minimum mining horizon cut-off.</li> <li>Only coal that falls within an optimised pit shell with revenue factor 0.60 is reported as resources. Costs and revenue parameters used in the pit optimisation are based on the costs at comparative BRL sites and include allowances for royalties, commissions, mining costs, coal processing and administration, and basic mining and processing losses. Estimated revenue is based on existing supply agreements to other sites.</li> <li>No other mining factors such as strip ratios, mining losses and dilutions have been applied when developing the resource model or reporting resource tonnages.</li> </ul>
<b>Metallurgical factors or assumptions</b>	<ul style="list-style-type: none"> <li>No metallurgical assumptions have been applied in estimating the resource.</li> </ul>
<b>Environmental factors or assumptions</b>	<ul style="list-style-type: none"> <li>Studies for ABA characterisation of overburden studies have been completed. It is not expected that these will prevent eventual economic extraction of the resource.</li> <li>No other environmental assumptions have been applied in developing the resource model.</li> <li>Limited environmental approvals are currently in place for exploration. It is reasonably expected that any modifications to existing agreements or additional agreements that will be required to operate in this area can be obtained in a timely manner.</li> </ul>
<b>Bulk density</b>	<ul style="list-style-type: none"> <li>After grade estimation air-dried density is calculated from the air-dried ash value using the ash-density relationship derived from the Southland lignite investigation in the Croydon and New Vale fields. Analysis of the coal from Albury show they are very similar to the coal from these Coalfields.</li> <li>An in situ density value is then computed using the Preston and Sanders method.</li> </ul>
<b>Classification</b>	<ul style="list-style-type: none"> <li>BRL have classified the resource using the following distances from a Point of Observation (POB): <ul style="list-style-type: none"> <li>Indicated Resources <ul style="list-style-type: none"> <li>Cored drill hole that intersected the seam/ply and where the seam/ply had been sampled and raw coal quality data was available.</li> <li>Distance between POB of no more than 300 m and extrapolation of no more than 150 m from a POB.</li> <li>Minimum of three (3) POB to define an Area of Interest (AOI).</li> </ul> </li> <li>Inferred Resources <ul style="list-style-type: none"> <li>Cored drill hole that intersected the seam/ply and where the seam/ply had been sampled and raw coal quality data was available.</li> <li>Distance between POB of no more than 500 m and extrapolation of no more than 250 m from a POB.</li> <li>Minimum of three (3) POB to define an Area of Interest (AOI).</li> </ul> </li> </ul> </li> <li>At this stage of the project, no consideration has been made for reduced confidence in areas of known historical mine workings, however, coal tonnages in these areas have been reduced to reflect some uncertainty around potential future extraction. <ul style="list-style-type: none"> <li></li> </ul> </li> </ul>
<b>Audits or reviews</b>	<ul style="list-style-type: none"> <li>A review of the resource model has been carried out by the Competent Person.</li> </ul>
<b>Discussion of relative accuracy/confidence</b>	<ul style="list-style-type: none"> <li>Statistical comparisons between the resource block model and the coal quality data set have been carried out and are within expected ranges. Some anomalies exist due to non-normal data distribution. Techniques utilised include QQ plots, probability plots, and visual comparisons.</li> <li>The location of the historical underground workings in the area is poorly understood hence a conservative depletion polygon and extraction factor has been used.</li> <li>The use of an ash density curve from another deposit has the potential to cause small variances in situ bulk density.</li> </ul>

Appendix A:

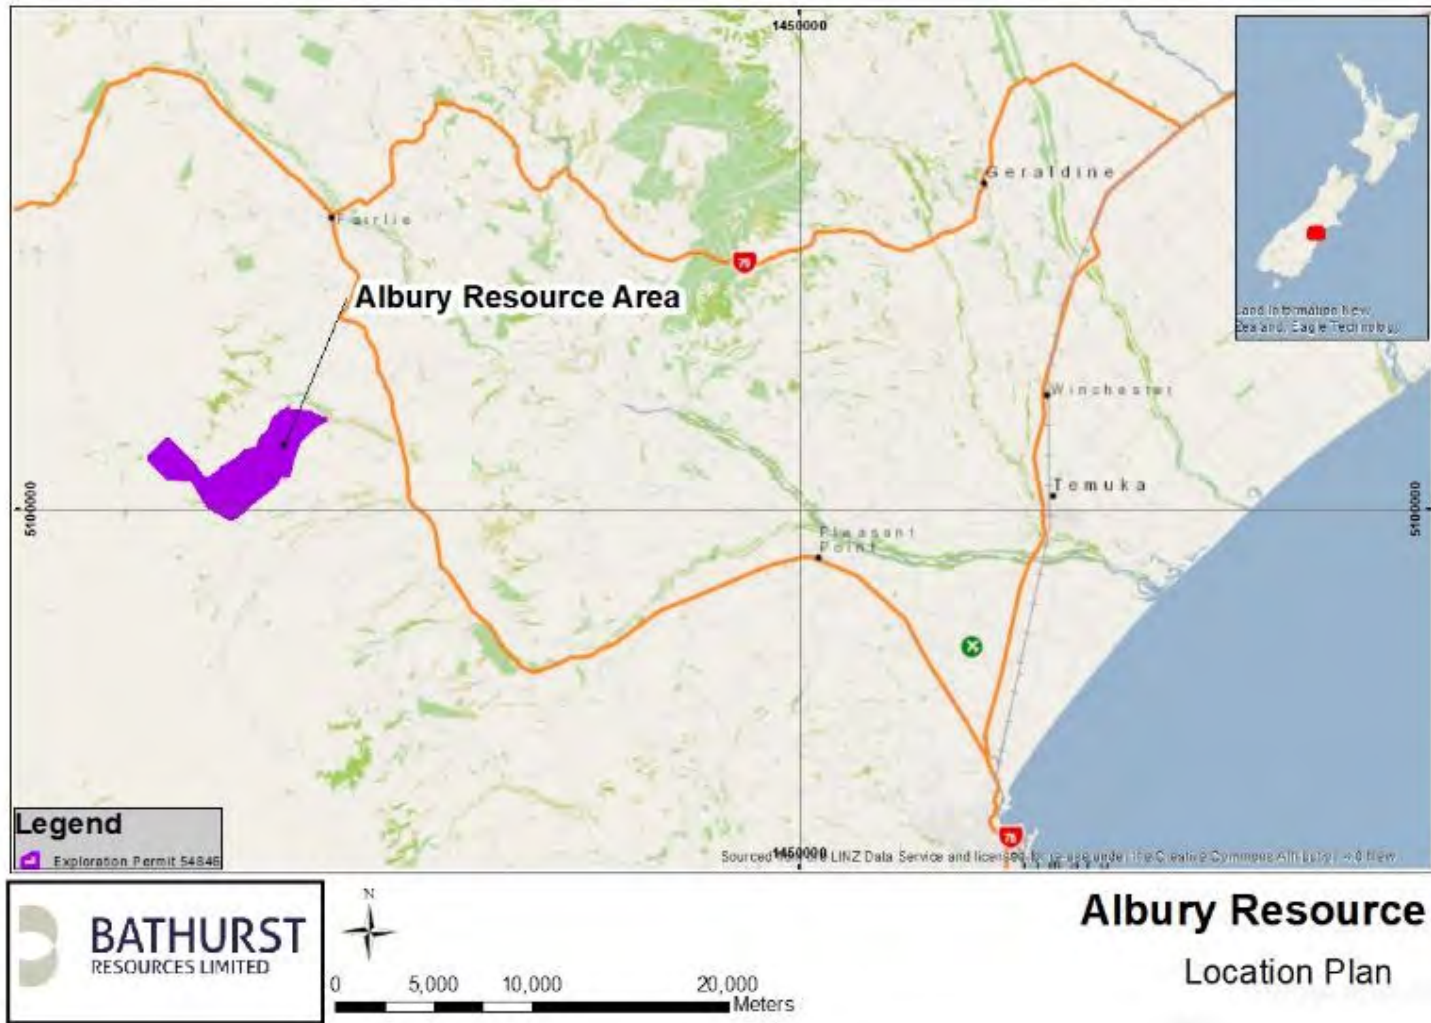


Figure 1: Location plan showing the proximity of the resource model area to regional centres and potential markets


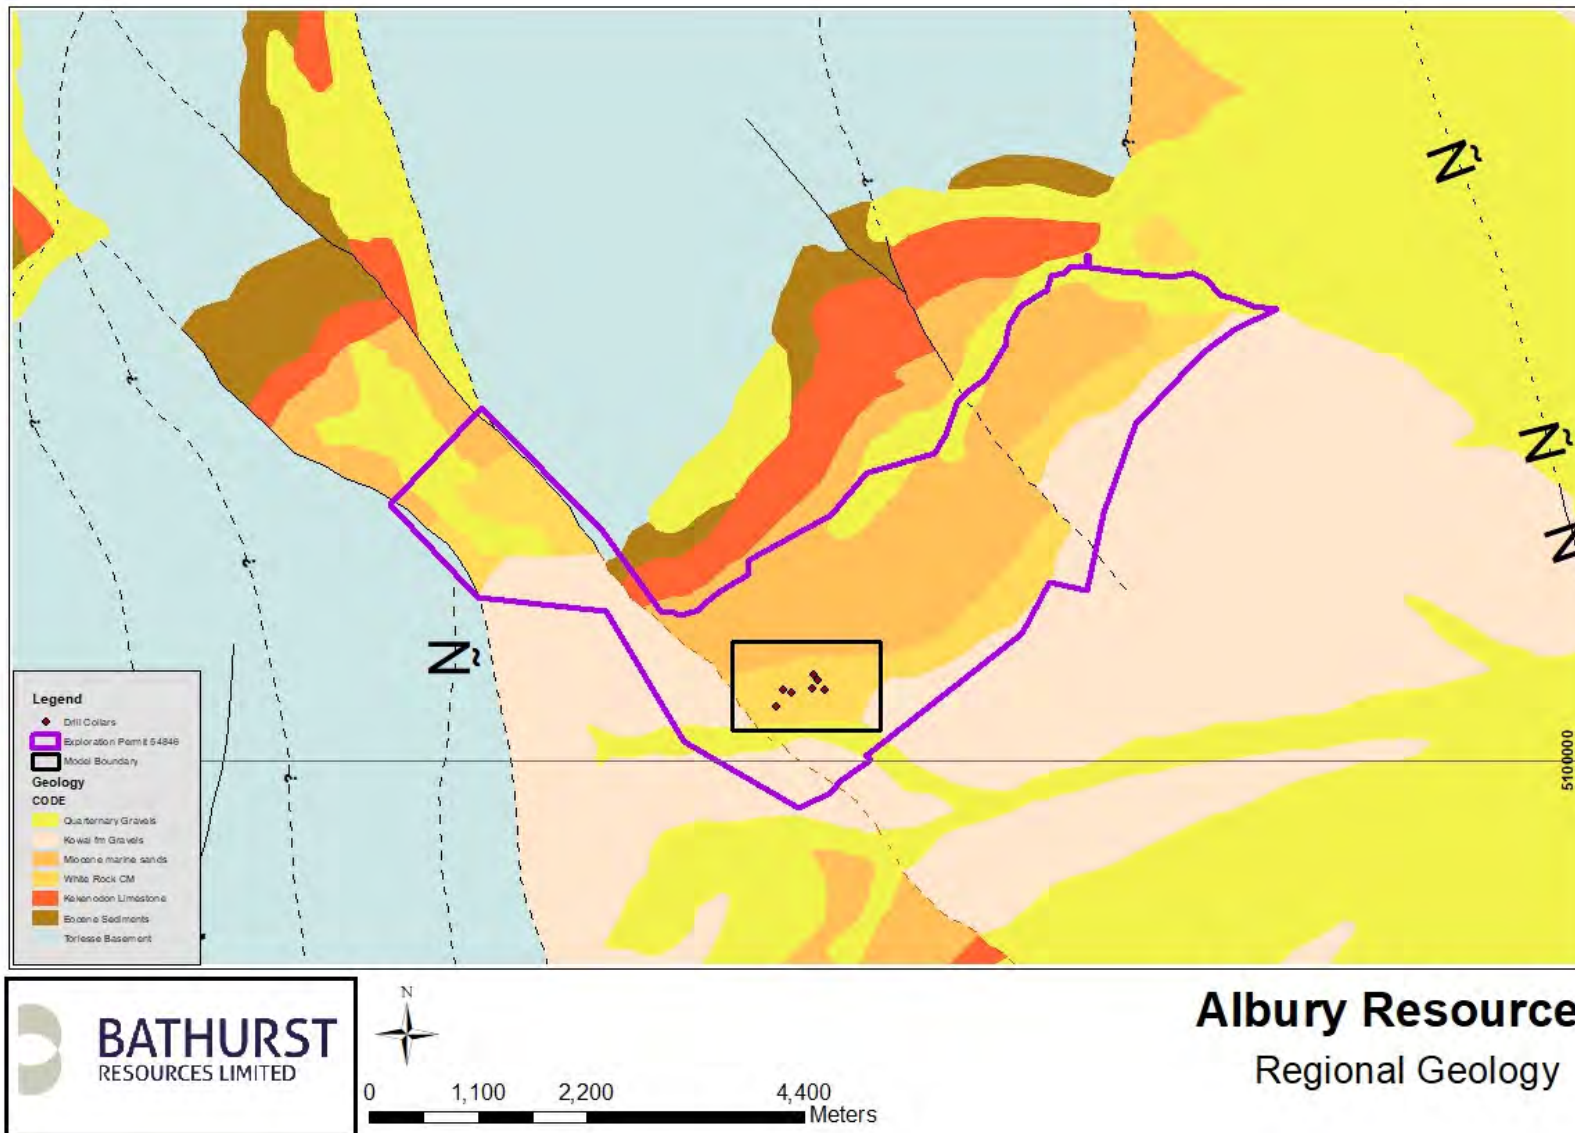


Figure 2: Generalised map of Albury Coalfield showing geological units and faults

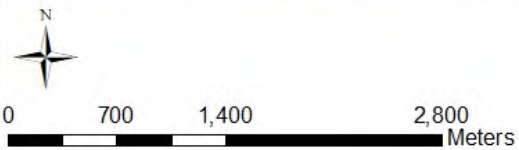

## Albury Resource

### Exploration Permit Boundary

Figure 3: Exploration Permit boundary

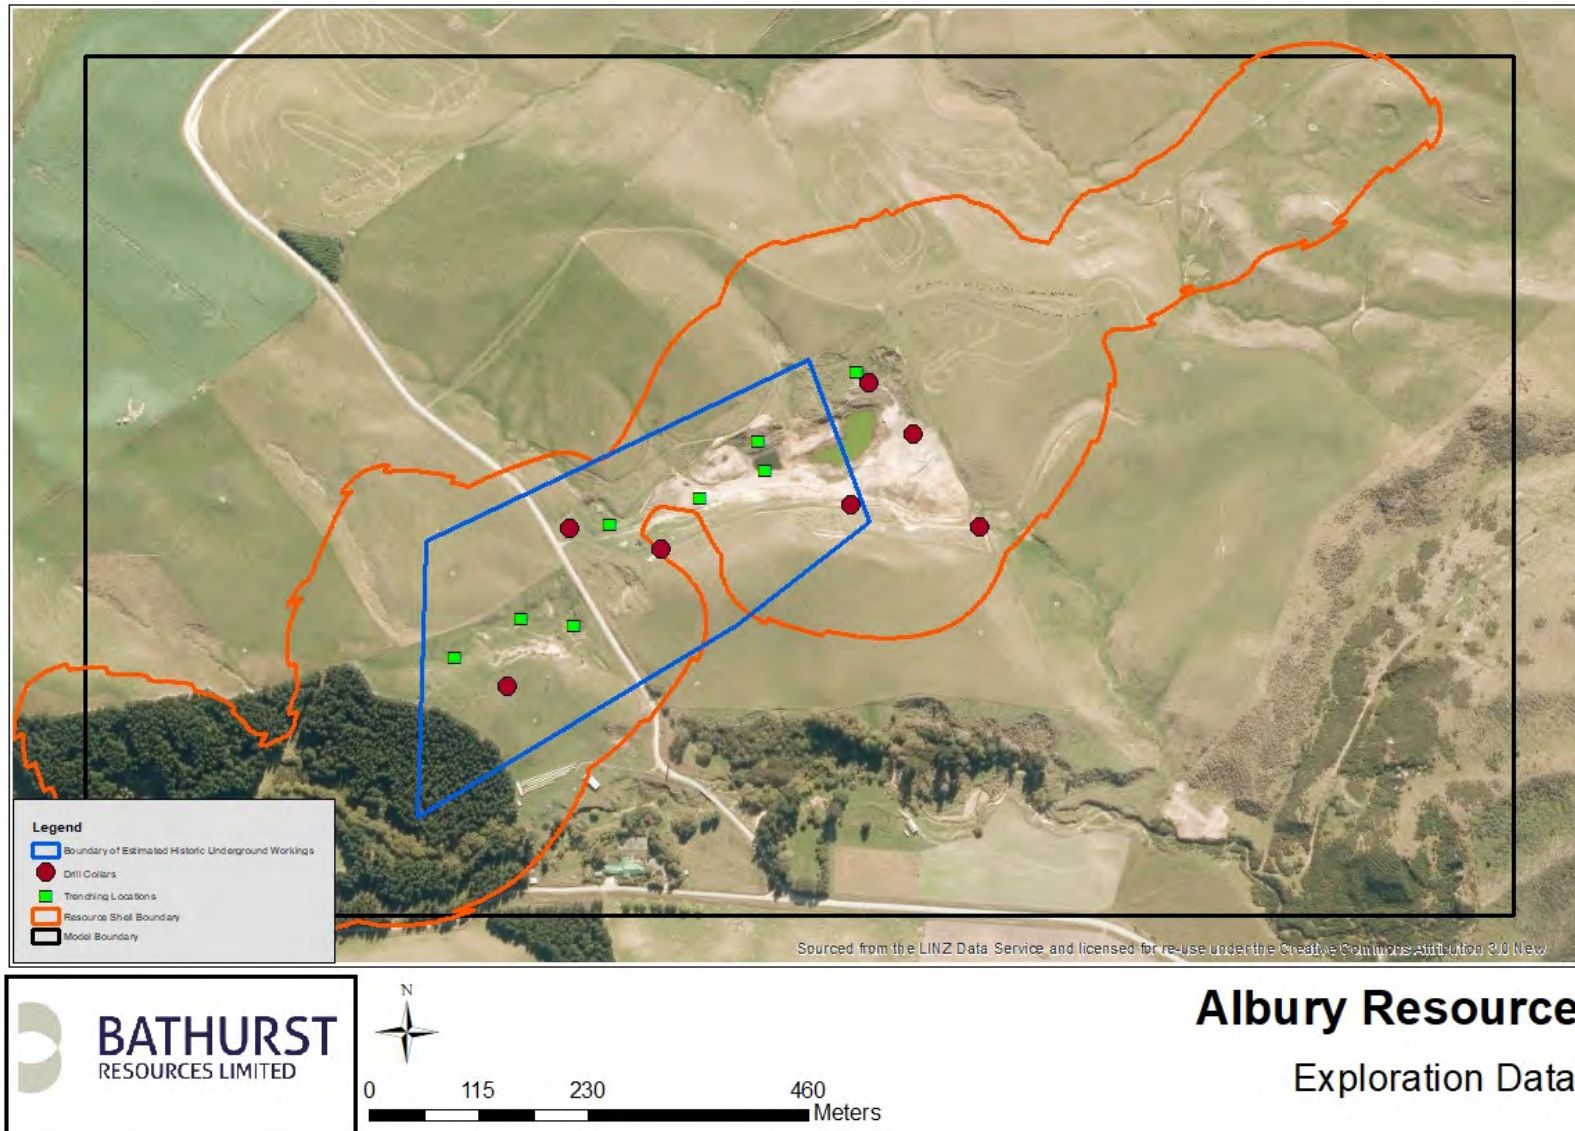


Figure 4: Exploration drill hole dataset and extent of historical underground coal mines for the Albury Project



## Albury Resource

G Seam Coal Roof Structure contours

Figure 5: Structure contours of the G Seam roof



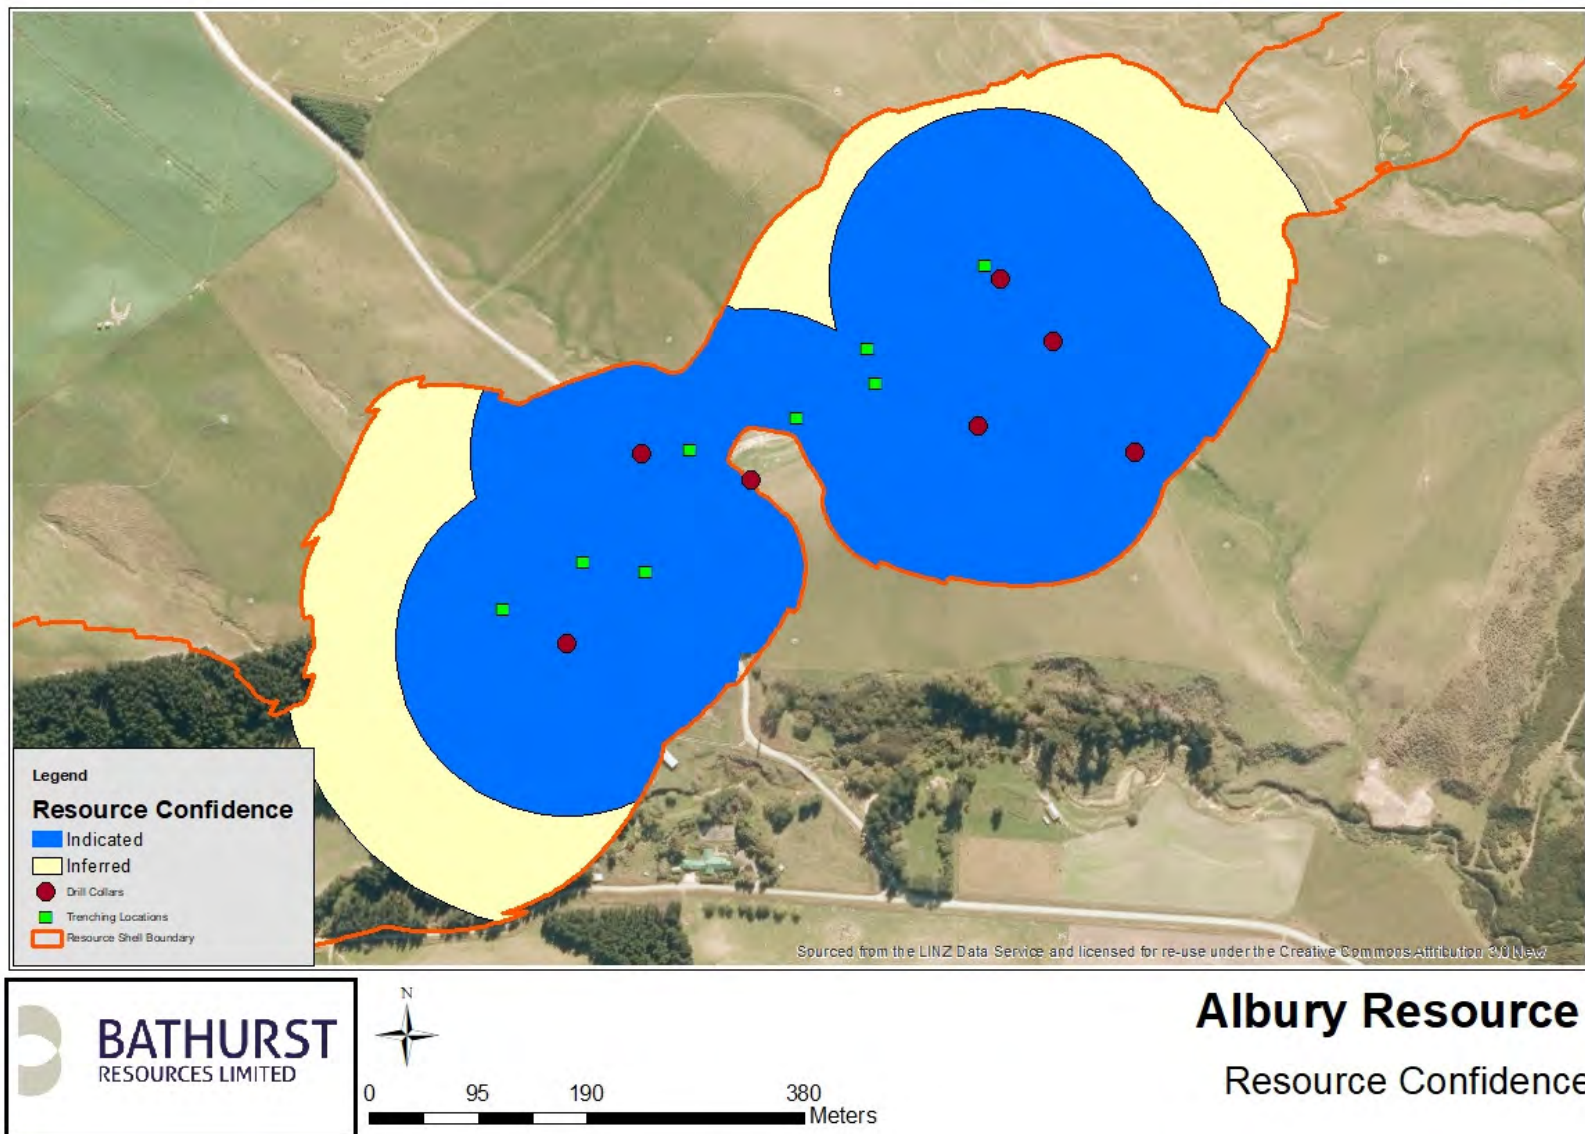


Figure 6: Resource Confidence

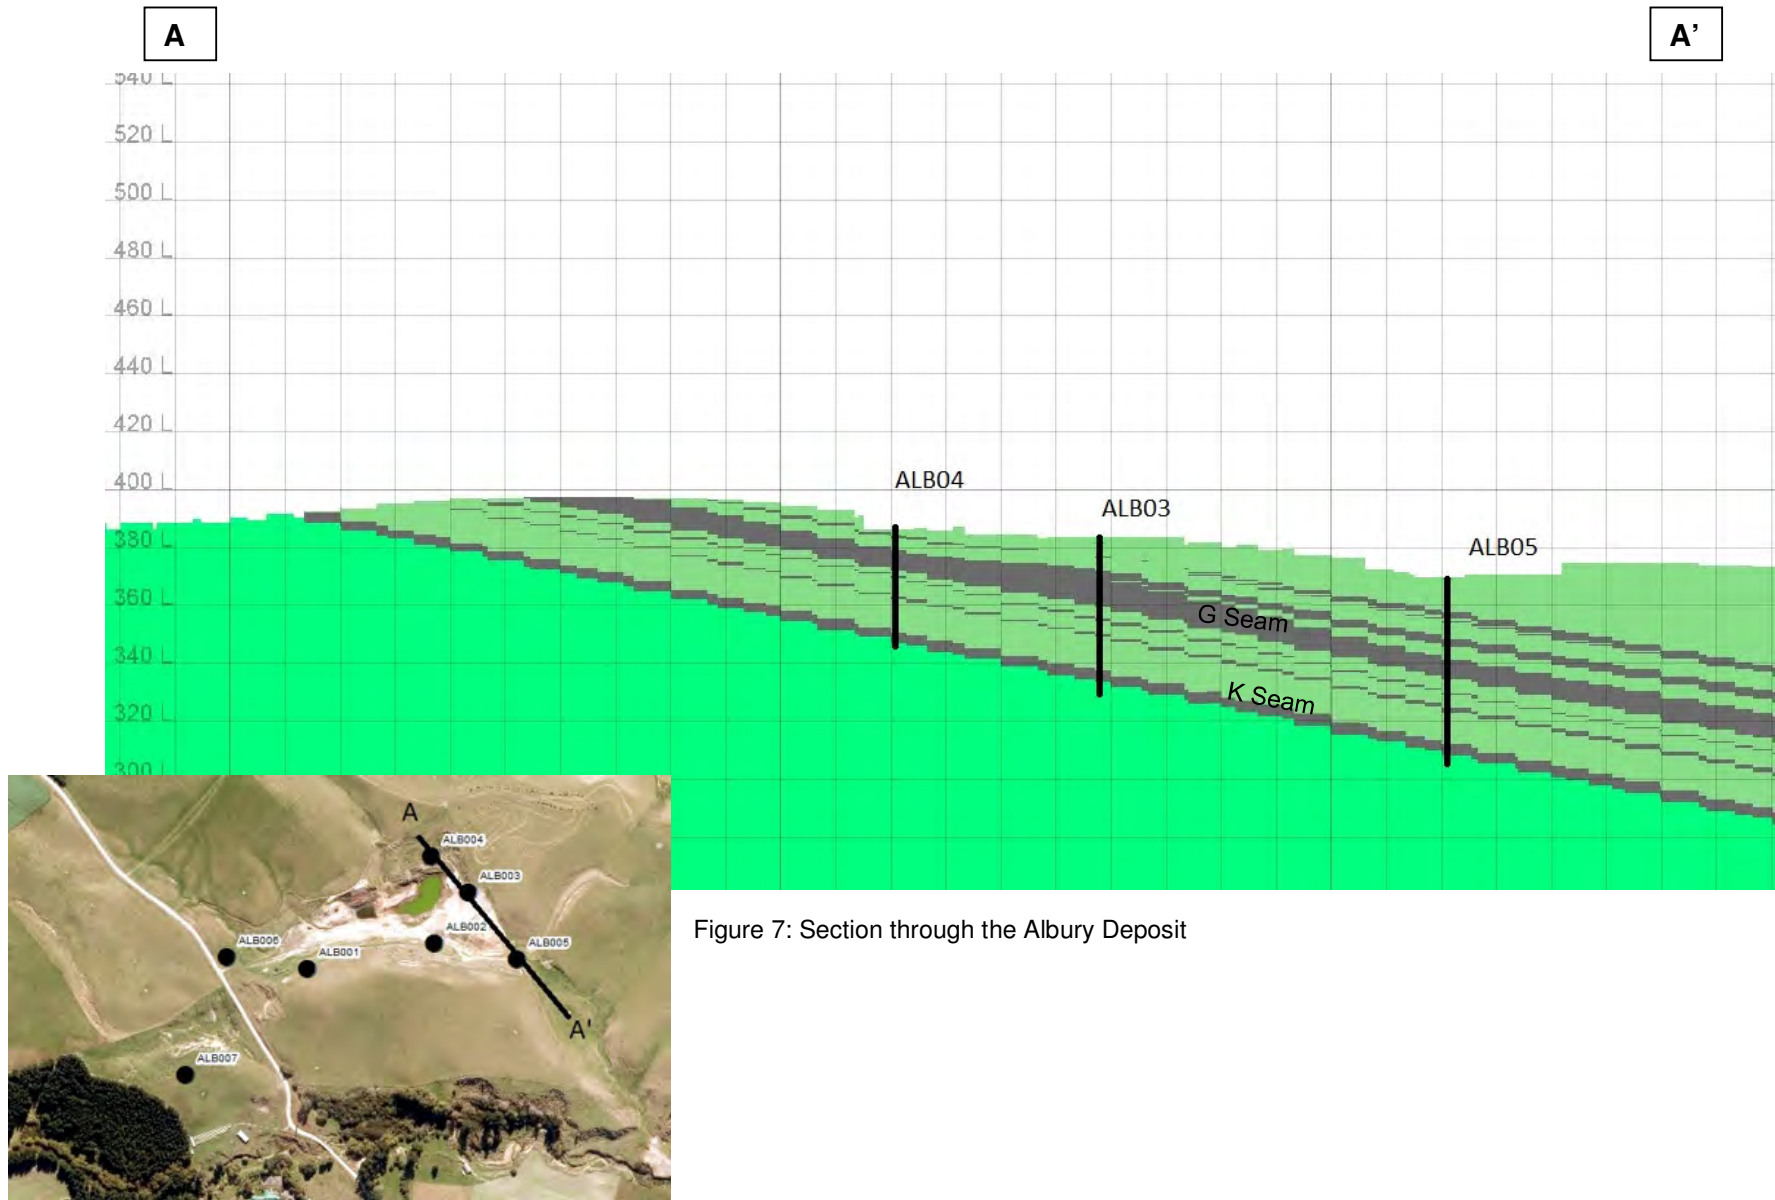


Figure 7: Section through the Albury Deposit

# JORC Code, 2012 Edition – Table 1 for the Canterbury Project 2021

## Section 1 Sampling Techniques and Data

Criteria	Commentary
<b>Sampling techniques</b>	<ul style="list-style-type: none"> <li>• Malvern Hills, Coalgate, Canterbury is a historical mining district, with recorded coal production from over 77 mines since 1872. Some historical exploration data of varying quality is available for parts of the area.</li> <li>• Modern exploration includes:               <ul style="list-style-type: none"> <li>○ 72 PQ/HQ Triple Tube Core (TTC) drill holes.</li> <li>○ 13 percussive probe drill holes.</li> <li>○ 13 Reverse Circulation (RC) drill holes.</li> <li>○ 81 outcrop trenches and mapped coal seam intersections.</li> </ul> </li> <li>• Recent drilling has aimed to infill areas around zones of historical workings lacking coal quality data and to test the reliability of historical data. The most recent drilling concentrated on extending resources to the northeast, along strike of the current mining operations.</li> <li>• BRL planned to geophysically log every drill hole where downhole conditions and operational constraints permitted. Initially, Field Tech Services Ltd (FTS) was contracted for downhole wireline geophysical services, utilising a natural gamma tool. From June 2016, the geophysical logging equipment was hired and operated by BRL geologists.</li> <li>• Natural gamma was typically run through a PVC standpipe installed into each drill hole after completion, or through the in situ drill string. Natural gamma produces a very reliable trace for use in coal seam correlation and depth adjustment due to relatively abundant clays present in the Broken River Formation coal measures.</li> <li>• Downhole geophysical data was essential to correlate coal seams, to confirm depths and thickness of coal seams and to validate drillers' logs. Geophysical logging was also used to accurately calculate drill recovery of coal.</li> <li>• Coal sampling was based on the BRL Coal Sampling Procedures. Coal quality ply samples were selected on all coal logged by a geologist, where the geologist had 95% confidence that ash content would be below 50%. Material with an estimated ash content &gt;50% was not sampled, unless the material was a sandstone parting of &lt;0.1 m in thickness within a coal seam, whereby it would be included within a larger coal ply sample.</li> <li>• Outcrop trench and channel samples constituted a significant proportion of the sample dataset. Coal seam thickness and partings between coal seams were measured either vertically or as a true thickness. Trench data was entered into the drilling database using azimuth and dip orthogonal to coal seam dip.</li> <li>• Outcrop coal samples were collected as channel samples through the coal seams.</li> <li>• All analytical data was assessed and verified prior to inclusion into the resource modelling dataset.</li> <li>• No deep drill holes (&gt;120 m) have been drilled in the project area, therefore no down dip information for the deposit is available.</li> <li>• Due to the coal seam dip and lack of continuity along strike of some coal seams, no single drill hole has been drilled that intersects all the coal seams in the stratigraphic sequence.</li> </ul>
<b>Drilling techniques</b>	<ul style="list-style-type: none"> <li>• BRL managed exploration and drilling campaigns have utilised the following drilling methods:               <ul style="list-style-type: none"> <li>○ Full PQ TTC. In one case, overlying strata were drilled using open hole methods prior to switching to TTC for the coal bearing section.</li> <li>○ Full HQ TTC.</li> <li>○ RC and conventional percussive probe drill holes.</li> <li>○ PQ reducing to HQ TTC where necessary.</li> <li>○ Trenches excavated using 20 and 30 tonne excavators.</li> <li>○ Trench/channel samples taken within active mining areas.</li> </ul> </li> <li>• Historical exploration and drilling techniques include:               <ul style="list-style-type: none"> <li>○ Air circulation blade and hammer.</li> </ul> </li> </ul>

Criteria	Commentary
	<ul style="list-style-type: none"> <li>○ RC blade and hammer.</li> <li>○ Air core (AC).</li> <li>○ Rotary wash.</li> <li>○ Trenches excavated using a 20 tonne excavator and hand methods.</li> <li>• Exploration drill holes have been drilled at a range of inclinations, ranging from vertical to -45°. Exploration drill holes completed by BRL have been drilled to intersect the dip at approximately 90°. Drill core from angled drill holes was not orientated.</li> </ul>
<b>Drill sample recovery</b>	<ul style="list-style-type: none"> <li>• Core recovery was measured as the length of core recovered divided by the length of driller's run and noted by the core logging geologist. If recovery of coal intersections dropped below 90% the drill hole may require a re-drill (no re-drills have yet been required).</li> <li>• Recovery of coal seams in the Canterbury deposit has been very good due to the strong nature of the coal, with average coal recovery being 96.5%. Downhole natural gamma geophysical data was used to confirm coal recoveries.</li> <li>• Average total core recovery over the recent drilling campaigns was 88.6%, however when broken down overlying soil, loess and quaternary gravel recovery was 61.7%, while coal measure core was recovered at a rate of 92.8%.</li> <li>• Where small intervals of coal were lost and where geophysical logging indicated strongly that coal was lost, ash content for the lost section was estimated using the results of overlying and underlying coal ply samples and the relative response of the natural gamma trace.</li> <li>• Sample recovery has been deemed not applicable to trench and channel sampling.</li> </ul>
<b>Logging</b>	<ul style="list-style-type: none"> <li>• BRL has developed standardised core logging procedures (BRL Coal Logging Procedures), and all core logging completed by BRL has followed these procedures.</li> <li>• All recent drill core has been geologically and geotechnically logged by either an experienced geologist or by geologists under the supervision and guidance of experienced exploration geologists.</li> <li>• As much data as practicable has been logged and recorded, including geotechnical and rock strength data.</li> <li>• All drill core was photographed prior to sampling. Depth meter marks and coal ply intervals were noted on the drill core in each photograph.</li> <li>• Downhole geophysical logs were used to aid core logging and to ensure true downhole depths were recorded.</li> </ul>
<b>Sub-sampling techniques and sample preparation</b>	<ul style="list-style-type: none"> <li>• For all exploration data acquired by BRL, an in-house detailed sampling procedure was used (BRL Coal Sampling Procedures). Sampling and sample preparation are consistent with internationally accepted coal sampling methodologies.</li> <li>• Drill core ply samples include all coal recovered for the interval of the sample. Core was not cut or halved. Ply sample intervals were generally 0.5 m in length, unless dictated by thin split or parting thickness. Coal sample size is considered adequate to be representative of the coal seam quality.</li> <li>• All recent sampled drilling has been completed using triple tube cored drill holes. No chip or RC samples have been collected during these campaigns.</li> <li>• For historical data, sample preparation processes are unknown. However, no historical drill hole coal quality results have been used for resource estimation.</li> <li>• Trench samples were taken representatively from excavated and cleaned outcrop, preventing sampling of weathered coal and other contamination of samples. Sample intervals were measured vertically, orthogonal to the seam or at the angle of the trench plunge and were generally 0.5 m or less in length. To date no field sample duplicates have been collected or analysed. Sample sizes generally aim to be at least 1 kg of coal per 0.5 m sampled.</li> <li>• Most assay samples were collected on site; however, some were completed at the core repository after transport from drill site in core boxes. Samples are stored in sealed plastic bags and taken as soon as practicable to the coal quality laboratory.</li> </ul>
<b>Quality of assay data</b>	<ul style="list-style-type: none"> <li>• All coal quality testing completed for BRL has been conducted by IANZ accredited laboratory SGS New Zealand Limited (SGS).</li> <li>• SGS have used the following standards for coal quality testing:</li> </ul>

Criteria	Commentary
<b>and laboratory tests</b>	<p><b>Chemical Analysis</b>  Proximate analysis (ASTM 7582)  Sulphur (ASTM 4239-04A)  Total Moisture (ISO 589)</p> <p><b>Ultimate Analysis</b>  Ash (ISO 1171)  Volatile Matter (ISO 562)  Inherent Moisture (ISO 5068)  Crucible Swell (ISO 501)  Calorific Value (ISO 1928)  Loss on Drying Data (ISO 13909-4)</p> <p><b>Rheological and Physical Analysis</b>  Relative Density (AS 1038.21.1.1)</p> <ul style="list-style-type: none"> <li>BRL has completed a total of 24 full seam composite samples. Composite samples have been tested using the following standards: <p><b>Chemical Analysis</b>  Loss on Air Drying Data (ISO 13909-4)  Inherent Moisture (ASTM D 7582 mod)  Sulphur (ASTM D 4239)</p> <p><b>Ultimate Analysis</b>  Ash (ASTM D 7582 mod)  Volatile Matter (ASTM D 7582 mod)  Fixed Carbon (by difference)  Ultimate Analysis (Laboratory Standard)  Chlorine in Coal (ASTM D4208)  Forms of Sulphur (ASO 1038 Part 11)  Calorific Value (ISO 1928)  Mean Maximum Reflectance All Vitrinite (RoMax) (Laboratory Standard)  Ash Fusion Temperatures (ISO 540)  Ash Constituents (XRF) (ASTM D 4326)</p> <p><b>Rheological and Physical Analysis</b>  Hardgrove Grindability Index (ISO 5074)  Gieseler Plastometer (ASTM D 2639)  Audibert Arnau Dilatometer (ISO 349)  Swelling Index (ISO 501)</p> </li> <li>All coal quality analysis was undertaken and reported on an air-dried basis (adb), unless stated otherwise.</li> </ul>
<b>Verification of sampling and assaying</b>	<ul style="list-style-type: none"> <li>Sample coal quality results have been cross-referenced and compared against lithology logs and downhole geophysical data. Results have also been inspected by experienced geologists and compared with expected values utilising known coal quality relationships for the Canterbury Coalfield.</li> <li>Anomalous coal quality results were investigated, and where necessary the laboratory was contacted and a retest was undertaken from sample residue.</li> <li>No twinned drill holes have been drilled at the project, and no field duplicate trench samples have been collected.</li> <li>Coal quality data from SGS is imported directly into an acQuire database with no manual data entry conducted by either SGS or BRL.</li> <li>Coal quality results files are securely stored on a backup server. Once validated, drill hole information is 'locked' in an acQuire database to ensure data is not inadvertently compromised.</li> <li>BRL commissioned a series of duplicate coal quality samples to be tested by CRL Energy Ltd (CRL). These samples repeated tests performed by SGS on a subset of coal ply samples selected at random. Results of the duplicate testing showed an average variation of <math>\pm 1.2\%</math> of the value for each parameter, demonstrating good analytical precision.</li> </ul>

Criteria	Commentary
<b>Location of data points</b>	<ul style="list-style-type: none"> <li>Recent drill hole positions have been surveyed using Trimble Real-Time Kinematic (RTK) survey equipment.</li> <li>Historical mine plans have been georeferenced by locating and surveying historical survey marks, and mine portals drawn on mine plans. Some surveyed mine plans are available from registered surveyors and engineers and these have been georeferenced using a standard co-ordinate system.</li> <li>Some historical mine plans are poorly constrained spatially and a large variance from the current georeferenced images is possible.</li> <li>New Zealand Transverse Mercator 2000 Projection (NZTM) is used by BRL for the Canterbury project area. NZTM is considered a standard co-ordinate system for general mapping within New Zealand. Historical data has been converted from various local circuits and map grids using NZ standard cadastral conversions.</li> <li>A LiDAR survey was conducted over the Canterbury area in January 2013. This LiDAR data provides accurate topographic data that was used for development of the resource model. The LiDAR survey contractor's specifications state that for the choice of sensor and operating settings used for this project, the LiDAR sensor manufacturer's specification states 0.15 m (1-sigma) horizontal accuracy and 0.1 m (1-sigma) as the open ground elevation accuracy.</li> <li>The topographic surface covering the mine area is regularly updated using ground survey and automated drone based photogrammetry.</li> <li>Surveyed elevations of drill hole collars were validated against the LiDAR topographic surface and ortho corrected aerial photography. Historical drill hole collar elevations were compared to the LiDAR topographic surface, and while most are within <math>\pm 1</math> to 2 m of the surface, there are a small number of drill holes with a large discrepancy between the RL of the drill hole collar and the LiDAR topographic surface, which may be due to survey errors, co-ordinate system conversion errors, or earthworks/mining activity.</li> </ul>
<b>Data spacing and distribution</b>	<ul style="list-style-type: none"> <li>Drill hole spacing across the Canterbury project area is not homogenous. Recent exploration and drilling have targeted potential pit extension areas to the southwest and the northeast of the active mining area. Historical exploration data focuses on the current open pit and further to the north and south of the current mining operation.</li> <li>Exploration work has been concentrated along strike of the steeply dipping coal measure sequence, and therefore produces a distinctly linear dataset.</li> <li>Drill holes and trench sample locations are unable to be spaced equally or on a grid pattern due to the steep nature of the deposit and the limitation of site access. Sample locations are often located to confirm specific items such as economic pit shell limits, coal quality concerns and confirmation of coal seam correlation.</li> <li>Recent drilling campaigns have relied on a framework of TTC drill holes infilled with percussive probe drill holes. Infill drill holes are used to confirm the geological structure and coal seam thickness between cored drill holes.</li> <li>Primary sample spacing has not been estimated over the deposit. There are 23 coal seam packages within the deposit, and only a subset of these coal seams are intersected by each drill hole or trench, therefore the average sample spacing for each individual coal seam in the deposit varies markedly.</li> <li>Drill hole spacing is not the only measurement used by BRL to establish the degree of resource confidence and therefore the resource classification. BRL uses a multivariate approach to resource classification, whereby sample spacing within each daughter seam provides the primary evidence of continuity used to classify that daughter seam.</li> <li>The current drill hole spacing is deemed sufficient for coal seam correlation purposes within targeted areas; however due to the lensoidal nature of the coal seams within the Broken River Formation, some coal seam correlations northeast of the recent drilling and mapping data may be incorrect and should be reviewed in the future if new data is collected.</li> <li>Geostatistics of the Canterbury project dataset were examined but variography results for many coal seams were poor due to the variation in distribution of drill holes with coal qualities, combined with the large number of seams and structural complexity within the deposit.</li> <li>The coal quality samples database was composited to full daughter seam thickness prior to coal</li> </ul>

Criteria	Commentary
	quality grid model development.
<b>Orientation of data in relation to geological structure</b>	<ul style="list-style-type: none"> <li>• Drilling conducted by BRL has been orientated to intersect orthogonal to the general stratigraphic strike-dip plane of the deposit. Structure dip ranges from 20° in the south to 50° north of the current pit.</li> <li>• Drill hole inclination was recorded at the surface using an inclinometer and compass. Drill hole deviation has not been verified by downhole survey tools, but any deviation from design is not expected to have a material effect on the geological understanding of the deposit as the average drill hole depth in the dataset is 52 m, with the deepest coal intersection being 96 m downhole. At a depth of 60 m, an overall deviation of 1° would produce a horizontal deviation of 1 m at end of hole (EOH) and a negligible thickness deviation for coal seams intersected at that depth.</li> <li>• Angled drilling is considered the most suitable drilling method for the Canterbury project to provide unbiased data.</li> <li>• Trenches are typically orientated perpendicular to the strike of bedding. Surface intersections are surveyed and are then adjusted to simulate a drill hole. Trench data is logged in such a way as to simulate a drill hole drilled from the collar point of the trench.</li> </ul>
<b>Sample security</b>	<ul style="list-style-type: none"> <li>• Rigorous sample preparation and handling procedures have been followed by BRL.</li> <li>• Coal ply samples are taken and recorded from drill core, bagged and securely stored prior to being dispatched to the laboratory for analysis.</li> <li>• Samples are typically hand delivered to SGS by BRL staff, thus removing the potential for third parties to tamper with samples.</li> <li>• It is considered unlikely that individual coal samples face a risk of theft or sabotage as coal is a bulk commodity with little value from small volumes of coal taken from drill core.</li> </ul>
<b>Audits or reviews</b>	<ul style="list-style-type: none"> <li>• Golder and BRL have reviewed the geological data available and consider the data used to produce the resource model is reliable and suitable for the purposes of generating a Mineral (Coal) Resource estimate to the extent that the Coal Resource estimate has been classified.</li> <li>• Results of a duplicate sample testing program comparing SGS and CRL assay results shows little analytical error or bias between laboratories.</li> </ul>

## Section 2 Reporting of Exploration Results

Criteria	Commentary						
<b>Mineral tenement and land tenure status</b>	<ul style="list-style-type: none"> <li>• Coal ownership is complex throughout the Canterbury Coalfield.</li> <li>• The coal resources within the Malvern Hills Coalfield, north of the Selwyn River, are predominantly privately owned, with coal rights attached to land title.</li> <li>• The ownership of coal rights is separate from land ownership in several land parcels surrounding the Canterbury project. Blocks to the northeast of the current mining operations are held by Nimmo Collieries and Charles Dean. Canterbury Coal Mine Limited (CCM) has agreements in place to access this coal.</li> <li>• Royalty agreements are in place for the extracted private coal and are based on the mine gate value of the coal. Mine gate value is defined as the price received at point of sale minus examine costs such as freight, handling and commissions.</li> <li>• There is a limited amount of Crown coal at the site, and BRL has 100% ownership of it through the following coal permit: <table border="1" data-bbox="586 1633 1211 1730"> <thead> <tr> <th>Permit<sup>(1)</sup></th> <th>Operation</th> <th>Expiry</th> </tr> </thead> <tbody> <tr> <td>Mining Permit 41372</td> <td>Malvern Hills</td> <td>11/12/2025</td> </tr> </tbody> </table> </li> </ul> <p>(1) Coal within permit 41372 is owned by the Crown and Wakaepa Farms in a 50/50 split.</p> <ul style="list-style-type: none"> <li>• BRL holds land access agreements over all of the areas that it currently operates at the Canterbury project and over all areas containing reported resources.</li> <li>• Much of the remainder of land that makes up the Canterbury project is owned by Matariki Forests (formerly the Selwyn Plantation Board). An access arrangement is in place to allow BRL to access through the areas, allow exploration activities and to undertake mining.</li> <li>• BRL has not reported any Coal Resource for the Canterbury project where land access and/or</li> </ul>	Permit <sup>(1)</sup>	Operation	Expiry	Mining Permit 41372	Malvern Hills	11/12/2025
Permit <sup>(1)</sup>	Operation	Expiry					
Mining Permit 41372	Malvern Hills	11/12/2025					

Criteria	Commentary																																																																																
	mineral rights have not been granted.																																																																																
<b>Exploration done by other parties</b>	<ul style="list-style-type: none"> <li>Historical geological investigations and reports for the Canterbury Coalfield spanning the past 140 years have been compiled.</li> <li>All historical data used to develop the resource model has been validated against original source documents by BRL staff. Where historical data was deemed unreliable (such as where spatial survey was missing or imprecise), this data was not included in the resource model dataset.</li> <li>The historical drilling database includes the following drill holes compiled from historical data records.</li> </ul> <table border="1"> <thead> <tr> <th>Years</th> <th>Agency</th> <th>Range of Collar ID</th> <th># Holes</th> <th>Drilling Method</th> <th># Drill Holes in Structure Model</th> <th># Drill Holes in Coal Quality Model</th> <th>Geophysics Available</th> </tr> </thead> <tbody> <tr> <td>1919-1921</td> <td>Homebush Brick and Coal</td> <td>HB_Bore_01 - HB_Bore_13</td> <td>13</td> <td>Diamond</td> <td>0</td> <td>0</td> <td>0</td> </tr> <tr> <td>1921</td> <td>Homebush Coal company</td> <td>Gov_1 - Gov_7</td> <td>7</td> <td>Diamond</td> <td>0</td> <td>0</td> <td>0</td> </tr> <tr> <td>1944</td> <td>Klondyke Colleries</td> <td>Klondyke_1 - Klondyke_7</td> <td>7</td> <td>Diamond</td> <td>0</td> <td>0</td> <td>0</td> </tr> <tr> <td>&lt;1949</td> <td>Deans</td> <td>DEANS_1 - DEANS_5</td> <td>5</td> <td>unknown</td> <td>0</td> <td>0</td> <td>0</td> </tr> <tr> <td>1987</td> <td>Coal Corp</td> <td>CoalCorp_1 - CoalCorp_4</td> <td>4</td> <td>Mechanical Auger</td> <td>0</td> <td>0</td> <td>0</td> </tr> <tr> <td>&lt;1997</td> <td>?</td> <td>CCL_N1 - CCL_N2</td> <td>2</td> <td>unknown</td> <td>0</td> <td>0</td> <td>0</td> </tr> <tr> <td>1997</td> <td>Yardley</td> <td>CCL_Y1 - CCL_Y8</td> <td>8</td> <td>Rotary air</td> <td>3</td> <td>0</td> <td>0</td> </tr> <tr> <td>2002</td> <td>CCL</td> <td>CCL_T1 - CCL_T47</td> <td>47</td> <td>Trenching</td> <td>9</td> <td>7</td> <td>0</td> </tr> <tr> <td>2006</td> <td>CCL</td> <td>CCL_DB01 - CCL_DB16</td> <td>16</td> <td>RC and Air core</td> <td>14</td> <td>0</td> <td>0</td> </tr> </tbody> </table> <ul style="list-style-type: none"> <li>BRL is continuing to source historical plans and reports from a number of data libraries around New Zealand. Historical data will be validated and added to the exploration dataset if deemed reliable.</li> </ul>	Years	Agency	Range of Collar ID	# Holes	Drilling Method	# Drill Holes in Structure Model	# Drill Holes in Coal Quality Model	Geophysics Available	1919-1921	Homebush Brick and Coal	HB_Bore_01 - HB_Bore_13	13	Diamond	0	0	0	1921	Homebush Coal company	Gov_1 - Gov_7	7	Diamond	0	0	0	1944	Klondyke Colleries	Klondyke_1 - Klondyke_7	7	Diamond	0	0	0	<1949	Deans	DEANS_1 - DEANS_5	5	unknown	0	0	0	1987	Coal Corp	CoalCorp_1 - CoalCorp_4	4	Mechanical Auger	0	0	0	<1997	?	CCL_N1 - CCL_N2	2	unknown	0	0	0	1997	Yardley	CCL_Y1 - CCL_Y8	8	Rotary air	3	0	0	2002	CCL	CCL_T1 - CCL_T47	47	Trenching	9	7	0	2006	CCL	CCL_DB01 - CCL_DB16	16	RC and Air core	14	0	0
Years	Agency	Range of Collar ID	# Holes	Drilling Method	# Drill Holes in Structure Model	# Drill Holes in Coal Quality Model	Geophysics Available																																																																										
1919-1921	Homebush Brick and Coal	HB_Bore_01 - HB_Bore_13	13	Diamond	0	0	0																																																																										
1921	Homebush Coal company	Gov_1 - Gov_7	7	Diamond	0	0	0																																																																										
1944	Klondyke Colleries	Klondyke_1 - Klondyke_7	7	Diamond	0	0	0																																																																										
<1949	Deans	DEANS_1 - DEANS_5	5	unknown	0	0	0																																																																										
1987	Coal Corp	CoalCorp_1 - CoalCorp_4	4	Mechanical Auger	0	0	0																																																																										
<1997	?	CCL_N1 - CCL_N2	2	unknown	0	0	0																																																																										
1997	Yardley	CCL_Y1 - CCL_Y8	8	Rotary air	3	0	0																																																																										
2002	CCL	CCL_T1 - CCL_T47	47	Trenching	9	7	0																																																																										
2006	CCL	CCL_DB01 - CCL_DB16	16	RC and Air core	14	0	0																																																																										
<b>Geology</b>	<ul style="list-style-type: none"> <li>The project is located in the Canterbury Coalfield, Malvern Hills, New Zealand.</li> <li>The defined Coal Resource is contained within the late Cretaceous to Early Palaeocene aged Broken River Formation, formed during the Tertiary transgressive-regressive cycle between the Rangitata and Kaikoura orogenies.</li> <li>Overlying the coal measures is the Conway Formation, dominated by micaceous and quartz-rich fine sandstones and mudstones, indicative of littoral to shallow marine settings.</li> <li>Pleistocene aged glacial outwash gravels and tills mask underlying stratigraphy over much of the project area. Younger river gravels also dominate larger river valleys within the area.</li> <li>Glacial derived windblown loess deposits mantle much of the project area.</li> <li>Igneous intrusions are present in the Malvern Hills area. Some contact metamorphism of coal measures has been observed, with localised rank increases observed in some Canterbury coal samples, however none noted in the Canterbury project Coal Resource area.</li> <li>Generally, the Canterbury project area is structurally complex. Seam dips range between 20° in the south to 50° in the north of the current open pit area. In some areas, principally on the east of the deposit there is localised overturning of coal seams. Generally, coal seams are not greatly affected by cross-cutting faults.</li> </ul>																																																																																
<b>Drill hole Information</b>	<ul style="list-style-type: none"> <li>No exploration results are being presented in this Table 1, rather this document is focused on advanced projects that have been defined by geological models with associated Coal Resource estimates completed.</li> <li>Due to the consistent nature of coal deposits and the bulk nature of the commodity, exclusion of this information from this report is considered to not be material to the understanding of the deposit.</li> </ul>																																																																																



Criteria	Commentary
<b>Data aggregation methods</b>	<ul style="list-style-type: none"> <li>• Exploration drilling results have not been reported.</li> <li>• The maximum raw ash cut-off for building the Canterbury project coal quality model was set at 50%.</li> <li>• Coal Resources have been reported with a block raw ash cut-off of 25%.</li> <li>• A minimum coal seam vertical thickness cut-off of 0.25 m was used to remove thin coal seams from the resource model.</li> </ul>
<b>Relationship between mineralisation widths and intercept lengths</b>	<ul style="list-style-type: none"> <li>• Exploration drilling results have not been reported.</li> <li>• Coal seams in the project area strike ~060° and dip between 20° and 50° to the south-east.</li> <li>• All recent drill holes were drilled at an angle orthogonal to coal seam structure dip.</li> <li>• Some historical drilling was also inclined to intersect seams at close to 90°. Most historical drill holes were drilled vertically.</li> </ul>
<b>Diagrams</b>	<ul style="list-style-type: none"> <li>• Plans can be found in Appendix A as follows: <ul style="list-style-type: none"> <li>○ Location map.</li> <li>○ Map showing generalised geology.</li> <li>○ Map showing coal rights and access.</li> <li>○ Map showing exploration drill hole data set.</li> <li>○ Map showing extent of underground workings.</li> <li>○ Map showing main coal seam roof structure contours.</li> <li>○ Map showing main coal seam depth to roof contours.</li> <li>○ Map showing reserve classification with pit designs.</li> <li>○ Cross-section of main coal seam.</li> </ul> </li> </ul>
<b>Balanced reporting</b>	<ul style="list-style-type: none"> <li>• No exploration results are being presented in this Table 1, rather this document is focused on an advanced project that has been defined by geological models with associated resource estimates completed.</li> <li>• The exclusion of this information from this report is considered to not be material to the understanding of the deposit.</li> </ul>
<b>Other substantive exploration data</b>	<ul style="list-style-type: none"> <li>• The Coal Resources reported relate to the area in and around the existing Canterbury mining operations.</li> <li>• Geotechnical logs and samples were taken by the geologist during all exploration by BRL. Geotechnical logs identified defect types, angles and character through cored intervals. Geotechnical samples were taken of seam roof, floor and overburden material.</li> <li>• Geochemical characterisation of overburden material for acid base accounting (ABA) purposes has been conducted. These results have been used to construct an ABA model independent of the resource model discussed here.</li> </ul>
<b>Further work</b>	<ul style="list-style-type: none"> <li>• Further exploration is planned along strike both to the north and south of the existing Canterbury mining operations.</li> <li>• Channel sampling of coal seams within the active pit are undertaken periodically.</li> </ul>

### Section 3 Estimation and Reporting of Mineral Resources

Criteria	Commentary
<b>Database integrity</b>	<ul style="list-style-type: none"> <li>• BRL utilises an acquire database to store and maintain its exploration dataset.</li> <li>• All historical and legacy datasets have been thoroughly validated against original logs and results tables. Where reliability of data is considered poor, the data is excluded from the resource modelling dataset.</li> <li>• The acquire database places explicit controls on certain data fields as they are entered or imported into the database, such as overlapping intervals, coincident samples, out of range sample values, standardised look-up tables for logging codes.</li> <li>• Manual data entry of coal quality results is not required as results are imported directly from laboratory results files.</li> </ul>
<b>Site visits</b>	<ul style="list-style-type: none"> <li>• Henry Dillon (the Competent Person) has visited the site on numerous occasions over the past 10 years and is familiar with the site.</li> </ul>

Criteria	Commentary
<b>Geological interpretation</b>	<ul style="list-style-type: none"> <li>• Golder has reviewed the modelling processes in use by BRL to develop their resource model and Coal Resource estimates.</li> <li>• Golder has confidence in the methodologies used by BRL for geological modelling and the interpretation of the available Canterbury Coal data. Confidence varies for different areas, and this is reflected in the resource classification.</li> <li>• Downhole natural gamma logs are a key tool in correlating the often thin and numerous coal seam packages between drill holes.</li> <li>• BRL uses a multivariate approach to resource classification, which considers a number of variables.</li> <li>• Uncertainty surrounds historical underground mine workings, both in the quality and quantity of coal extracted, which seam was mined and surveying and spatial location of underground workings. This uncertainty is reflected in the resource classification.</li> <li>• Golder considers the quantity of geological data sufficient to estimate Coal Resources.</li> <li>• Quaternary gravel deposits overlie the coal measures unconformably over the southern portion of the project area. Some uncertainty surrounds the depth of erosion and the extent of the quaternary deposits. A conservative approach to modelling this Quaternary erosional surface has been used in the model and is reflected within the resource classification.</li> </ul>
<b>Dimensions</b>	<ul style="list-style-type: none"> <li>• Depth of cover (DOC) varies from 0 m at outcrop to over 200 m at the southeastern boundary of the model area. The strike length of the deposit is in excess of 4 km.</li> </ul>
<b>Estimation and modelling techniques</b>	<ul style="list-style-type: none"> <li>• All available exploration data has been validated and, where reliable, has been used to develop a 3D geological block model for resource estimation and classification.</li> <li>• All exploration drilling data is stored in an acquire database and exported to a Maptek Vulcan™ (Vulcan) drill hole database.</li> <li>• Mapping data including coal seam thickness and roof/floor points is stored in an acquire database and exported to Vulcan.</li> <li>• Interpretive data is stored within a Vulcan design database in various layers.</li> <li>• A horizons definition was developed and used to define the coal seams to be modelled in the stratigraphic modelling process.</li> <li>• Vulcan 11 was used to build the structure model.</li> <li>• Two main iterations of the structure model were completed. <ul style="list-style-type: none"> <li>• The first pass defined the regional structure in a reference grid (the M03 seam roof) in a 25 m x 25 m grid for use in correcting coal seam intercepts from apparent thickness to true thickness.</li> <li>• The second pass utilised the modified coal seam thicknesses to build a finer grid spacing of 5 m x 5 m. This spacing was selected to be 1/5 of the minimum data spacing of a targeted area and to model steeply dipping strata more accurately.</li> </ul> </li> <li>• Vulcan's 'Hybrid Method' was used to develop the structure model. This method triangulates a reference surface and then stacks the remaining horizons by adding structure thickness grids. Thickness grids are created using an inverse distance (ID) modelling algorithm. Design data from other horizons is incorporated into the final grid structure.</li> <li>• Modelling parameters for the two structural modelling passes are as follows: <ul style="list-style-type: none"> <li>• Pass 1 – Reference grid surface by Stacking: <ul style="list-style-type: none"> <li>• Method is Triangulation.</li> <li>• Trend Order is 1 (Linear).</li> <li>• Smoothing is 9.</li> <li>• The maximum triangle length is 1,500 m.</li> <li>• Surfaces are splined.</li> </ul> </li> <li>• Pass 1 – Reference grid thickness modelling by Stacking: <ul style="list-style-type: none"> <li>• Method is ID.</li> <li>• Trend Order is 0 (Horizontal Planar).</li> <li>• Smoothing is 9.</li> <li>• Search Radius is 1,500 m.</li> <li>• The ID power is set to 2.</li> </ul> </li> </ul> </li> </ul>

Criteria	Commentary				
	<ul style="list-style-type: none"> <li>• Maximum samples set to 10.</li> <li>• Pass 2 – Structural grid surface by Hybrid method:               <ul style="list-style-type: none"> <li>• Method is Triangulation.</li> <li>• Trend Order is 1 (Linear).</li> <li>• Smoothing is 9.</li> <li>• The maximum triangle length is 1,500 m.</li> <li>• Surfaces are splined.</li> </ul> </li> <li>• Pass 2 – Structural grid thickness modelling by Hybrid method:               <ul style="list-style-type: none"> <li>• Method is ID.</li> <li>• Trend Order is 0 (Horizontal Planar).</li> <li>• Smoothing is 9.</li> <li>• Search Radius is 1,500 m.</li> <li>• The ID power is set to 2.5.</li> <li>• Maximum samples set to 12.</li> </ul> </li> <li>• Structure grids are checked and validated visually before being used to construct the resource block model.</li> <li>• Vulcan 11 is used to build the block model. The process is automated using a Lava script.</li> <li>• The coal structure surfaces, along with LiDAR topography surface, Quaternary unconformity, and open cut mined out surfaces are used to build the block model. The block dimensions are constructed at 5 m x 5 m. Vertical thickness for coal blocks is 0.25 m, whilst overburden blocks have no maximum thickness. The model is rotated at 60° to align with the strike of the coal measure deposits.</li> <li>• Coal seam existence has been masked by a 0.25 m vertical thickness cut-off. No resources are reported for daughter seams of less than 0.25 m vertical thickness.</li> <li>• Coal quality grids for each daughter seam are built using composited samples for each daughter seam on a full seam basis using an inverse distance squared function.               <ul style="list-style-type: none"> <li>• Method is ID.</li> <li>• Trend Order is 0 (Horizontal Planar).</li> <li>• Smoothing is 9.</li> <li>• Search Radius is 750 m.</li> <li>• The ID power is set to 2.5.</li> <li>• Maximum samples set to 12.</li> </ul> </li> <li>• If a coal block is not estimated during the grade estimation process the blocks are not reported as resources.</li> <li>• Quality grids for air-dried ash, sulphur, volatile matter, and inherent moisture and in situ moisture are estimated. Calorific value is calculated from ash on a dry basis.</li> <li>• Geostatistics of the coal quality dataset has been investigated to examine and define the estimation search parameters; however, the results have been poor due to the non-normal distribution of the data along strike of the deposit.</li> <li>• Various methods have been used to check the validity of the block estimation. This includes manual inspection of the model, QQ plots of block model qualities vs the coal quality database and other comparison tools.</li> <li>• Reconciliations of production versus plan are completed quarterly with coal production generally 5-10% over modelled coal tonnage. Production data on coal quality follows modelled coal quality.</li> <li>• Resource tonnages within historical underground workings areas have been discounted by an estimated extraction rate. The primary underground mining method utilised historically in Malvern Hills area is bord and pillar mining although some minor hydro mining took place at Nimmo's underground operation in the 1970's where production was limited due to a lack of available water. Where mine plans are available and are sufficiently accurate to define extraction types the following factors are used:               <table border="1" data-bbox="440 1898 1247 1976" style="margin-left: 40px;"> <thead> <tr> <th data-bbox="451 1902 610 1927">Mining Method</th> <th data-bbox="943 1902 1105 1927">Extraction Rate</th> </tr> </thead> <tbody> <tr> <td data-bbox="451 1940 586 1965">First worked</td> <td data-bbox="943 1940 987 1965">33%</td> </tr> </tbody> </table> </li> </ul>	Mining Method	Extraction Rate	First worked	33%
Mining Method	Extraction Rate				
First worked	33%				

Criteria	Commentary				
	<p>(including crown pillars and access protection pillars)</p> <table border="1"> <tr> <td>Pillars extracted</td> <td>75%</td> </tr> <tr> <td>Default</td> <td>50%</td> </tr> </table> <p>(areas where workings are known but plans are insufficient to define type)</p> <ul style="list-style-type: none"> <li>Where the mine plans are not of sufficient detail to accurately define extraction methods the default rate of 50% is used to reduce coal tonnages within worked seams in the model.</li> </ul>	Pillars extracted	75%	Default	50%
Pillars extracted	75%				
Default	50%				
<b>Moisture</b>	<ul style="list-style-type: none"> <li>Resource tonnages are reported using natural bed moisture, calculated from air-dried density, air-dried moisture and in situ moisture using the Preston Sanders equation.</li> </ul>				
<b>Cut-off parameters</b>	<ul style="list-style-type: none"> <li>Stratigraphic structure grids have been developed based on a 50% raw ash cut-off.</li> <li>No lower cut-off has been applied. There is an inherent minimum limit to ash samples in modern results due to a laboratory lower detection limit of 0.17% (adb).</li> <li>Coal Resources are reported down to a seam thickness of 0.25 m (one block); however, all seams are masked from the model where modelled structure thickness is less than 0.3 m thick (vertical) with a raw ash cut-off of 25%.</li> </ul>				
<b>Mining factors or assumptions</b>	<ul style="list-style-type: none"> <li>It is assumed that any future mining operation would have a minimum vertical daughter seam thickness of 0.3 m as a minimum mining horizon cut-off. The current opencast operation mines some seam splits that are thinner than this.</li> <li>Only coal that falls within an optimised pit shell with revenue factor 0.75 is reported as resources. Costs and revenue parameters used in the pit optimisation are based on the 2018 Canterbury Project budget and include allowances for royalties, commissions, mining costs, coal processing and administration, and basic mining and processing losses. This optimised pit shell is used to determine Reasonable Prospects for Eventual Economic Extraction (RPEEE).</li> <li>No other mining factors such as strip ratios, mining losses and dilutions have been applied when developing the resource model or reporting Coal Resource tonnages.</li> </ul>				
<b>Metallurgical factors or assumptions</b>	<ul style="list-style-type: none"> <li>No metallurgical assumptions have been applied in estimating Coal Resources.</li> <li>Currently no wash plant is used at the Canterbury Project. Run-of-Mine (ROM) coal produced is processed through a crushing/screening plant where losses are minimal.</li> </ul>				
<b>Environmental factors or assumptions</b>	<ul style="list-style-type: none"> <li>Studies for ABA characterisation of overburden, and boron leaching studies have been completed. It is not expected that these will prevent eventual economic extraction of the resource.</li> <li>No other environmental assumptions have been applied in developing the resource model.</li> <li>All environmental approvals are currently in place to operate the current section of the mine.</li> <li>Updating of approvals for mine footprint expansion is an ongoing process and it is reasonably expected that any modifications to existing agreements or additional agreements that may be required can be obtained in a timely manner.</li> </ul>				
<b>Bulk density</b>	<ul style="list-style-type: none"> <li>After grade estimation air-dried density is calculated from the raw ash value (adb) using the ash-density relationship derived from the project dataset.</li> <li>An in situ density value is then computed using the Preston Sanders method.</li> <li>In situ moisture determinations have been collected from drill core ply samples and un-weathered outcrop/trench samples taken from the active pit.</li> </ul>				
<b>Classification</b>	<ul style="list-style-type: none"> <li>BRL classifies resources using a multivariate approach.</li> <li>Coal Resources have been classified on the basis of geological and grade continuity balanced by relative uncertainties surrounding historical underground extraction and proximity to faults and unconformities. The result reflects the Competent Person's view of the deposit.</li> <li>Closely spaced drilling with valid samples increases the confidence for each seam in resource assessments.</li> <li>The confidence is reduced by: <ul style="list-style-type: none"> <li>A block being within an underground worked area due to extraction rate uncertainty.</li> <li>Thin coal, where thickness is 0.5 m or less.</li> <li>A block lies below but within 2 m of the quaternary unconformable surface.</li> </ul> </li> </ul>				
<b>Audits or reviews</b>	<ul style="list-style-type: none"> <li>A review of the resource model has been undertaken by the Competent Person.</li> </ul>				

Criteria	Commentary
<b>Discussion of relative accuracy/confidence</b>	<ul style="list-style-type: none"> <li>Statistical comparisons between the resource block model and the coal quality data set have been carried out and are within expected ranges. Some anomalies exist due to non-normal data distribution. Techniques utilised include QQ plots and probability plots.</li> <li>Reconciliations of production versus plan are completed quarterly with coal production generally within 5-10% of the modelled coal tonnage. Production data on coal quality is insufficiently recorded to reconcile modelled coal quality.</li> </ul>

## Section 4 Estimation and Reporting of Ore Reserves

Criteria	Commentary										
<b>Mineral Resource estimate for conversion to Ore Reserves</b>	<ul style="list-style-type: none"> <li>A 3D Resource block model of topography, structure and quality are used for in situ Resource definition.</li> <li>Mineral Resources are inclusive of Ore Reserves.</li> </ul>										
<b>Site visits</b>	<ul style="list-style-type: none"> <li>The Ore Reserves competent person visits the site regularly.</li> </ul>										
<b>Study status</b>	<ul style="list-style-type: none"> <li>Canterbury Coal is an operating mine project. The reportable Ore Reserve is based on the life of mine (LOM) plan and has determined a mine plan that is technically achievable and economically viable, and that material modifying factors have been considered.</li> </ul>										
<b>Cut-off parameters</b>	<ul style="list-style-type: none"> <li>Pit optimisation runs were completed to determine economic pit limits.</li> <li>BRL supplied cost and revenue data.</li> <li>A maximum ROM ash of 15% (arb) and a minimum coal seam vertical thickness of 0.3m vertical are applied.</li> </ul>										
<b>Mining factors or assumptions</b>	<ul style="list-style-type: none"> <li>The Canterbury Coal mining area has been operational since approximately 2005, with the current operation starting in 2013. Costs and prices are derived from actual and budget estimations. Hence, a Feasibility Study was not completed.</li> <li>Mining recovery of 80% is applied to the in-situ coal from areas not affected by underground mining. Mining recovery in areas of underground workings are summarised below. <table border="1" data-bbox="430 1129 1188 1453"> <thead> <tr> <th>Mining Method</th> <th>Mining Recovery</th> </tr> </thead> <tbody> <tr> <td><b>Not worked</b></td> <td>80%</td> </tr> <tr> <td><b>First worked</b> (including crown pillars and access pillars)</td> <td>66%</td> </tr> <tr> <td><b>Pillars extracted</b></td> <td>0%</td> </tr> <tr> <td><b>Default</b> (areas where workings are known but are insufficient to define type)</td> <td>50%</td> </tr> </tbody> </table> </li> <li>Periodically, the ROM coal production is reconciled against depletion of the mining model. Reconciliation to date shows more coal produced than modelled from the same areas.</li> <li>The Canterbury Coal mine utilises truck and shovel for waste and coal movement. The operations are supported by additional equipment including dozers, graders, and water carts.</li> <li>Geotechnical studies have been completed for Canterbury existing operations and will be an ongoing requirement for new pits prior to development.</li> <li>Moisture Adjustments: Moisture is modified during both the mining and processing operations. In situ moisture is determined by the process described in Section 3 and is the base point for all moisture adjustments. Recoverable Coal Reserves are stated on a ROM moisture basis, as received by the processing plant. Marketable Coal Reserves are stated on a product moisture basis, as sold.</li> </ul>	Mining Method	Mining Recovery	<b>Not worked</b>	80%	<b>First worked</b> (including crown pillars and access pillars)	66%	<b>Pillars extracted</b>	0%	<b>Default</b> (areas where workings are known but are insufficient to define type)	50%
Mining Method	Mining Recovery										
<b>Not worked</b>	80%										
<b>First worked</b> (including crown pillars and access pillars)	66%										
<b>Pillars extracted</b>	0%										
<b>Default</b> (areas where workings are known but are insufficient to define type)	50%										
<b>Metallurgical factors or assumptions</b>	<ul style="list-style-type: none"> <li>The ROM coal produced at Canterbury Coal is crushed and screened on site. A process recovery of 95% is used based on a processing reconciliation study.</li> <li>Product coal specifications include ash, sulphur, moisture and calorific value.</li> </ul>										
<b>Environmental</b>	<ul style="list-style-type: none"> <li>All environmental approvals are currently in place to operate the current section of the mine.</li> </ul>										

Criteria	Commentary
	<ul style="list-style-type: none"> <li>BRL is in the process of seeking approvals to expand the current operations.</li> <li>Waste rock characterisation results show that a portion of the waste material is acid producing, as such it requires special placement requirements and procedures in the dumps.</li> </ul>
<b>Infrastructure</b>	<ul style="list-style-type: none"> <li>All necessary infrastructure is in place and operational for the current operation.</li> </ul>
<b>Costs</b>	<ul style="list-style-type: none"> <li>All infrastructure is in place at Canterbury Coal. The primary ongoing capital requirements are for equipment replacement and this is included in the economic model.</li> <li>All operating costs were based on the 2021 Canterbury Coal budget estimates developed by BRL and include allowances for royalties, commissions, mining costs, road haulage loading and administration.</li> <li>Prices are at the mine gate. Customers are responsible for transport costs.</li> <li>Contracted product specifications and penalties for failure to meet specification are included in the cost model.</li> </ul>
<b>Revenue factors</b>	<ul style="list-style-type: none"> <li>BRL uses a weighted average of contracted coal price. These price assumptions are considered reasonable for the purposes of estimating Reserves.</li> </ul>
<b>Market assessment</b>	<ul style="list-style-type: none"> <li>Long term supply contracts are in place.</li> </ul>
<b>Economic</b>	<ul style="list-style-type: none"> <li>For JORC Reserves reporting purposes, detailed mine design and schedules are generated. This work includes identifying the mining sequence and equipment requirements.</li> <li>BRL generates detailed cash flow schedules and identifies incremental and sustaining capital.</li> </ul>
<b>Social</b>	<ul style="list-style-type: none"> <li>BRL have key stakeholder agreements in place.</li> </ul>
<b>Other</b>	<ul style="list-style-type: none"> <li>All mining projects operate in an environment of geological uncertainty. The Competent Person is not aware of any other potential factors, legal, marketing or otherwise, that could affect the operations viability.</li> <li>The Competent Person understands that the pit shells used as the basis of this Statement are based on extending the operation to the north and south along strike. Updating of approvals is an ongoing process and it is reasonably expected that any modifications to existing agreements or additional agreements that may be required can be obtained in a timely manner.</li> </ul>
<b>Classification</b>	<ul style="list-style-type: none"> <li>Classification of Ore Reserves has been derived by considering the Measured and Indicated Resources and the level of mine planning.</li> <li>For the Canterbury Coal operation, Measured Coal Resources are classified as Proved Coal Reserves and Indicated Resources classified as Probable Coal Reserves, as the mine is currently operating and the level of mine planning adequate.</li> <li>The Inferred Coal Resources have been excluded from the Reserve estimates.</li> </ul>
<b>Audits or reviews</b>	<ul style="list-style-type: none"> <li>Internal peer review and reconciliation by BRL of the Reserves estimate has been completed.</li> </ul>
<b>Discussion of relative accuracy/confidence</b>	<ul style="list-style-type: none"> <li>Periodically, the ROM coal production is reconciled against depletion of the mining model. To-date more coal has been produced than modelled from the same areas.</li> <li>Accuracy and confidence of modifying factors are generally consistent with the current operation.</li> </ul>

Appendix A:

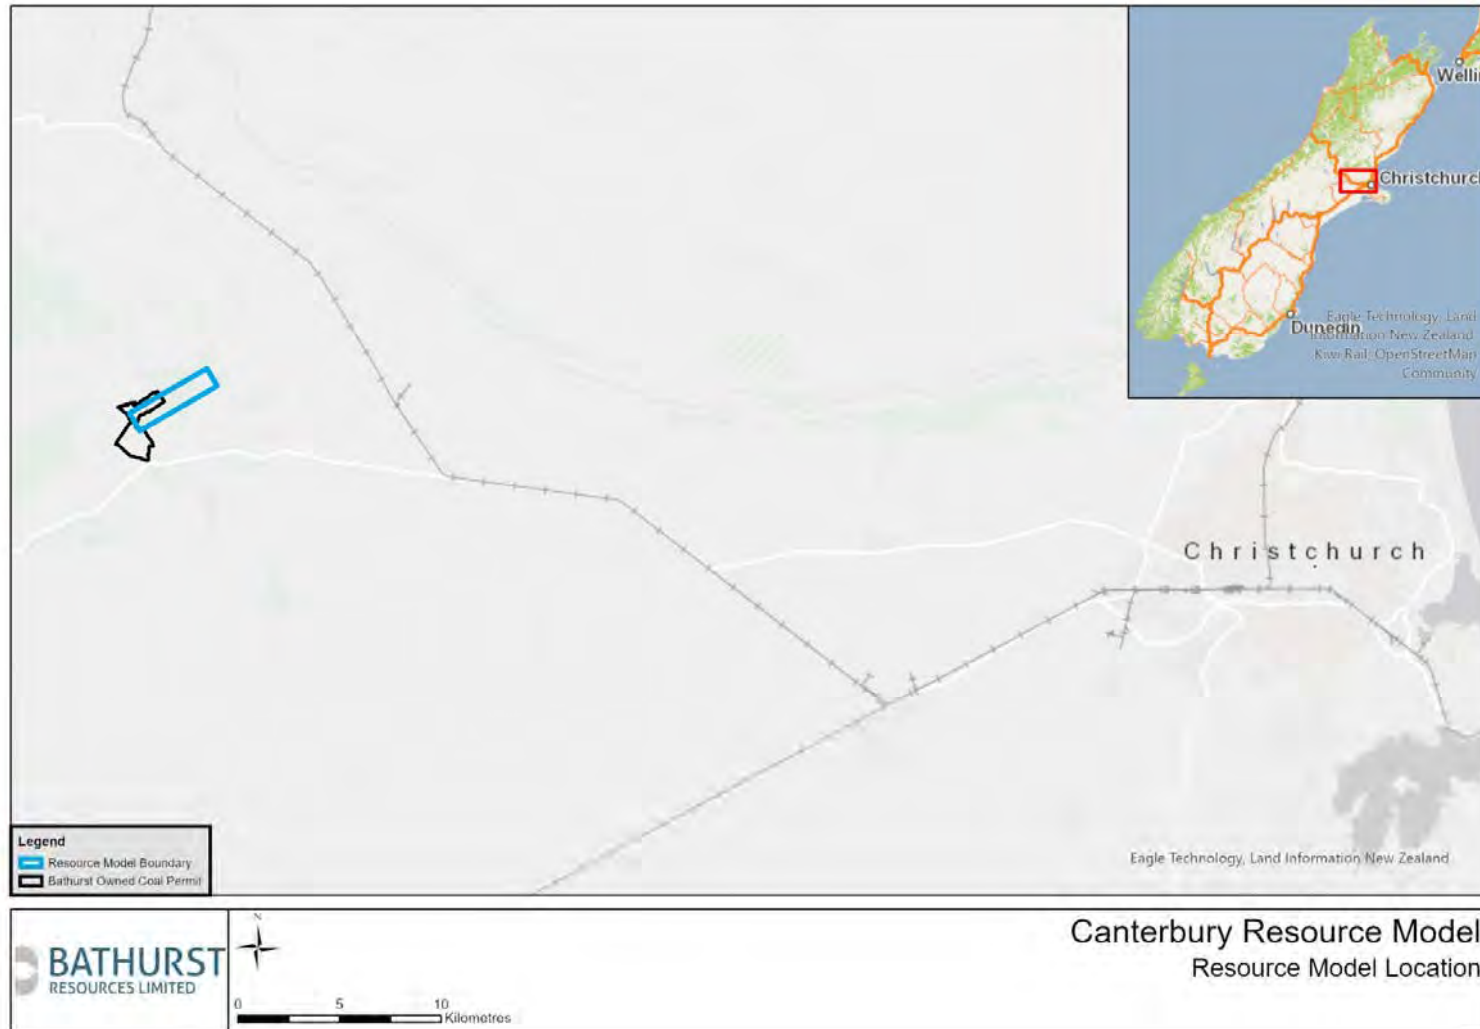


Figure 1: Location plan showing the proximity of the resource model area to regional centres and markets


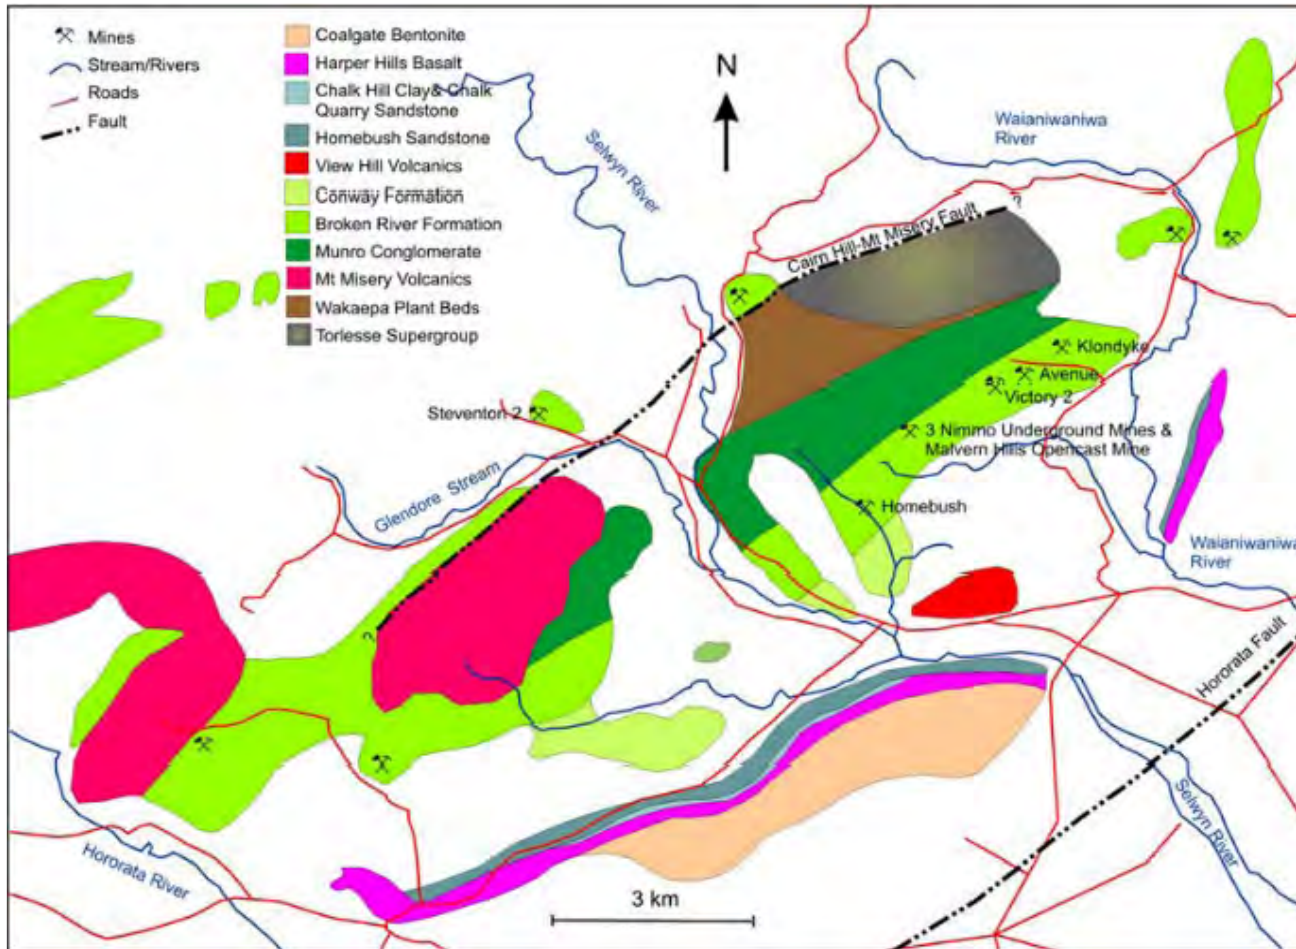


Figure 2: Generalised map of Malvern Hills Coalfield showing geological units and faults with locations of mines noted in the text (from Seale 2006 after Carlson et al., 1980; Duff, 1986; Duff and Barry, 1989; Field and Browne, 1989; Mathews, 1989; Tappenden, 2003. Refer to details below for details of the stratigraphic units)

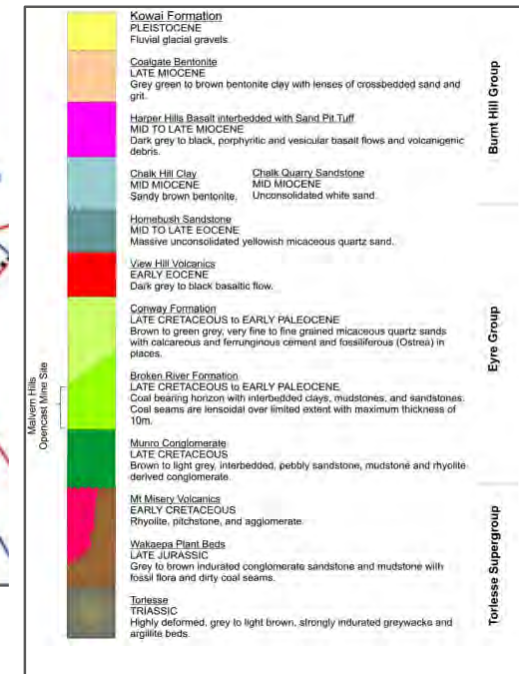

General geological stratigraphic column for the Malvern Hills coalfield (from Seale 2006).



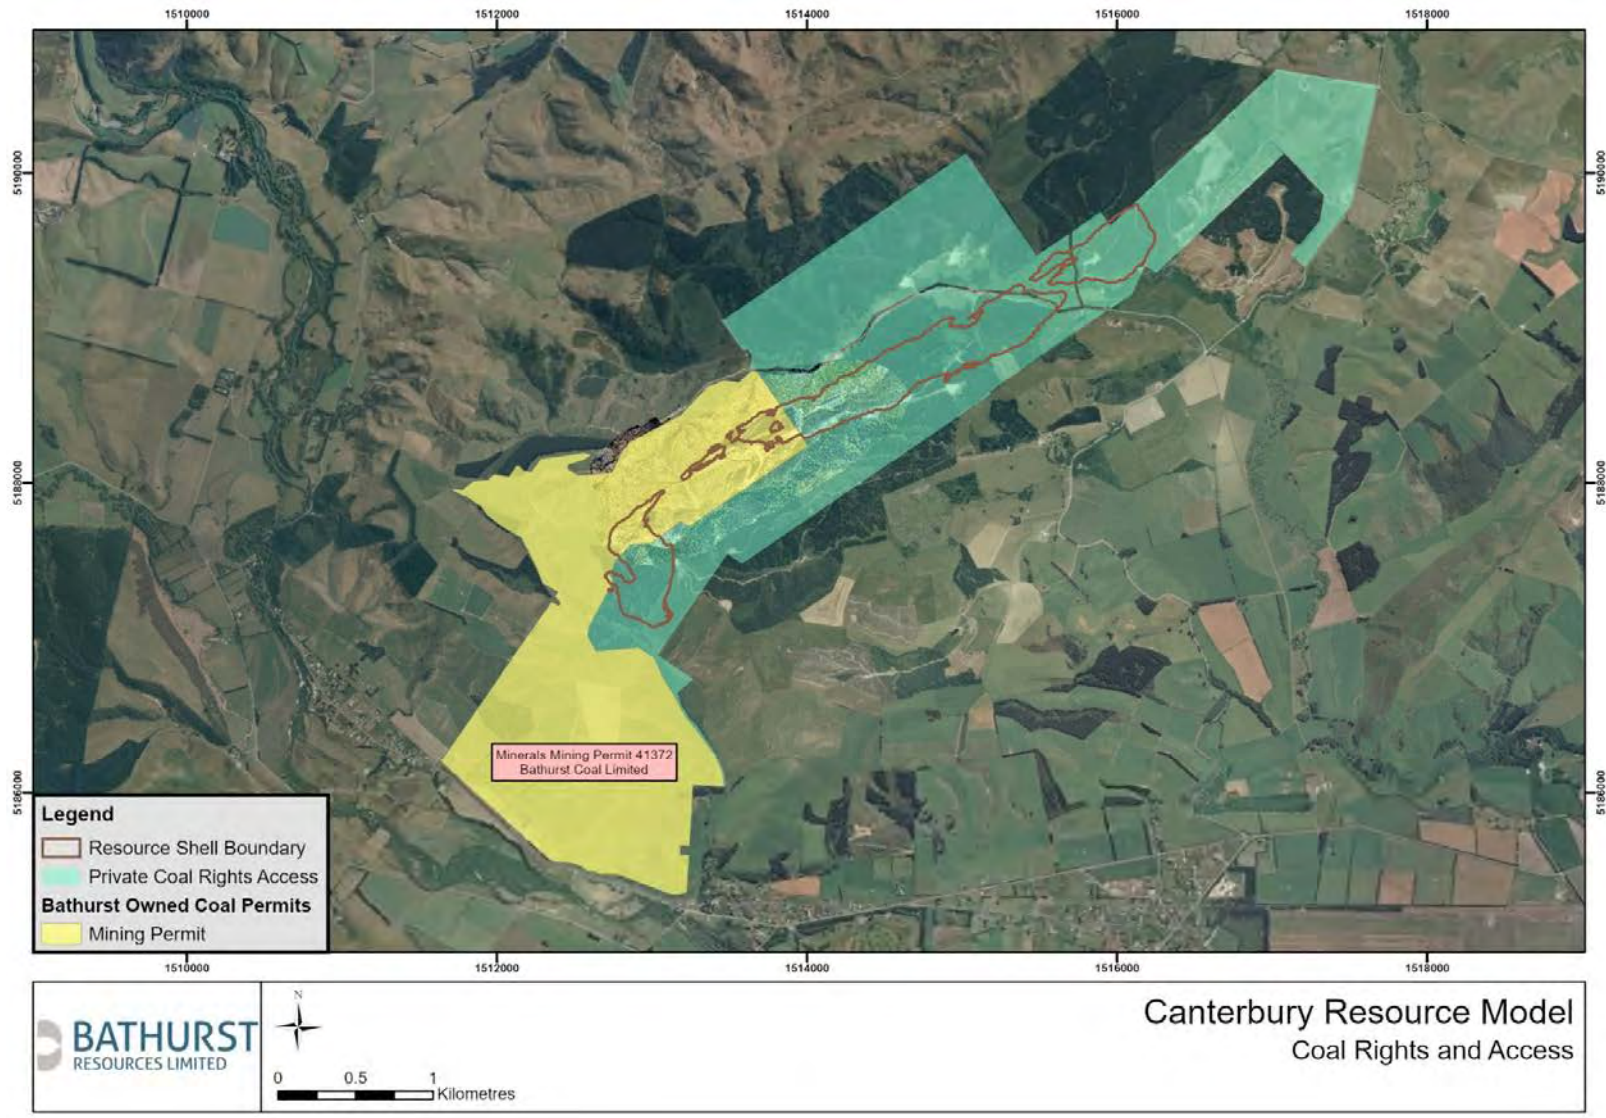


Figure 3: Coal right access

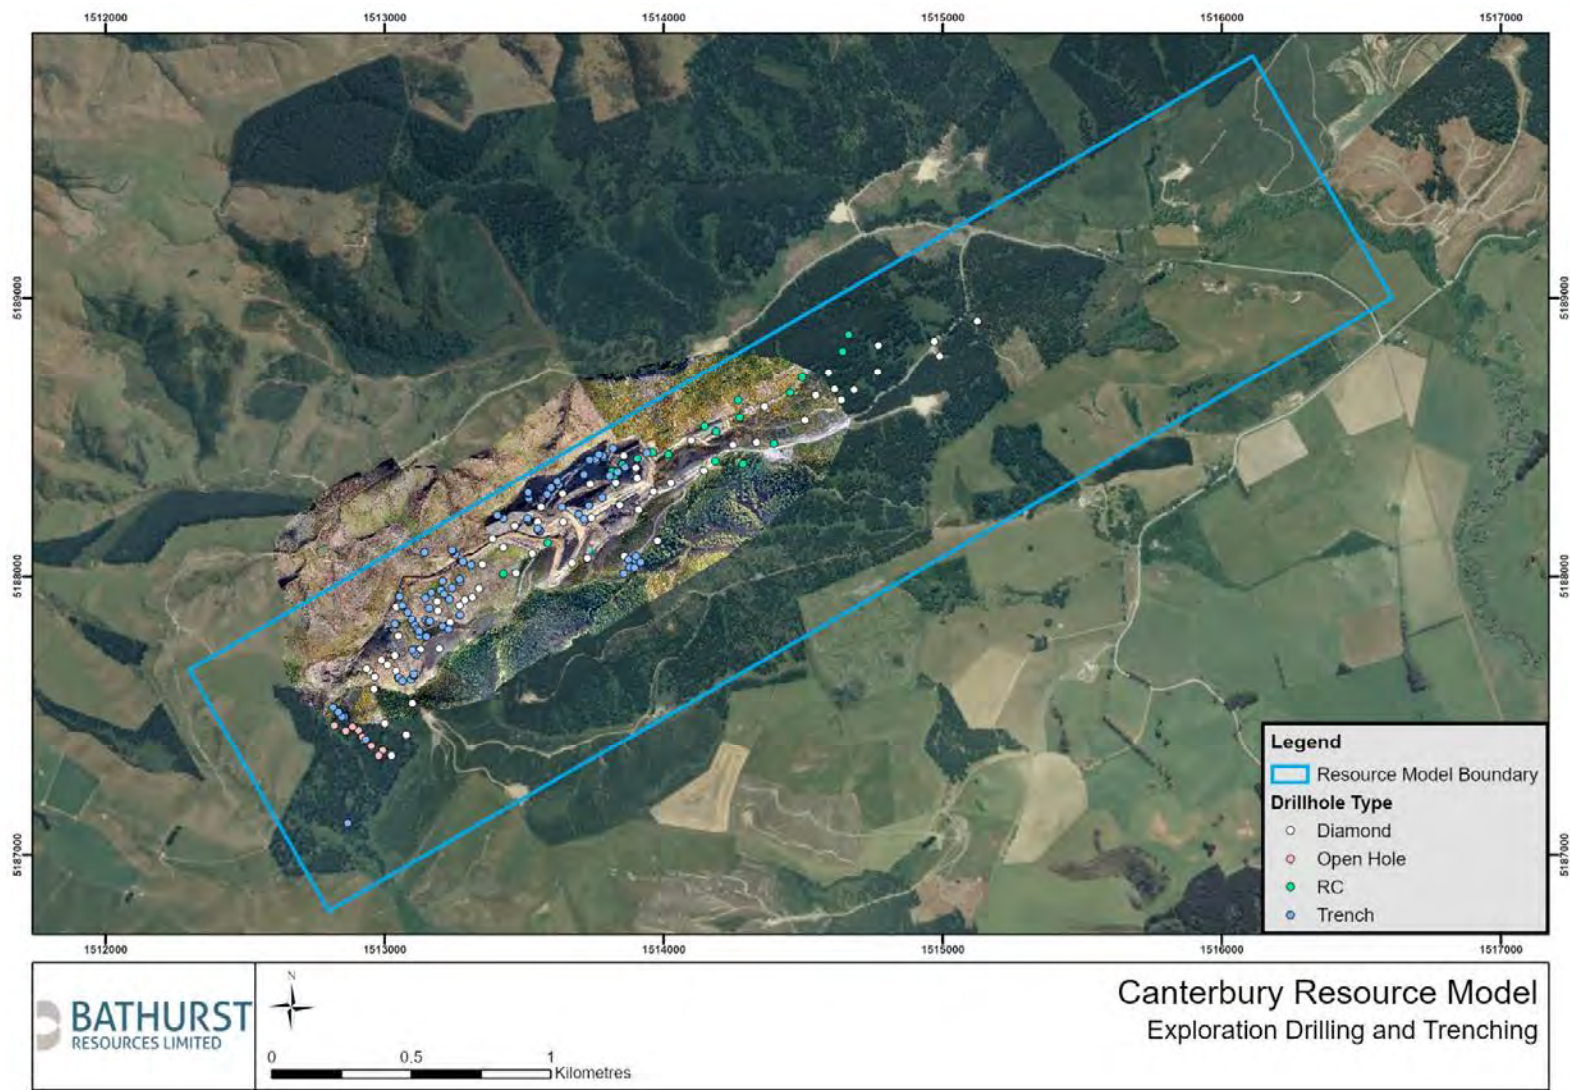


Figure 4: Exploration dataset for the Canterbury project

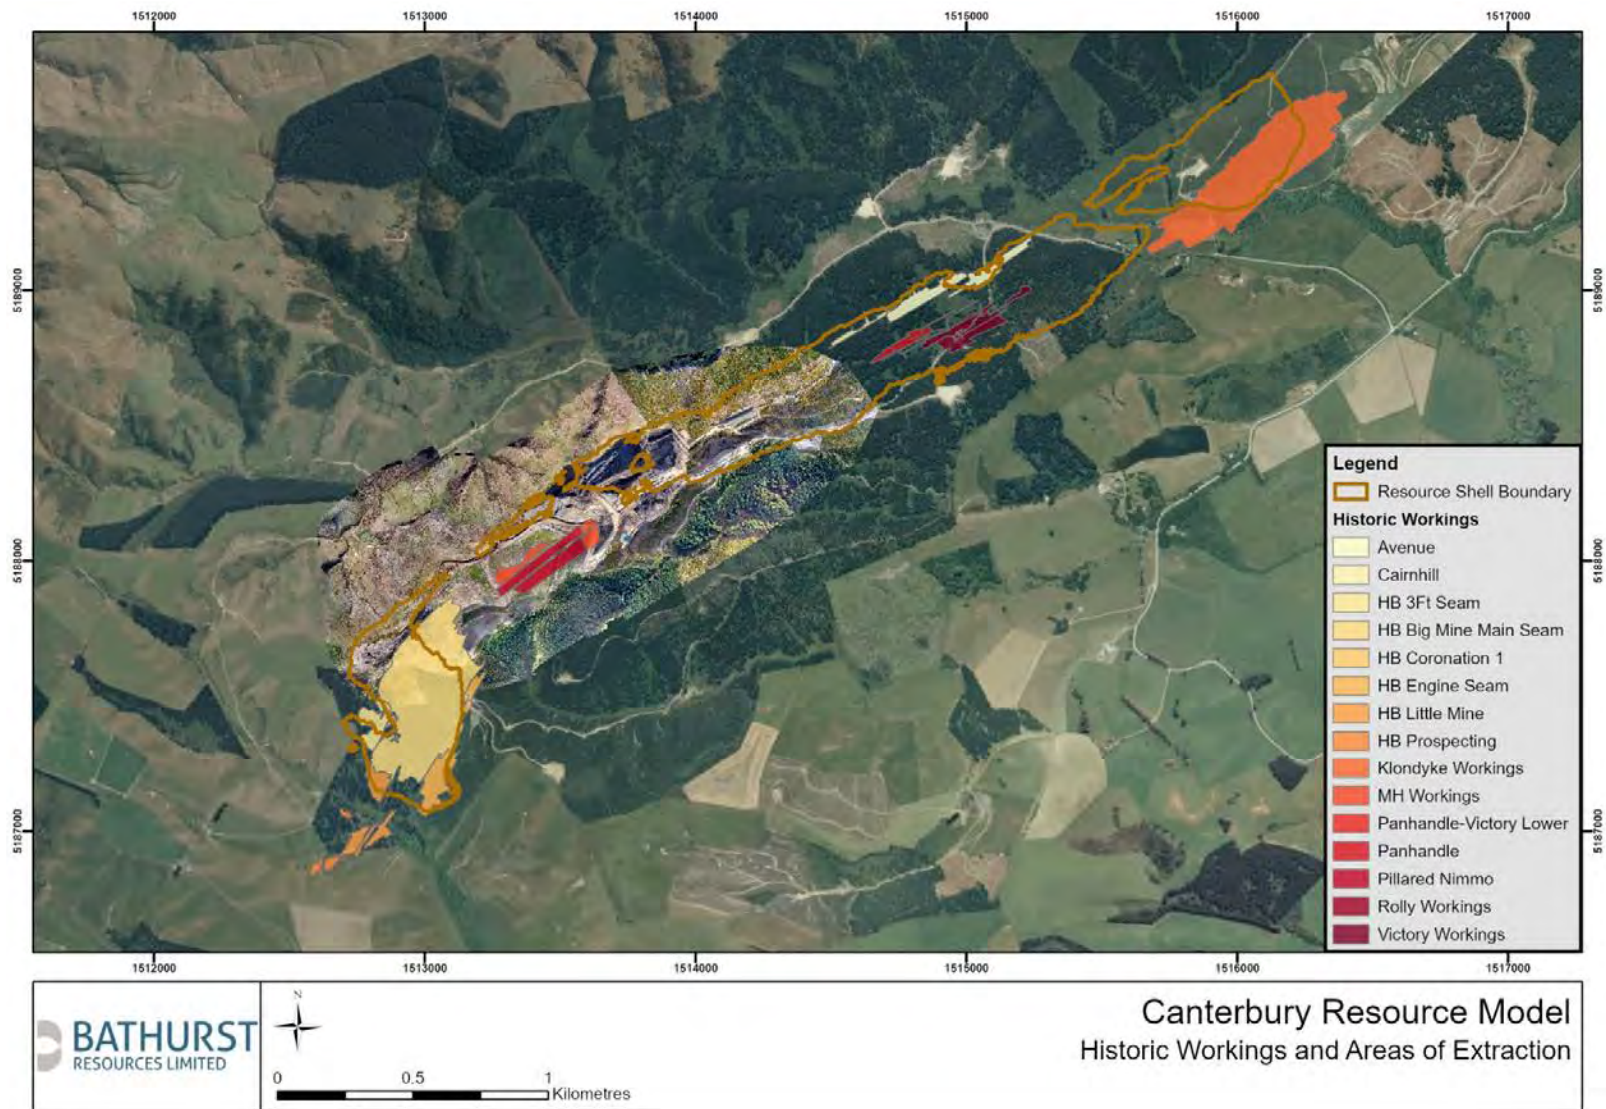


Figure 5: Extent of historic underground coal mines in the project area

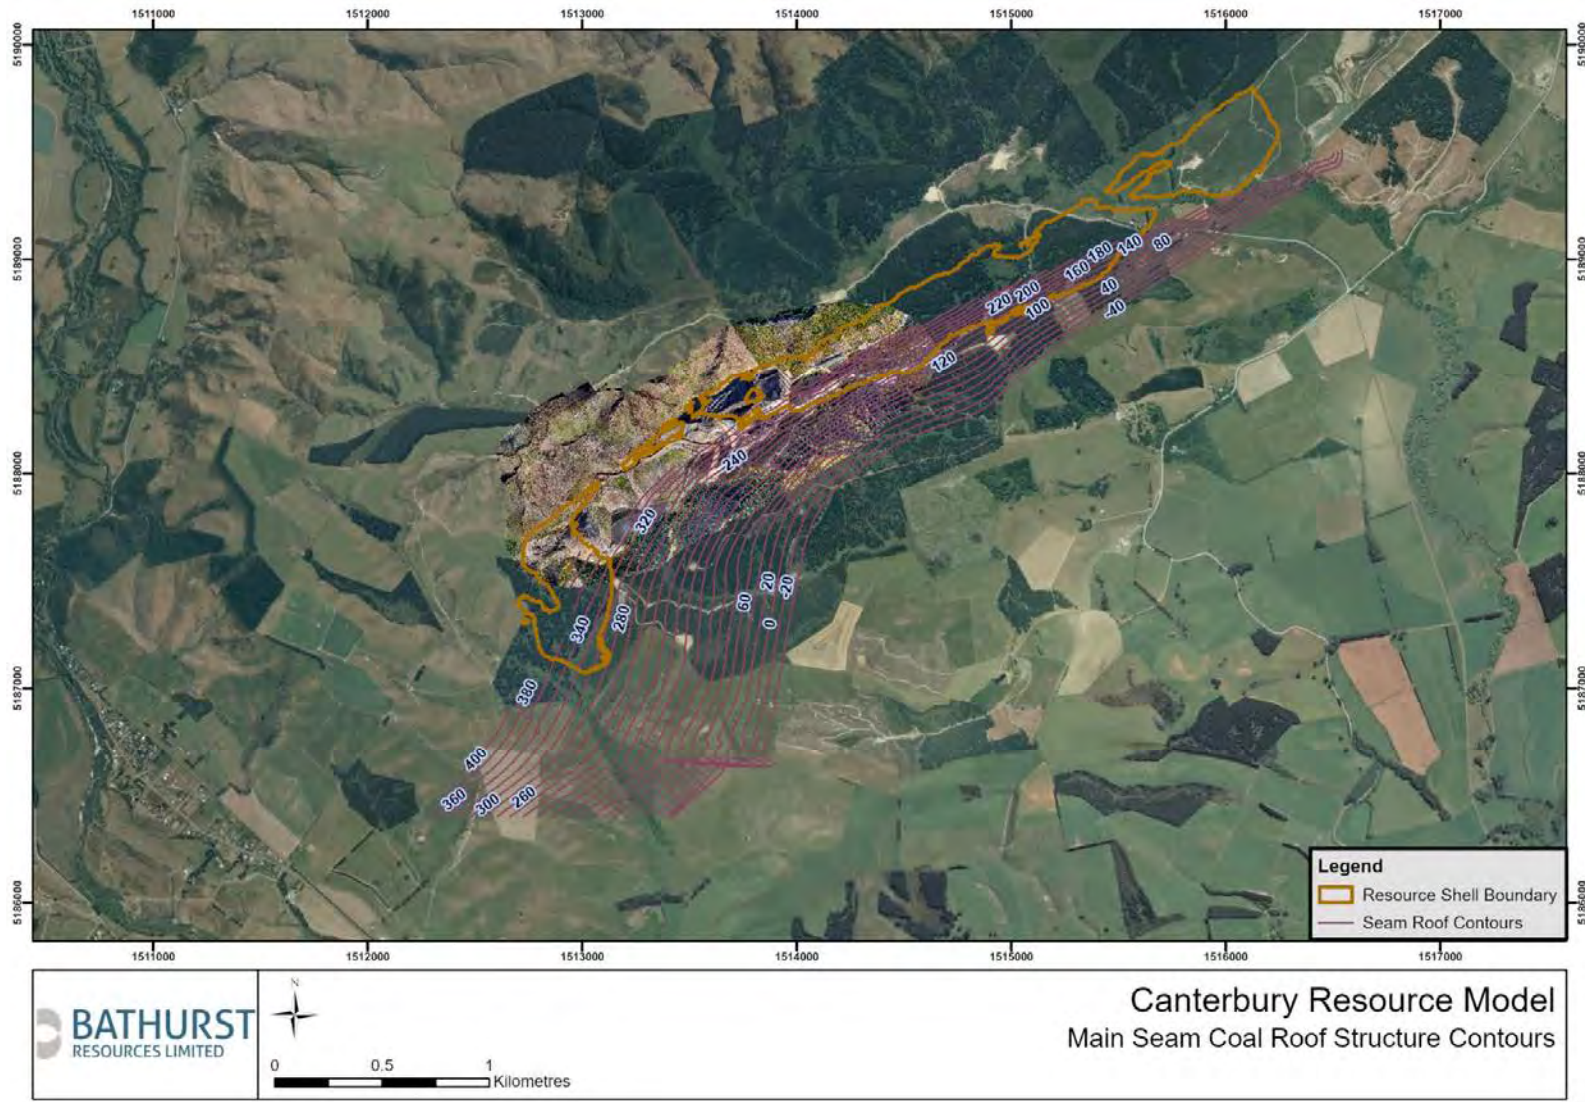


Figure 6: Structure contours of the Main Seam roof

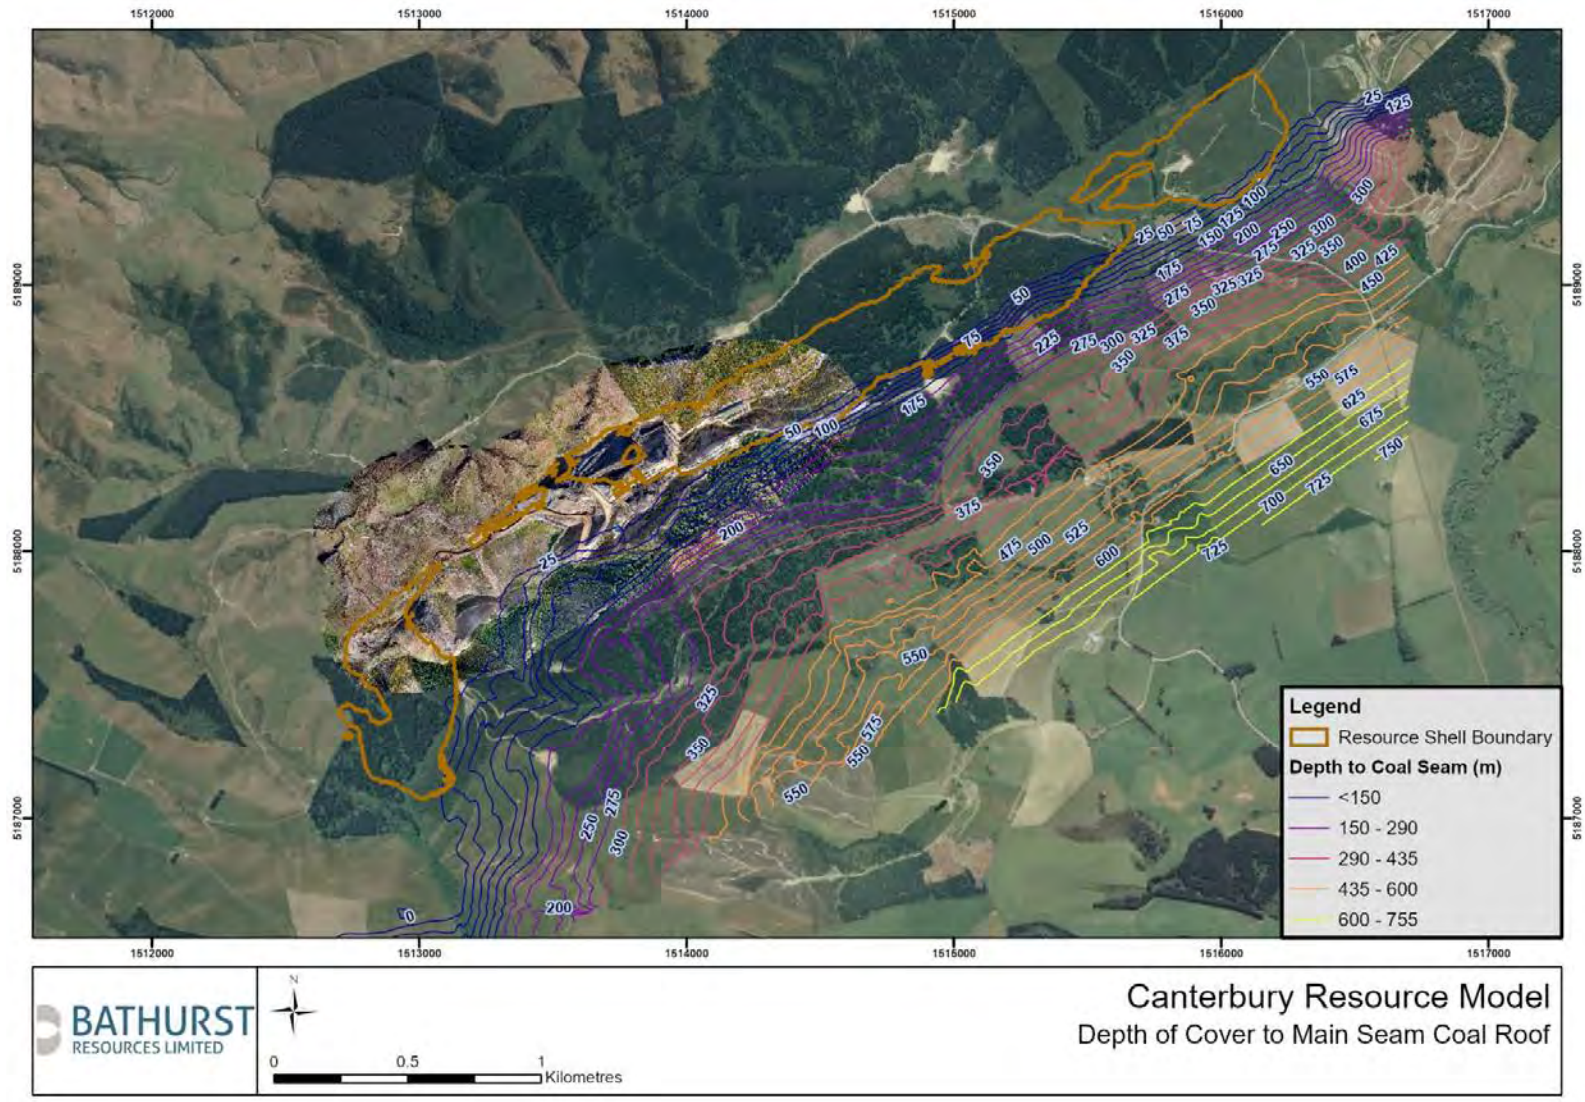


Figure 7: Depth to the Main coal seam roof

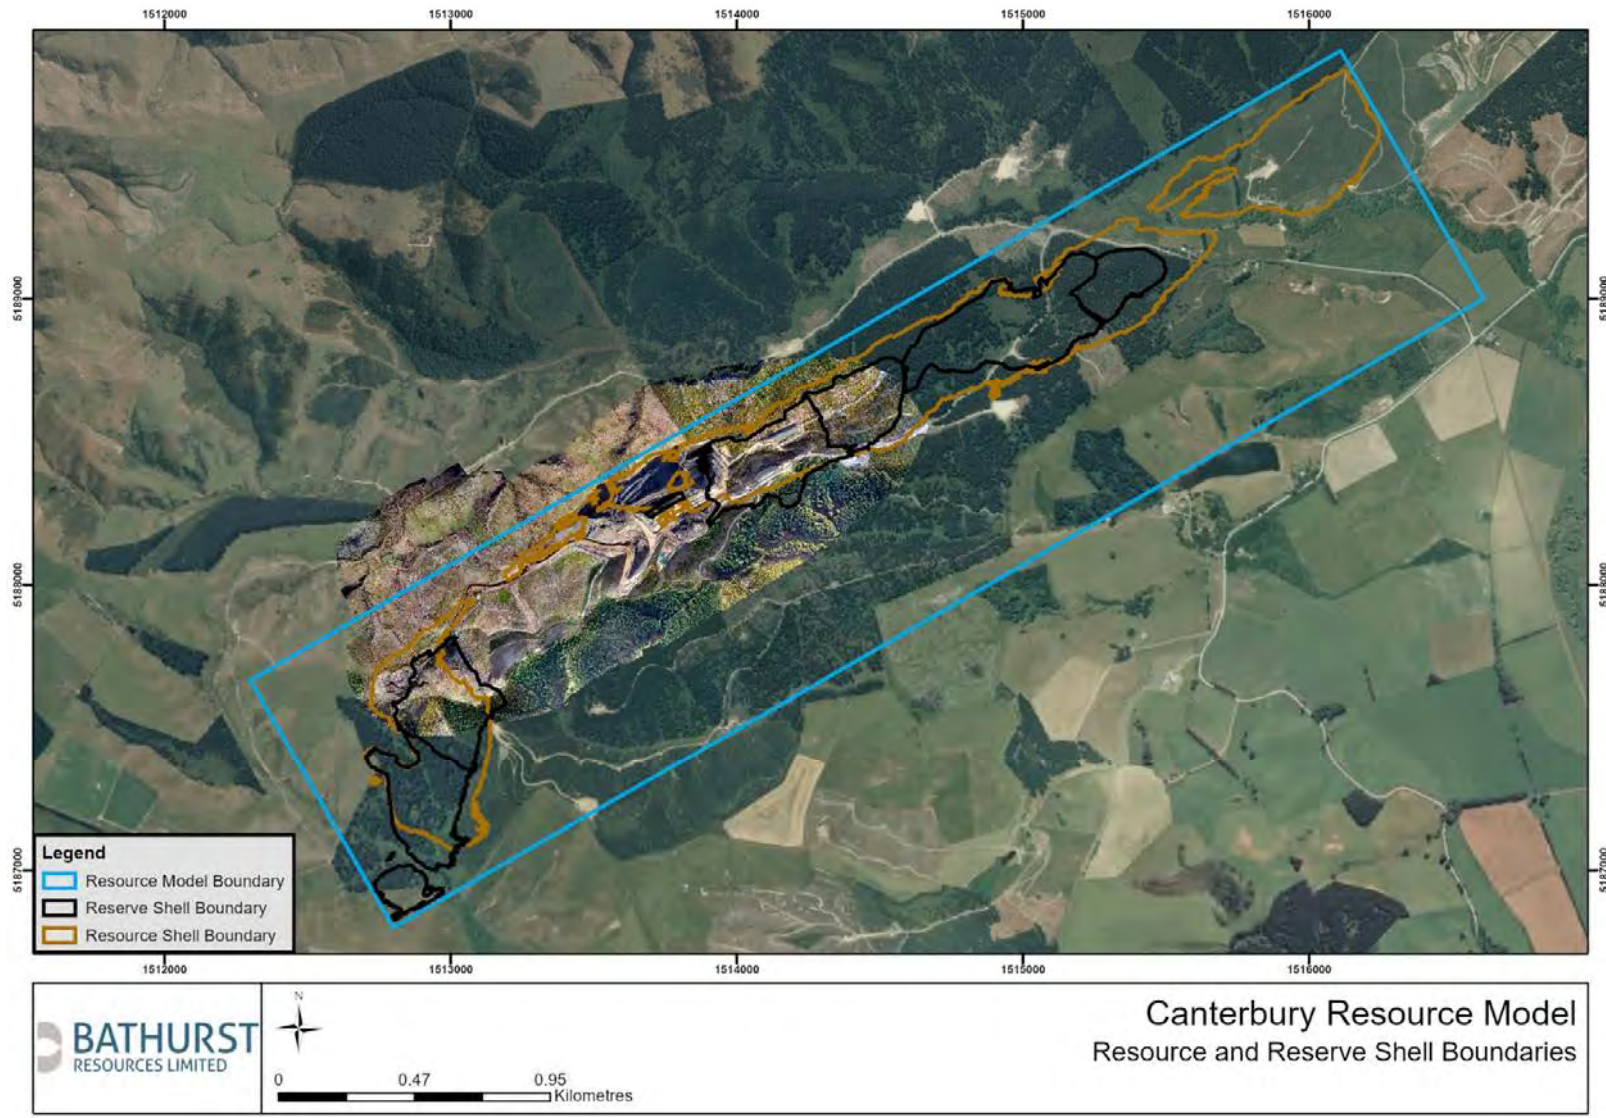


Figure 8: Canterbury Reserve and resource shell boundaries

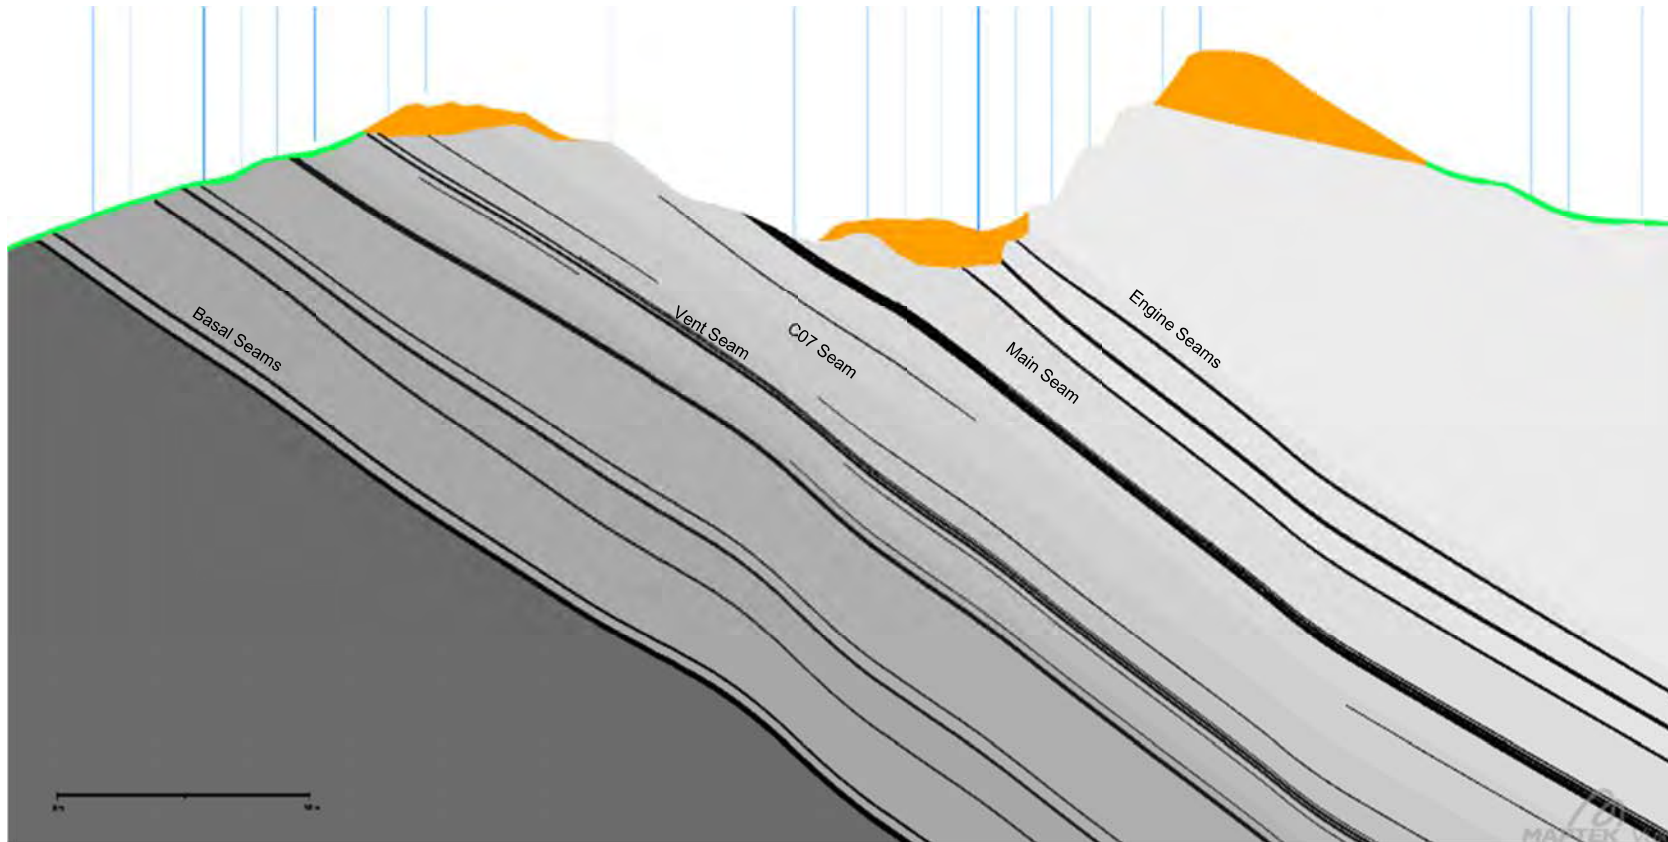


Figure 9: North west facing section through the working seam section at Canterbury Opencast Mine

# JORC Code, 2012 Edition – Table 1 Report for Nightcaps 2021

## Section 1 Sampling Techniques and Data

Criteria	Commentary
<b>Sampling techniques</b>	<ul style="list-style-type: none"> <li>• The Ohai Coalfield of Western Southland is a historical mining district, with mining beginning in 1879.</li> <li>• Multiple campaigns of data acquisition have been conducted in the Ohai Coalfield over the past century.</li> <li>• A combination of open hole (OH), Reverse Circulation (RC), and cored drilling techniques have been used. Extensive logged and sampled trenching (channel sampling) has also been employed.</li> <li>• Modern exploration campaigns include data from 2006:               <ul style="list-style-type: none"> <li>○ 38 RC hammer drill holes.</li> <li>○ 41 NQ (47.6 mm core diameter) RC blade drill holes.</li> <li>○ 23 wash drilled (OH) drill holes.</li> <li>○ 162 HQ/PQ (63.5/85 mm core diameter) Triple Tube Core (TTC) cored holes.</li> <li>○ 272 logged channel samples and trenches.</li> </ul> </li> <li>• Historical drilling includes:               <ul style="list-style-type: none"> <li>○ 35 drill holes drilled between 1944 and 1962.</li> <li>○ 14 drill holes completed in the 1980's.</li> <li>○ No downhole wireline geophysical data is available for these drill holes.</li> </ul> </li> <li>• Recent drilling has aimed to infill areas to improve resource confidence and to test the reliability of historical data. Drilling has concentrated on areas deemed closer to production, therefore tighter spaced drilling exists in the Takitimu and Coaldale pits. In 2020, drilling targeted the northwest of Black Diamond that enabled the area to be upgraded to Indicated Resource.</li> <li>• Downhole wireline geophysical logs are available for 79 of the recent drill holes.</li> <li>• Recent exploration drill holes were ordinarily geophysically logged if drill hole conditions and operational constraints permitted. The standard suite of tools run includes density, dip meter, sonic, and natural gamma.</li> <li>• In rod density logs have produced a reliable trace for use in coal seam correlation and depth adjustment and is used to correlate coal seams, to confirm depths and thickness of coal seams and to validate drillers' logs. Downhole wireline geophysics was also used to accurately calculate core recovery rates across coal intersections.</li> <li>• RC drill holes drilled in 2009-2010 and 2020 were geophysically logged for natural gamma with an Auslog Model A051 combination natural gamma/single-point resistivity/spontaneous potential sonde (43 mm diameter). Calibration method used a gamma test source jig, model P6721.</li> <li>• Diamond drill holes were geophysically logged for density with a 9034 sidewall density tool. The tool was calibrated for use in 9239 using a concrete block and water tank.</li> <li>• Outcrop trench and channel samples provide a significant proportion of the sample dataset. Coal seam thickness and partings between coal seams were measured vertically. Trench data is entered into the drilling database in a form that replicates a drill hole at that location.</li> </ul>
<b>Drilling techniques</b>	<ul style="list-style-type: none"> <li>• All BRL managed drilling campaigns have utilised the following drilling methods:               <ul style="list-style-type: none"> <li>○ Full PQ TTC.</li> <li>○ Full HQ TTC.</li> <li>○ Combination OH / TTC.</li> <li>○ 133 mm RC.</li> </ul> </li> <li>• Historic drilling techniques include:               <ul style="list-style-type: none"> <li>○ HQ TTC Rotary wash, fishtail bit.</li> </ul> </li> <li>• All drill holes (with the exception of three geotechnical drill holes) were drilled vertically.</li> <li>• Channel sampling of faces is utilised extensively at the Nightcaps projects.</li> </ul>



Criteria	Commentary
<b>Drill sample recovery</b>	<ul style="list-style-type: none"> <li>• Core recovery was measured as the length of core recovered divided by the length of driller's run and noted by the core logging geologist. If recovery of coal intersections dropped below 90%, the drill hole required a re-drill.</li> <li>• Mean total core recovery over the recent drilling campaigns was 91.8%, with core recovery of coal at 96.9%.</li> <li>• Where small intervals of coal were lost, and geophysical logging indicated strongly that coal was lost, raw ash values were estimated using the results of overlying and underlying ply samples and the relative response of the downhole density trace.</li> <li>• Little core recovery data is available for historical drill holes.</li> </ul>
<b>Logging</b>	<ul style="list-style-type: none"> <li>• BRL has developed standardised core logging procedures (BRL Coal Logging Procedures), and all core logging completed by BRL has followed these procedures.</li> <li>• All recent drill core has been geologically and geotechnically logged by logging geologists under the supervision and guidance of experienced exploration and geotechnical geologists.</li> <li>• All drill core was photographed prior to sampling. Depth meter marks and coal ply intervals were noted on the drill core in each photograph.</li> <li>• Downhole wireline geophysical logs were used to aid core logging and to ensure true downhole depths were recorded where applicable.</li> </ul>
<b>Sub-sampling techniques and sample preparation</b>	<ul style="list-style-type: none"> <li>• For all exploration data acquired by BRL, an in-house detailed sampling procedure was used (BRL Coal Sampling Procedures). Sampling and sample preparation are consistent with internationally accepted coal sampling and sample preparation methodologies.</li> <li>• Drill core ply samples include all coal recovered for the interval of the sample. Core was not cut or halved. Ply sample intervals were generally 0.5 m in length, unless dictated by thin split or parting thickness. Coal sample size is considered adequate to be representative of the coal seam quality.</li> <li>• For historical data, sample preparation processes are unknown. No historical drill hole coal quality results were used for Mineral (Coal) Resource estimation.</li> <li>• Trench samples were taken representatively from excavated and cleaned outcrop, preventing sampling of weathered coal and other contamination of the sample. Sample intervals were measured vertically and were generally 0.5 m or less in length, however thicker sample intervals of up to 4 m in length were used for thick coal seams. No field sample duplicates have been taken or analysed. Sample sizes generally aim to be at least 1 kg of coal per 0.5 m length sampled.</li> <li>• All diamond core samples, and RC chip samples were collected as soon as practicable after drilling, bagged and dispatched to the SGS New Zealand Limited (SGS) minerals laboratory in Ngakawau, where they were crushed and split.</li> <li>• Some grade control drill holes and channel samples have been analysed at the on-site laboratory for raw ash and total sulphur using standards in accordance with ISO 17025 requirements for laboratory practices.</li> </ul>
<b>Quality of assay data and laboratory tests</b>	<ul style="list-style-type: none"> <li>• All coal quality testing completed for BRL has been conducted by either SGS or CRL Energy Ltd (CRL) and both are IANZ accredited laboratories.</li> <li>• SGS have used the following standards for coal quality testing: <ul style="list-style-type: none"> <li>○ Proximate analysis (ASTM 7582).</li> <li>○ Ash (ISO 1171).</li> <li>○ Volatile Matter (ISO 562).</li> <li>○ Inherent Moisture (ISO 5068).</li> <li>○ Total Sulphur (ASTM 4239-04A).</li> <li>○ Calorific Value (ISO 1928).</li> <li>○ Loss on Drying (ISO 13909-4).</li> <li>○ Relative Density (AS 1038.21.1.1).</li> </ul> </li> <li>• CRL completed much of the assay test work for samples collected prior to BRL taking over the projects.</li> <li>• CRL used the following standards for their test work: <ul style="list-style-type: none"> <li>○ Inherent Moisture (ISO 117221).</li> <li>○ Ash (ISO 1171).</li> </ul> </li> </ul>

Criteria	Commentary
	<ul style="list-style-type: none"> <li>○ Volatile Matter (ISO 562).</li> <li>○ Calorific Value (ISO 1928).</li> <li>• All analysis was carried out and reported on an air-dried basis (adb) unless stated otherwise.</li> <li>• Some coal quality testing completed for BRL on in pit channel samples and grade control drill holes used in the resource model has been conducted by the onsite laboratory, which uses the following standards in accordance with ISO 17025 requirements laboratory practices: <ul style="list-style-type: none"> <li>○ Sample preparation is carried out as per ISO 5063/2 brown coal and lignite's – Principles of sampling.</li> <li>○ All coal is crushed to -3 mm and a minimum of 650 g of coal is extracted using a rotary divider.</li> <li>○ Coal is dried, the loss on air drying determined and ground to -212 microns (µm) in a ring mill.</li> <li>○ Coal is representatively spot sampled into a lab sample bottle and is then tested for inherent moisture, ash, and sulphur.</li> <li>○ LOD carried out as per ISO 5068-1.</li> <li>○ Inherent moisture is carried out using the ISO 5068-2.</li> <li>○ Ash has been analysed using the standard ISO 1171-1997.</li> </ul> </li> <li>• Duplicate results from the onsite laboratory are compared to results tested at SGS; results are comparable between the two laboratories, however some differences between inherent and total moisture have been observed. No Total or Inherent moisture results from the onsite lab are used for resource estimation, however ash and sulphur (ad) results from three grade control drill holes and 72 channel samples have been used for grade estimation.</li> <li>• SGS reviewed onsite sampling and calibration procedures in 2013 as part of the initial setup of the laboratory in 2009. Reviews and audits are completed every six months by an external party.</li> <li>• Onsite coal sampling procedures were audited and tested by consultant Trevor Daly Consulting (TDC) in 2010, 2013, 2016 and in 2019 by SGS.</li> </ul>
<b>Verification of sampling and assaying</b>	<ul style="list-style-type: none"> <li>• Sample coal quality results have been cross-referenced and compared against lithology logs and downhole geophysical data. Results are also inspected by experienced geologists and compared with expected values utilising known coal quality relationships for the Nightcaps Coalfield.</li> <li>• Anomalous assay results were investigated, and where necessary the laboratory was contacted and a re-test was undertaken from sample residue.</li> <li>• Six twinned drill holes have been drilled at the project, but no field duplicate trench samples have been conducted.</li> <li>• In pit channel samples have been collected for grade control purposes. These have been used to cross-validate historical OH/TTC and modern RC drilling and to provide an increased density of coal quality data for modelling and estimation in close proximity to active mining areas.</li> <li>• Laboratory data is imported directly into an acQuire database, with no manual data entry at either the laboratory or BRL.</li> <li>• Coal quality results files are securely stored on a backup server. Once validated, drill hole information is 'locked' in an acQuire database to ensure data is not inadvertently compromised.</li> <li>• Geophysical data has been used to establish coal seam thickness and depths on the margins of coal seams in RC drill holes, where sampling uncertainty inherent in RC drilling made coal sample and intersection depths less reliable.</li> <li>• In 2014, BRL commissioned a series of duplicate samples to be completed by CRL. These samples have repeated tests performed by SGS on a subset of ply samples selected at random. The results are shown in Figure 1.</li> </ul>

Criteria	Commentary
----------	------------

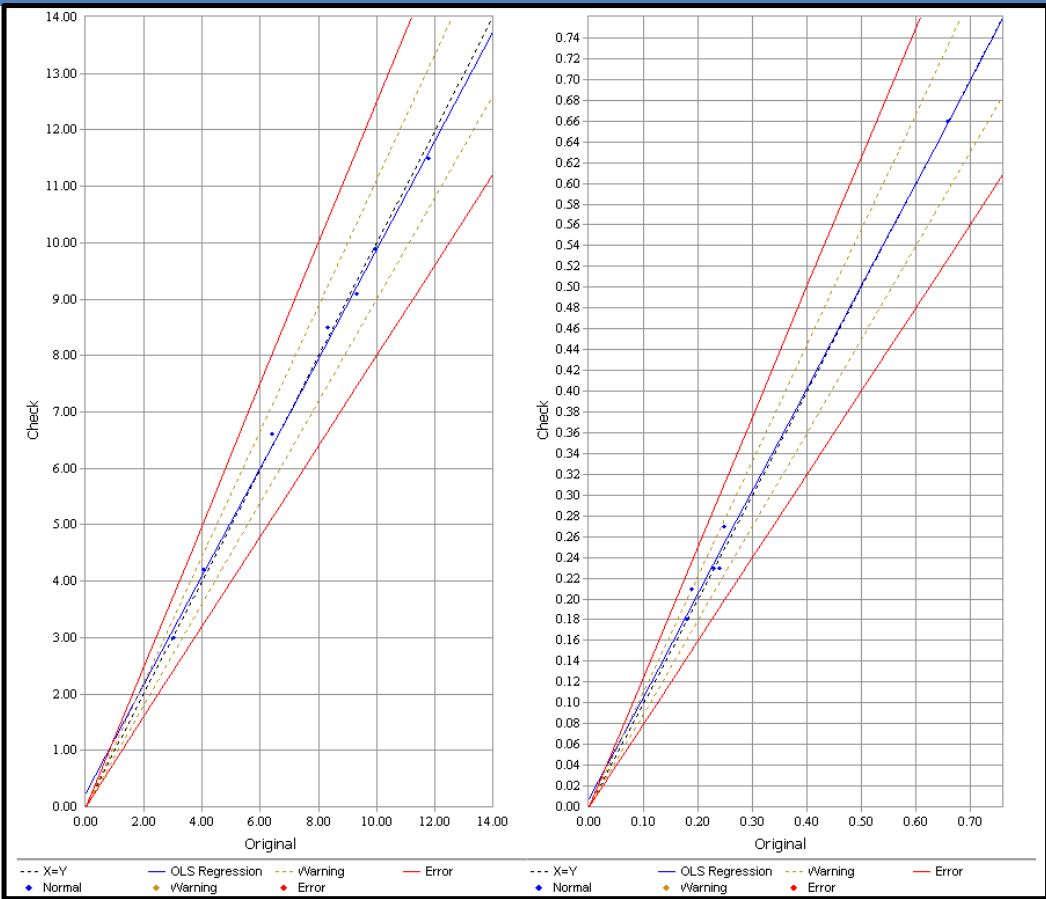


Figure 1: Air-dried ash (ash ad) (left) and sulphur (right) duplicate results comparing SGS and CRL laboratories

<b>Location of data points</b>	<ul style="list-style-type: none"> <li>• The site currently uses the Bluff Circuit 1949 Geodetic Datum.</li> <li>• LiDAR and digital imagery were acquired on 10 April 2013 using an Optech M200 LiDAR system and CS8900 medium format digital camera.</li> <li>• The data was collected flying 1,300 m above the lowest ground and using a scanner field of view of 44°. Outgoing pulse rate was set at 70kHz and minor scan frequency 33.5 Hz.</li> <li>• The topographic surface used to build the model is derived from a combination of LiDAR data and Land Information New Zealand (LINZ) topographical data (where LiDAR coverage in outer areas is unavailable). The topographic surface is updated with end of month mine surveys for active mining and dumping areas.</li> <li>• The Takitimu Mine has completed its own site survey since 2014, and exploration data is surveyed by qualified surveyors combined with in-house trained surveyors and survey technicians. Prior to 2014, surveying was completed by BTW South Limited (BTW) based in Cromwell.</li> <li>• End of Month (EOM) surveys are completed by trained drone pilots and qualified BRL staff.</li> <li>• All in-pit surveying of coal roof and floor and channel samples has been conducted by trained BRL staff.</li> <li>• Historical data has been converted from various local circuits and map grids to the Bluff Circuit 1949 Geodetic Datum.</li> <li>• Surveyed elevations of drill hole collars are validated against the LiDAR topography and EOM survey surfaces.</li> </ul>
<b>Data spacing and distribution</b>	<ul style="list-style-type: none"> <li>• Drill hole spacing for the Nightcaps Project, including the Black Diamond, Coaldale and Takitimu project areas has been calculated by finding the radius required to fill the total area of the project divided by the number of drill holes within that area.</li> <li>• The project has an average drill hole spacing of approximately 130 m and Channel sampling reduces this average sample spacing to approximately 90 m.</li> </ul>

Criteria	Commentary
	<ul style="list-style-type: none"> <li>Drill hole spacing is not the only measurement used by BRL to establish the degree of resource uncertainty and therefore the resource classification. BRL uses a multivariate approach to resource classification which is explained further in Section 3.</li> <li>The current drill hole spacing is deemed sufficient for coal seam correlation and grade estimation purposes.</li> <li>Geostatistical analysis has been undertaken on the Nightcaps Project dataset. Ranges derived from variograms results have been utilised in the grade estimation search parameters.</li> <li>The samples database is composited to 0.5 m sample length prior to grade estimation.</li> <li>Composite samples are not weighted.</li> <li>Any samples with composited length of less than 0.1 m are not utilised during estimation. Compositing starts at the top of seam and small samples are not distributed or merged.</li> </ul>
<b>Orientation of data in relation to geological structure</b>	<ul style="list-style-type: none"> <li>All recent exploration drilling has been completed on a vertical orientation. The exception to this is three diamond drill holes that have been drilled with a dip of 45° and azimuth of 286°. These drill holes were drilled to assess the geotechnical properties of the western Coaldale highwall and were intended to intersect a fault.</li> <li>All historical drill holes are vertical. Those without deviation plots are assumed to be vertical.</li> <li>Any deviation from vertical is not expected to have a material effect on geological understanding due to the shallow nature of deposit. Average drill hole depth in the dataset is 47.7 m, with the deepest coal intersection being at a depth of 86.4 m.</li> <li>Most of the deposit presents a shallow seam dip between 3 and 15° although some localised steep dips do exist near fault margins.</li> <li>Vertical drilling is the most suitable drilling method of assessing the coal resource in the Nightcaps Coalfield.</li> </ul>
<b>Sample security</b>	<ul style="list-style-type: none"> <li>Rigorous sample preparation and handling procedures have been followed by BRL.</li> <li>Coal samples are taken and recorded from drill core, sealed in plastic bags, and securely stored prior to being dispatched to the laboratory for analysis.</li> <li>It is not considered likely that individual coal samples face a risk of theft or sabotage as coal is a bulk commodity with little value for small volumes of coal from drill core.</li> </ul>
<b>Audits or reviews</b>	<ul style="list-style-type: none"> <li>Golder and BRL have reviewed the geological data available and consider the data used to produce the resource model is reliable and suitable for the purposes of generating a Coal Resource estimate to the extent that the Coal Resource estimate has been classified.</li> <li>BRL Senior geologists have undertaken audits of the sample collection and analysis processes.</li> </ul>

## Section 2 Reporting of Exploration Results

Criteria	Commentary																
<b>Mineral tenement and land tenure status</b>	<ul style="list-style-type: none"> <li>The Nightcaps Project resource model includes two coal permits and a privately held land parcel with coal rights attached that are wholly owned by Bathurst Coal Ltd (BCL).</li> <li>Exploration Permit Application (EPA) 60642 was lodged to cover the area of Exploration Permit (EP) 51260 when it expired in early 2020. The EPA covers an area of 690.51 hectares (ha) and contains a portion of the resource area.</li> <li>Mining Permit 53614 (MP 53614) covers the western margin of the Coaldale opencast pit and Black Diamond and is entirely included within the bounds of the resource model.</li> </ul> <table border="1"> <thead> <tr> <th>Permit/Rights</th> <th>Operation</th> <th>Mining Type</th> <th>Expiry</th> </tr> </thead> <tbody> <tr> <td>Exploration Permit Application</td> <td>Ohai</td> <td>N/A</td> <td>N/A</td> </tr> <tr> <td>Mining Permit 53614</td> <td>Coaldale</td> <td>Opencast</td> <td>04 Jun 2032</td> </tr> <tr> <td>Private Coal Lot 1 DP 4505</td> <td>Coaldale/Takitimu</td> <td>N/A</td> <td>N/A</td> </tr> </tbody> </table> <ul style="list-style-type: none"> <li>Royalties are paid to the Crown on coal mined from within MP 53614 and an Energy</li> </ul>	Permit/Rights	Operation	Mining Type	Expiry	Exploration Permit Application	Ohai	N/A	N/A	Mining Permit 53614	Coaldale	Opencast	04 Jun 2032	Private Coal Lot 1 DP 4505	Coaldale/Takitimu	N/A	N/A
Permit/Rights	Operation	Mining Type	Expiry														
Exploration Permit Application	Ohai	N/A	N/A														
Mining Permit 53614	Coaldale	Opencast	04 Jun 2032														
Private Coal Lot 1 DP 4505	Coaldale/Takitimu	N/A	N/A														

Criteria	Commentary
	<p>Resources Levy is paid to the Crown on all coal extracted from private and Crown owned coal.</p> <ul style="list-style-type: none"> <li>• A deferred consideration payment of 5% of gross sales revenue at mine gate is payable on all coal produced by the company in the Ohai area. The deferred consideration is for the acquisition of the New Brighton EP 40625 as announced in March 2015.</li> <li>• BRL owns a portion of the Coaldale resources as coal rights attached to the land title.</li> <li>• An access arrangement (AA) is in place to access a small parcel of private land in the southern portion of MP53614. There are no royalty payments included as part of this agreement.</li> <li>• An AA is in place to access parcels of private land in the northeastern portion of MP 53614. There are royalty payments included as part of this agreement. The royalty is adjusted to the Price Producer Index (PPI) and Labour Cost Index (LCI).</li> <li>• BRL owns the remaining area of the Black Diamond opencut pit.</li> <li>• BRL has a lease agreement with the Southland District Council over a large land parcel covering the Takitimu project and mine infrastructure. The lease includes rights to explore for, extract and sell coal from within the parcel.</li> <li>• Figure 9 and Figure 10 in show BRL's land ownership and access, and mineral rights within the project area.</li> </ul>
<b>Exploration done by other parties</b>	<ul style="list-style-type: none"> <li>• All exploration post 2011 has been conducted by BRL.</li> <li>• Before 2011 and BRL taking responsibility for exploration, modern exploration was conducted by CRL for Takitimu Coal Limited (TCL) prior to the purchase by BRL.</li> <li>• Historical data has been traced back to original reports and logs held at Archives NZ storage centres.</li> <li>• Historical data has been thoroughly investigated for reliability and quality and, where the integrity of the data is limited, it has been omitted from the resource model.</li> </ul>
<b>Geology</b>	<ul style="list-style-type: none"> <li>• The project is located in the Ohai Coalfield, New Zealand.</li> <li>• The Ohai Coalfield is a fault bounded basin containing Cretaceous sub-bituminous coal.</li> <li>• The defined Coal Resource is contained within the Morley and Beaumont formations.</li> <li>• The Cretaceous Ohai Group contains three formations – the Wairio, New Brighton and the Morley Formations.</li> <li>• The Eocene Nightcaps Group contains two formations – the Beaumont and Orauea Formations.</li> <li>• The two groups are separated by an unconformity, clearly distinguishable by micro-flora.</li> <li>• Most of the historical production has come from seams in the Morley Formation, which tend to contain higher quality coal. Coal seams are faulted and folded into complex structures. Coal thickness and extent varies as coal seams are often lenticular and split or washed out by fluvial sand channels and syn-depositional faulting and folding are indicated.</li> <li>• Morley Coal Measures of the Ohai Group have a combined vertical seam thickness which averages 4.1 m; however, 23 m thick seams have been recorded.</li> <li>• Beaumont Coal Measures of the Nightcaps Group have a combined vertical seam thickness which averages 1.4 m; however, 7 m thick seams have been recorded. Coal ranks from sub-bituminous C-B rank.</li> <li>• The Nightcaps Group Beaumont Formation Coal Measures are conformably overlain by Eocene Orauea Formation mudstone.</li> <li>• Coal rank ranges from sub-bituminous A to high-volatile bituminous C.</li> </ul>

Criteria	Commentary																																																																																																																																															
<b>Drill hole Information</b>	Table 1: Showing summary of drilling data available within the model area																																																																																																																																															
	<table border="1"> <thead> <tr> <th>Years</th> <th>Agency</th> <th>Range of Collar ID</th> <th># Holes</th> <th>Drilling Method</th> <th># Holes in structure Model</th> <th># Holes in Quality Model</th> <th>Geophysics Available</th> </tr> </thead> <tbody> <tr> <td>1944-1947</td> <td>Various</td> <td>d133 - d144</td> <td>9</td> <td>unknown</td> <td>3</td> <td>0</td> <td>0</td> </tr> <tr> <td>~1955</td> <td>Various</td> <td>236-245, 247-250, 255, 372, 376</td> <td>17</td> <td>unknown</td> <td>13</td> <td>0</td> <td>0</td> </tr> <tr> <td>1962</td> <td>Black Diamond Collieries</td> <td>280A - 285A</td> <td>6</td> <td>WD</td> <td>6</td> <td>0</td> <td>0</td> </tr> <tr> <td>1981 - 1984</td> <td>Coal and Energy NZ Ltd</td> <td>SC101 - SC111</td> <td>11</td> <td>Wash drilled, core</td> <td>10</td> <td>10</td> <td>0</td> </tr> <tr> <td>1989</td> <td>Downer Mining</td> <td>DMDH01 - DMDH03</td> <td>3</td> <td>Wash drilled</td> <td>0</td> <td>0</td> <td>0</td> </tr> <tr> <td>2006</td> <td>Takitimu Coal Ltd</td> <td>NC001 - NC012</td> <td>14</td> <td>HQ Triple Tube, OH</td> <td>12</td> <td>7</td> <td>14</td> </tr> <tr> <td>2007</td> <td>Takitimu Coal Ltd</td> <td>T001</td> <td>1</td> <td>Trench</td> <td>1</td> <td>0</td> <td>0</td> </tr> <tr> <td>Mar 2009</td> <td>Takitimu Coal Ltd</td> <td>NC013 - NC027</td> <td>15</td> <td>HQ Triple Tube, RC hammer, RC blade</td> <td>15</td> <td>15</td> <td>11</td> </tr> <tr> <td>Feb 2010</td> <td>Takitimu Coal Ltd</td> <td>NC028 - NC044</td> <td>17</td> <td>RC hammer</td> <td>16</td> <td>12</td> <td>16</td> </tr> <tr> <td>2010</td> <td>Takitimu Coal Ltd</td> <td>T002 - T004</td> <td>3</td> <td>Trench</td> <td>2</td> <td>0</td> <td>0</td> </tr> <tr> <td>Aug 2010 - Sep 2010</td> <td>Takitimu Coal Ltd</td> <td>NC045 - NC060</td> <td>16</td> <td>Triple Tube Core, OH, RC hammer</td> <td>11</td> <td>9</td> <td>8</td> </tr> <tr> <td>2012 - 2014</td> <td>Takitimu Coal Ltd</td> <td>NC061 - NC078, NC086 - NC117</td> <td>50</td> <td>Triple Tube Core, Open holed</td> <td>48</td> <td>29</td> <td>13</td> </tr> <tr> <td>2013</td> <td>Takitimu Coal Ltd</td> <td>T005 - T011</td> <td>7</td> <td>Trench</td> <td>7</td> <td>3</td> <td>0</td> </tr> <tr> <td>2013 - 2014</td> <td>Takitimu Coal Ltd</td> <td>CS001 - CS107</td> <td>107</td> <td>Trench</td> <td>93</td> <td>86</td> <td>0</td> </tr> <tr> <td>2015</td> <td>Takitimu Coal Ltd</td> <td>BKDT001 - BKDT043</td> <td>43</td> <td>Trench</td> <td>11</td> <td>6</td> <td>0</td> </tr> <tr> <td>2014 - 2020</td> <td>Takitimu Coal Ltd</td> <td>CS107- CS222</td> <td>103</td> <td>Trench</td> <td>102</td> <td>78</td> <td>0</td> </tr> <tr> <td>2015 - 2020</td> <td>Takitimu Coal Ltd</td> <td>NC130- NC263</td> <td>114</td> <td>Triple Tube Core</td> <td>92</td> <td>87</td> <td>14</td> </tr> </tbody> </table>	Years	Agency	Range of Collar ID	# Holes	Drilling Method	# Holes in structure Model	# Holes in Quality Model	Geophysics Available	1944-1947	Various	d133 - d144	9	unknown	3	0	0	~1955	Various	236-245, 247-250, 255, 372, 376	17	unknown	13	0	0	1962	Black Diamond Collieries	280A - 285A	6	WD	6	0	0	1981 - 1984	Coal and Energy NZ Ltd	SC101 - SC111	11	Wash drilled, core	10	10	0	1989	Downer Mining	DMDH01 - DMDH03	3	Wash drilled	0	0	0	2006	Takitimu Coal Ltd	NC001 - NC012	14	HQ Triple Tube, OH	12	7	14	2007	Takitimu Coal Ltd	T001	1	Trench	1	0	0	Mar 2009	Takitimu Coal Ltd	NC013 - NC027	15	HQ Triple Tube, RC hammer, RC blade	15	15	11	Feb 2010	Takitimu Coal Ltd	NC028 - NC044	17	RC hammer	16	12	16	2010	Takitimu Coal Ltd	T002 - T004	3	Trench	2	0	0	Aug 2010 - Sep 2010	Takitimu Coal Ltd	NC045 - NC060	16	Triple Tube Core, OH, RC hammer	11	9	8	2012 - 2014	Takitimu Coal Ltd	NC061 - NC078, NC086 - NC117	50	Triple Tube Core, Open holed	48	29	13	2013	Takitimu Coal Ltd	T005 - T011	7	Trench	7	3	0	2013 - 2014	Takitimu Coal Ltd	CS001 - CS107	107	Trench	93	86	0	2015	Takitimu Coal Ltd	BKDT001 - BKDT043	43	Trench	11	6	0	2014 - 2020	Takitimu Coal Ltd	CS107- CS222	103	Trench	102	78	0	2015 - 2020	Takitimu Coal Ltd	NC130- NC263	114	Triple Tube Core	92	87
Years	Agency	Range of Collar ID	# Holes	Drilling Method	# Holes in structure Model	# Holes in Quality Model	Geophysics Available																																																																																																																																									
1944-1947	Various	d133 - d144	9	unknown	3	0	0																																																																																																																																									
~1955	Various	236-245, 247-250, 255, 372, 376	17	unknown	13	0	0																																																																																																																																									
1962	Black Diamond Collieries	280A - 285A	6	WD	6	0	0																																																																																																																																									
1981 - 1984	Coal and Energy NZ Ltd	SC101 - SC111	11	Wash drilled, core	10	10	0																																																																																																																																									
1989	Downer Mining	DMDH01 - DMDH03	3	Wash drilled	0	0	0																																																																																																																																									
2006	Takitimu Coal Ltd	NC001 - NC012	14	HQ Triple Tube, OH	12	7	14																																																																																																																																									
2007	Takitimu Coal Ltd	T001	1	Trench	1	0	0																																																																																																																																									
Mar 2009	Takitimu Coal Ltd	NC013 - NC027	15	HQ Triple Tube, RC hammer, RC blade	15	15	11																																																																																																																																									
Feb 2010	Takitimu Coal Ltd	NC028 - NC044	17	RC hammer	16	12	16																																																																																																																																									
2010	Takitimu Coal Ltd	T002 - T004	3	Trench	2	0	0																																																																																																																																									
Aug 2010 - Sep 2010	Takitimu Coal Ltd	NC045 - NC060	16	Triple Tube Core, OH, RC hammer	11	9	8																																																																																																																																									
2012 - 2014	Takitimu Coal Ltd	NC061 - NC078, NC086 - NC117	50	Triple Tube Core, Open holed	48	29	13																																																																																																																																									
2013	Takitimu Coal Ltd	T005 - T011	7	Trench	7	3	0																																																																																																																																									
2013 - 2014	Takitimu Coal Ltd	CS001 - CS107	107	Trench	93	86	0																																																																																																																																									
2015	Takitimu Coal Ltd	BKDT001 - BKDT043	43	Trench	11	6	0																																																																																																																																									
2014 - 2020	Takitimu Coal Ltd	CS107- CS222	103	Trench	102	78	0																																																																																																																																									
2015 - 2020	Takitimu Coal Ltd	NC130- NC263	114	Triple Tube Core	92	87	14																																																																																																																																									
	<ul style="list-style-type: none"> <li>• Exploration drilling results have not been reported in detail.</li> <li>• The exclusion of detailed exploration data from this document is considered to not be material to the understanding of the Table 1.</li> </ul>																																																																																																																																															
<b>Data aggregation methods</b>	<ul style="list-style-type: none"> <li>• The nominal cut-off for ash (adb) for constructing the Takitimu structure model is set at 35%.</li> <li>• The resource model is built as a block model with 0.5 m block thicknesses for coal. Coal ply data is used to grade estimate the block model.</li> <li>• Coal ply data is composited into 0.5 m samples for estimation. No weighting is used in the compositing.</li> <li>• Some composite samples have been analysed by SGS as full seam minable sections for additional attributes including ash constituents, forms of sulphur, ash fusion temperatures, and ultimate analysis.</li> <li>• Composite samples are not used in grade estimation.</li> </ul>																																																																																																																																															
<b>Relationship between mineralisation widths and intercept lengths</b>	<ul style="list-style-type: none"> <li>• All exploration drill holes have been drilled vertically, and the coal seams are generally gently dipping.</li> <li>• Reported and modelled seam intercept thickness is representative of the true seam thickness.</li> </ul>																																																																																																																																															

Criteria	Commentary
<b>Diagrams</b>	<ul style="list-style-type: none"> <li>Diagrams can be found in the Appendix A for each of the following: <ul style="list-style-type: none"> <li>Location map.</li> <li>Map showing coal ownership rights.</li> <li>Map showing access arrangement and land ownership status.</li> <li>Map showing resource model prospect areas.</li> <li>Map showing exploration drill holes.</li> <li>Map showing historical mine workings.</li> <li>Map showing Beaumont Formation coal seam floor contours.</li> <li>Map showing Beaumont Formation full seam cumulative thickness isopachs.</li> <li>Map showing Beaumont Formation full seam ash isopachs.</li> <li>Map showing Beaumont Formation full seam Sulphur isopachs.</li> <li>Map showing Morley Formation coal seam floor contours.</li> <li>Map showing Morley Formation full seam cumulative coal thickness isopachs.</li> <li>Map showing Morley Formation full seam air dried ash isopachs.</li> <li>Map showing Morley Formation full seam air dried Sulphur isopachs.</li> <li>Map showing cross-section view through the deposit.</li> <li>Plan showing the cross-section through A-A'.</li> </ul> </li> </ul>
<b>Balanced reporting</b>	<ul style="list-style-type: none"> <li>No exploration results are being presented in this Table 1, rather this document is focused on an advanced project that has been defined by geological models with associated Coal Resource estimates completed.</li> <li>The exclusion of this information from this report is considered to not be material to the understanding of the deposit.</li> </ul>
<b>Other substantive exploration data</b>	<ul style="list-style-type: none"> <li>Exploration drilling results have not been reported in detail.</li> <li>The Black Diamond mine is in commercial production. Mining in the Coaldale area is mostly completed with all coal mined out and the areas is currently being backfilled</li> <li>Substantial ash constituent data has been compiled on coal samples and coal composite samples for the Coaldale and Black Diamond prospects.</li> </ul>
<b>Further work</b>	<ul style="list-style-type: none"> <li>Further infill drilling and geotechnical drilling is planned on the southern edge of the previously mined Takitimu pit.</li> </ul>

### Section 3 Estimation and Reporting of Mineral Resources

Criteria	Commentary
<b>Database integrity</b>	<ul style="list-style-type: none"> <li>BRL utilises an acquire database to store and maintain its exploration dataset.</li> <li>All historical and legacy datasets have been thoroughly validated against original logs and results tables. Where reliability of the data is poor, the data is excluded from the the resource modelling dataset.</li> <li>The acquire database places explicit controls on certain data fields as they are entered or imported into the database, such as overlapping intervals, coincident samples, out of range sample values, standardised look-up tables for logging codes.</li> <li>Manual data entry of coal quality results is not required as results are imported directly from laboratory results files.</li> <li>The database is automatically backed up on an offsite server.</li> </ul>
<b>Site visits</b>	<ul style="list-style-type: none"> <li>Henry Dillon (the Competent Person) has visited the site on numerous occasions over the past 10 years and is familiar with the site.</li> </ul>
<b>Geological interpretation</b>	<ul style="list-style-type: none"> <li>Golder has reviewed the modelling processes in use by BRL to develop their resource model and Coal Resource estimates.</li> <li>Golder has confidence in the methodologies used by BRL for geological modelling and the interpretation of the available Nightcaps Project data. Confidence varies for different areas, and this is reflected in the resource classification.</li> <li>Dry, mineral matter and sulphur free volatile matter is the principal quality used to differentiate and correlate Beaumont and Morley coal seams.</li> <li>BRL uses a multivariate approach to resource classification, which considers a number of</li> </ul>

Criteria	Commentary
	<p>variables.</p> <ul style="list-style-type: none"> <li>• Golder considers the quantity of geological data sufficient to estimate Coal Resources.</li> <li>• Uncertainty surrounds the historic underground and opencast workings, both in the quality and quantity of coal extracted and the surveying of underground workings. This is reflected in the resource classification.</li> <li>• Some residual uncertainty of quality and confidence of historic drilling data remains despite thorough evaluation of the historic logs and drill locations.</li> </ul>
<b>Dimensions</b>	<ul style="list-style-type: none"> <li>• Several coal seams are present in two main seams in the Beaumont Formation and up to four in the Morley Formation. The total combined coal thickness varies from less than 1 m thick up to 25 m locally.</li> <li>• The model covers an area 2.4 km in width by 3.6 km in length.</li> <li>• The deposit consists of the Takitimu, Coaldale and Black Diamond prospects which covers an area approximately 230 Ha.</li> <li>• The deposit is bounded by the Nightcaps Fault to the northeast and the Fern Fault to the northwest.</li> <li>• The Takitimu deposit is separated from the Coaldale and Black Diamond deposits by the Trig E fault.</li> </ul>
<b>Estimation and modelling techniques</b>	<ul style="list-style-type: none"> <li>• All available exploration data has been validated and, where reliable, has used to develop a 3D geological block model for Coal Resource estimation and classification.</li> <li>• All exploration drilling data is stored in an acquire database and exported to a Maptek Vulcan™ (Vulcan) drill hole database.</li> <li>• Interpretive design data is stored within Vulcan in various layers.</li> <li>• Due to the presence of two unconformable coal bearing formations, the model is sub-divided into two separate formation domains for modelling (Morley and Beaumont). The Morley coal seams are truncated by the overlying unconformable Beaumont coal measures.</li> <li>• The model is domained further into four fault blocks (Basement, Black Diamond, Coaldale and South) using the large Trig E Black Diamond, Fern, and the Tinker/Nightcaps faults as bounding surfaces.</li> <li>• Each domain is modelled for structure and grade separately.</li> <li>• A horizons definition was developed and used to define the coal seams to be modelled in the stratigraphic modelling process.</li> <li>• Vulcan 12 is used to build the structure model. Grid spacing is 10 m x 10 m.</li> <li>• Maptek's Integrated Stratigraphic Model module is used to produce the structure model. The 'Hybrid Method' was used to develop the structure model. This method triangulates a reference surface and then stacks the remaining horizons by adding structure thickness grids. Thickness grids are created using an inverse distance (ID) modelling algorithm. Design data from other horizons is incorporated into the final grid structure.</li> <li>• Modelling parameters for the two structural modelling passes are as follows: <ul style="list-style-type: none"> <li>• Beaumont Formation - Reference grid surface (NB21 roof) by Hybrid Stacking: <ul style="list-style-type: none"> <li>○ Method is Triangulation.</li> <li>○ Trend Order is 1 (Linear).</li> <li>○ Smoothing is 9.</li> <li>○ The maximum triangle length is 1,500 m.</li> <li>○ Surfaces are splined.</li> </ul> </li> <li>• Beaumont Formation - Reference grid thickness modelling by Hybrid Stacking: <ul style="list-style-type: none"> <li>○ Method is Triangulation.</li> <li>○ Trend Order is 0 (Horizontal Planar).</li> <li>○ Smoothing is 9.</li> <li>○ Search Radius is 1,500 m.</li> <li>○ Surfaces are splined.</li> </ul> </li> <li>• Morley Formation - Reference grid surface (UM211 roof) by Hybrid Stacking: <ul style="list-style-type: none"> <li>○ Method is Triangulation.</li> <li>○ Trend Order is 0 (Horizontal Planar).</li> <li>○ Smoothing is 9.</li> </ul> </li> </ul> </li> </ul>



Criteria	Commentary
	<ul style="list-style-type: none"> <li>○ The maximum triangle length is 1,500 m.</li> <li>○ Surfaces are splined.</li> <li>● Morley Formation - Reference grid thickness modelling by Hybrid Stacking: <ul style="list-style-type: none"> <li>○ Method is Triangulation.</li> <li>○ Trend Order is 1 (Linear).</li> <li>○ Smoothing is 9.</li> <li>○ Search Radius is 1,500 m.</li> <li>○ Surfaces are splined.</li> </ul> </li> <li>● Structure grids are checked and validated visually before being used to construct the resource block model.</li> <li>● Vulcan is used to build the block model and to estimate grade. The process is automated using a Lava script.</li> <li>● The stratigraphic structure grids for each domain, along with end of month site survey combined with LiDAR topography surface, Beaumont unconformity surface, and other mining related surfaces for Coaldale and Takitimu were used to build the block model. The block dimensions are constructed at 10m x 10m. Vertical thickness for coal blocks is 0.5 m.</li> <li>● Block Grade estimation is performed in Vulcan using the Tetra Projection unfolding methodology.</li> <li>● The Beaumont seams and Morley seams are estimated in the three fault domains. <ul style="list-style-type: none"> <li>○ Proximate and sulphur coal qualities are estimated on an air-dried basis.</li> <li>○ Ash, moisture, volatile matter, and are estimated simultaneously.</li> <li>○ Calorific value is estimated on a dry ash free basis (daf) and converted to an air-dried basis based on the block ash and moisture estimates. This enables changes in coal rank across the area to be accurately modeled.</li> </ul> </li> <li>● Sulphur is estimated using a different search ellipse as indicated by geostatistics. Variability in sulphur may be related to post depositional fluid flow in NE-SW trending fault structures. Sulphur is shown to be elevated in close proximity to these fault zones.</li> <li>● Geostatistics of the coal quality dataset has been examined to determine any spatial relationships and define the estimation search parameters for each coal seam quality and thickness. The maximum search radius is set to the maximum range of influence found in the semi-variogram for ash dependent variables and for sulphur.</li> <li>● Grade estimation is computed using an inverse distance squared (ID2) function for ash dependent qualities, and inverse distance squared function for sulphur.</li> <li>● Various methods have been used to check the validity of the block estimation. This includes manual inspection of the model, Quantile Quantile (QQ) plots of the model qualities vs coal quality database and other comparison tools.</li> <li>● Mining reconciliation has been completed on the resource model to check model accuracy within the mining area. To date the results are within the bounds of expected variability based on resource classification used with mining factors applied. No other bulk reconciliation has been completed.</li> <li>● Resource tonnages within the model have been discounted where the resource falls within historical underground workings areas.</li> <li>● The primary underground mining method utilised historically in the Nightcaps area is bord and pillar mining. Extraction rates using this type of mining generally reduce as seam thickness increases. Historic extraction rates are estimated using from mining extraction reports, and work completed by Yardley <i>et al.</i> 1986. Figure 2 presents a plot of coal thickness against after Yardley's extraction rates.</li> </ul>

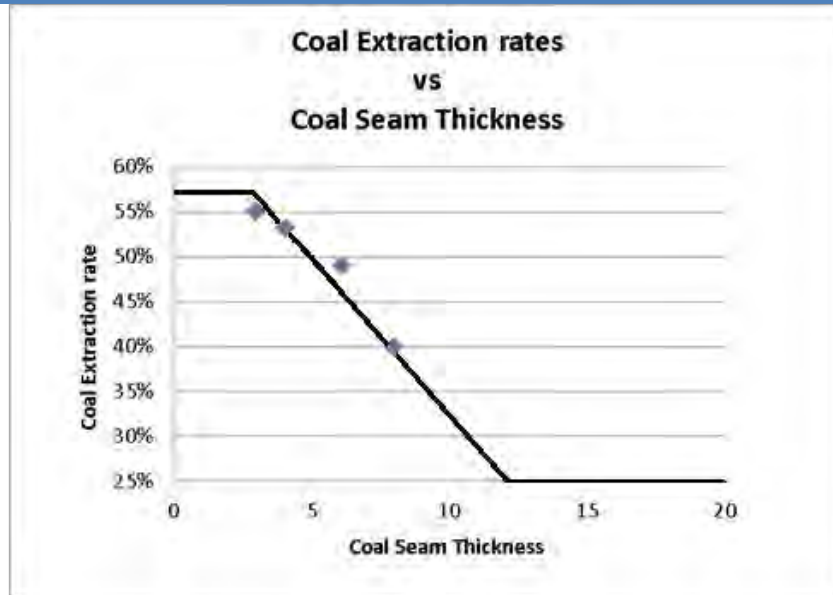


Figure 2: Historical underground extraction rates applied to areas of underground workings based on coal seam thickness

- Opencast mining was also undertaken in the Nightcaps Project.
- The extraction rates used to discount coal tonnages in the resource model are as follows:

Mining Method	Extraction Rate
Underground workings	Morley coal discounted at rate shown in Figure 2 with a minimum rate of 25% extracted. Beaumont coal discounted by 10% due to collapsed ground.
Opencast	100% of all coal seams

- Reconciliation data from the Takitimu pit supports these extraction rates on a medium to long term basis.
- No acid mine drainage occurs at the Coaldale and Takitimu operations due the non-acid forming lacustrine depositional environment of the coal measures and therefore acid generation models have not been completed.

### Moisture

- Moisture, both on an air-dried and total moisture basis, is estimated into the resource model from the sample database after using a cut-off envelope to cut samples that vary excessively from the norm. Natural variability in bed moisture is amplified by excessive variability in the sampling process and laboratory testing methods.
- The cut-off envelope used was derived from  $\pm 0.67$  times the standard deviation of the dataset. The Figure 3 and Figure 4 show the envelope used for Morley and Beaumont coal.

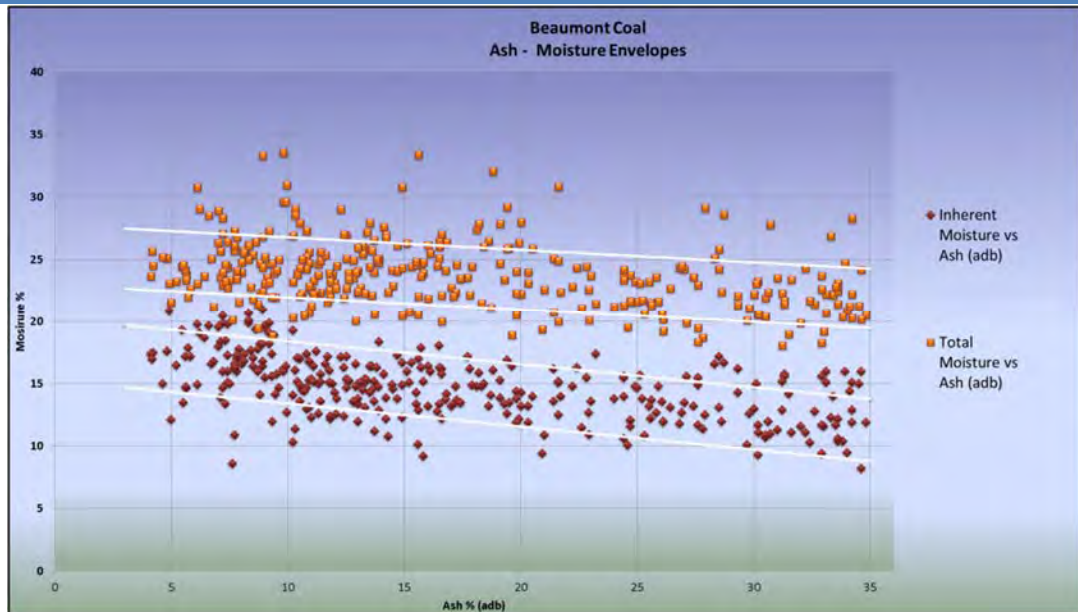


Figure 3: Inherent moisture and total moisture cut-off envelopes for Beaumont coal

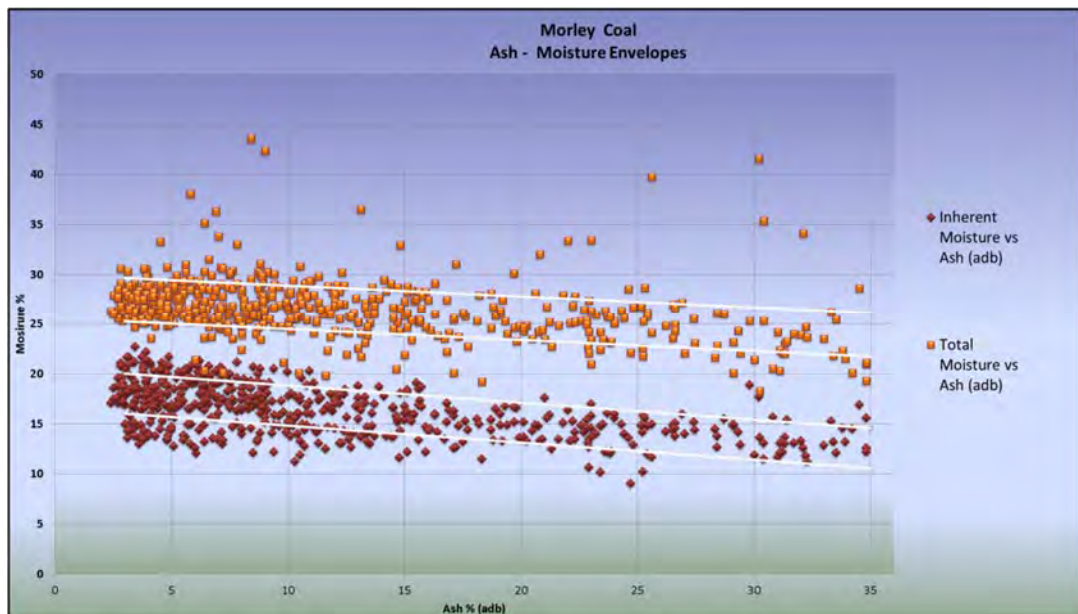


Figure 4: Inherent moisture and total moisture cut-off envelopes for Morley coal

- This technique compares favourably to the Run of Mine coal sampling data from Coaldale and Takitimu open pit operations and provides a more accurate representation of coal bed moisture than using a single value for total moisture across the deposit and estimating qualities on a dry basis.
- Resource tonnages are reported using natural bed moisture, calculated using the Preston and Sanders equation.

**Cut-off parameters**

- Structure grids have been developed based on a 35% ash cut-off. Some higher ash intervals are retained within the coal quality dataset to allow simplification of the seam model.
- No lower ash cut-off has been applied.
- Moisture data has an upper and lower cut-off applied as described in the previous section.
- Coal resources are reported down to a seam thickness of 0.5 m (one block) with an ash cut-off of 25%.
- Resources have been defined as economic by using a Lerchs-Grossman optimized pit shell using budgeted mining costs and contracted coal sales values. The 1.0RF shell from the

Criteria	Commentary
	optimization has been used. No resources have been reported outside of this pit shell. This optimised pit shell is used to determine Reasonable Prospects for Eventual Economic Extraction (RPEEE).
<b>Mining factors or assumptions</b>	<ul style="list-style-type: none"> <li>The Coaldale and Black Diamond pits are in commercial production utilising truck and excavator mining.</li> <li>Long term coal sales contracts are tied to inflation (Labour Cost Index, Producers Price Index) for the mining industry.</li> <li>No other mining factors such as mining losses and dilutions have been applied when developing the resource model.</li> </ul>
<b>Metallurgical factors or assumptions</b>	<ul style="list-style-type: none"> <li>No metallurgical assumptions have been applied in estimating the resource.</li> <li>Currently no wash plant is used at the Takitimu Mine. Run-of-Mine (ROM) coal produced is processed through a crushing/screening plant where losses are minimal.</li> </ul>
<b>Environmental factors or assumptions</b>	<ul style="list-style-type: none"> <li>No environmental assumptions have been applied in developing the resource model.</li> <li>The Coaldale and Black Diamond pits are currently in commercial production and there is a large area available for waste disposal.</li> <li>Overburden has been shown to be non-acid forming.</li> </ul>
<b>Bulk density</b>	<ul style="list-style-type: none"> <li>A total of 89 relative density (air-dried) sample results are available for the Morley coal, and 38 samples are available for Beaumont coal.</li> <li>The samples are distributed throughout the Takitimu-Coaldale-Black Diamond project area and the sample set covers a range of ash values from 3.8% to 50.3%.</li> <li>From this dataset an ash-density curve was generated with a coefficient of determination of <math>R^2=0.87</math> for Morley Coal, and <math>R^2=0.94</math> for Beaumont coal (Figure 5).</li> </ul>

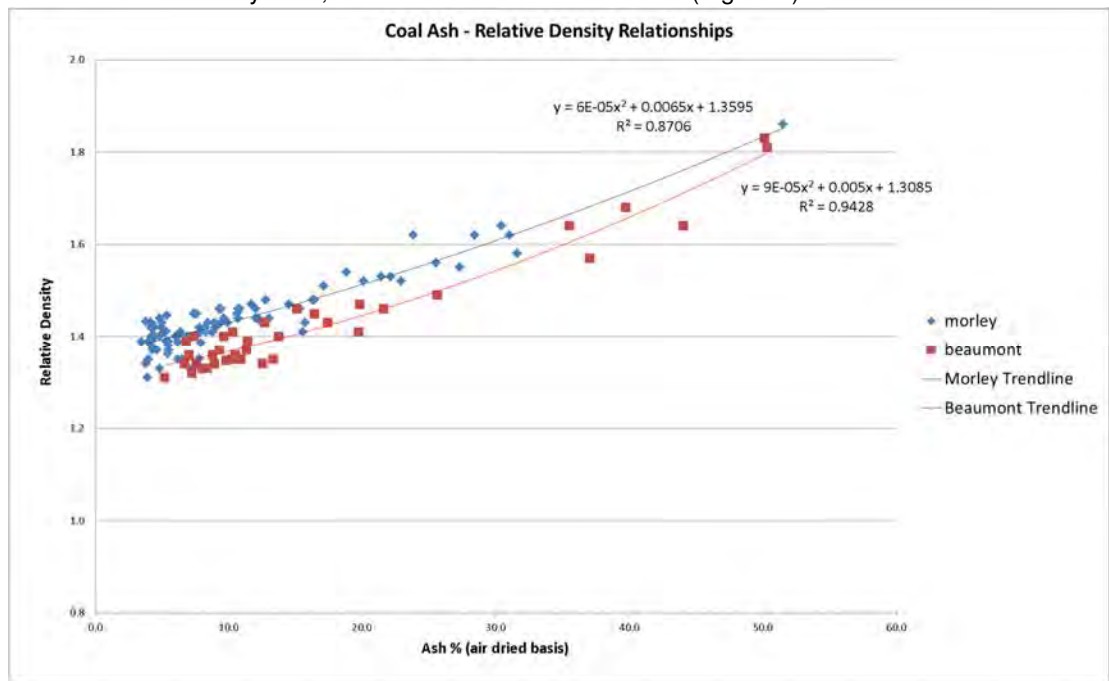


Figure 5: Graph showing Ash (adb) - Relative Density (adb) relationship for both Morley and Beaumont coal

- Air dried relative density (RD\_ad) is calculated using the air-dried block ash (Ash\_ad) value and the derived density equations.
  - Morley coal:  $RD_{ad} = (0.00006 * Ash_{ad}^2) + (0.0065 * Ash_{ad}) + 1.3595$
  - Beaumont coal:  $RD_{ad} = (0.00009 * Ash_{ad}^2) + (0.005 * Ash_{ad}) + 1.3085$
- An in situ bulk density (RD\_ps) value is computed using the Preston Saunders method;
 
$$RD_{ps} = (RD_{ad} * (100 - mo_{ad})) / (100 + RD_{ad} * (mo_{ar} - mo_{ad}) - mo_{ar})$$
 Where RD\_ad is relative density on an air-dried basis, mo\_ad is inherent moisture, and mo\_ar is total bed moisture.
- The Coaldale and Black Diamond pits are in commercial production and reconciliations have

Criteria	Commentary
	confirmed density estimates.
<b>Classification</b>	<ul style="list-style-type: none"> <li>• BRL classifies resources using a multivariate approach.</li> <li>• Coal resources have been classified on the basis of geological and grade continuity balanced by relative uncertainties surrounding historical underground extraction, historical fire-affected areas and proximity to faults and unconformities.</li> <li>• Closely spaced drill holes with valid coal quality samples (point of observation) increase the confidence in resource assessments.</li> <li>• The confidence is reduced by: <ul style="list-style-type: none"> <li>○ A block being within an area of historical underground workings due to extraction rate uncertainty.</li> <li>○ A block being within 20 m of historical underground workings due to uncertainty with historical survey of the workings and georeferencing of mine plans.</li> <li>○ A block lying in an area where structure dip is greater than 20° due to proximity to large faults. Faulting can impact coal thickness and quality.</li> <li>○ A block lying within an area with thin or splitting seams resulting in uncertainty of geological continuity. Where a seam is thin or is splitting, a small change in thickness can have a large impact to reported vs actual coal tonnages and qualities.</li> <li>○ A block being within an area close to a possible erosional 'washout' of Morley coal as indicated by historic underground mine plans and extents.</li> <li>○ A block lying within an area identified to be affected by historical underground mine fires.</li> <li>○ A block is less than 2 m below the modelled regional unconformity between Beaumont and Morley formations due to uncertainties in unconformity surface topology.</li> </ul> </li> <li>• Essentially, in an area that is not affected by the above conditions, a distance to nearest sample of less than 75 m would be classified as Measured, less than 150 m is classified as Indicated and less than 500 m would be classified as Inferred.</li> <li>• Figure 6 and Figure 7 present the resource classification polygons for Morley and Beaumont Coal. Economic resources are reported from within these polygons provided they lie within the Lerchs-Grossman optimized opencast pit shell.</li> </ul>

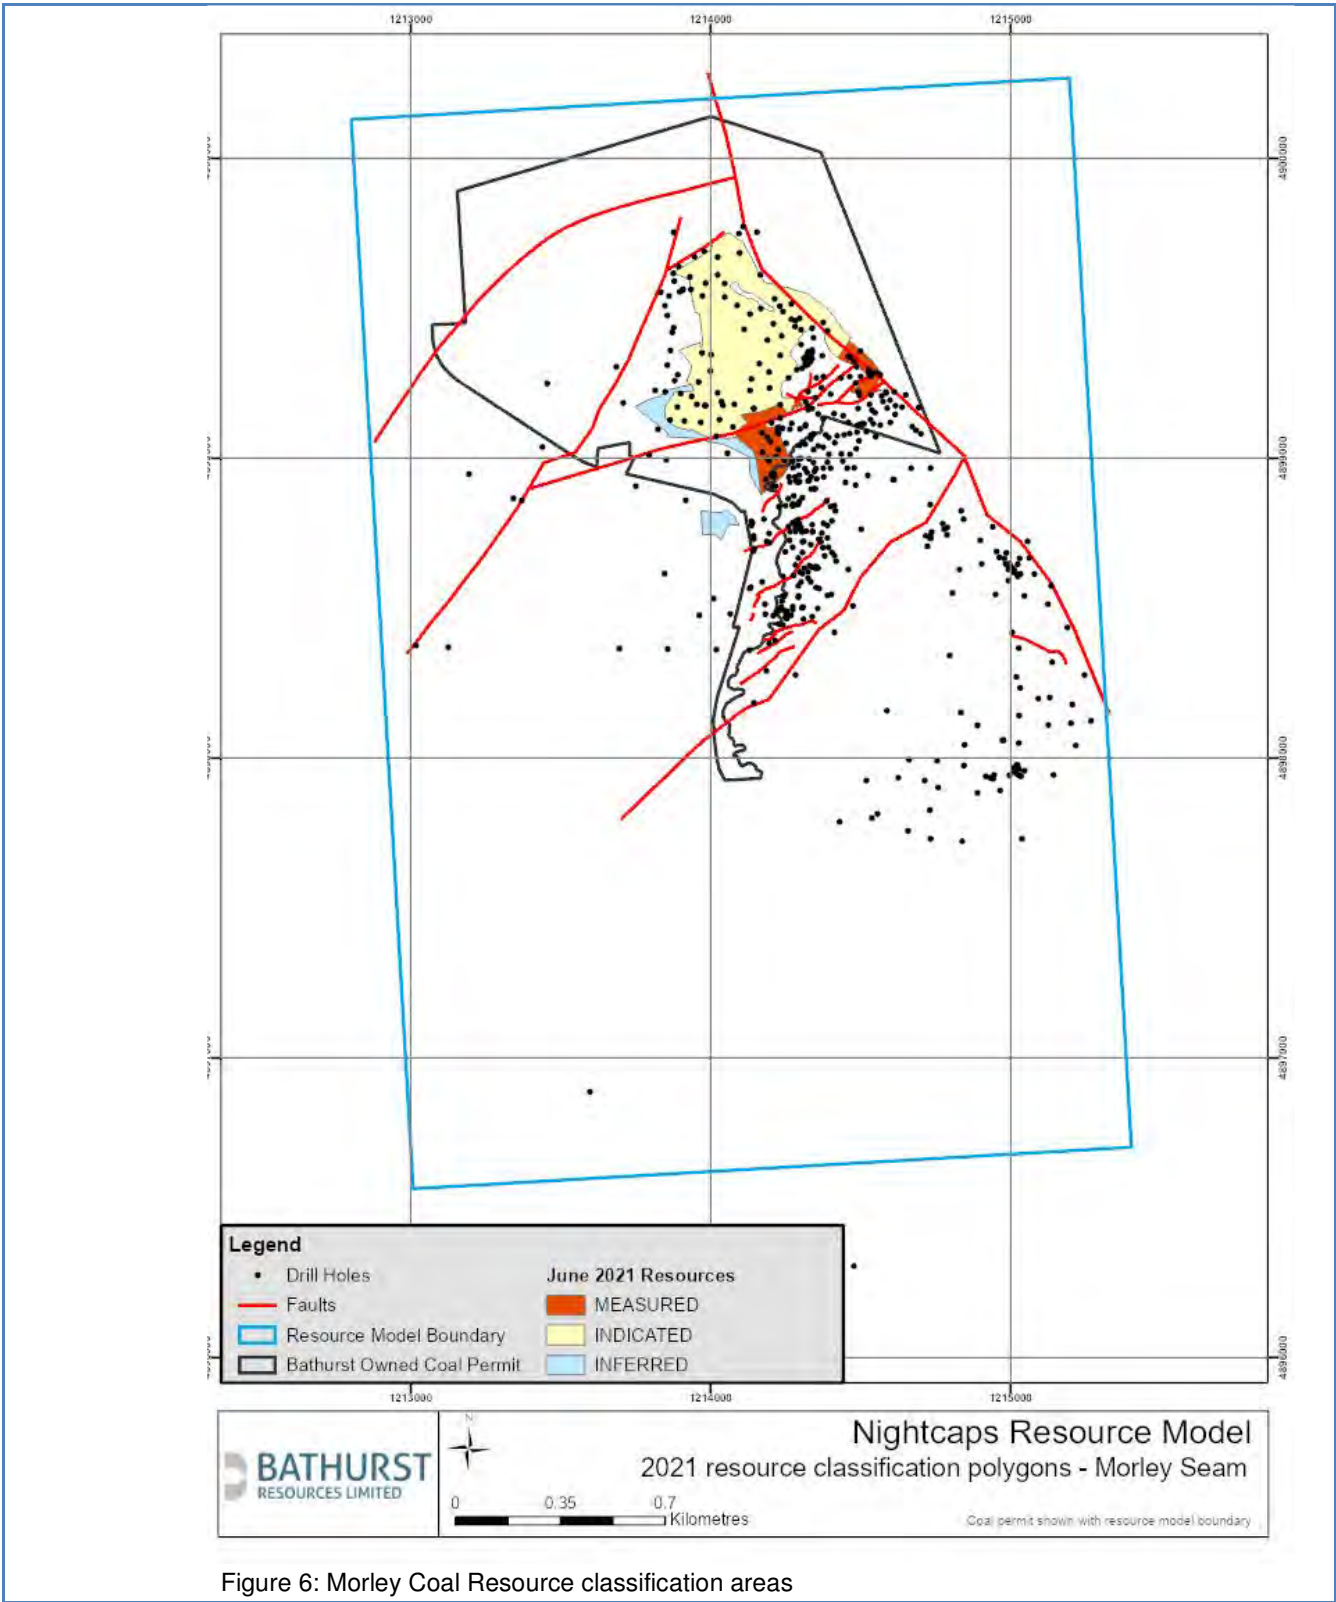


Figure 6: Morley Coal Resource classification areas

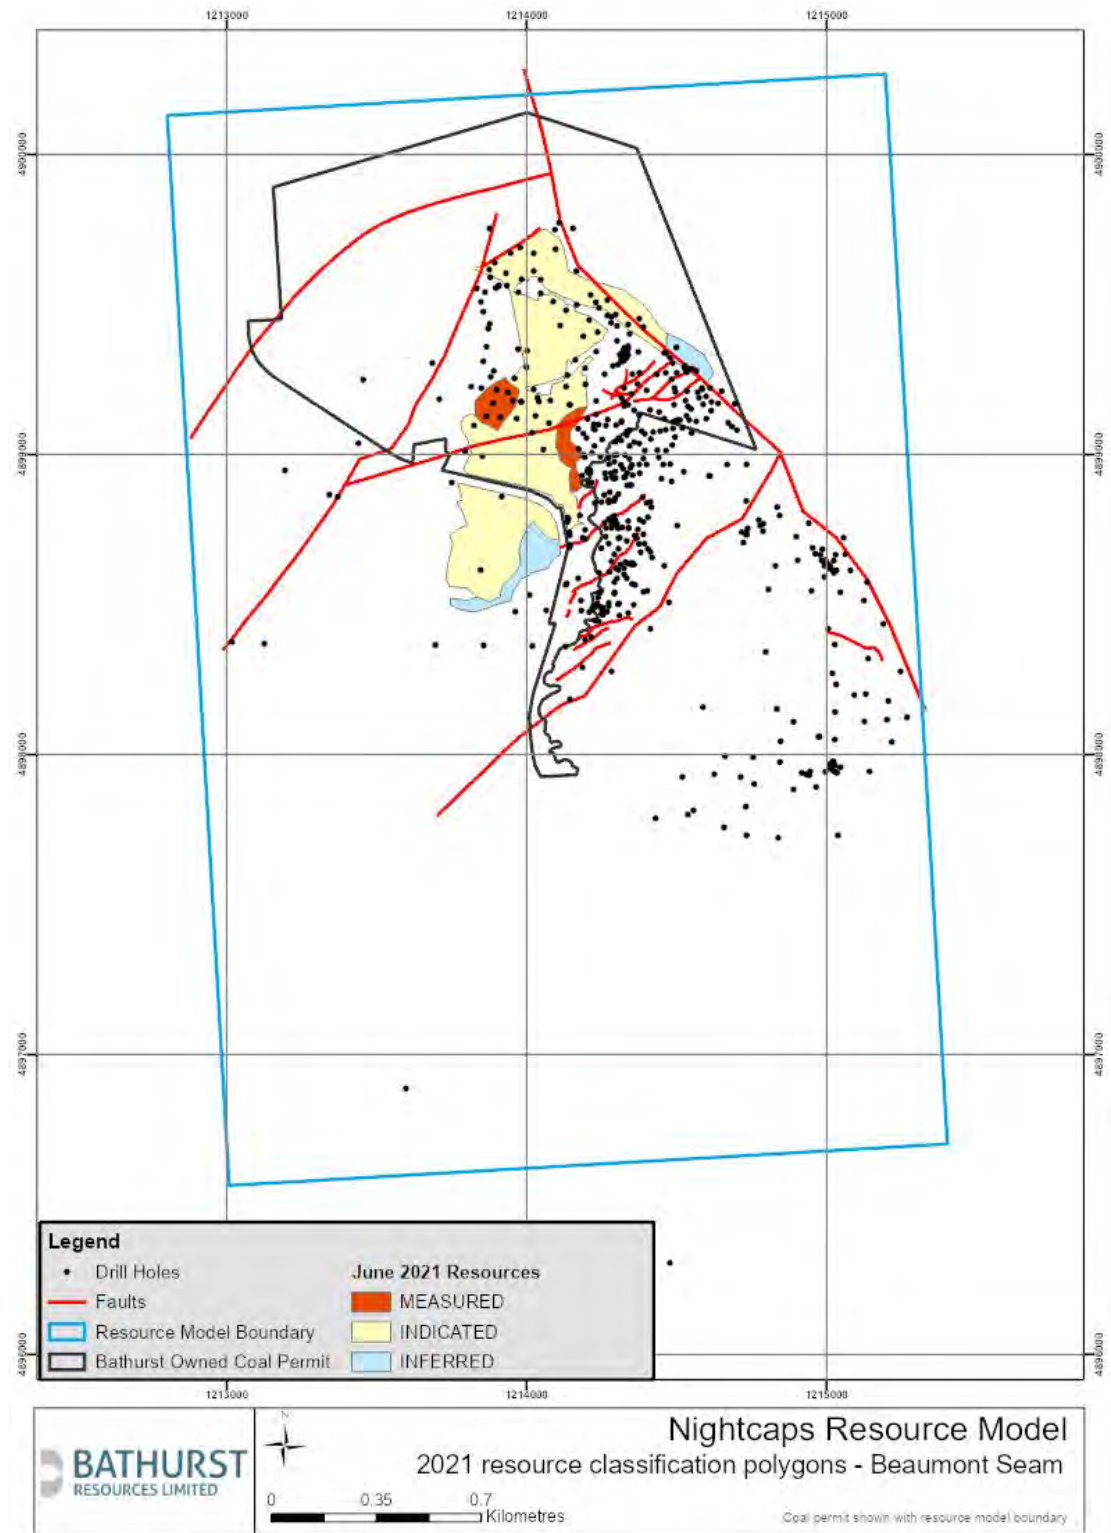


Figure 7: Beaumont Coal Resource classification areas

**Audits or reviews**

- Previous iterations of the model were reviewed by BRL mine engineering staff and Core Mining Consultants (CMC) as part of the mine planning for the Coaldale and Black Diamond pits.
- The currently reported model has been reviewed by the Competent Person.
- The 2021 resource model represents an update to the 2020 resource models and incorporates all the drilling and exploration data to 30 June 2020.

**Discussion of relative**

- The Competent Person has reviewed the Coal Resource estimates and has visited the existing

Criteria	Commentary
<b>accuracy/ confidence</b>	<p>operations. The Competent Person has examined the methodology used to estimate the resources and reserves and is satisfied that the processes have been properly conducted. The estimation methodology is generally in accordance with industry practice and the estimates can be regarded as consistent with the requirements of JORC 2012.</p> <ul style="list-style-type: none"> <li>• Statistical comparisons between the resource block model and the coal quality data set have been carried out and are within expected ranges.</li> <li>• The Takitimu mine utilises the resource model modified to a reserve model for mine planning and scheduling. Production reconciliation for the four years of Coaldale production completed in July 2017 shows that ROM coal produced reconciles to within 10% of the expected coal resources defined by the model. Classification of mined coal in this period was split evenly between Measured and Indicated coal.</li> </ul>

## Section 4 Estimation and Reporting of Ore Reserves

Criteria	Commentary
<b>Mineral Resource estimate for conversion to Ore Reserves</b>	<ul style="list-style-type: none"> <li>• A 3D Resource Block model of topography, structure and quality are used for in situ Resource definition.</li> <li>• Mineral Resources are inclusive of Ore Reserve.</li> </ul>
<b>Site visits</b>	<ul style="list-style-type: none"> <li>• The Reserves Competent Person visits the site regularly.</li> </ul>
<b>Study status</b>	<ul style="list-style-type: none"> <li>• Takitimu is an operating mine project. The reportable Ore Reserve is based on the life of mine (LOM) plan and has determined a mine plan that is technically achievable and economically viable, and that material modifying factors have been considered.</li> </ul>
<b>Cut-off parameters</b>	<ul style="list-style-type: none"> <li>• Pit optimisation runs were completed to determine economic pit limits.</li> <li>• BRL supplied cost and revenue data.</li> <li>• A maximum ROM ash of 15% (arb) and a minimum coal thickness of 0.5m are applied.</li> </ul>
<b>Mining factors or assumptions</b>	<ul style="list-style-type: none"> <li>• The Takitimu mining area has been operational since 2007, with the current Coaldale pit starting in 2012. Costs and prices are derived from actual and budget. Hence, a Feasibility Study was not completed.</li> <li>• In 2018 a significant review of Mining recovery factors was undertaken. Allowance was made in the reserves for coal to be contract washed offsite at the Ohai coal plant. Variable clean coal recovery factors were estimated for sections of the remaining Coaldale and Black Diamond areas. Recovery factors were based on the presence of coal workings and the presence of Beaumont sediment intrusions into Morley coal seams.</li> <li>• A default mining loss of 90% is applied to the in situ coal. Periodically, the ROM coal production is reconciled against depletion of the mining model. Reconciliation to date shows more coal produced than modelled from the same areas.</li> <li>• The Takitimu mine utilises truck and shovel for waste and coal movement. The operations are supported by additional equipment including dozers, graders, and water carts.</li> <li>• Geotechnical studies have been completed for Black Diamond.</li> <li>• Moisture Adjustments: Moisture is modified during both the mining and processing operations. In situ moisture is determined by the process described in Section 3 and is the base point for all moisture adjustments. Recoverable Coal Reserves are stated on a ROM moisture basis, as received by the processing plant. Marketable Coal Reserves are stated on a product moisture basis, as sold.</li> </ul>
<b>Metallurgical factors or assumptions</b>	<ul style="list-style-type: none"> <li>• The ROM coal produced at Takitimu is crushed and screened on site. A process recovery of 95% is used based on a processing reconciliation study.</li> <li>• Product coal specifications include ash, sulphur, moisture and calorific value.</li> </ul>
<b>Environmental</b>	<ul style="list-style-type: none"> <li>• All environmental approvals are currently in place to operate the Coaldale section of the mine.</li> <li>• Waste rock characterisation results show that the material is non-acid or metal producing, as such it does not require special placement requirements or procedures in the dumps.</li> </ul>
<b>Infrastructure</b>	<ul style="list-style-type: none"> <li>• All necessary infrastructure is in place and operational for the current operation.</li> </ul>



<b>Criteria</b>	<b>Commentary</b>
<b>Costs</b>	<ul style="list-style-type: none"> <li>All infrastructure is in place at Takitimu. The primary ongoing capital requirements are for equipment replacement and this is included in the economic model.</li> <li>All operating costs were based on the 2020 Takitimu three year budget estimates provided by BRL and include allowances for royalties, commissions, mining costs, train loading and administration.</li> <li>Prices are at the mine gate. Customers pay for transport.</li> <li>Product specifications and penalties for failure to meet specification were provided by BRL.</li> </ul>
<b>Revenue factors</b>	<ul style="list-style-type: none"> <li>Prices are at the mine gate. Customers pay for transport.</li> <li>Product specifications and penalties for failure to meet specification were provided by BRL.</li> </ul>
<b>Market assessment</b>	<ul style="list-style-type: none"> <li>Long term supply contracts are in place.</li> </ul>
<b>Economic</b>	<ul style="list-style-type: none"> <li>No NPV analysis was completed as it is an operating mine. For JORC Reserves reporting purposes, detailed mine design and schedules are generated. This work includes identifying the mining sequence and equipment requirements.</li> <li>BRL generates detailed cash flow schedules and identifies incremental and sustaining capital.</li> </ul>
<b>Social</b>	<ul style="list-style-type: none"> <li>BRL have required key stakeholder agreements in place.</li> </ul>
<b>Other</b>	<ul style="list-style-type: none"> <li>All mining projects operate in an environment of geological uncertainty. The Competent Person is not aware of any other potential factors, legal, marketing or otherwise, that could affect the operations viability.</li> </ul>
<b>Classification</b>	<ul style="list-style-type: none"> <li>Classification of Ore Reserves has been derived by considering the Measured and Indicated Resources and the level of mine planning.</li> <li>For the Takitimu operation, Measured Coal Resources are classified as Proved Coal Reserves and Indicated Resources classified as Probable Coal Reserves, as the mine is currently operating and the level of mine planning adequate.</li> <li>The Inferred Coal Resources have been excluded from the Reserve estimates.</li> </ul>
<b>Audits or reviews</b>	<ul style="list-style-type: none"> <li>Internal peer review and reconciliation by BRL of the Reserves estimate has been completed.</li> </ul>
<b>Discussion of relative accuracy/confidence</b>	<ul style="list-style-type: none"> <li>Periodically, the ROM coal production is reconciled against depletion of the mining model. To-date more coal has been produced than modelled from the same areas.</li> <li>Accuracy and confidence of modifying factors are generally consistent with the current operation.</li> </ul>

Appendix A:



Figure 8: Location of resource

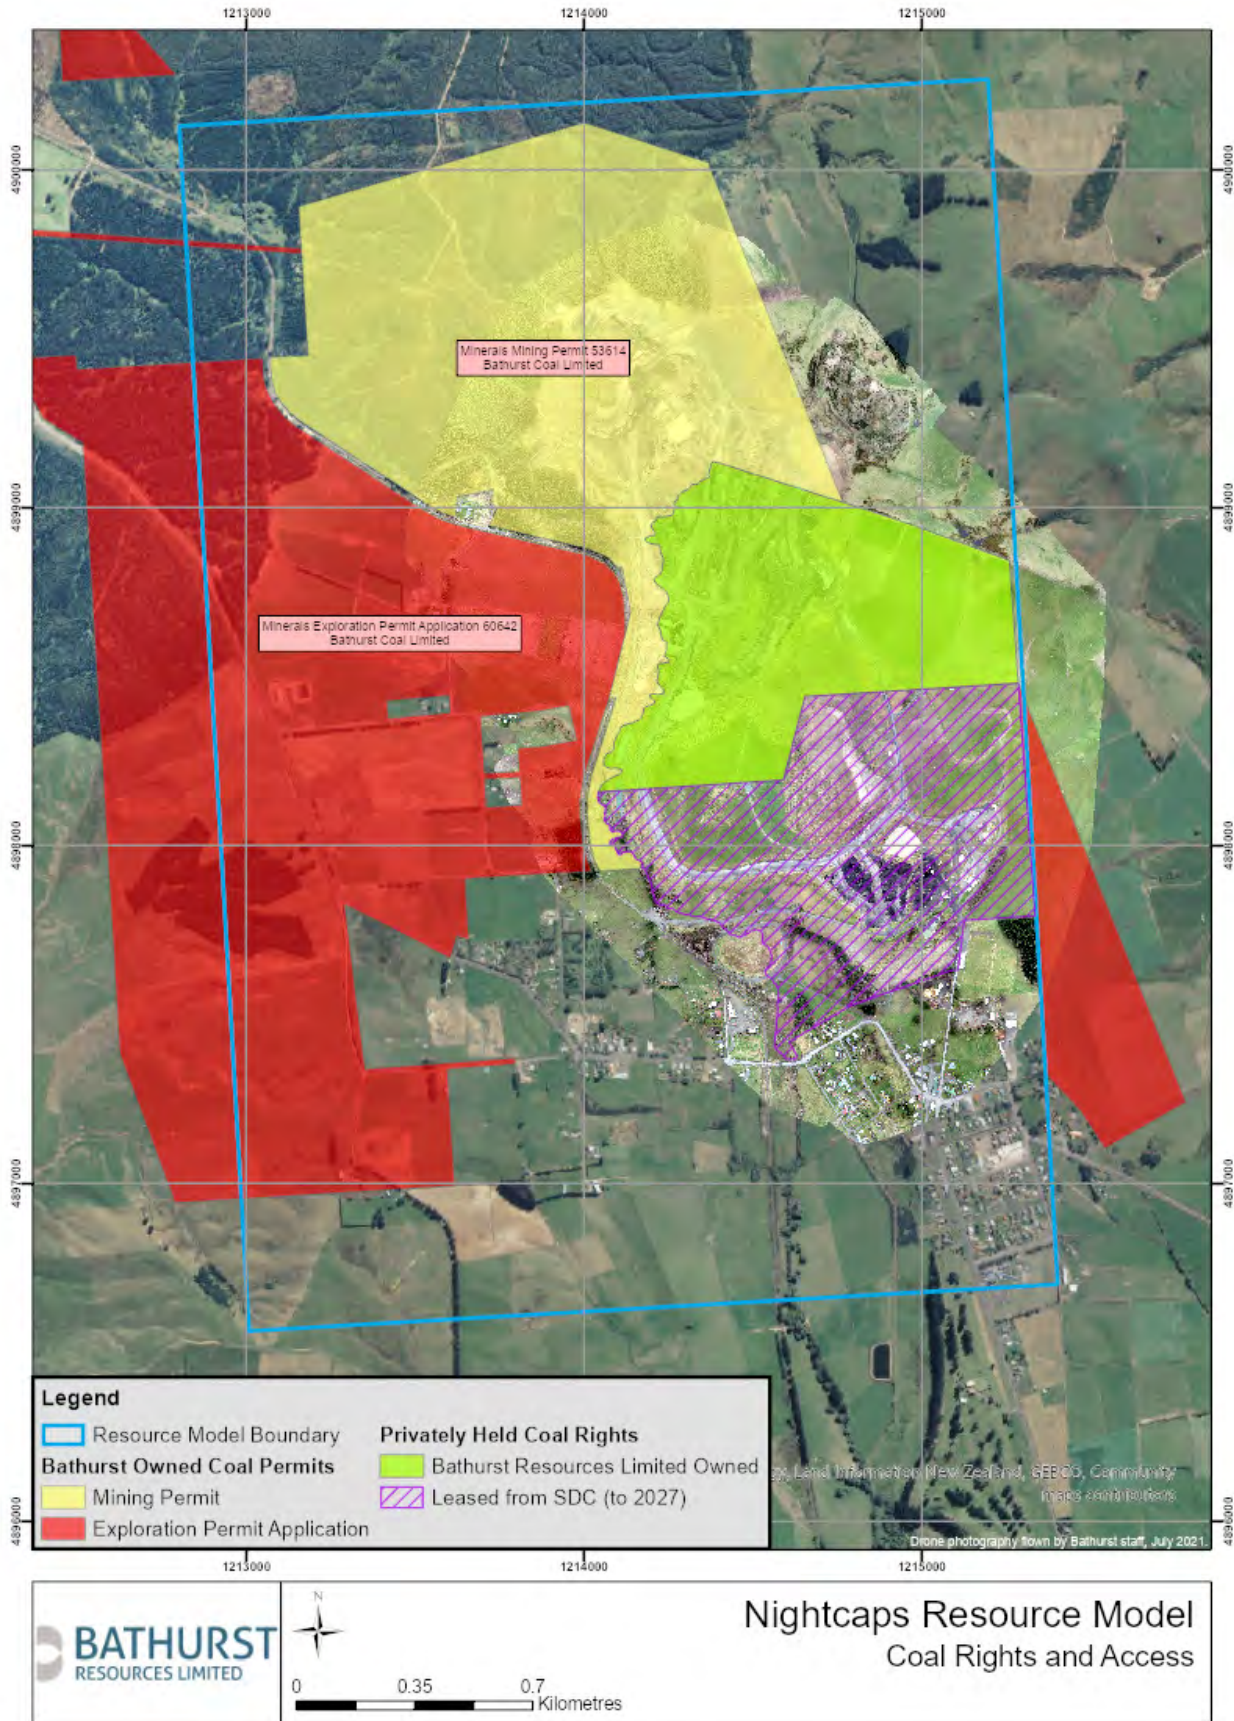


Figure 9: Land areas that BRL holds coal ownership rights

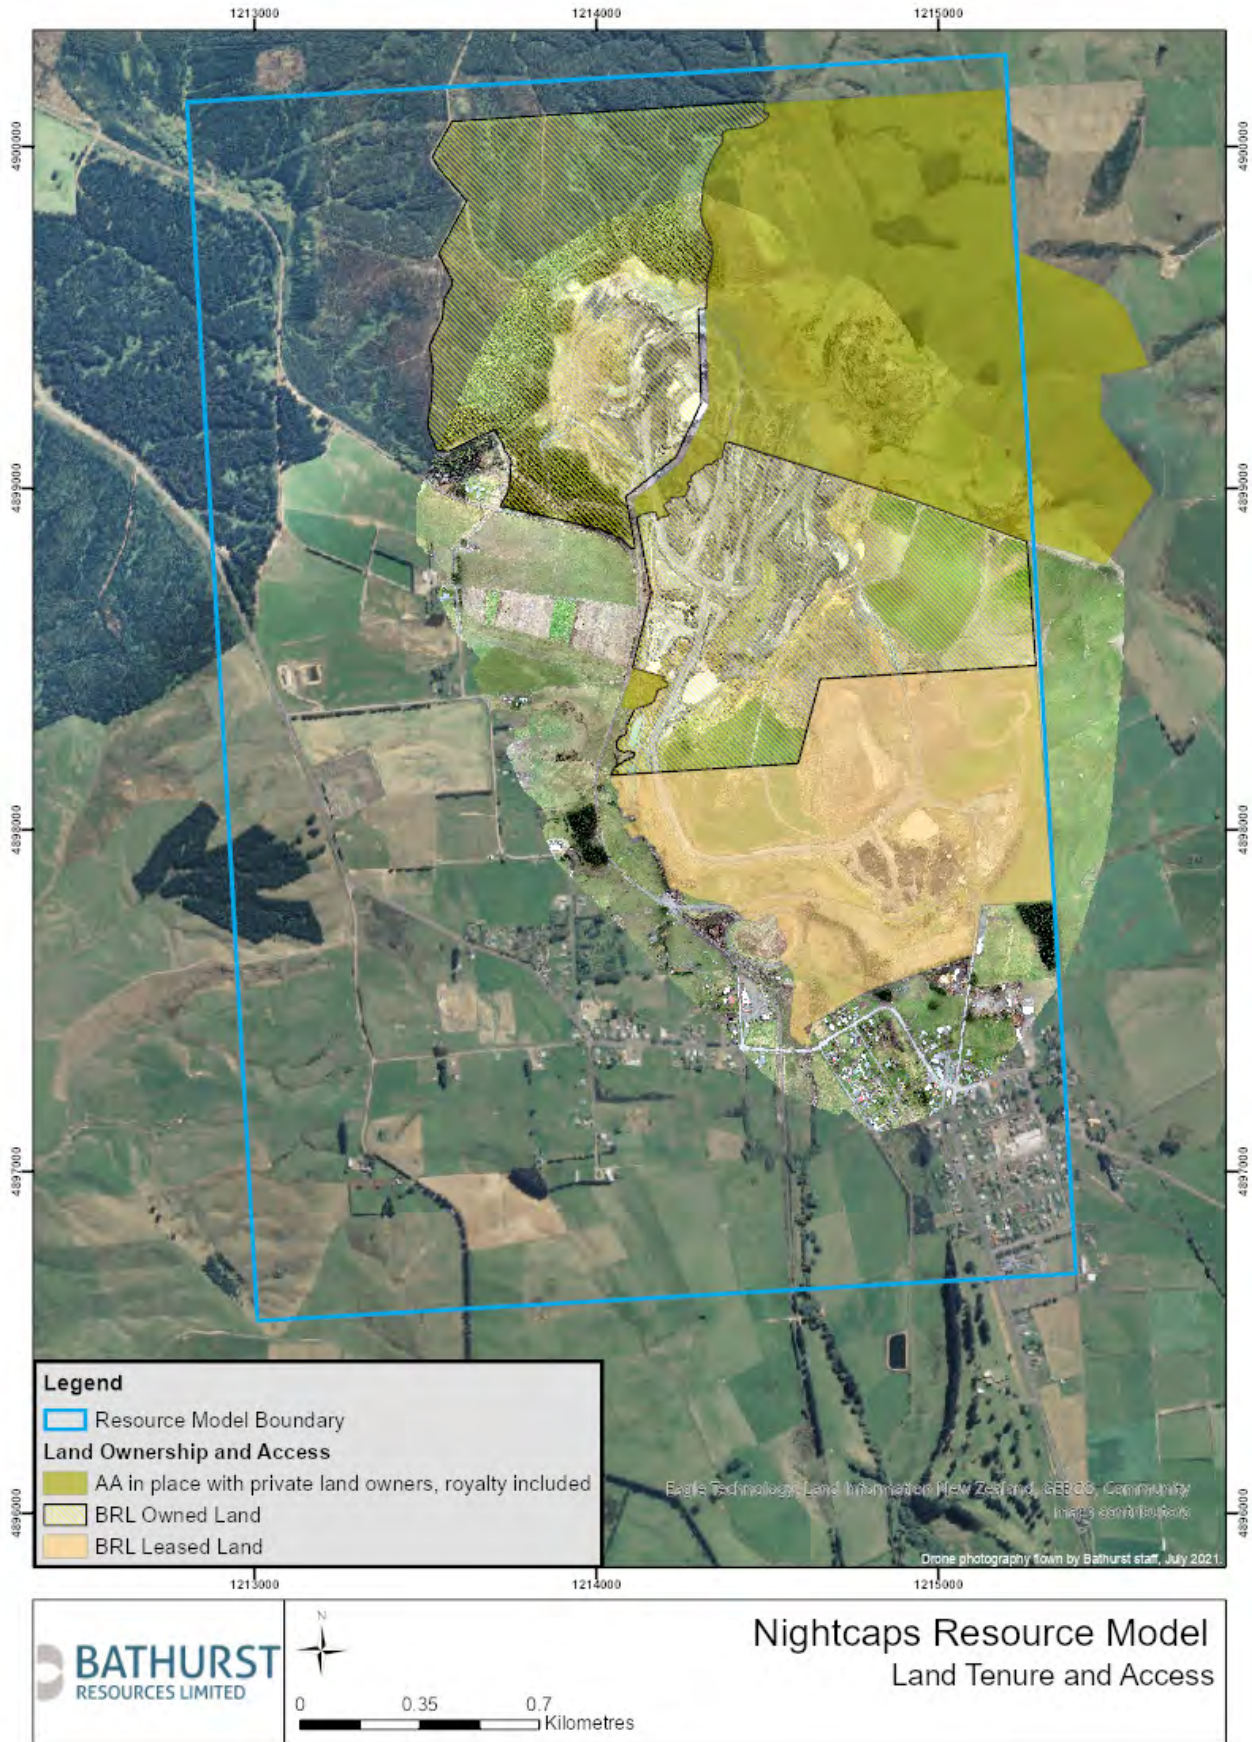


Figure 10: Access arrangement and land ownership status of land parcels within the project areas

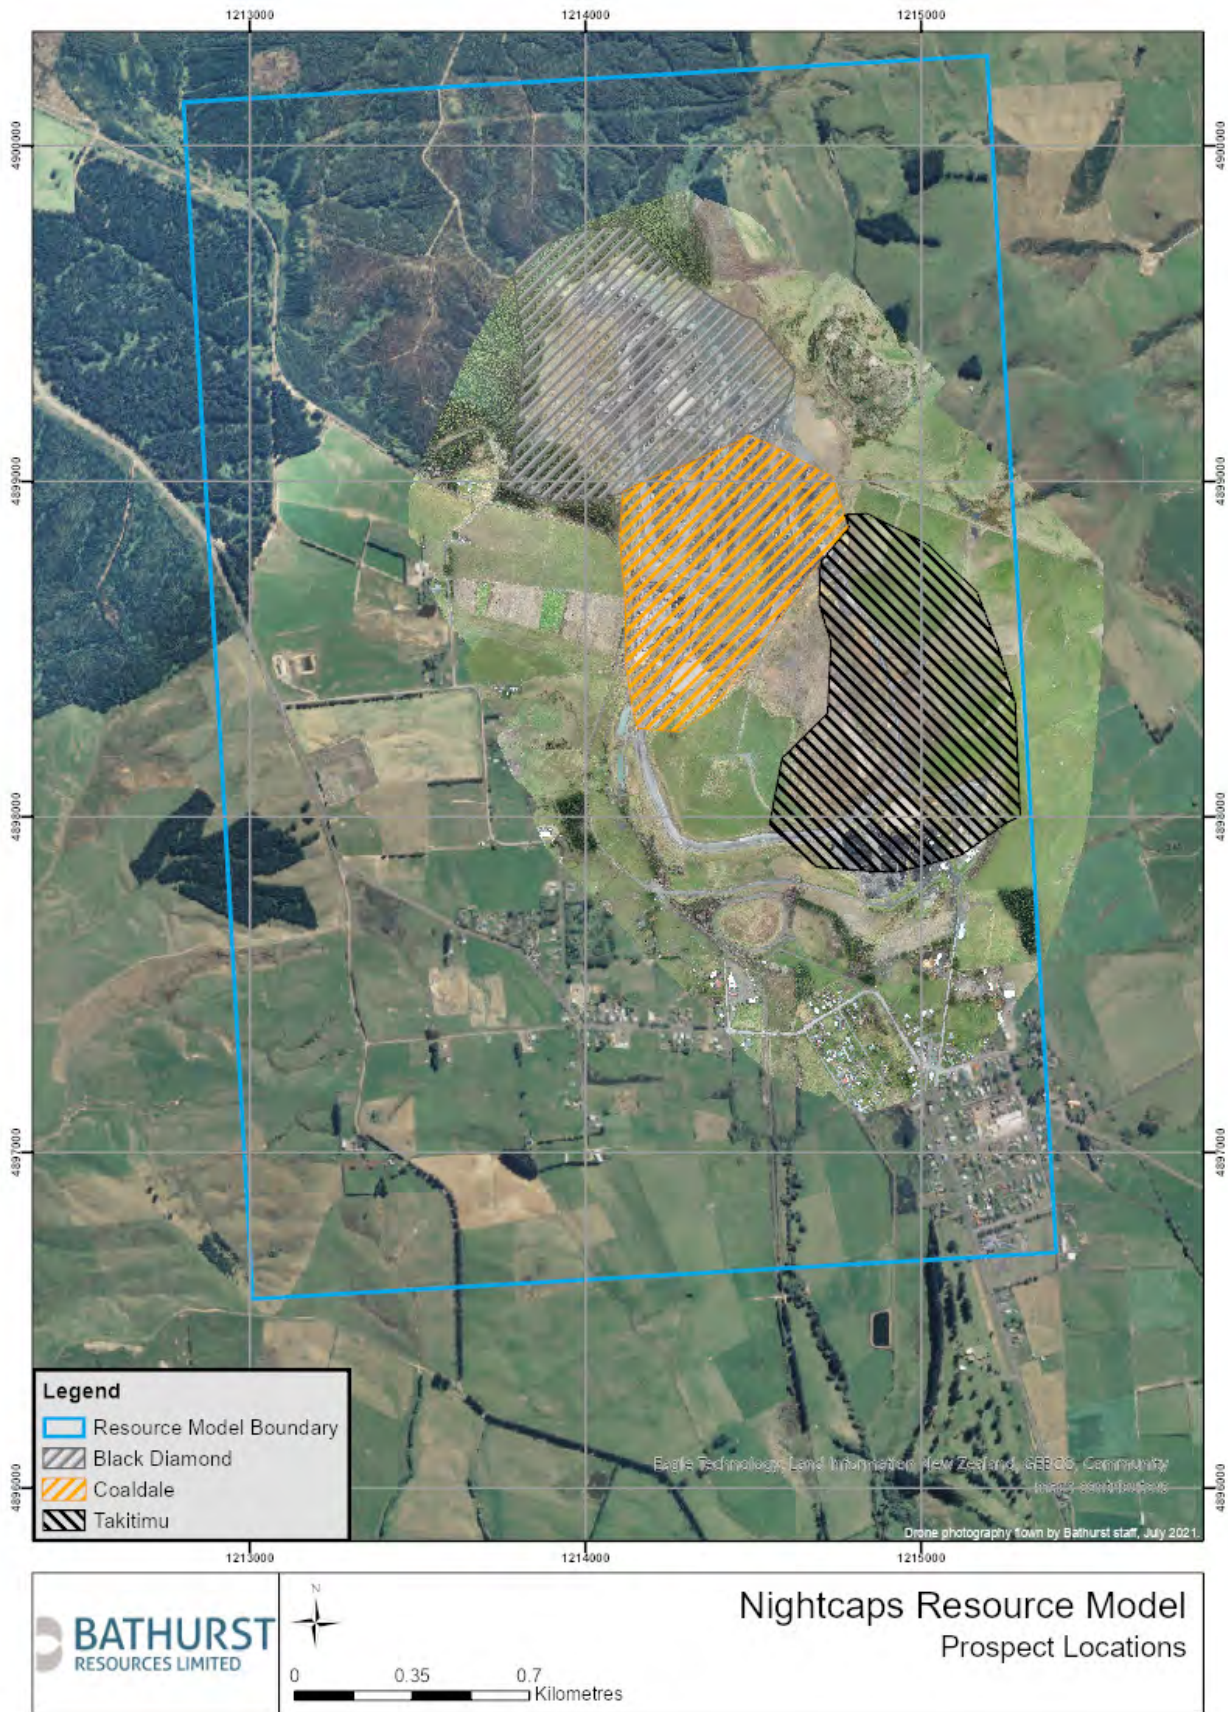


Figure 11: Three regions within the Resource Model

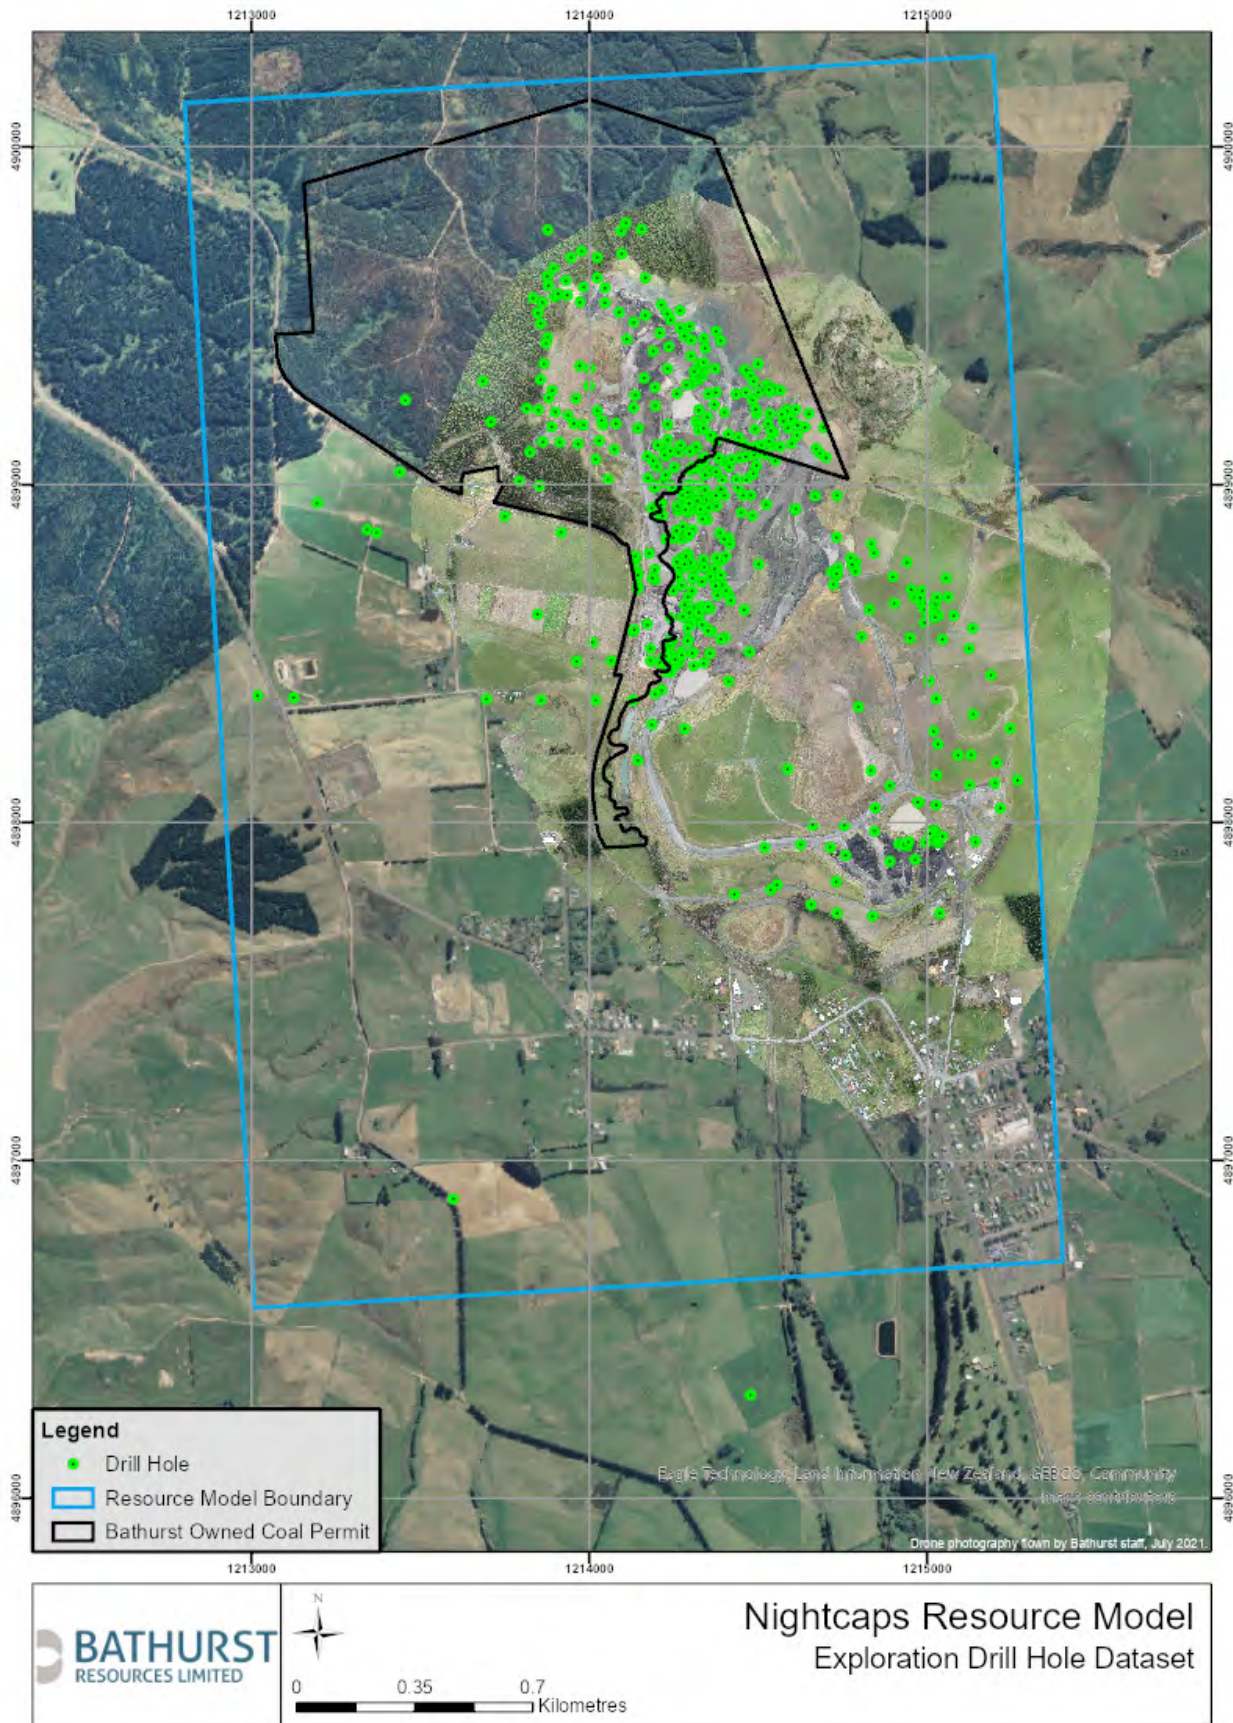


Figure 12: Location of drilling and major faults within Resource Area

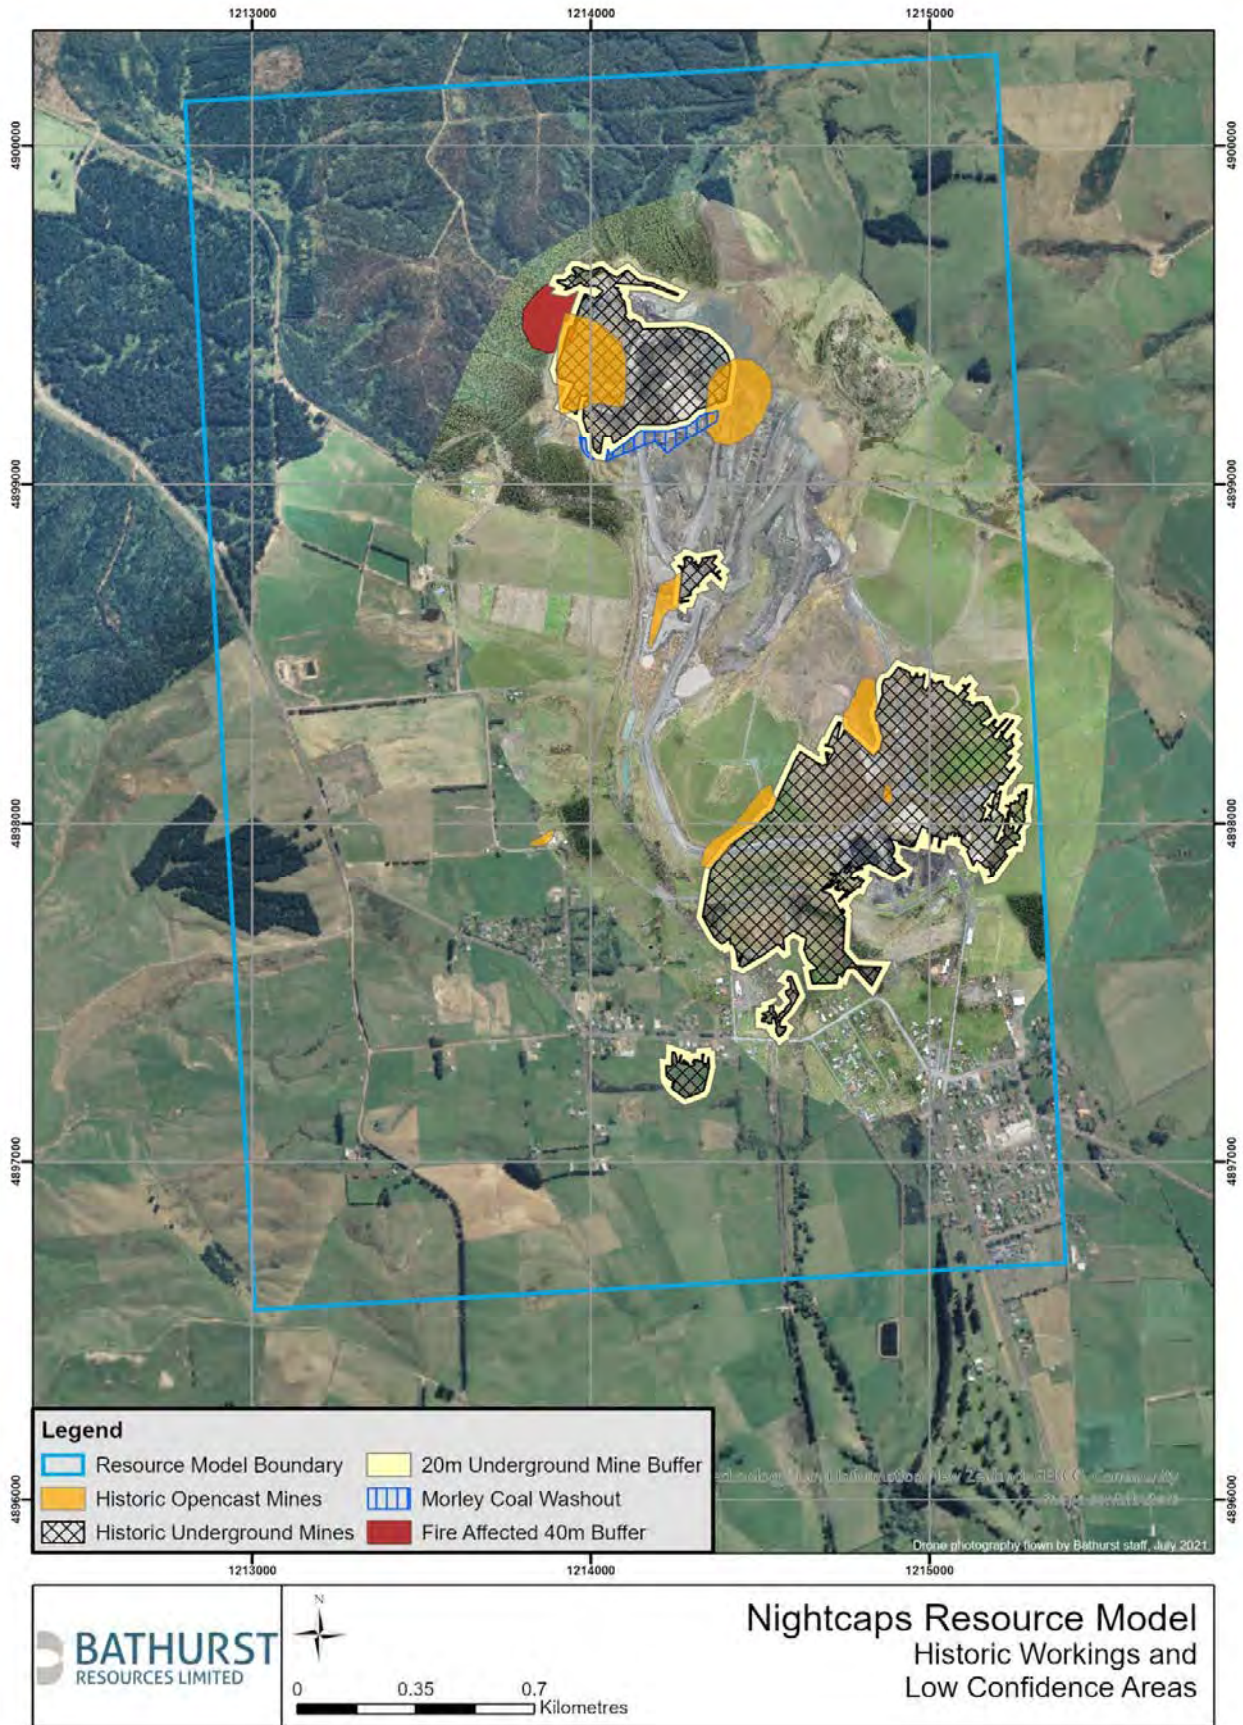


Figure 13: Location of historic mine workings and areas of low confidence.  
Note: Recent opencast mined areas are not shown.

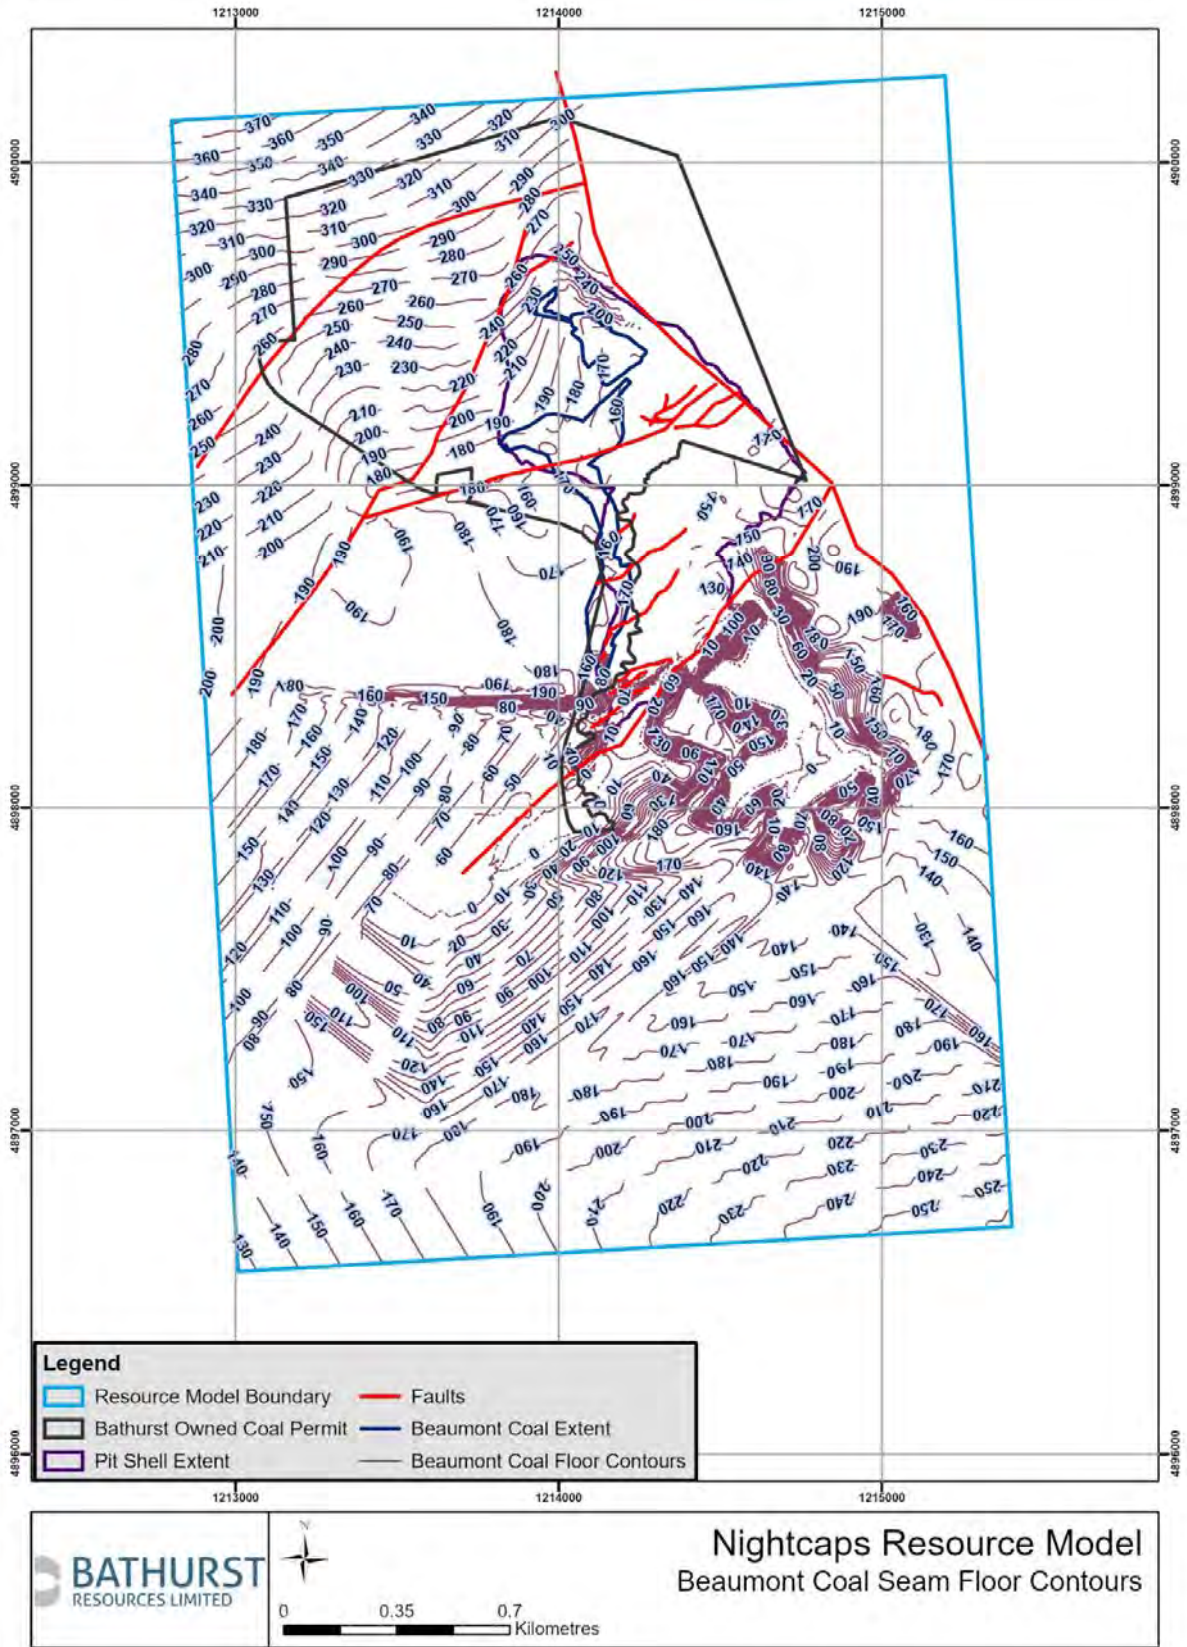


Figure 14: Beaumont Formation coal floor contours



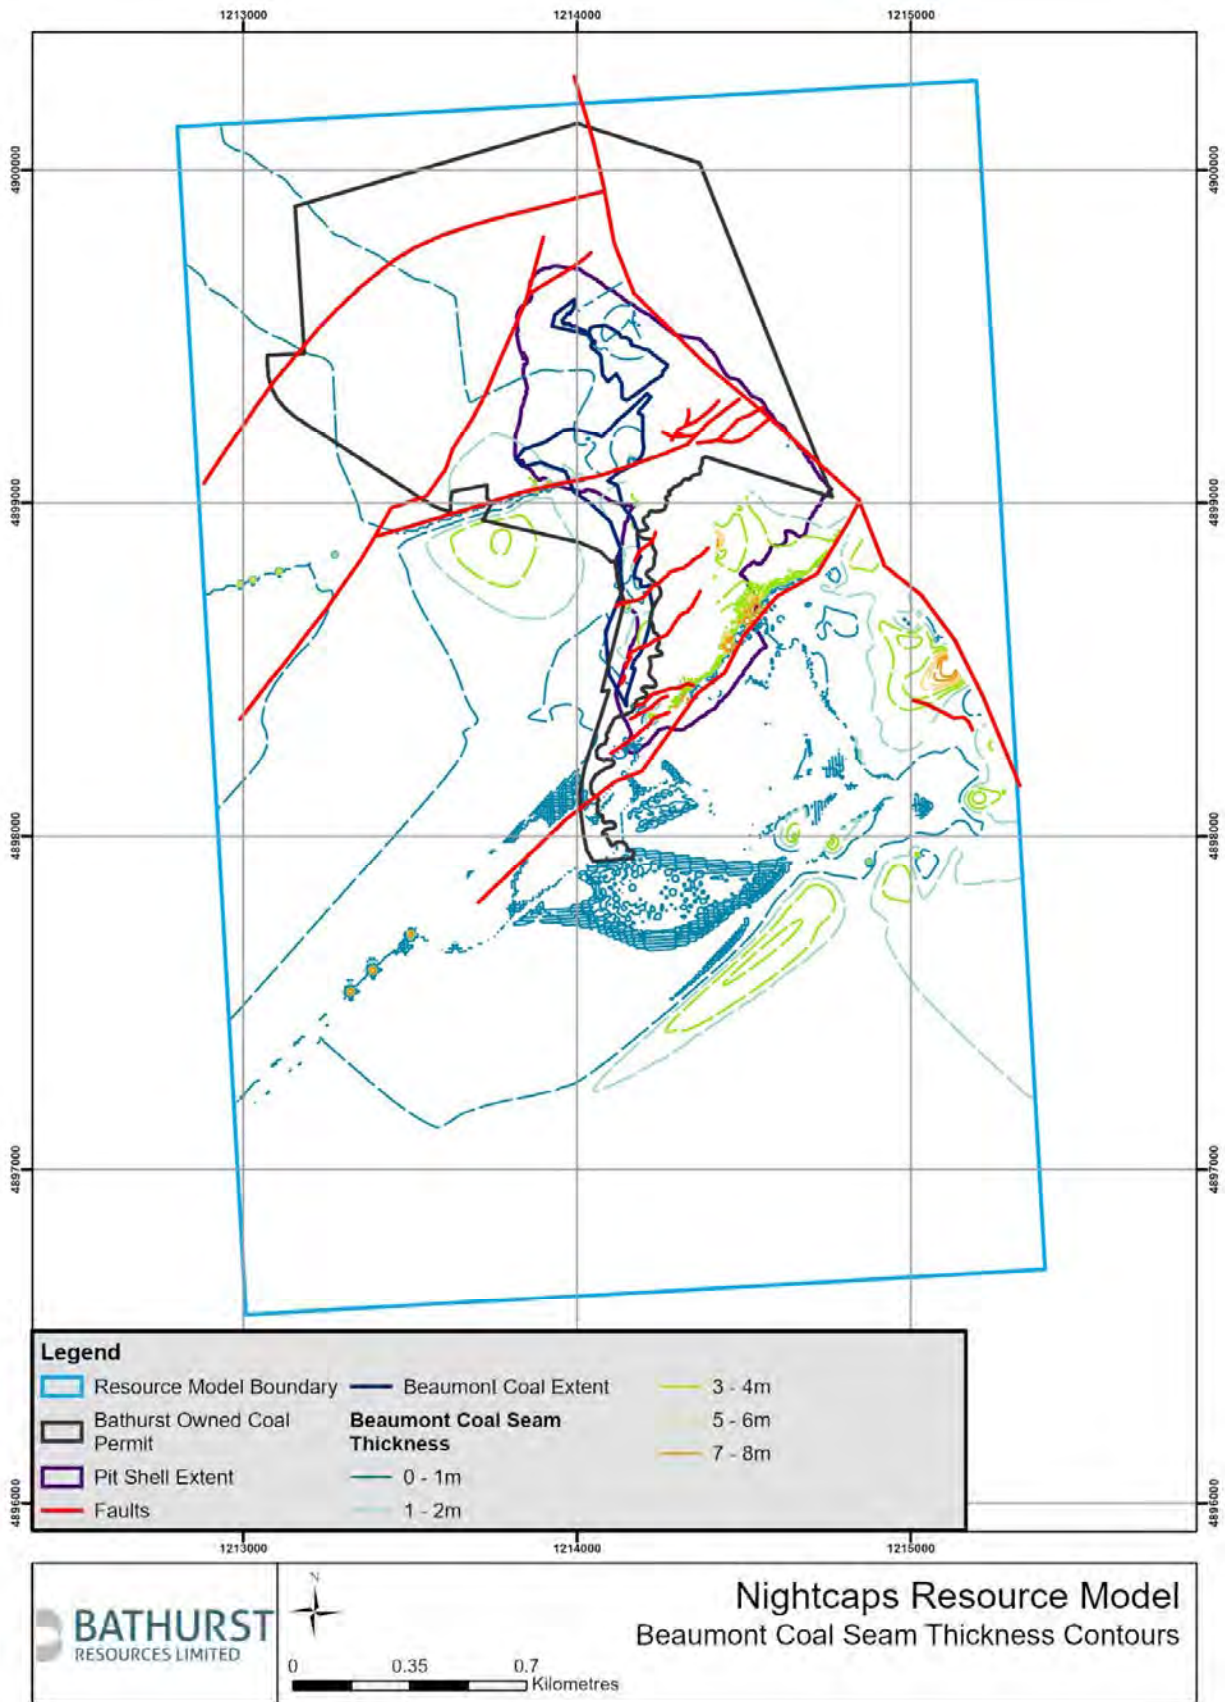


Figure 15: Beaumont Formation full seam cumulative thickness isopachs

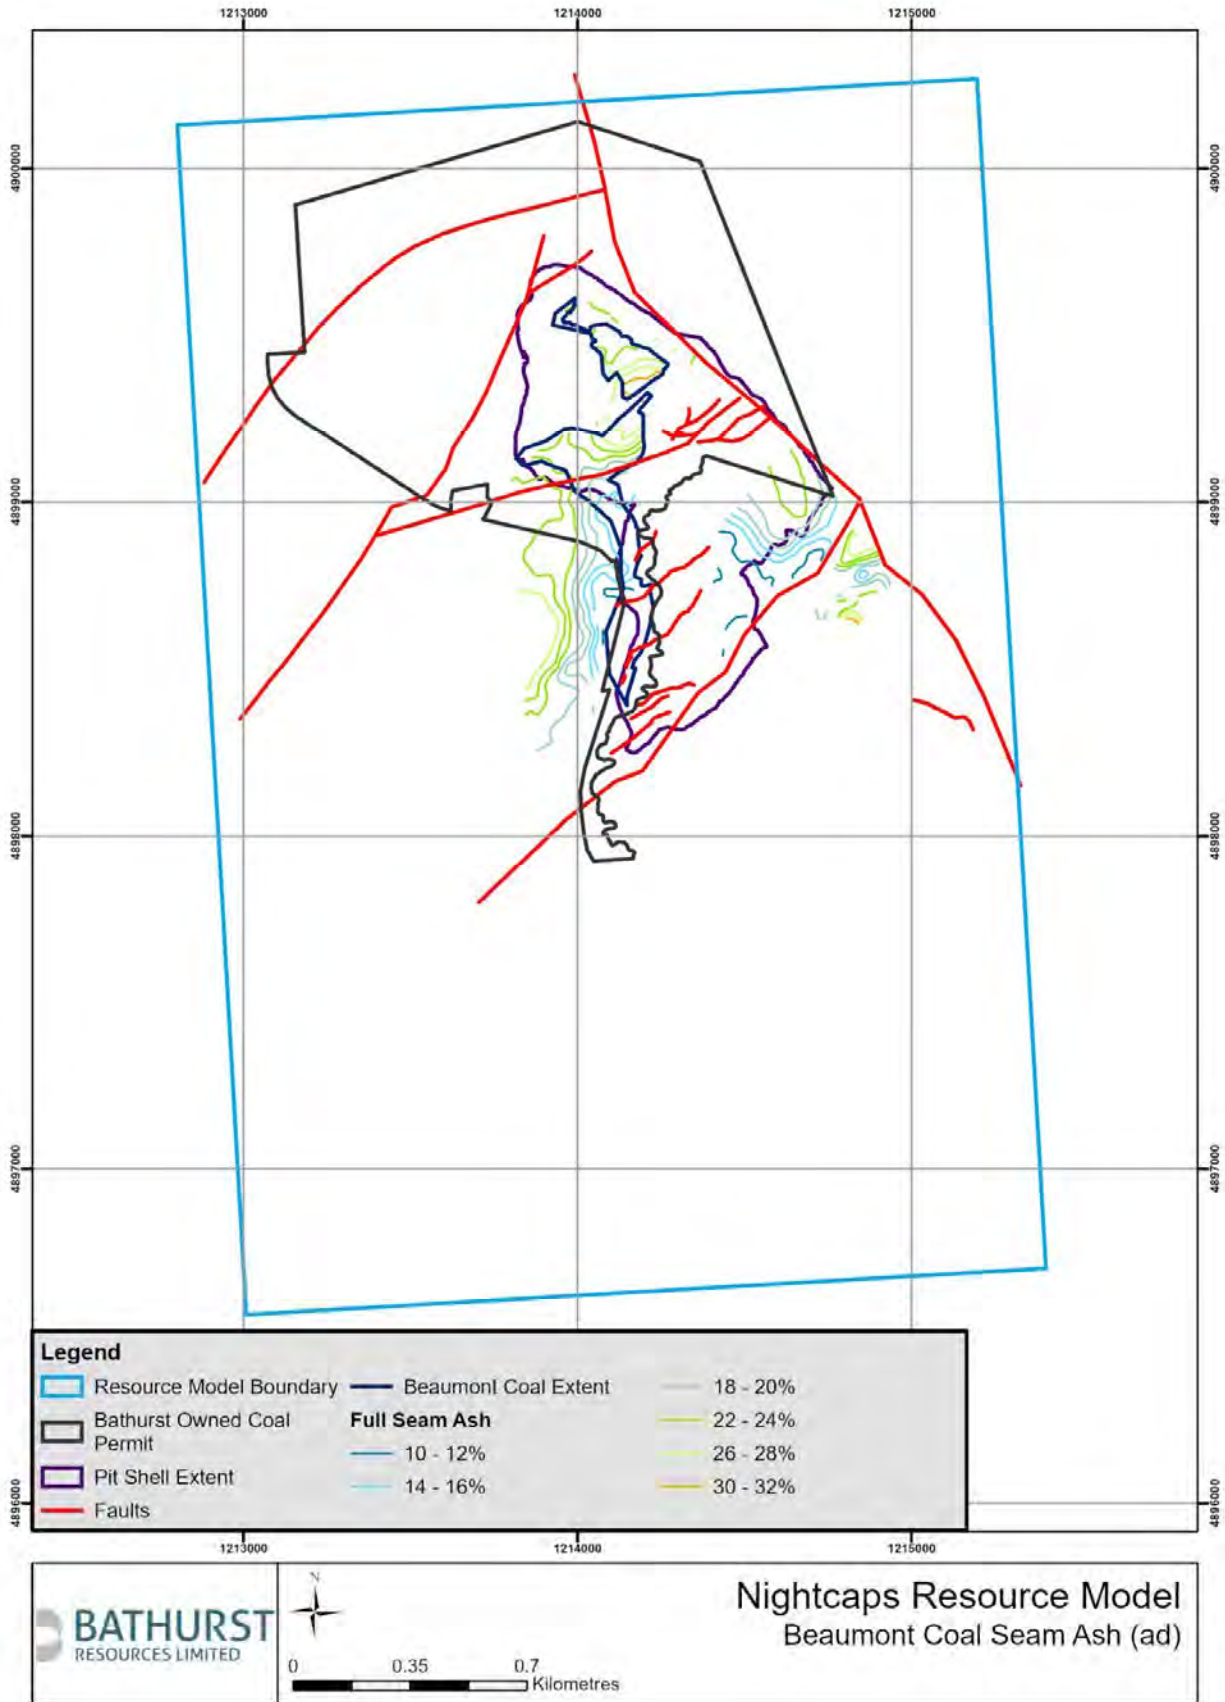


Figure 16: Beaumont Formation full seam ash isopachs

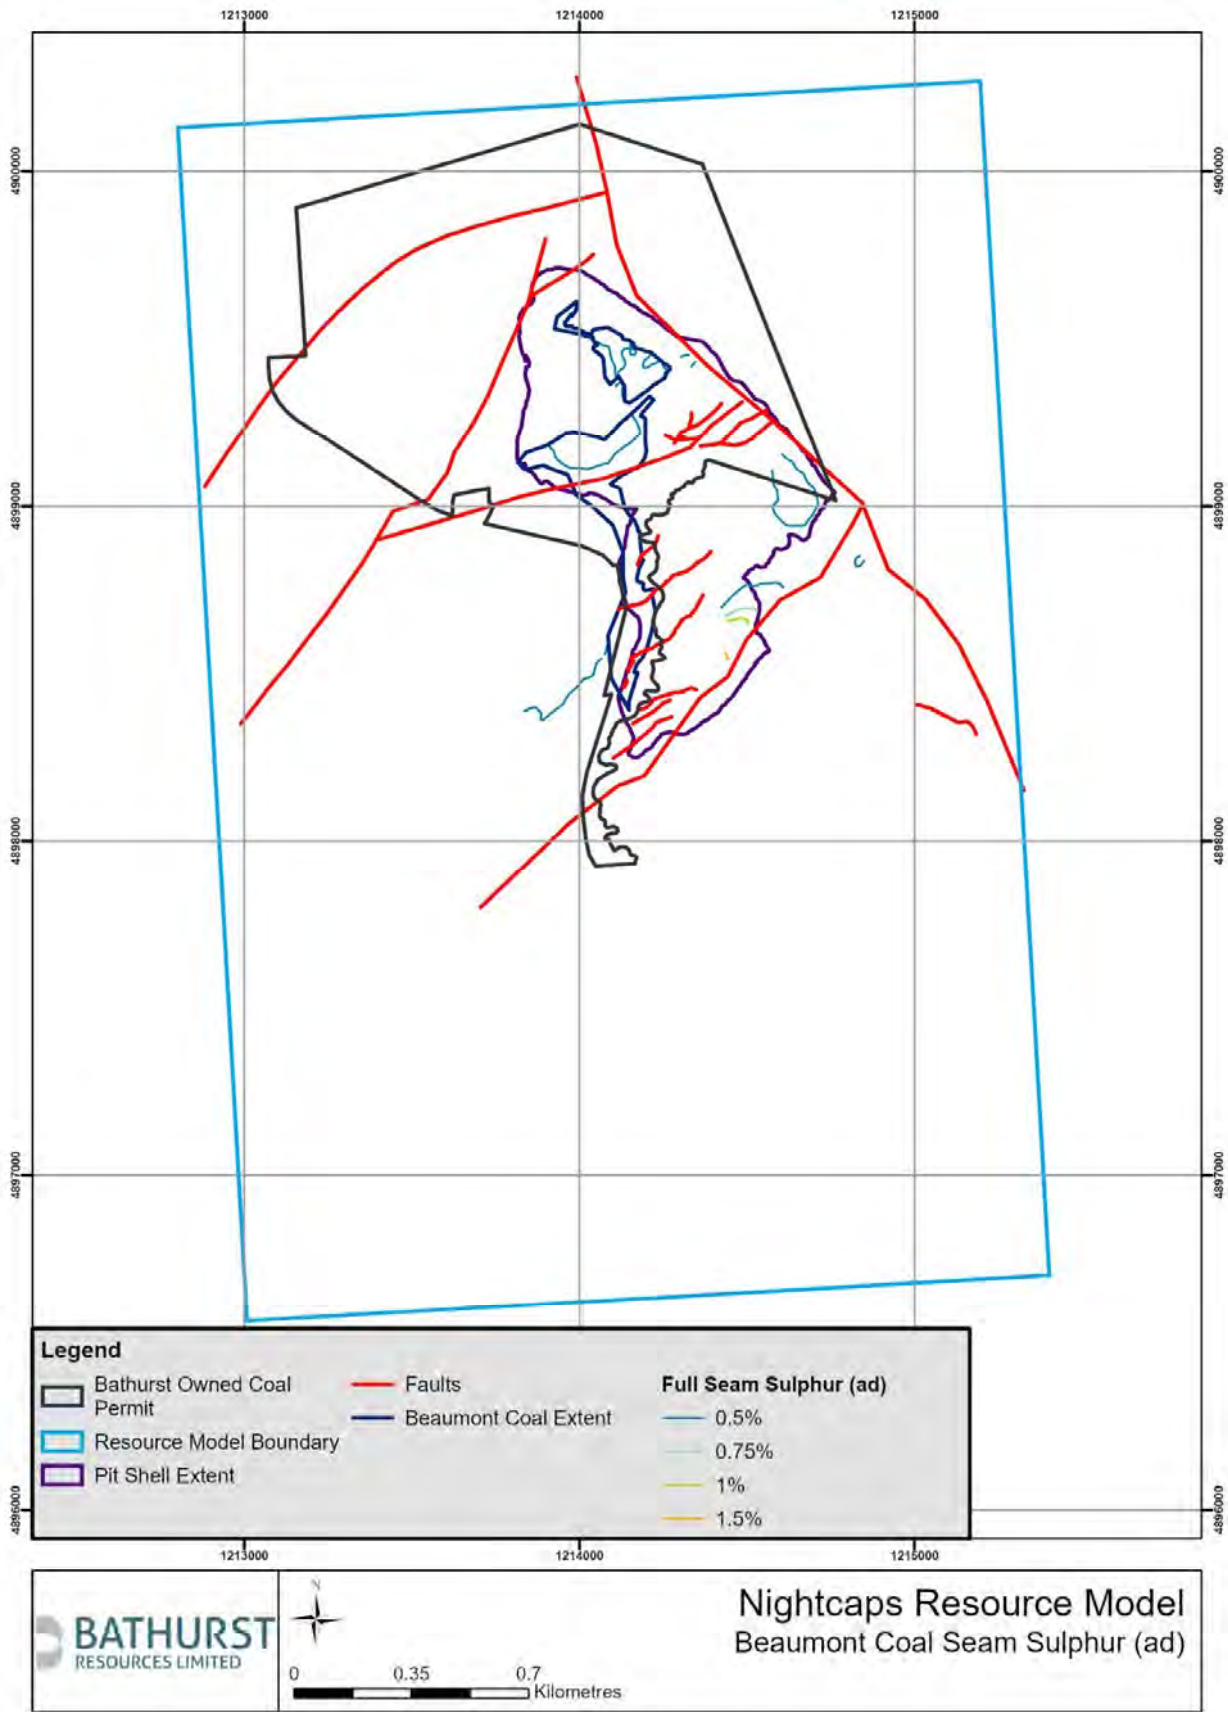


Figure 17: Beaumont Formation full seam Sulphur isopachs

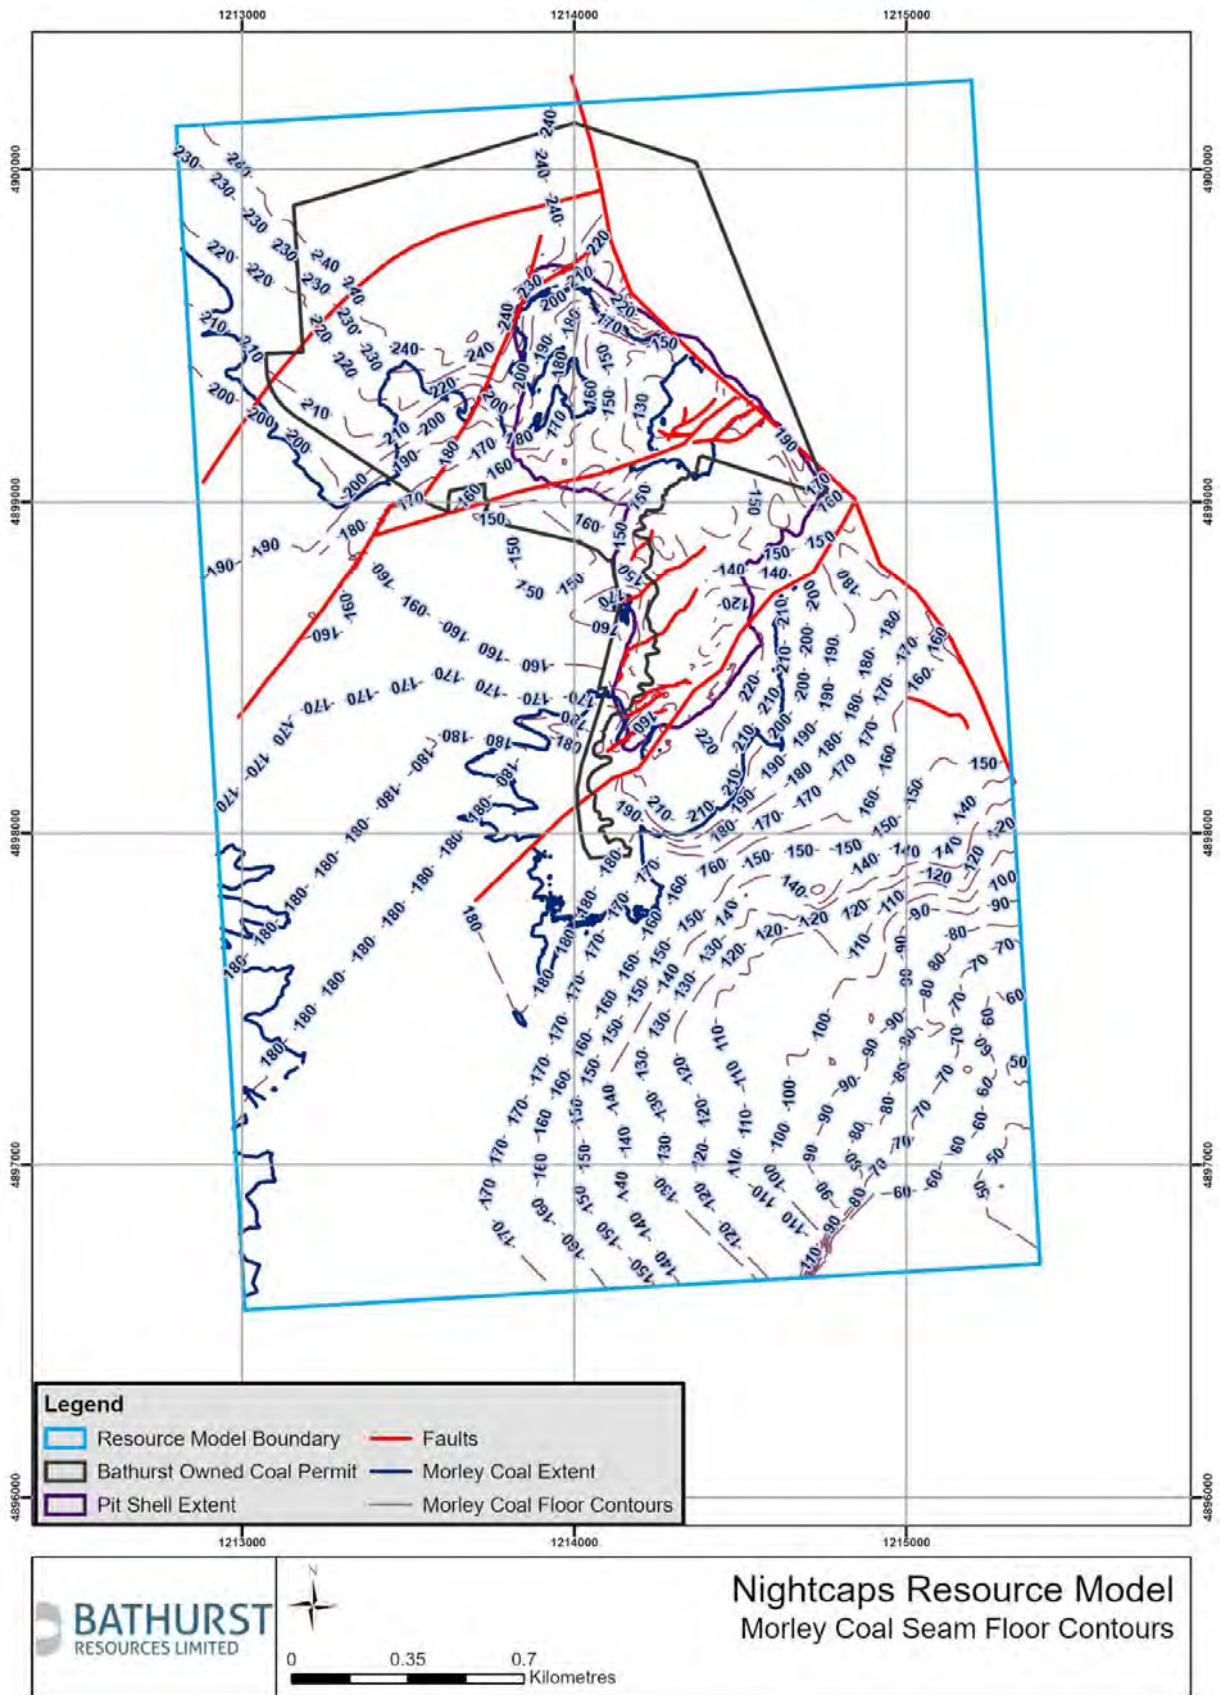


Figure 18: Morley Formation coal floor contours

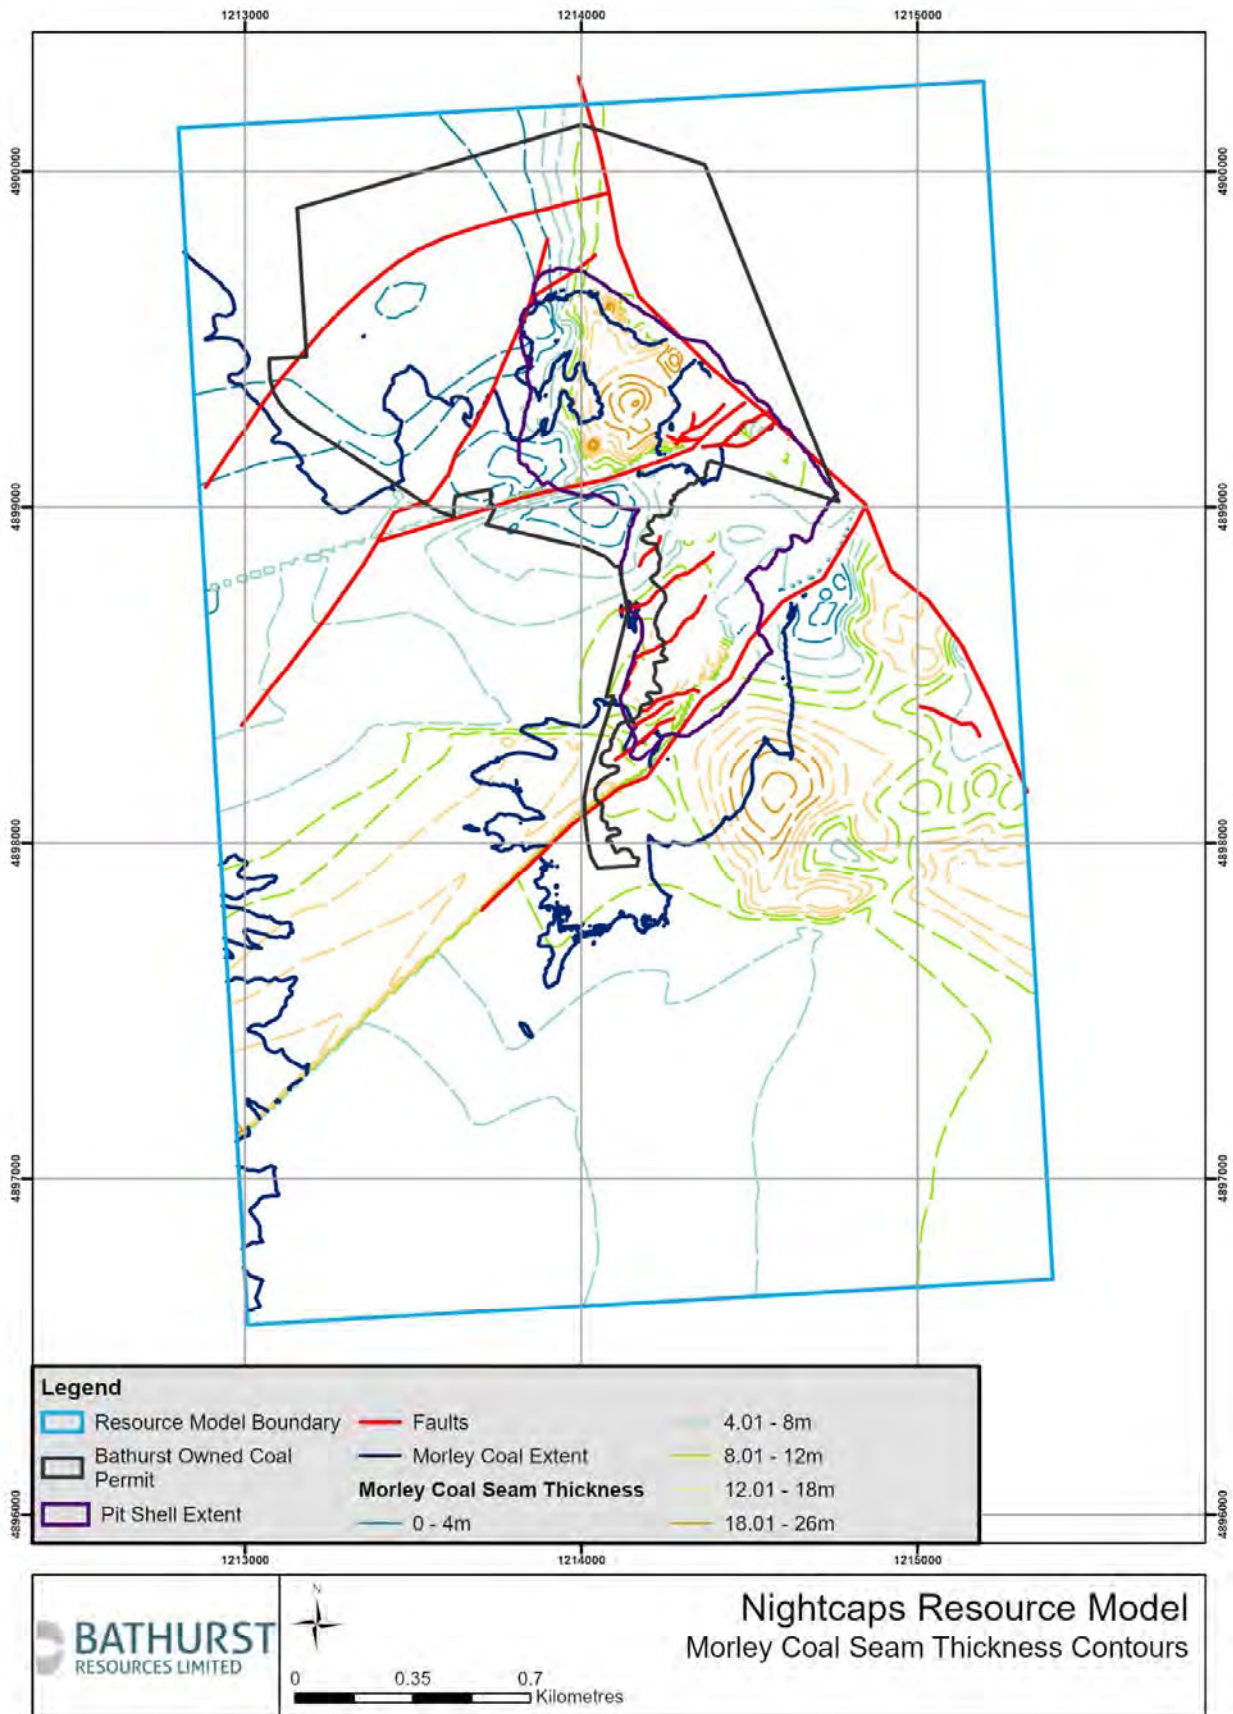


Figure 19: Morley Formation full seam cumulative coal thickness isopachs

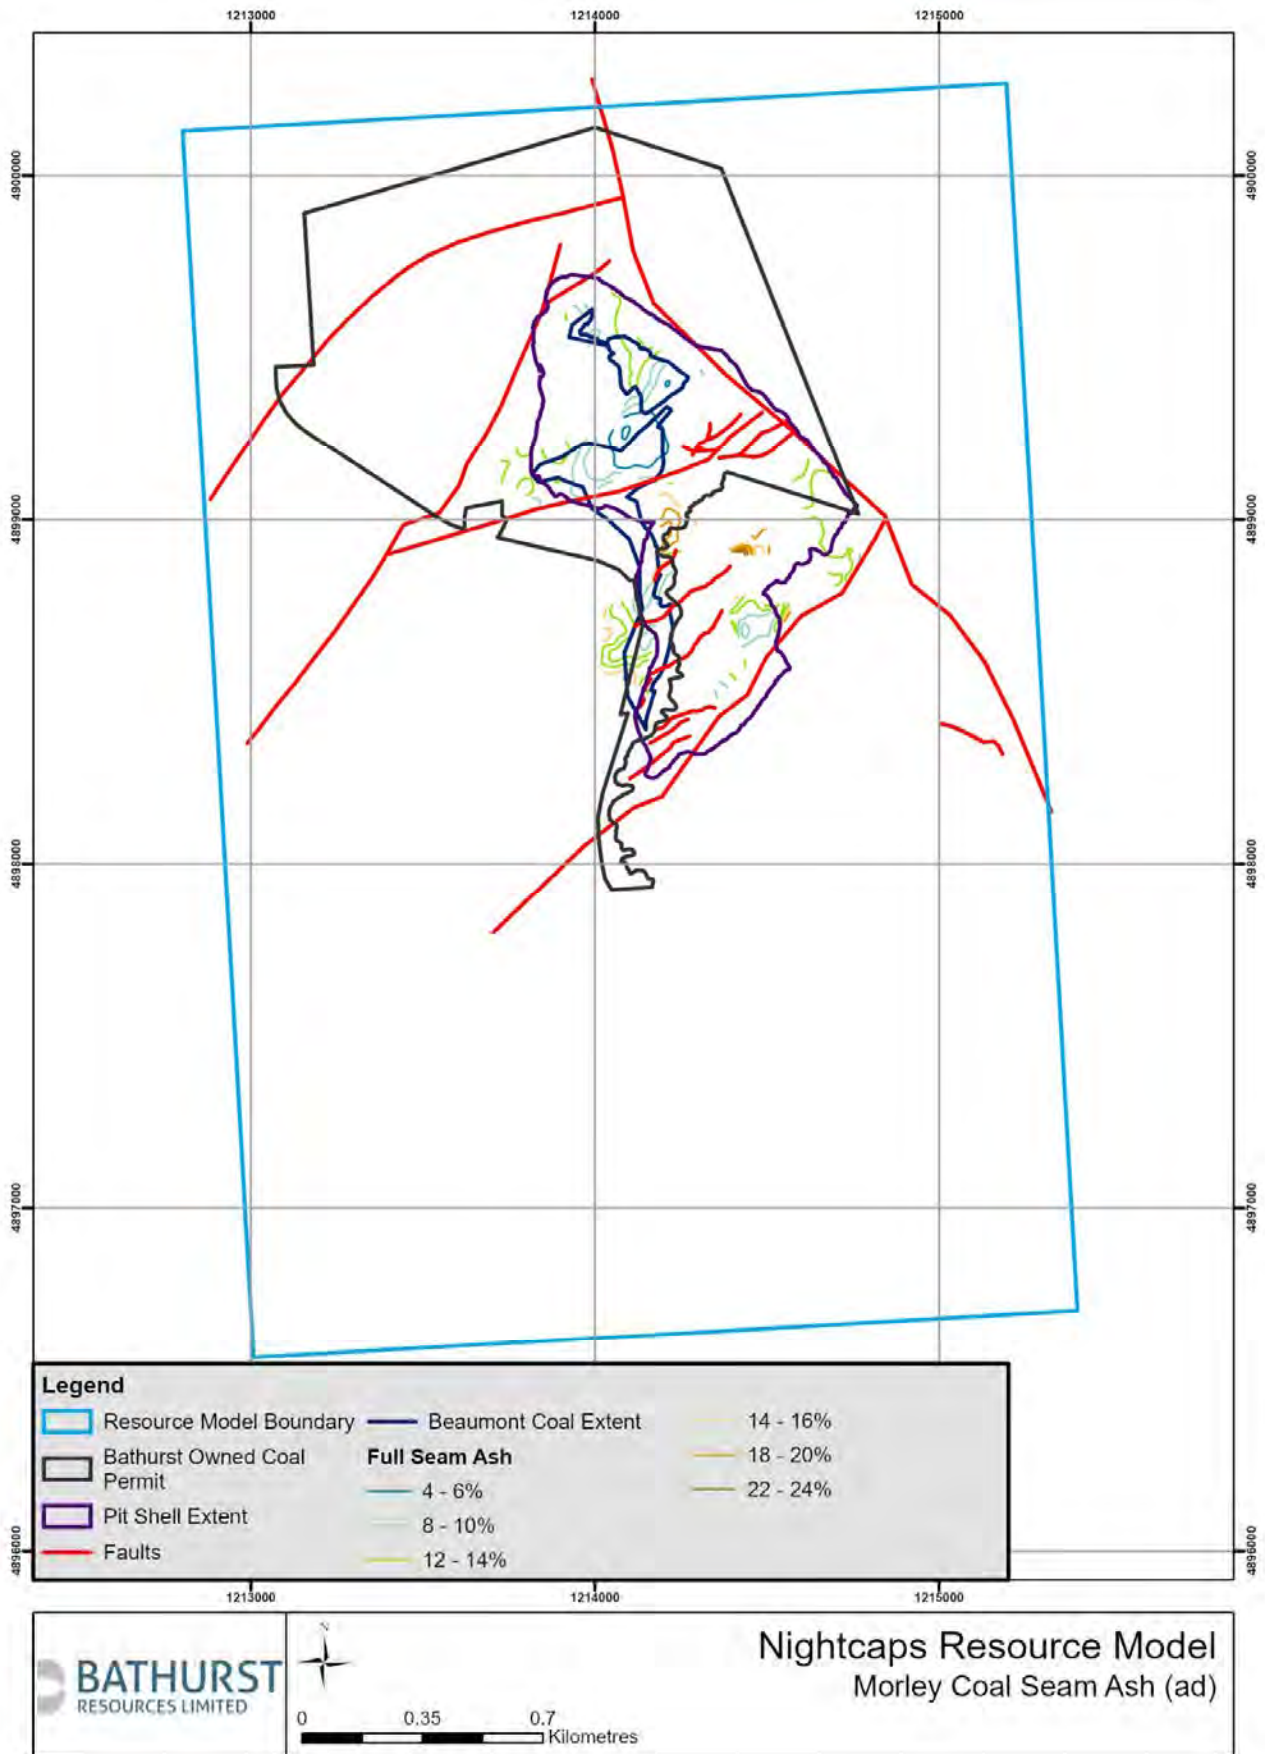


Figure 20: Morley Formation full seam air dried ash isopachs

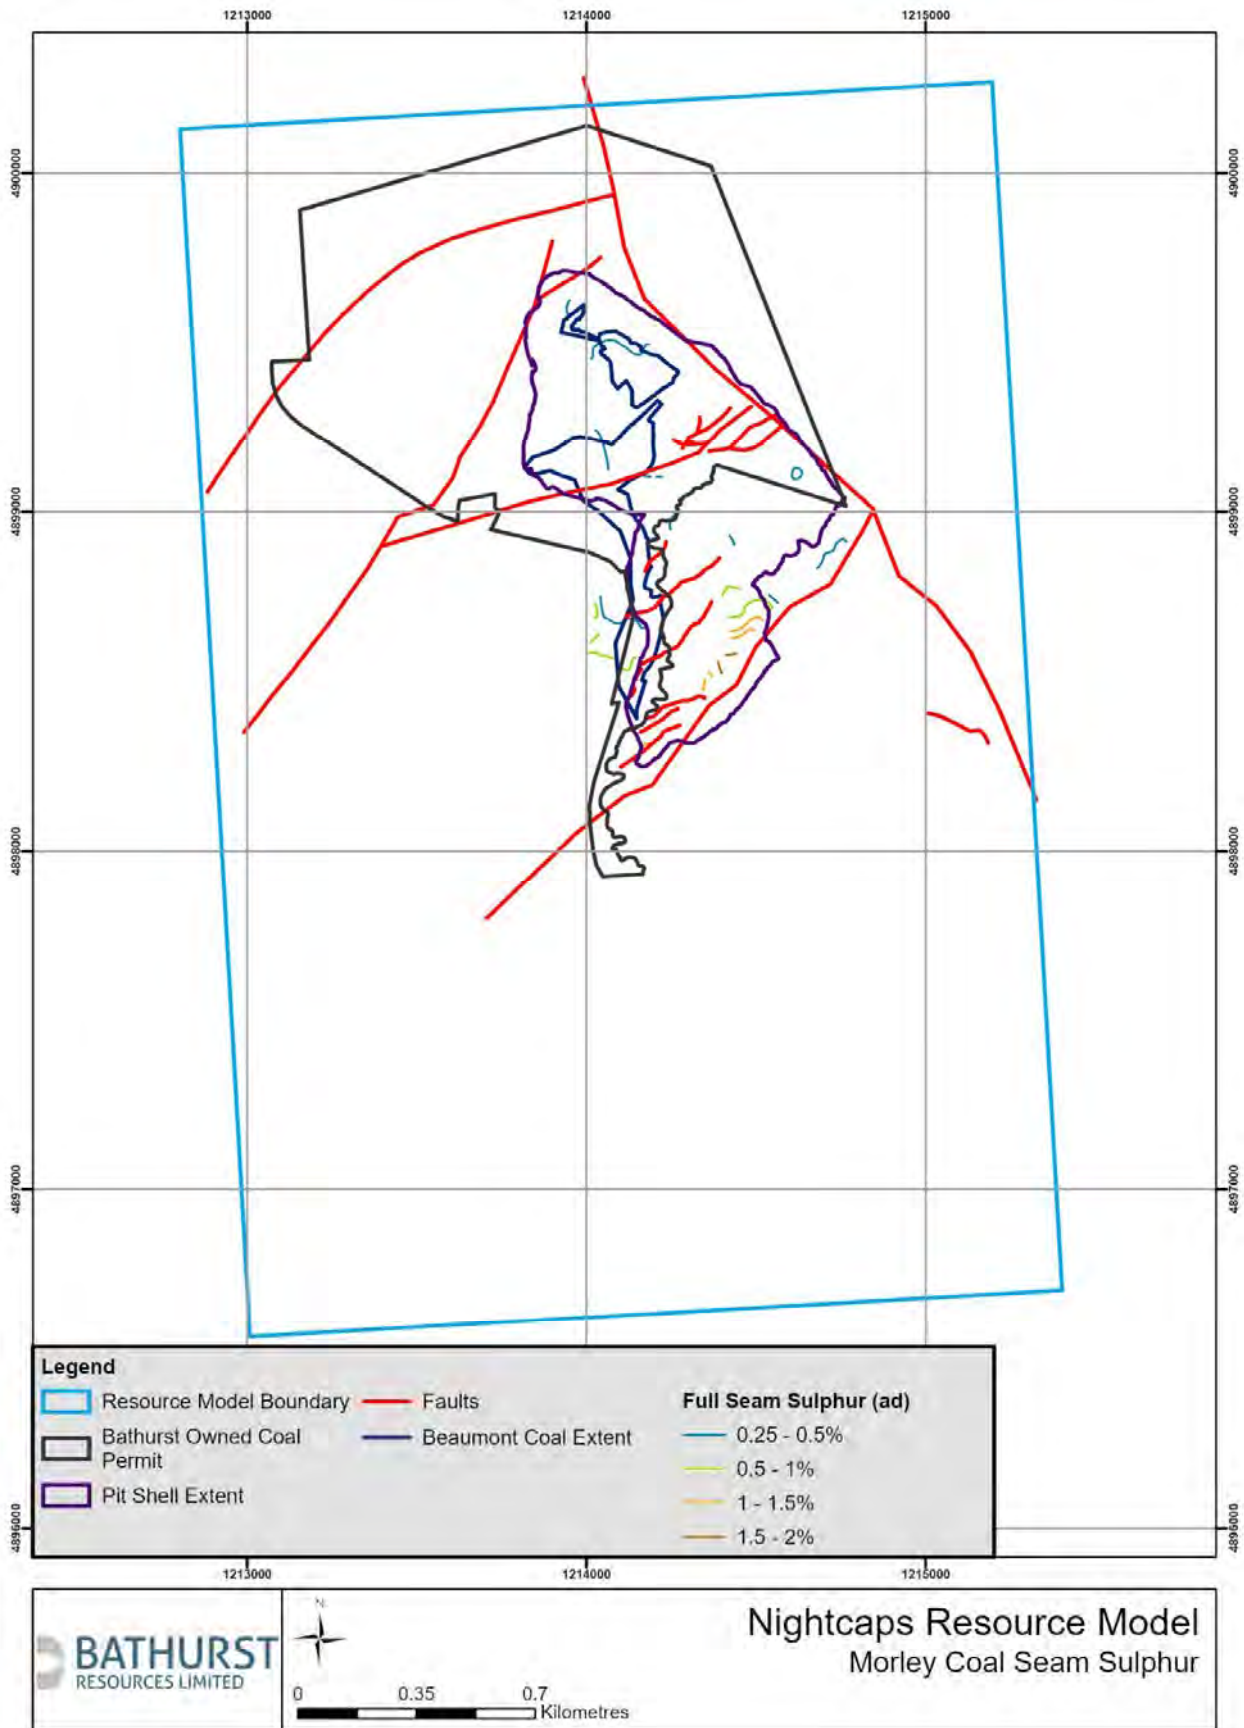


Figure 21: Morley Formation full seam air dried Sulphur isopachs

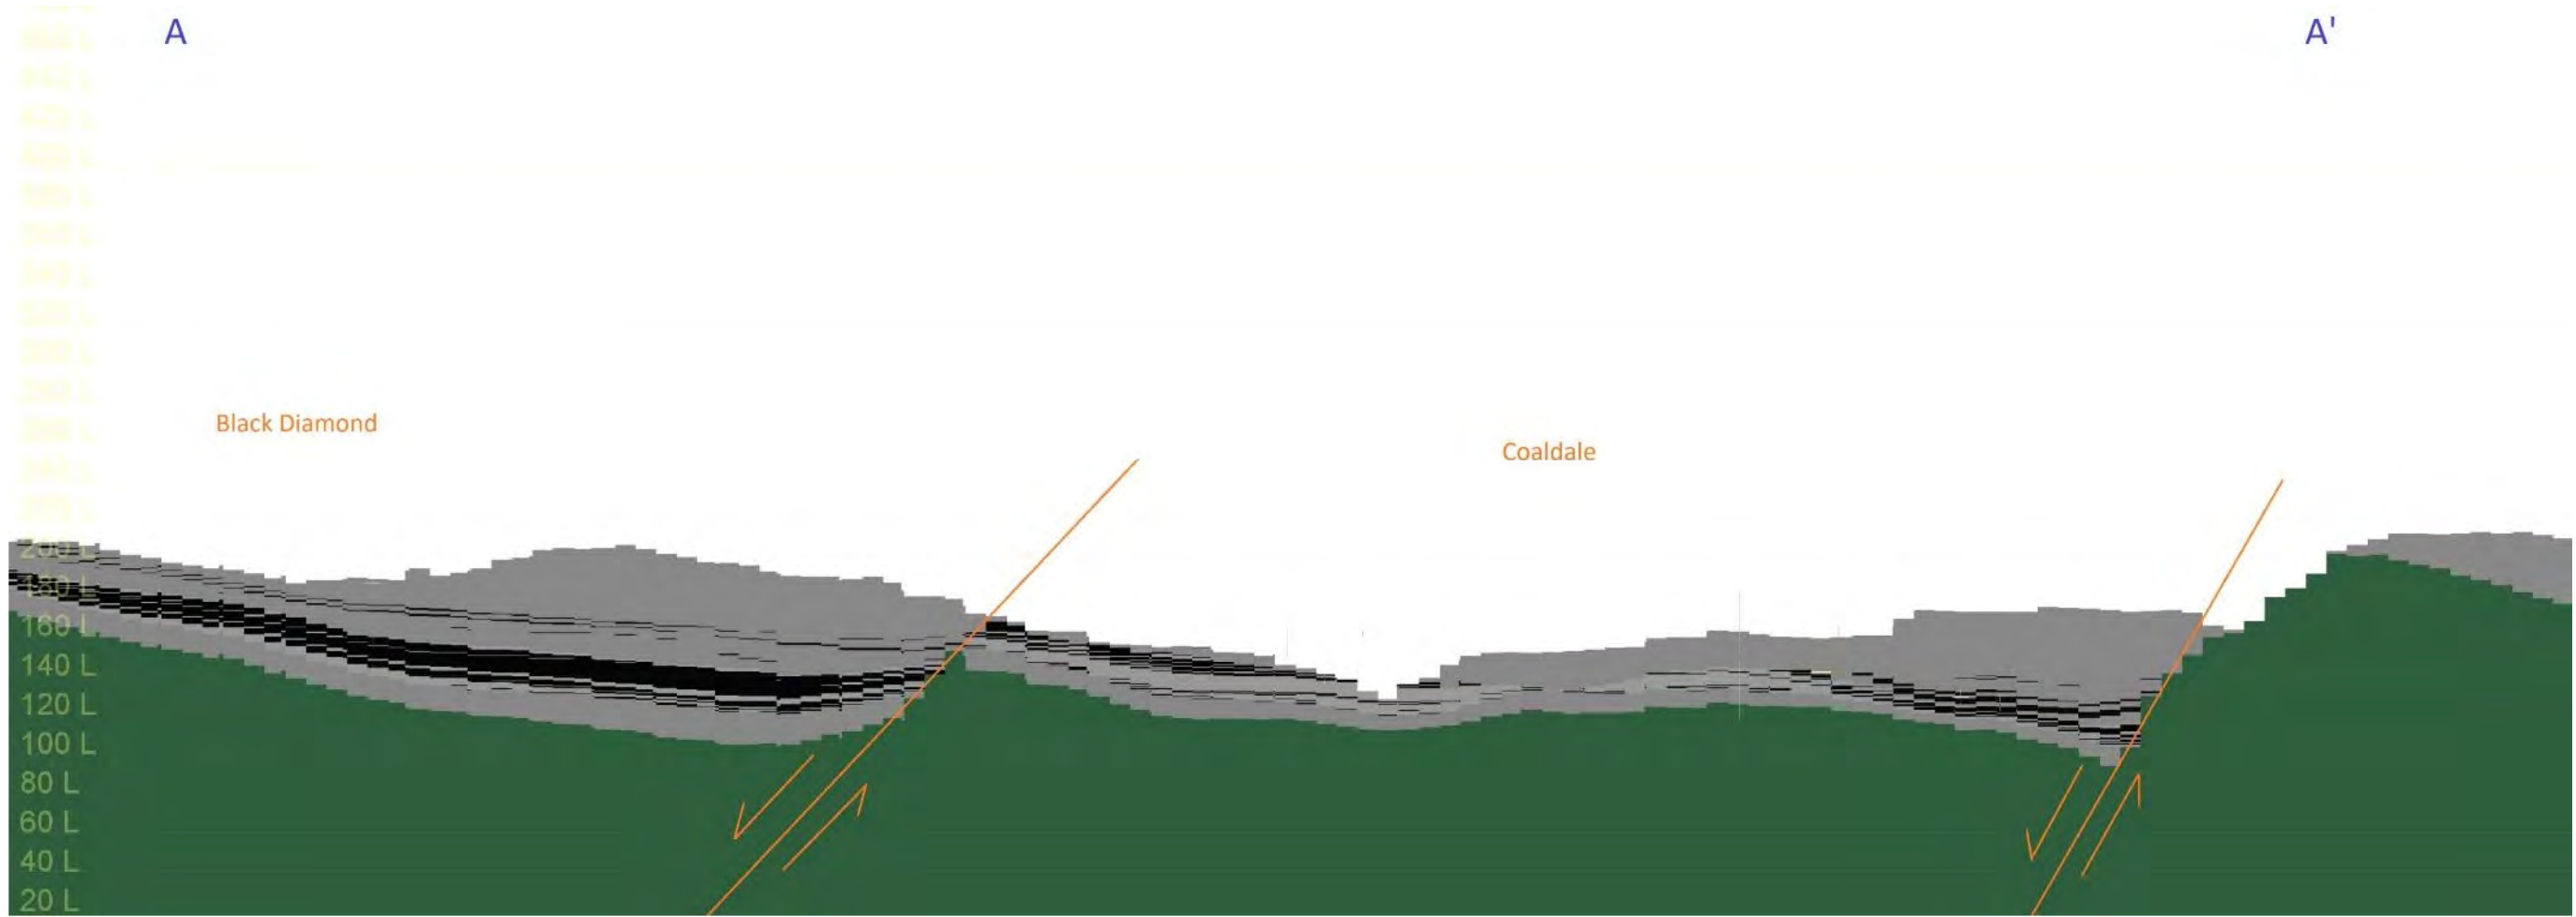


Figure 22: Section view through the deposit. The Black Diamond south fault and Trig E faults are shown





Figure 23: Plan view showing the section through A-A'.

# JORC Code, 2012 Edition – Table 1 Report for Rotowaro 2021

## Section 1 Sampling Techniques and Data

Criteria	Commentary
<b>Sampling techniques</b>	<ul style="list-style-type: none"> <li>Multiple campaigns of data acquisition have been carried out in the Waikato Coalfield over the past century.</li> <li>Core sampling for coal quality sampling is undertaken using HQ (63.5 mm core diameter) Triple Tube Coring (TTC) methods. Coal core samples are assigned unique identifiers and are dispatched to the laboratory with Chain of Custody tracking using paper, e-mail and/or acQuire software. Core recovery recorded in the field is validated and adjusted if required using downhole geophysical logs during core logging and sampling. Composite samples are generated from individual coal plies at the laboratory that are thickness weighted.</li> <li>A suite of downhole wireline geophysical logs, including density, natural gamma, calliper, sonic, dipmeter, acoustic scanner, and verticality were typically run in all drill holes completed since 1989. All tools were calibrated on a regular and systematic basis. All downhole geophysical logging work was conducted by a reputable geophysical contractor.</li> <li>All analytical data has been assessed and verified before inclusion in the resource model.</li> </ul>
<b>Drilling techniques</b>	<ul style="list-style-type: none"> <li>Tungsten drag bits have been used to wash drill fully open holes (OH) and open hole sections. TTC barrels have been used to recover coal core to established industry standards. Core diameters are HQ (63.5 mm). No core has been orientated.</li> <li>In recent times, diamond drill holes have been infilled with air-core (AC) drilling. AC samples are logged onsite and provide coal seam roof and floor locations.</li> <li>Several historical drill holes are included in the resource modelling database for the areas modelled. Drill holes that have no verifiable location, lithology log or survey, or contradict adjacent reliable data, are considered unreliable and excluded from the Coal Resource modelling database.</li> </ul>
<b>Drill sample recovery</b>	<ul style="list-style-type: none"> <li>Core recovery was measured as the length of core recovered divided by the length of driller's run and noted by the core logging geologist. If recovery of coal intersections dropped below 90%, the drill hole required a re-drill.</li> <li>Standard industry techniques are employed for recovering core samples from HQ (63.5 mm) core diameter TTC drill holes.</li> <li>For open holes and open hole sections, cuttings are sampled in intervals five metres in length or when there is a change in lithology and logged.</li> <li>Core is obtained by HQ (63.5 mm core diameter) TTC techniques providing good core recovery, averaging 96%. On average, core recovery of target seams is 90%.</li> </ul>
<b>Logging</b>	<ul style="list-style-type: none"> <li>Bathurst Resources Limited (BRL) has developed standardised core logging procedures (BRL Coal Logging Procedures), and all core logging completed by Bathurst Talley's Mining (BT) has followed these procedures.</li> <li>All recent drill core has been geologically and geotechnically logged by logging geologists under the supervision and guidance of experienced exploration and geotechnical geologists.</li> <li>All drill core was photographed prior to sampling. Depth meter marks and coal ply intervals are noted on the drill core in each photograph.</li> <li>All TTC core samples are logged in detail (centimetre scale).</li> <li>Quantitative logging for lithology, stratigraphy, texture, hardness, Rock Quality Designation (RQD) and defects is conducted using defined material code types based on characterisation studies and mineralogical assessments. Colour and any other additional qualitative comments are also recorded.</li> <li>In conjunction with geological logging, most drill holes are geophysically logged with a suite of tools being used (as described above). Downhole geophysical logs are analysed extensively and used to confirm and correct depth measurements on geological logs and sample locations. Validation and, if required, correction of the geological logs against downhole geophysical logs is undertaken to ensure accuracy and consistency. Verticality, caliper, density and natural</li> </ul>

Criteria	Commentary
	<p>gamma tools are checked regularly with standard calibration assemblies. Density calibrations are performed routinely with blocks of material of known densities (aluminium and/or water). A quality report is generated by the logging technician for each drill hole.</p> <ul style="list-style-type: none"> <li>Downhole geophysical logs were used to aid core logging. Downhole geophysics was used to correlate coal seams, to confirm depths and thickness of coal seams and to validate drillers' logs. Downhole geophysical logs were also used to accurately calculate recovery rates of coal.</li> </ul>
<p><b>Sub-sampling techniques and sample preparation</b></p>	<ul style="list-style-type: none"> <li>For all exploration data acquired by BRL, in-house detailed sampling procedures were used (BRL Coal Sampling Procedures). Sampling and sample preparation are consistent with internationally accepted coal sampling and sample preparation methodologies.</li> <li>No splitting of core is undertaken in the field or during sampling. Sample interval and core recovery recorded in the field by drillers is validated and adjusted if required using downhole geophysical logs during core logging and sampling.</li> <li>Sample selection is determined in-house according to the BRL Coal Sampling Procedures. Clean coal core has been sampled in plies 0.5 m in length, depending also on core loss intervals and lithological variations.</li> <li>Sampling and sample preparation are consistent with international coal sampling methodology.</li> <li>Associated high ash coal intervals and partings were sampled separately to assess potential dilution effects where they are &lt;0.5 m thick. Composite horizons were determined by the ash yield of the plies. Plies with ash yield &gt;20% were excluded from the subsequent modelling processes.</li> <li>Ply thickness weighted compositing is conducted by SGS.</li> <li>Samples are placed into labelled bags to ensure proper Chain of Custody, and transported to the laboratory for testing. The laboratory continues with the Chain of Custody requirements. Sample preparation is undertaken according to industry standards.</li> <li>HQ (63.5 mm) core diameter is considered to provide a sample of sufficient volume to be representative of the in situ material and provides adequate sample mass to undertake the variety of raw coal tests together with composite testing when required. Where the testing regime requires additional sample volume, PQ (85 mm) core size is employed.</li> <li>For surface trenches, coal samples of 2 kg are obtained for each 0.5 m ply interval approximately equivalent weight of 0.5 m of HQ core length. Trenches were sampled by hand ensuring all highly weathered and contaminated material are excluded.</li> </ul>
<p><b>Quality of assay data and laboratory tests</b></p>	<ul style="list-style-type: none"> <li>SGS and CRL (ACIRL Australia and Newman Energy subcontracted for specific tests) laboratories are used to undertake physical and chemical testing and use Industry Standards for all coal tests and systematic Quality Assurance/Quality Control (QA/QC) procedures for all work. Both laboratories hold accreditation by International Accreditation New Zealand (IANZ). The processes employed are considered appropriate for coal quality analysis. Results are reviewed in-house by a senior geologist to ensure the accuracy of the data. The laboratory has been inspected by the BT personnel. Tests include: <ul style="list-style-type: none"> <li><b>Chemical Analysis</b> <ul style="list-style-type: none"> <li>Loss on air drying (ISO 13909-4).</li> <li>Inherent moisture (ASTM D 7582 mod).</li> <li>Ash (ASTM D 7582 mod).</li> <li>Volatile matter (ASTM D 7582 mod).</li> <li>Fixed carbon (by difference).</li> <li>Sulphur (ASTM D 4239).</li> <li>Swelling index (ISO 501).</li> <li>Calorific value (ISO 1928).</li> <li>Mean maximum reflectance all vitrinite (RoMax) (Laboratory Standard)</li> <li>Chlorine in Coal (ASTM D4208).</li> <li>Gieseler plastometer (ASTM D 2639).</li> <li>Forms of sulphur (AS 1038 Part 11).</li> <li>Ash fusion temperatures (ISO 540).</li> <li>Ash constituents (xrf) (ASTM 4326).</li> <li>Ultimate analysis (ASTM D3176-09).</li> </ul> </li> </ul> </li> </ul>

Criteria	Commentary
	<p><b>Rheological and Physical</b></p> <ul style="list-style-type: none"> <li>○ Hardgrove grindability index (ISO 5074, ASTM D409-02).</li> <li>○ Relative density (AS 10382111-1994).</li> </ul> <ul style="list-style-type: none"> <li>• All analysis was undertaken and reported on an air-dried basis unless stated otherwise.</li> </ul>
<b>Verification of sampling and assaying</b>	<ul style="list-style-type: none"> <li>• All diamond core samples are checked, measured and marked up before being logged in detail.</li> <li>• Every discrepancy between the measured length of the core and the driller's length marked on the core blocks is investigated. Discrepancies are resolved by geologists using downhole geophysical logs prior to sampling.</li> <li>• All drill core was photographed prior to sampling. Depth meter marks and coal ply intervals are noted on the drill core in each photograph.</li> <li>• Quantitative logging for lithology, stratigraphy, texture, hardness, RQD and defects is conducted using defined material code types based on characterisation studies and mineralogical assessments to the nearest centimetre. Colour and any other additional qualitative comments are also recorded.</li> <li>• Raw logs, as well as sample dispatch details, are recorded on paper then transferred into the acQuire database in accordance with BRL standards.</li> <li>• Assessments of coal intersections is undertaken by an internal or contract geologist, and by a senior geologist. Downhole geophysical logs allow confirmation of the presence (or absence) of coal seams and accurate determination of the locations of coal seam roof and floor contacts. Downhole geophysical density measurements are used to guide sampling and identify high ash bands.</li> <li>• Downhole geophysical logs (dual density and gamma) are analysed and used to validate or correct geological and sample interval logs to ensure accuracy and consistency, where required.</li> <li>• Sample sheets are developed in-house and receive a final check by the laboratory prior to testing. The Technical Marketing Manager provides guidance on the specific testing regime to be undertaken on both ply and composite samples.</li> <li>• Since 2006, all coal quality data has been directly submitted and stored in electronic format using acQuire database software. All data provided by the coal laboratory is reviewed before acceptance into the database.</li> <li>• Sample coal quality results have been cross-referenced and compared against lithology logs and downhole geophysical data. Results are also inspected by experienced geologists and compared with expected values utilising known coal quality relationships for the Waikato Coalfield.</li> <li>• Anomalous assay results were investigated, and where necessary the laboratory was contacted and a re-test was undertaken from sample residue.</li> <li>• Downhole geophysical logs (dual density and gamma) are analysed extensively and used to validate and, if required, correct geological and sample interval logs to ensure accuracy and consistency.</li> <li>• All data is provided by the coal laboratory and reviewed internally. No adjustments are made to any coal quality data. In instances where results are significantly different from what was observed in downhole geophysical logs or outside of local or regional ranges defined by previous testing, sample results are queried and/or retested.</li> <li>• Twin drill holes have not been used.</li> </ul>
<b>Location of data points</b>	<ul style="list-style-type: none"> <li>• Rotowaro data is presented in Mt Eden 1949 grid co-ordinate system in New Zealand, with Auckland 1946 mean sea level datum (MSL).</li> <li>• All drill holes post-1997 have been surveyed using GPS technology and are located within +/- 40 mm in three dimensions. Older drill hole collars were surveyed using conventional methods with an unknown precision.</li> <li>• The topographic dataset consists of a digital terrain model (DTM) constructed from an airborne LiDAR survey (accurate to +/- 0.2m) collected for the whole of the Rotowaro site in December 2012. The DTM has been supplemented by GPS survey data (+/- 40 mm accuracy), aerial drone photogrammetric survey, and 1:150k LINZ topographic contours.</li> </ul>

Criteria	Commentary
	<ul style="list-style-type: none"> <li>• Surveyed elevations of drill hole collars are validated against the site topographic surface and ortho-corrected aerial photography.</li> <li>• Historical underground mine workings plans are based on historical hand drawn plans that have been geo-rectified (in 2D only) by converting from cadastral links to the Mt Eden 1949 geodetic grid.</li> <li>• Drill holes with a full suite of downhole geophysics are surveyed for deviation with a verticality tool (+/- 15° azimuth and +/- 0.5° inclination). Some drill holes have been surveyed with natural gamma only.</li> </ul>
<b>Data spacing and distribution</b>	<ul style="list-style-type: none"> <li>• Drill holes are variably spaced (from 25 m to 100 m in easting and northing) depending on target seam depth, geological structure, topographic constraints, down hole conditions due to historical underground mine workings, and degree of existing data density in immediate surrounds.</li> <li>• Coal Resources are downgraded from Measured Resource to Indicated Resource in areas that are shown on historical plans to have had pillar extraction.</li> </ul>
<b>Orientation of data in relation to geological structure</b>	<ul style="list-style-type: none"> <li>• Orientation/spacing/density of drill holes is driven by both coal quality and geological structure.</li> <li>• Historically, geological structure was the main factor determining drill hole spacing and orientation. The focus since 2012 has been to delineate areas of elevated sulphur and ash as well as to decrease sample spacing for coal quality.</li> <li>• The low angle of strata dips means vertical drill holes are the most successful in achieving desired high angle intercepts of the coal seams.</li> <li>• The modelling of the deposit uses drill holes both with and without reliable verticality data. Drill holes without verticality data are considered to be vertical.</li> <li>• Vertical drilling is the most suitable drilling method for assessing the resource at Awaroa.</li> </ul>
<b>Sample security</b>	<ul style="list-style-type: none"> <li>• Rigorous sample preparation and handling procedures have been followed by BRL. Core is removed from the drill hole and put into core splits. Core is wrapped in clear-wrap to retain natural moisture and put into core boxes.</li> <li>• Core is transported to the core shed, unwrapped, logged, sampled and then re-wrapped.</li> <li>• Chip samples are put into bags with marked intervals by drillers and transported to the core shed for logging. Chip samples are disposed of once logged.</li> <li>• Logged core is stored at the Rotowaro core logging facility on Rotowaro Road under lock and key and is accessed only by registered personnel. Drill core is stored according to BRL procedure 'EXDP-N-27 Drill Core Storage'.</li> <li>• Samples are bagged and labelled as outlined in BRL procedure 'EXDP-N-24 Coal Quality Sampling and Analysis'.</li> <li>• All coal quality analysis results are approved for input directly into the acQuire database by the resource geologist.</li> <li>• It is not considered likely that individual coal samples face a risk of theft or sabotage as coal is a bulk commodity with little value for small volumes of coal from drill core.</li> </ul>
<b>Audits or reviews</b>	<ul style="list-style-type: none"> <li>• Golder and BRL have reviewed the geological data available and consider the data used to produce the resource model to be reliable and suitable for the purposes of generating a Coal Resource estimate to the extent that the Coal Resource estimate has been classified.</li> <li>• BRL senior geologists have undertaken audits of the sample collection and analysis processes.</li> <li>• Integrity of all data (drill hole, geological, survey, geophysical and coal quality) is reviewed by the resource geologist prior to being incorporated into the acQuire database.</li> </ul>

## Section 2 Reporting of Exploration Results

Criteria	Commentary																
<b>Mineral tenement and land tenure status</b>	<ul style="list-style-type: none"> <li>The Rotowaro resource area includes a mixture of Crown and privately-owned coal.</li> <li>BT is a joint venture between BRL (65%) and Talley's Energy Limited (TEL) [35%].</li> <li>Rotowaro Coal Mining Licence (CML) 37155 covers approximately 2,423.8 hectares in area and is due to expire on 31 March 2027. All operations at Rotowaro, including the Waipuna Extension pits, are currently undertaken within the CML. BT has sole ownership of the operation. BT holds long term leases over the land underlying the operations.</li> <li>BT holds Exploration Permit (EP) 56220 and Mining Permit (MP) 60422, which cover Crown-owned coal and straddle the western side of the CML.</li> </ul> <table border="1"> <thead> <tr> <th>Permit/Rights</th> <th>Operation</th> <th>Mining Type</th> <th>Expiry</th> </tr> </thead> <tbody> <tr> <td><b>CML 37155</b></td> <td>Rotowaro</td> <td>Open Cut</td> <td>31 Mar 2027</td> </tr> <tr> <td><b>EP 56220</b></td> <td>Awaroa West</td> <td>N/A</td> <td>16 Dec 2024</td> </tr> <tr> <td><b>MP 60422</b></td> <td>Awaroa West</td> <td>Open Cut</td> <td>03 Jul 2024</td> </tr> </tbody> </table> <ul style="list-style-type: none"> <li>There are two owners of the coal resources in the Rotowaro resource area. These are the Crown in the north of Rotowaro and the Ralph Estate.</li> <li>The Royalty Mortgage 17836 is a lease arrangement between the Crown and the Ralph Estate, whereby BT pays the Crown the Crown royalty for opencast coal (\$0.50/tonne) and the Crown, subsequently pays the Ralph Estate. The Ralph Estate (WJ and SM Ralph) owns the balance by way of Coal Leases 4092 and 199268.</li> </ul>	Permit/Rights	Operation	Mining Type	Expiry	<b>CML 37155</b>	Rotowaro	Open Cut	31 Mar 2027	<b>EP 56220</b>	Awaroa West	N/A	16 Dec 2024	<b>MP 60422</b>	Awaroa West	Open Cut	03 Jul 2024
Permit/Rights	Operation	Mining Type	Expiry														
<b>CML 37155</b>	Rotowaro	Open Cut	31 Mar 2027														
<b>EP 56220</b>	Awaroa West	N/A	16 Dec 2024														
<b>MP 60422</b>	Awaroa West	Open Cut	03 Jul 2024														
<b>Exploration done by other parties</b>	<ul style="list-style-type: none"> <li>The previous owner Solid Energy New Zealand Limited (SENZ) and its predecessors have conducted all exploration in the area since 1986. However, there have been earlier periods of work that have contributed to the understanding of the Coal Resource.</li> <li>Early data collection is based on drill hole logs recorded by drillers.</li> <li>From the 1970's drill holes were also logged by geologists, which had the effect of increasing the accuracy, the level of detail, and ultimately the reliability of the exploration data.</li> <li>The addition of downhole geophysical logging in the late 1980's further added to reliability.</li> </ul>																
<b>Geology</b>	<ul style="list-style-type: none"> <li>The Rotowaro deposit trends north-south to the north of 618250mN and northwest-southeast to the south of 618250mN (Mt Eden Circuit 1949).</li> <li>The dip is to the northwest at the northern end of the deposit and to the southwest along the western margin.</li> <li>There are a series of northwest-southeast trending anticlines and synclines in the central and east of the deposit. Rotowaro is bounded to the southwest by the Mangakotukutuku Monocline, with a net throw of 90 m down to southwest, and to the northeast by the extension of the Waipuna Fault scarp.</li> <li>There are only minor faults identified within the deposit, with throws less than 10 m in height. These faults are either recorded on historical underground mine plans or interpreted from structure contour plans derived from drill holes.</li> <li>The area is underlain by indurated siltstones, with common sandstones, of the Mesozoic Newcastle Group, which is weathered to a depth of 5-30 m. This unit is referred to as "Basement" and has no economic significance.</li> <li>The Waikato Coal Measures (WCM) lie unconformably on the basement and form the lower part of the Te Kuiti Group. The WCM consist mainly of mudstones and siltstones, often referred to collectively as "fireclay", with common siderite concretions, referred to as "hardbars".</li> <li>There are three major coal seam groups within the WCM: Renown, Kupakupa and Taupiri.</li> <li>The Taupiri seams are only represented in the Callaghan's sector of the Rotowaro Coalfield, where they are confined to the structural trough between the Mangakotukutuku Monocline and the Waipuna Fault scarp.</li> <li>Thickness patterns of seams lying close to basement are influenced by the paleo-relief developed on the basement contact, with thickening and thinning over basement valleys and ridges respectively.</li> <li>The upper part of the Te Kuiti Group consists of marine to marginal marine claystones, mudstones, sandstones and siltstones which are conformably overly the WCM. There is a regional unconformity at the top of the Te Kuiti Group, above which lie the Quaternary deposits</li> </ul>																

Criteria	Commentary																								
	of the Tauranga Group, consisting of interlayered alluvial clays, muds and highly weathered volcanic ashes of the Hamilton Formation.																								
<b>Drill hole Information</b>	<ul style="list-style-type: none"> <li>In summary: 2,029 drill holes are located across the Rotowaro prospect. Only 1,160 of the drill holes have been used for modelling and Coal Resource estimation. 17 drill holes were not used as they were considered unreliable.</li> </ul> <table border="1"> <thead> <tr> <th>Drill hole Type</th> <th>Number of Holes / Sites</th> <th>Number of Meters</th> <th>Geophysically logged (Number of drill holes)</th> </tr> </thead> <tbody> <tr> <td>Wash Drill</td> <td>1,227</td> <td>93,026</td> <td>2</td> </tr> <tr> <td>Partially Cored Drilling</td> <td>761</td> <td>60,571</td> <td>84</td> </tr> <tr> <td>Fully Cored Drilling</td> <td>5</td> <td>174</td> <td>1</td> </tr> <tr> <td>Air-core</td> <td>36</td> <td>2,726</td> <td>15</td> </tr> <tr> <td>Total</td> <td>2,029</td> <td>156,497</td> <td>102</td> </tr> </tbody> </table> <ul style="list-style-type: none"> <li>Exploration drilling results have not been reported.</li> </ul>	Drill hole Type	Number of Holes / Sites	Number of Meters	Geophysically logged (Number of drill holes)	Wash Drill	1,227	93,026	2	Partially Cored Drilling	761	60,571	84	Fully Cored Drilling	5	174	1	Air-core	36	2,726	15	Total	2,029	156,497	102
Drill hole Type	Number of Holes / Sites	Number of Meters	Geophysically logged (Number of drill holes)																						
Wash Drill	1,227	93,026	2																						
Partially Cored Drilling	761	60,571	84																						
Fully Cored Drilling	5	174	1																						
Air-core	36	2,726	15																						
Total	2,029	156,497	102																						
<b>Data aggregation methods</b>	<ul style="list-style-type: none"> <li>The nominal air-dried basis (adb) cut-off for ash for constructing the Rotowaro structure model is set at 20%.</li> <li>The resource model is built as a block model with maximum 0.5 m block thicknesses for coal.</li> <li>Coal ply data is used to grade estimate the block model.</li> <li>Some coal composite samples for full seam, minable sections have been taken for thorough analysis including ash constituents, forms of sulphur, ash fusion temperatures, and ultimate analysis. These composite samples are not used for grade estimation.</li> <li>No seam thickness cut-offs have been applied, as the reported coal seam does not thin below the minimum thickness cut-off (typically less than 0.5 m in thickness) which is generally acceptable for opencast mining.</li> </ul>																								
<b>Relationship between mineralisation widths and intercept lengths</b>	<ul style="list-style-type: none"> <li>The stratigraphic nature of coal measures means that the coal seams generally lie in a horizontal or sub-horizontal plane. The resource discussed throughout this Table 1 document has a dip to the northwest at the northern end of the deposit and to the southwest along the western margin. Folding and faulting through the coal seams create localised dips approaching 80°.</li> <li>A large majority of the surface drill holes were drilled vertically.</li> <li>A small number of inclined drill holes were drilled to target the Mangokotoku fault zone.</li> </ul>																								
<b>Diagrams</b>	<ul style="list-style-type: none"> <li>Diagrams can be found in Appendix A for each of the following: <ul style="list-style-type: none"> <li>Location map.</li> <li>Geological QMap.</li> <li>Map showing Mining Licenses and Permits.</li> <li>Map showing exploration drill holes.</li> <li>Map of Coal Resource classification.</li> <li>Map of underground workings.</li> <li>Map showing Taupiri Main seam roof distribution.</li> <li>Map showing Taupiri Main seam thickness distribution.</li> <li>Map showing Taupiri Main seam ash distribution.</li> <li>Map showing Taupiri Main seam sulphur distribution.</li> <li>Map showing Ore Reserve classification.</li> <li>Map showing Ore Reserve classification with pit designs.</li> </ul> </li> </ul>																								
<b>Balanced reporting</b>	<ul style="list-style-type: none"> <li>No exploration results are being presented in this Table 1 document, rather this document is focussed on advanced projects that have been defined by geological models with associated Coal Resource estimates completed.</li> <li>The exclusion of this information from this Table 1 document is considered to not be material to the understanding of the deposit.</li> </ul>																								
<b>Other substantive exploration data</b>	<ul style="list-style-type: none"> <li>Groundwater has been encountered in most drill holes. A total of 418 piezometers have been installed at various depths in 256 different drill holes in order to monitor changes in ground water levels for geotechnical purposes. Currently there are 51 piezometers being monitored in</li> </ul>																								

Criteria	Commentary
	<p>27 different drill holes.</p> <ul style="list-style-type: none"> <li>• Bulk density of the coal is set to 1.3 t/m<sup>3</sup>.</li> <li>• The different stratigraphic units and rock defects have been assigned various strength parameters based on a mixture of recent and historical laboratory test data (UCS, shear box and ring shears), empirical classifications (RMR, GSI and Hoek Brown) and back analysis of existing cut slopes. Downhole in situ geophysical measurements have been undertaken to compare the strength variability with actual laboratory test data.</li> </ul>
<b>Further work</b>	<ul style="list-style-type: none"> <li>• Undertake studies on in situ moisture and density.</li> <li>• Drilling programs are planned within southern parts of the Rotowaro Coal Mining License. This drilling will be incorporated into a future resource estimate.</li> </ul>

### Section 3 Estimation and Reporting of Mineral Resources

Criteria	Commentary
<b>Database integrity</b>	<ul style="list-style-type: none"> <li>• BRL utilises an acQuire database to store and maintain its exploration dataset.</li> <li>• All historical and legacy datasets have been thoroughly checked and validated against original logs and results tables.</li> <li>• Data recorded in the field is input into field books and later transcribed into the acQuire database.</li> <li>• The acQuire database places explicit controls on certain data fields as they are entered or imported into the database, such as overlapping intervals, coincident samples, out of range sample values, standardised look-up tables for logging codes.</li> <li>• Manual data entry of coal quality results is not required as results are imported directly from laboratory results files.</li> <li>• Validation of historical wash drilled drill holes has been conducted by comparing coal seam depths and thicknesses with those of adjacent more reliable cored drill holes in cross-section. Coal quality data and downhole geophysical logs have been used to validate more recent (post-1977) drill holes, to provide confidence in coal seam depths and thicknesses.</li> <li>• All historical and legacy datasets have been thoroughly validated against original logs and results tables. Where reliability of the data is poor the data is excluded from the modelling process.</li> </ul>
<b>Site visits</b>	<ul style="list-style-type: none"> <li>• Henry Dillon (the Competent Person) has visited the area on numerous occasions over the past 10 years and is familiar with the site and with the geology of the Waikato Coalfield.</li> </ul>
<b>Geological interpretation</b>	<ul style="list-style-type: none"> <li>• Golder has reviewed the modelling processes in use by BRL to develop their resource model and Coal Resource estimates.</li> <li>• Golder has confidence in the methodologies used by BRL for geological modelling and the interpretation of the available Rotowaro Project data. Confidence varies for different areas, and this is reflected in the resource classification.</li> <li>• Confidence in interpretation of geological stratigraphy, structure and coal seam correlation/continuity is variable across the Rotowaro area. Coal seam correlations are difficult to interpret in some areas due to the discontinuous nature, and rapid variation in thickness of the coal.</li> <li>• Seam correlation was reviewed and updated in 2020 using coal seam floor survey data from the open cut operation and improved Stratigraphic Correlation tools available in Maptek Eureka™.</li> <li>• While the Waikato Coal Measures are entirely conformable, part way through deposition movement on the Mangakotuku Fault ceased, which lead to preferential deposition of mudstone dominated coal measures between Taupiri and Kupakupa coal seams which thickens with proximity to the Mangakotuku Fault. This also presents as different structural trends between the Taupiri and Kupakupa seams.</li> <li>• Variations in geological confidence are reflected in the reported resource classifications.</li> <li>• Residual uncertainty exists concerning geological structure along the Mangakotuku fault zone. All of the past interpretations of this zone involving highly complex faulting have been proven</li> </ul>



Criteria	Commentary
	<p>inaccurate as the geology is exposed through mining. Currently it is modelled as a large near vertical monocline.</p> <ul style="list-style-type: none"> <li>• The data used in the geological interpretation included field mapping, LiDAR, drill hole data, core logging data, geophysical logs, sampling, coal quality laboratory testing and assessments.</li> <li>• Coal seam ash content can vary locally due to the occurrence of siderite concretions and calcite veining in the coal seams. The resource model does not predict these occurrences well which leads to very localised increases in ash.</li> <li>• Other factors affecting continuity of geology are basement ridges (causing thin coal) and faulting. The Taupiri Lower seam can terminate against basement highs and ridges due to peat “onlap” during deposition. It can be difficult to predict whether the Taupiri Lower seam is merged with the Taupiri Main seam over basement highs, as is sometimes the case, or whether it terminates against the basement. This can lead to a want zone where the coal seam is absent. Where this has happened in the past it has been found that the increased thickness of the Taupiri Lower seam around the want zone balances out the losses of the want zone.</li> </ul>
<b>Dimensions</b>	<ul style="list-style-type: none"> <li>• The Rotowaro resource area covers approximately 11.5 km<sup>2</sup>.</li> <li>• Within this area all seams are exposed in the operating mine. Prior to mining the Renown Seam roof was as close as 6 m below the surface and the floor of the Taupiri Bottom seam is as deep as 290 m (-200m RL) below surface.</li> <li>• Coal thickness varies considerably throughout the Rotowaro area, from 28 m down to &lt;0.5 m.</li> </ul>
<b>Estimation and modelling techniques</b>	<ul style="list-style-type: none"> <li>• One single geological model is used to define the geology within the resource area.</li> <li>• Modelling has been undertaken using Maptek’s Vulcan™ (Vulcan) software by geologists and mining engineers trained and experienced in its use.</li> <li>• The Tauranga Group (Quaternary sediments and soils) structural floor is modelled using a stacking algorithm with a pre-mining topographical surface as a reference.</li> <li>• Structural surfaces for coal seams, Whaingaroa, Glen Massey, and Mangakotuku Formation’s roof and floor are modelled using a triangulation algorithm to produce grids on a 10x10m basis in order to best define the structure in the project area. From these grid models a 10x10m block model is produced.</li> <li>• Maptek’s Integrated Stratigraphic Model (ISM) module is used to produce the structure model. The Hybrid stacking method is used which triangulates a reference surface and then stacks the remaining horizons by adding structure thickness. Thickness grids are created using a triangulation modelling algorithm. Design data from other horizons is incorporated into the final grid structure.</li> <li>• Grid modelling is completed in two stages. One pass models the upper coal seams of the Kupakupa and Renown seams and a second pass model Taupiri group of seams.</li> <li>• Modelling parameters for the structural modelling are as follows: <ul style="list-style-type: none"> <li>• Kupakupa and Renown Groups - Reference grid surface (KK22 Floor) by Hybrid Stacking: <ul style="list-style-type: none"> <li>○ Method is Triangulation.</li> <li>○ Trend Order is 2 (Quadratic).</li> <li>○ Smoothing is 9.</li> <li>○ The maximum triangle length is 750 m.</li> <li>○ Surfaces are splined.</li> </ul> </li> <li>• Kupakupa and Renown Groups - Grid thickness modelling by Hybrid Stacking: <ul style="list-style-type: none"> <li>○ Method is Triangulation.</li> <li>○ Trend Order is 1 (Linear).</li> <li>○ Smoothing is 9.</li> <li>○ There is no maximum triangle length.</li> <li>○ Surfaces are splined.</li> </ul> </li> <li>• Taupiri group - Reference grid surface (TM22 Floor) by Hybrid Stacking: <ul style="list-style-type: none"> <li>○ Method is Triangulation.</li> <li>○ Trend Order is 2 (Quadratic).</li> <li>○ Smoothing is 9.</li> <li>○ The maximum triangle length is 750 m.</li> </ul> </li> </ul> </li> </ul>

Criteria	Commentary
	<ul style="list-style-type: none"> <li>○ Surfaces are splined.</li> <li>● Taupiri group - Grid thickness modelling by Hybrid Stacking: <ul style="list-style-type: none"> <li>○ Method is Triangulation.</li> <li>○ Trend Order is 1 (Linear).</li> <li>○ Smoothing is 9.</li> <li>○ There is no maximum triangle length.</li> <li>○ Surfaces are splined.</li> </ul> </li> <li>● No cropping of grid surfaces is undertaken. This is completed during construction of the resource block model.</li> <li>● Validation of data during modelling occurs at three different stages: <ul style="list-style-type: none"> <li>○ Firstly, when importing drill hole data from the master acQure database to ensure that the original dataset is in order.</li> <li>○ Once structural grids have been produced from drill hole data, the slice viewer tool is used to run sections through the grids both across and along dip to check for any anomalies.</li> <li>○ Finally, once structural grids have been produced from drill hole data the data posting tool is used to ensure grid nodes honour drill hole data. Contour plans are also produced to ensure modelled values represent original data.</li> </ul> </li> <li>● The grid and triangulation generated by the ISM tools are used to create the resource block model.</li> <li>● Coal quality data is modelled using inverse distance squared block estimation.</li> <li>● Five coal quality attributes are independently modelled. Ash, Sulphur, Calorific Value, and Volatile Matter are estimated on a dry basis (db) and Inherent Moisture is estimated on air - dried basis (adb).</li> <li>● The estimation is completed over three runs for each coal quality parameter with increasing circular search distances (80 m, 250 m, 500 m) with the semi-major (across the coal seam from roof to floor) controlled using Vulcan's Tetra projection unfolding tool.</li> <li>● Estimated block values are determined as part of modelling workflow which are reviewed by a senior geologist to ensure no anomalies exist and that original data is honoured. The grade estimations were checked using Quartile-Quartile (QQ) Plots and Swath Plots to examine global and local composite to block value comparisons.</li> <li>● The Rotowaro resource was underground mined from 1919 to 1986. The Rotowaro No's.1, 3, 5, and 6, Callaghans, and Mahons all operated within the Rotowaro Coal Mining License. The Rotowaro West exploration permit has been underground mined by Awaroa No. 4, and Summit. Underground Mining studies for the site have been conducted with historical plans digitised and void size estimated based on mining techniques. From this the resource and reserves are depleted based on estimated recoveries as detailed below under mining factors or assumptions.</li> <li>● The Rotowaro resource has also been mined by numerous open cut mines. Rotowaro 1, 2, and 3, Maori Farm 1, 2, and 3, Waipuna, Callaghans, Boundary, and the currently operating mine (Rotowaro) have all operated in the Rotowaro Coal Mining License.</li> <li>● The only material that could be considered by-product that is recovered from the Rotowaro resource is contaminated coal. This comes from collapsed underground workings and roof and floor cleanings. It is "washed" at the washery at an estimated 62% product yield.</li> <li>● Mining has been occurring continuously at Rotowaro since 1919 with no record of acid mine drainage.</li> </ul>
<b>Moisture</b>	<ul style="list-style-type: none"> <li>● Test work has been undertaken to determine moisture levels from all core with Inherent Moisture being measured in the 8000, 15000, and 17000 series drill holes. Total Moisture is also measured.</li> </ul>
<b>Cut-off parameters</b>	<ul style="list-style-type: none"> <li>● A minimum coal seam thickness cut-off for all modelled seams is 0.50 m, as this is what is the minimum mineable using current methods.</li> <li>● The coal has been classified as high volatile sub-bituminous B rank and is likely to be marketed as thermal coal.</li> <li>● A maximum ash cut-off of 20% has been applied to all seams.</li> </ul>

Criteria	Commentary
	<ul style="list-style-type: none"> <li>Coal Resources have been defined as economic by using a Lerchs-Grossman optimized pit shell using budgeted mining costs and contracted coal sales values. The 0.85RF shell from the optimization has been used. No resources have been reported outside of this pit shell. This optimised pit shell is used to determine Reasonable Prospects for Eventual Economic Extraction (RPEEE).</li> </ul>
<b>Mining factors or assumptions</b>	<ul style="list-style-type: none"> <li>This declaration reports on a long-term operating site.</li> <li>The site operates using traditional truck and shovel open cut mining methods with parameters selected from long term experience of local conditions.</li> <li>Geotechnical parameters for cut slope design were developed based on historical cut slope performance, slope back-analysis and laboratory testing of material strength parameters. Slopes are designed to comply with a Factor of Safety that exceeds 1.2 and within BRL risk volume criteria which is a function of the probability of failure and potential failure dimensions.</li> <li>Mining recoveries - minimum recoverable coal seam thickness is 0.5 m. 1 % of the in situ is assumed to be lost and is not included in the Coal Resource Estimate.</li> </ul>
<b>Metallurgical factors or assumptions</b>	<ul style="list-style-type: none"> <li>Although not included in the resource model, studies have been conducted on the properties of the coal pertaining to combustion potential, ash fusion temperatures and Hardgrove Grindability Index (HGI).</li> </ul>
<b>Environmental factors or assumptions</b>	<ul style="list-style-type: none"> <li>There are several Resource Consents regarding land use, air, and water quality that must be strictly adhered to for the Rotowaro site.</li> <li>Rotowaro mine site has no rock types that can generate acid rock drainage.</li> <li>Suspended solids are treated through a series of drains and sumps that collect dirty water which is pumped through the central water treatment where dosing with flocculants can occur if necessary, before being discharged into the Rotowaro stream.</li> <li>Waste material is rehabilitated using soils recovered before overburden removal. The soil is spread to a thickness of 0.4 m, and then sown in grass seed before final rehabilitation outcomes are implemented.</li> <li>The Rotowaro site has resource consent to use bio-solids as a soil conditioner to help with re-establishing vegetation as part of the rehabilitation of certain areas of the site.</li> </ul>
<b>Bulk density</b>	<ul style="list-style-type: none"> <li>Density is calculated as a from a relationship with dry Ash. <ul style="list-style-type: none"> <li>Density = <math>((0.0001 \times (as\_db^2)) + (0.0087 \times as\_db) + 1.2715)</math></li> </ul> </li> </ul>
<b>Classification</b>	<ul style="list-style-type: none"> <li>Coal Resources have been classified based on geological and grade continuity balanced by relative uncertainties surrounding historical underground extraction and proximity to faults and unconformities. The result reflects the Competent Person's view of the deposit.</li> <li>Coal Resource estimation is based on the following criteria: <ul style="list-style-type: none"> <li>A Point of Observation (POB) is defined by a drill hole with has a reliable intercept in a coal seam.</li> <li>An Area of Interest (AOI) is defined by a polygon drawn around POB's.</li> </ul> </li> <li>1. Measured Resource <ul style="list-style-type: none"> <li>A drill hole that intersected the coal seam(s).</li> <li>Distance between POB of no more than 75 m and extrapolation of no more than 150 m from a POB.</li> <li>Minimum of three (3) POB to define an AOI.</li> </ul> </li> <li>2. Indicated Resource <ul style="list-style-type: none"> <li>A drill hole that intersected the coal seam(s).</li> <li>Distance between POB of no more than 150 m and extrapolation of no more than 300 m from a POB.</li> <li>Minimum of three (3) POB to define an AOI.</li> </ul> </li> <li>3. Inferred Resource <ul style="list-style-type: none"> <li>A drill hole that intersected the coal seam(s).</li> <li>Distance between POB of no more than 225 m and extrapolation of no more than 450 m from a POB.</li> <li>Minimum of three (3) POB to define an AOI.</li> </ul> </li> <li>Closely spaced drilling with valid samples increases the confidence for each seam in resource assessments.</li> </ul>

Criteria	Commentary
<b>Audits or reviews</b>	<ul style="list-style-type: none"> <li>In 2020, Golder was engaged to review and rebuild the geology resource model and several updates to seam correlation in the model were completed.</li> <li>Several internal reviews have been completed during the various project stages and during purchase due diligence. No audits or reviews have been undertaken on this resource estimation.</li> </ul>
<b>Discussion of relative accuracy/confidence</b>	<ul style="list-style-type: none"> <li>Based on the data available, the degree of accuracy of this statement is considered high for the Rotowaro resource. The process for calculation has used: Standards, Guidelines and the JORC Code along with best practice where available to define the Resource estimates provided to confirm search estimation ranges and drill hole spacing for each resource classification.</li> <li>Coal Resources have been defined as economic by using a Lerchs-Grossman optimized pit shell using budgeted mining costs and contracted coal sales values. The 0.85RF shell from the optimization has been used. No resources have been reported outside of this pit shell. This optimised pit shell is used to determine Reasonable Prospects for Eventual Economic Extraction (RPEEE).</li> </ul>

## Section 4 Estimation and Reporting of Ore Reserves

Criteria	Commentary
<b>Mineral Resource estimate for conversion to Ore Reserves</b>	<ul style="list-style-type: none"> <li>Reserves are calculated from measured and indicated resource areas that have been determined from drill hole spacing and presence of underground workings. See sections above.</li> <li>Resources are reported inclusive of the reserve.</li> </ul>
<b>Site visits</b>	<ul style="list-style-type: none"> <li>Damian Spring (the Competent Person) is an employee of BRL and visits the project area on a regular basis.</li> </ul>
<b>Study status</b>	<ul style="list-style-type: none"> <li>Rotowaro is an operating mine project. The reportable Ore Reserve is based on the life of mine (LOM) plan and has determined a mine plan that is technically achievable and economically viable, and that material modifying factors have been considered.</li> </ul>
<b>Cut-off parameters</b>	<ul style="list-style-type: none"> <li>Pit optimisation runs were completed to determine economic pit limits.</li> <li>Thin seam cut-off limit determined from long term site experience and quality info related to sales product requirements.</li> </ul>
<b>Mining factors or assumptions</b>	<ul style="list-style-type: none"> <li>Pit shell determined initially determined by Whittle optimisation using a revenue factor of 0.80 subsequently modified after slope stability analyses.</li> <li>Minimum mining thickness, seam compositing factors, losses associated with u/g mining and washery yield.</li> <li>Truck and shovel has been determined to be most cost effective mining method given the multiple coal seams as well as the requirement for large quantity of ex-pit dumping initially required. This is the proven mining method in terms of past and present operations at site.</li> <li>Geotechnical parameters for cut slope design were developed based on historical cut slope performance, slope back-analysis and laboratory testing of material strength parameters. Basic highwall design criteria include slopes in Waikato Coal Measures (fireclay and coal) and 'softs' (marine sediments, quaternary clays and old backfill). Slopes are designed to comply with a Factor of Safety that exceeds 1.2 and within BRL's risk volume criteria which is a function of the probability of failure and potential failure dimensions. Consideration of underground workings intersecting highwalls also considered.</li> <li>Mining dilution factors are minimum mining tk 0.5m, parting 0.1m, coal waste 10:1, roof/floor losses 0.15m (combined) per recoverable seam.</li> <li>To account for minor unmodelled faults the quantity of in situ tonnes is downrated by 1%.</li> <li>A 'mining recovery' variable is calculated in the reserve model to account for roof and floor losses of 150mm. The formula is (seam thickness – 0.15) / seam thickness and the result ranges from 0.700 (0.5m mining horizon) to ~0.985 (10m mining horizon).</li> <li>Resource tonnes are calculated using estimated seam depletion quantities from historical</li> </ul>

Criteria	Commentary
	<ul style="list-style-type: none"> <li>records. <ul style="list-style-type: none"> <li>○ KK seam first worked 30%, pillared 1.5m 55%, pillared 5.0m 65% and 8.0m 60%.</li> <li>○ TP seam: first worked 40% pillared 1.5m 55% pillared 5.0m 60%.</li> <li>○ TM seam first worked 20%, pillared 1.5m 55%, pillared 5.0m, 65%, pillared 8.0m, 60%, Pillared 10.0m, 55%.</li> <li>○ TL seam First worked 15%.</li> </ul> </li> <li>• ROM tonnes are calculated by multiplying resource tonnes by mining recovery.</li> <li>• Coal sent to the washery is then ROM tonnes multiplied by the proportion of the seam coal requiring washing.</li> <li>• Proportion of coal sent to wash plant; unworked 11%, first worked 23%, pillared 59%.</li> <li>• The washery yield is currently modelled at 62%.</li> <li>• Clean coal sent direct to the Blending Plant (BP) from the pit is simply ROM tonnes less wash tonnes.</li> <li>• Total product coal is clean coal sent direct to BP plus washery product.</li> <li>• CQ values adjusted for product specs by adding 0.55% to ash, 5.3% to convert air-dried moisture to produce moisture.</li> </ul>
<b>Metallurgical factors or assumptions</b>	<ul style="list-style-type: none"> <li>• Product coal specifications include ash, sulphur, fixed carbon, moisture and calorific value.</li> <li>• Product specifications are adequate to meet contractual sales requirements.</li> </ul>
<b>Environmental</b>	<ul style="list-style-type: none"> <li>• All regulatory consents required for an operating mine are current.</li> <li>• Waste rock characterisation results show that the material is non-acid or metal producing, as such it does not require special placement requirements or procedures in the dumps.</li> </ul>
<b>Infrastructure</b>	<ul style="list-style-type: none"> <li>• All necessary infrastructure is in place and operational for the current operation.</li> </ul>
<b>Costs</b>	<ul style="list-style-type: none"> <li>• Rotowaro is an existing operating mine and as such all infrastructure is in place at Rotowaro. The primary ongoing capital requirements are for equipment replacement and this is included in the economic model.</li> <li>• All operating costs were based on the three year budget estimates and include allowances for royalties, commissions, mining costs, train loading and administration.</li> <li>• Product specifications and penalties for failure to meet specification are included.</li> </ul>
<b>Revenue factors</b>	<ul style="list-style-type: none"> <li>• Long term sales contracts are in place.</li> </ul>
<b>Market assessment</b>	<ul style="list-style-type: none"> <li>• The pit is an existing operating mine with long term sales contracts in place.</li> </ul>
<b>Economic</b>	<ul style="list-style-type: none"> <li>• No NPV analysis was completed as it is an operating mine. For JORC Reserves reporting purposes, detailed mine design and schedules are generated. This work includes identifying the mining sequence and equipment requirements.</li> <li>• Lerch Grossman pit optimisation is used as a tool to identify resources that may have the potential to be converted to reserve.</li> <li>• BRL generates detailed cash flow schedules and identifies incremental and sustaining capital.</li> <li>• Long term sales contracts in place.</li> </ul>
<b>Social</b>	<ul style="list-style-type: none"> <li>• All regulatory consents required for an operating mine are current.</li> <li>• Updating of approvals is an ongoing process and it is reasonably expected that any modifications to existing agreements or additional agreements that may be required can be obtained in a timely manner.</li> </ul>
<b>Other</b>	<ul style="list-style-type: none"> <li>• All regulatory consents required for an operating mine are current.</li> </ul>
<b>Classification</b>	<ul style="list-style-type: none"> <li>• Confidence based on resource model assessment.</li> <li>• Results fairly reflect the Competent Person's understanding of the deposit.</li> <li>• Classification of Ore Reserves has been derived by considering the Measured and Indicated Resources and the level of mine planning.</li> <li>• For the Rotowaro operation, Measured Coal Resources are classified as Proved Coal Reserves and Indicated Resources classified as Probable Coal Reserves, as the mine is currently operating and the level of mine planning adequate.</li> <li>• The Inferred Coal Resources have been excluded from the Reserve estimates.</li> </ul>

Criteria	Commentary
<b><i>Audits or reviews</i></b>	<ul style="list-style-type: none"> <li>• Palaris completed an external review of this estimation in May 2016 as part of Solid Energy's Vendor Due Diligence process. No substantial issues were raised.</li> <li>• Several internal reviews have been completed during the various project stages and during purchase due diligence.</li> </ul>
<b><i>Discussion of relative accuracy/confidence</i></b>	<ul style="list-style-type: none"> <li>• Confidence in the result is reinforced by reviewing the long term performance of the sites history verses actual coal production. Historically previous models (using the same techniques as the current model) have shown an approximate 5% conservatism. With a model update and pit configuration change to include Waipuna West into the reserve statement a reconciliation has yet to be undertaken.</li> <li>• Reserves are only stated for the current pit and do not include areas currently being investigated for further pit expansion to the east.</li> <li>• Because the longer term results show good correlation between actual tonnes sold and the model it is thought the current modifying factors are performing adequately.</li> </ul>

Appendix A:

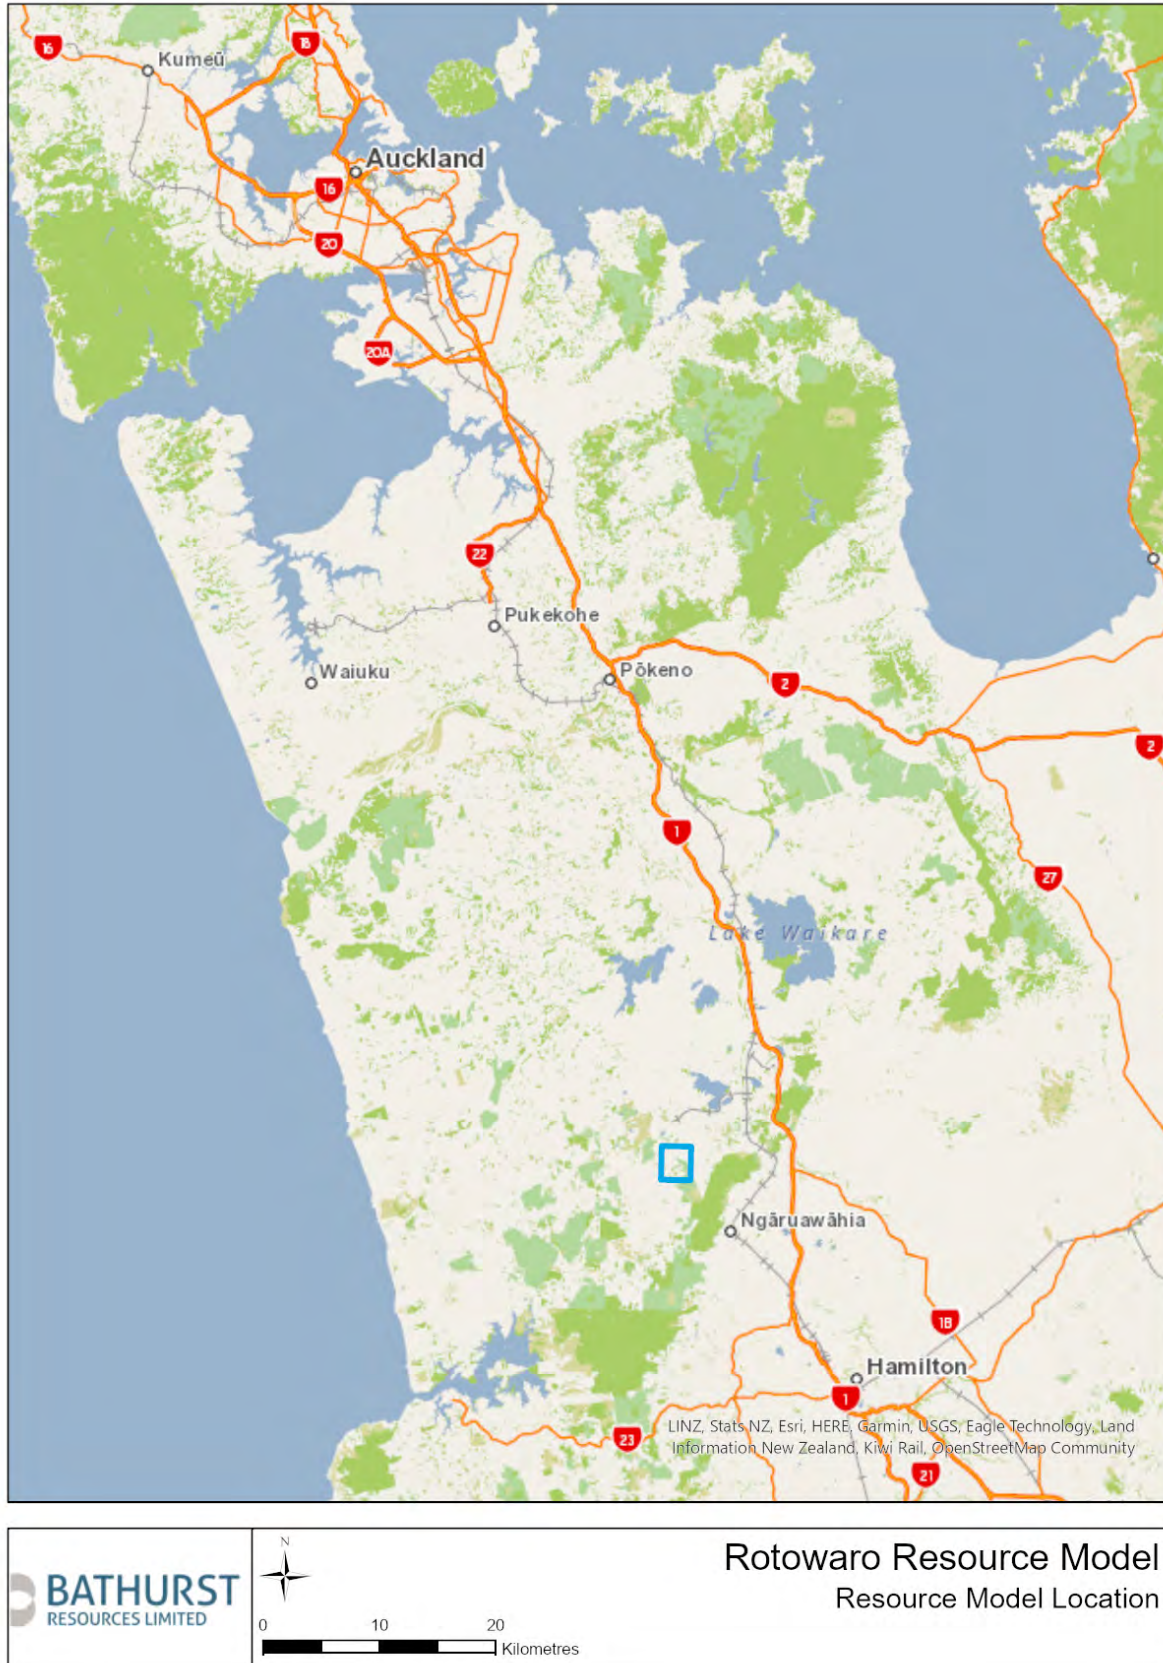


Figure 1: Location map of Rotowaro

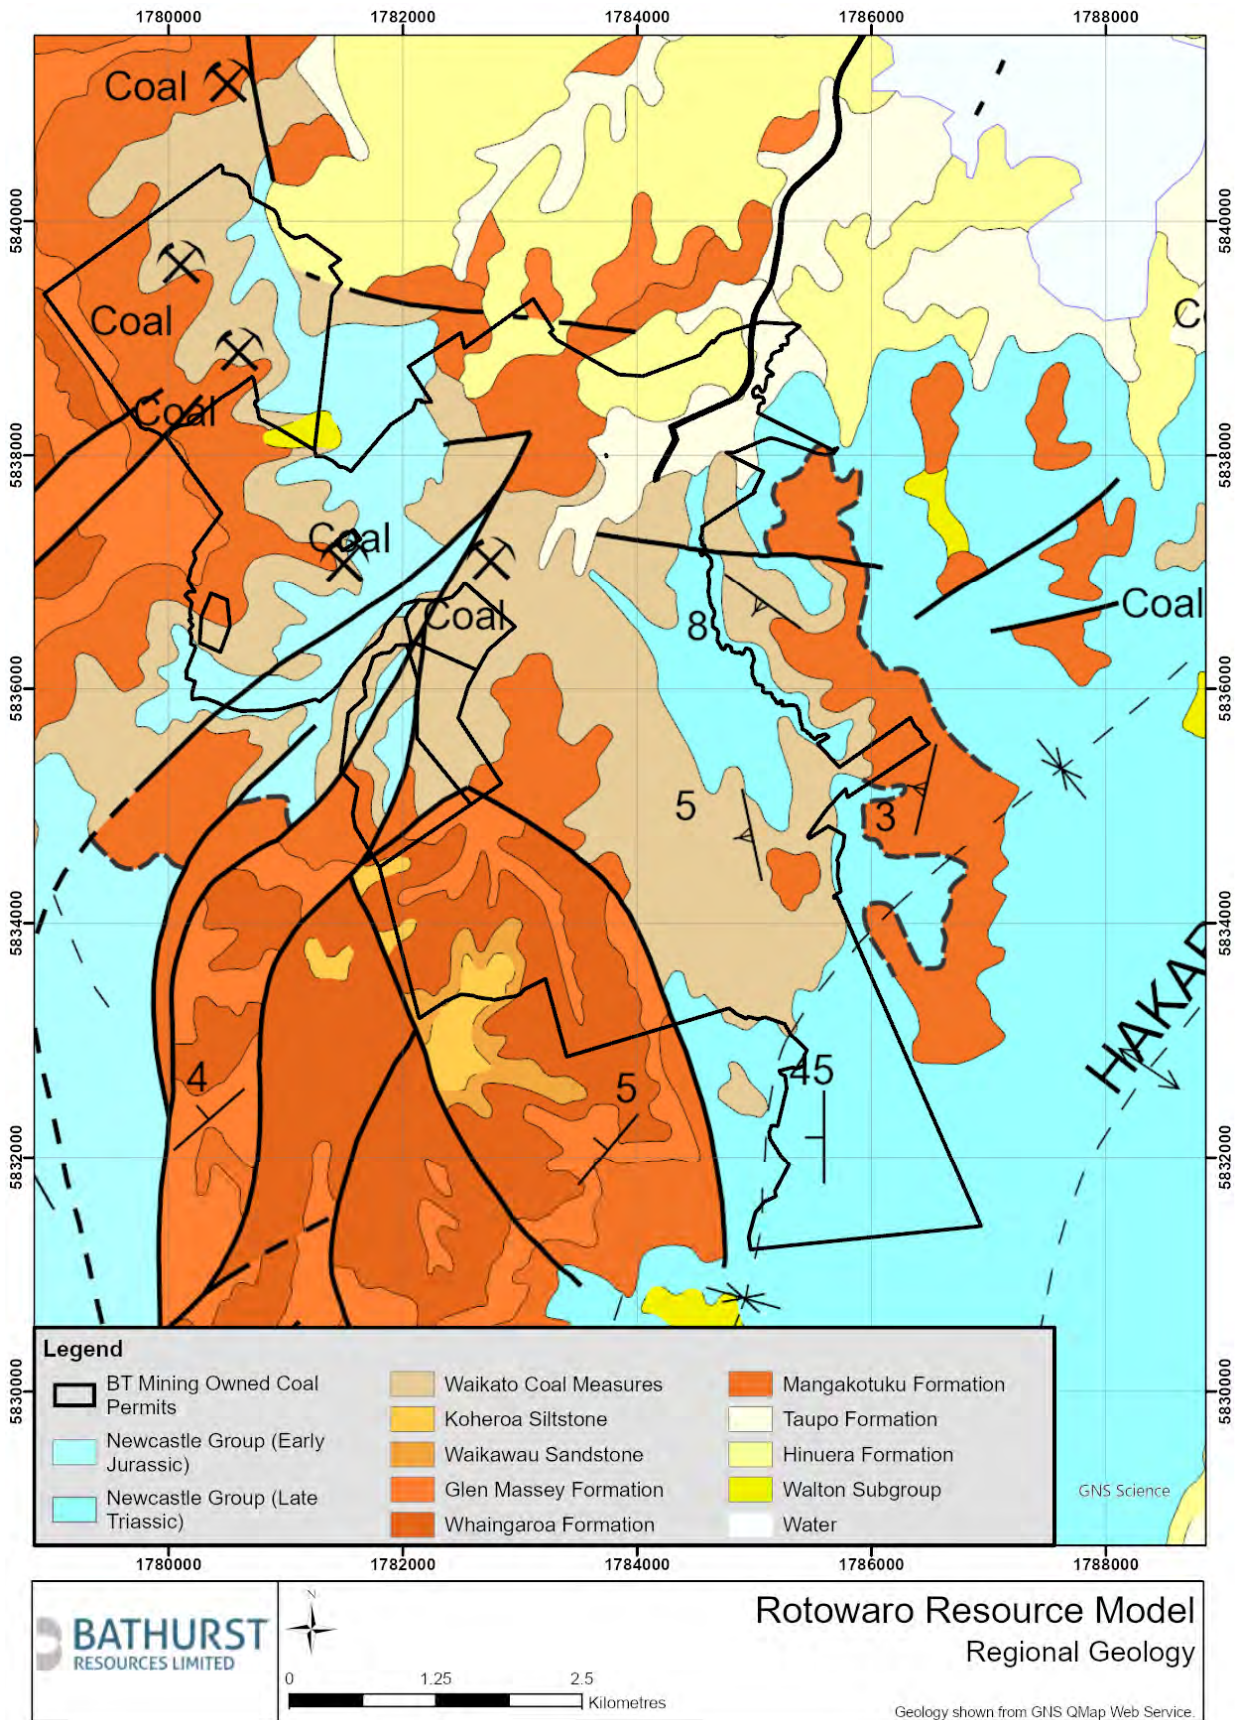


Figure 2: Regional Geology



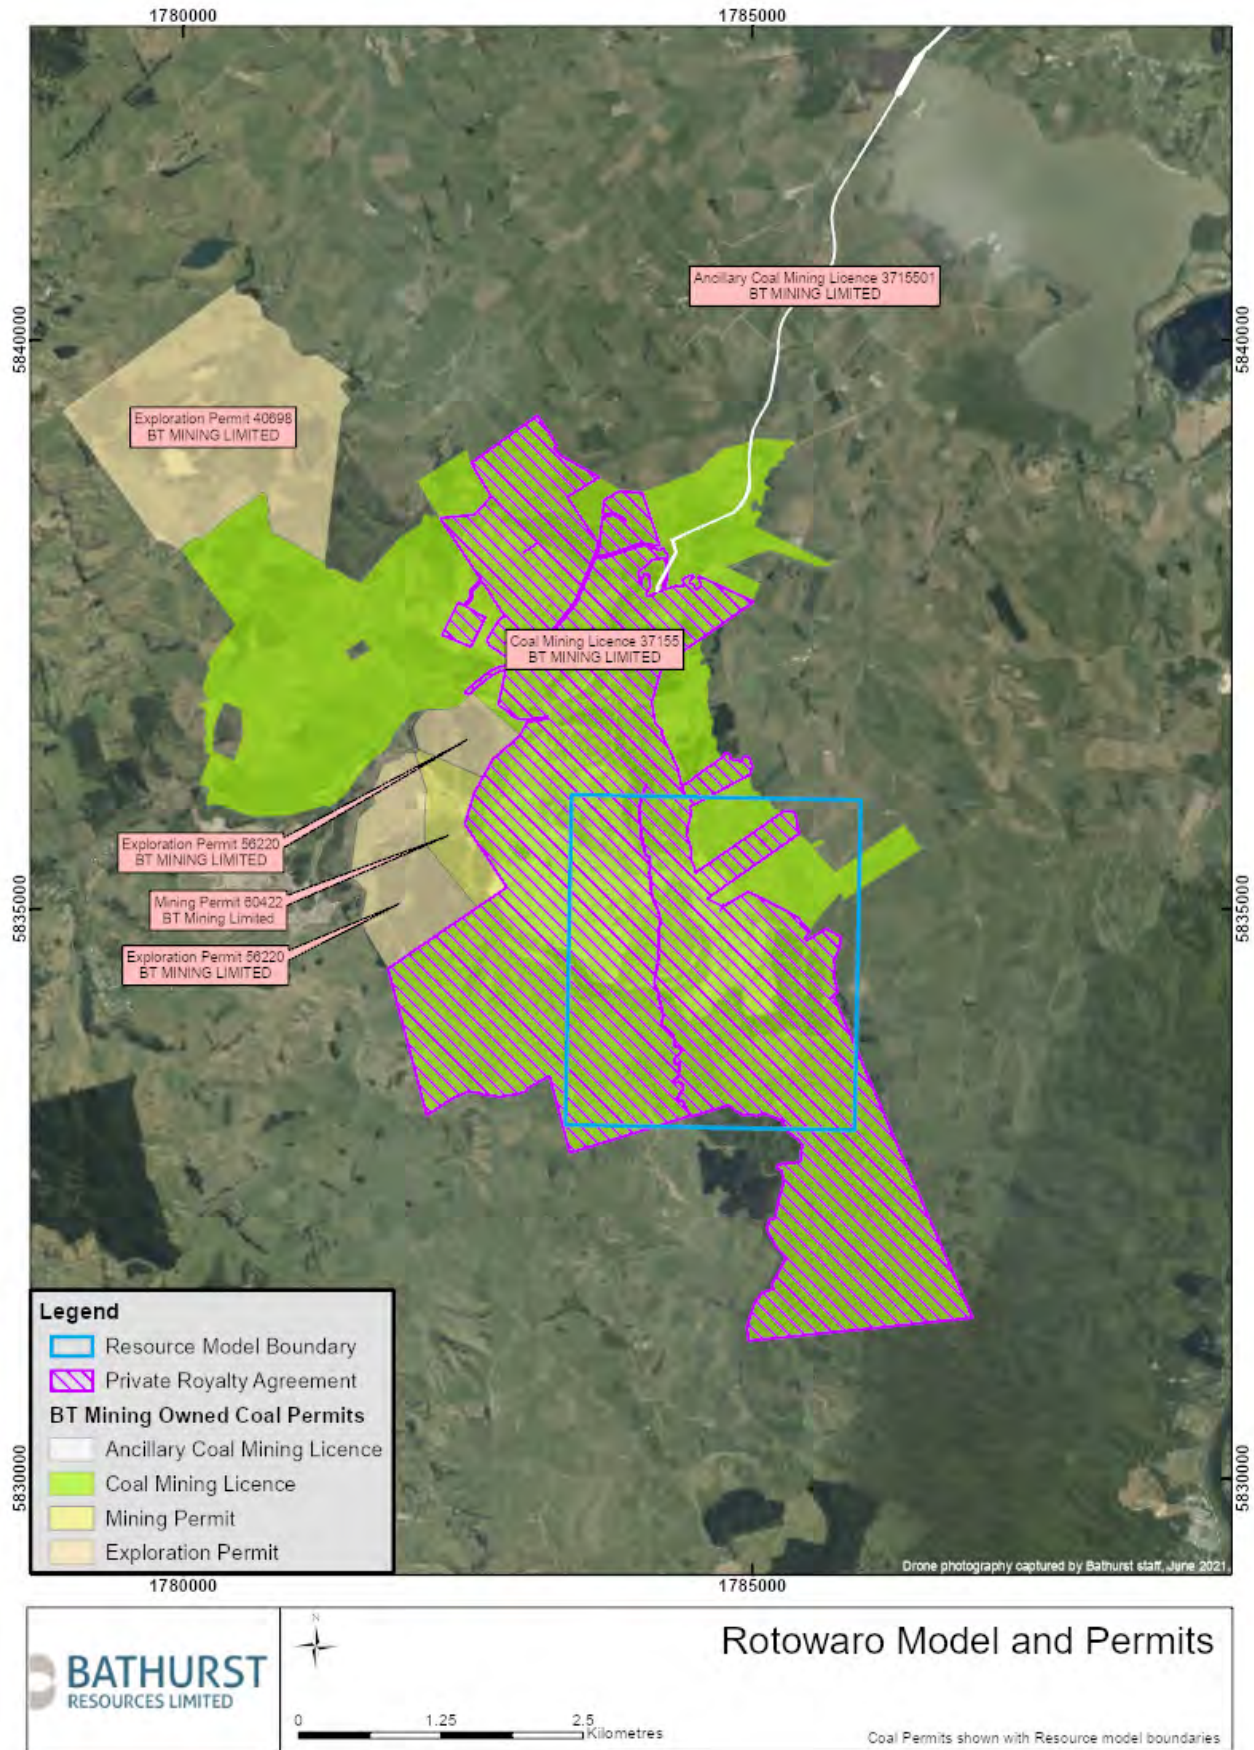


Figure 3: Rotowaro and the Coal Licenses and permits within the resource model area

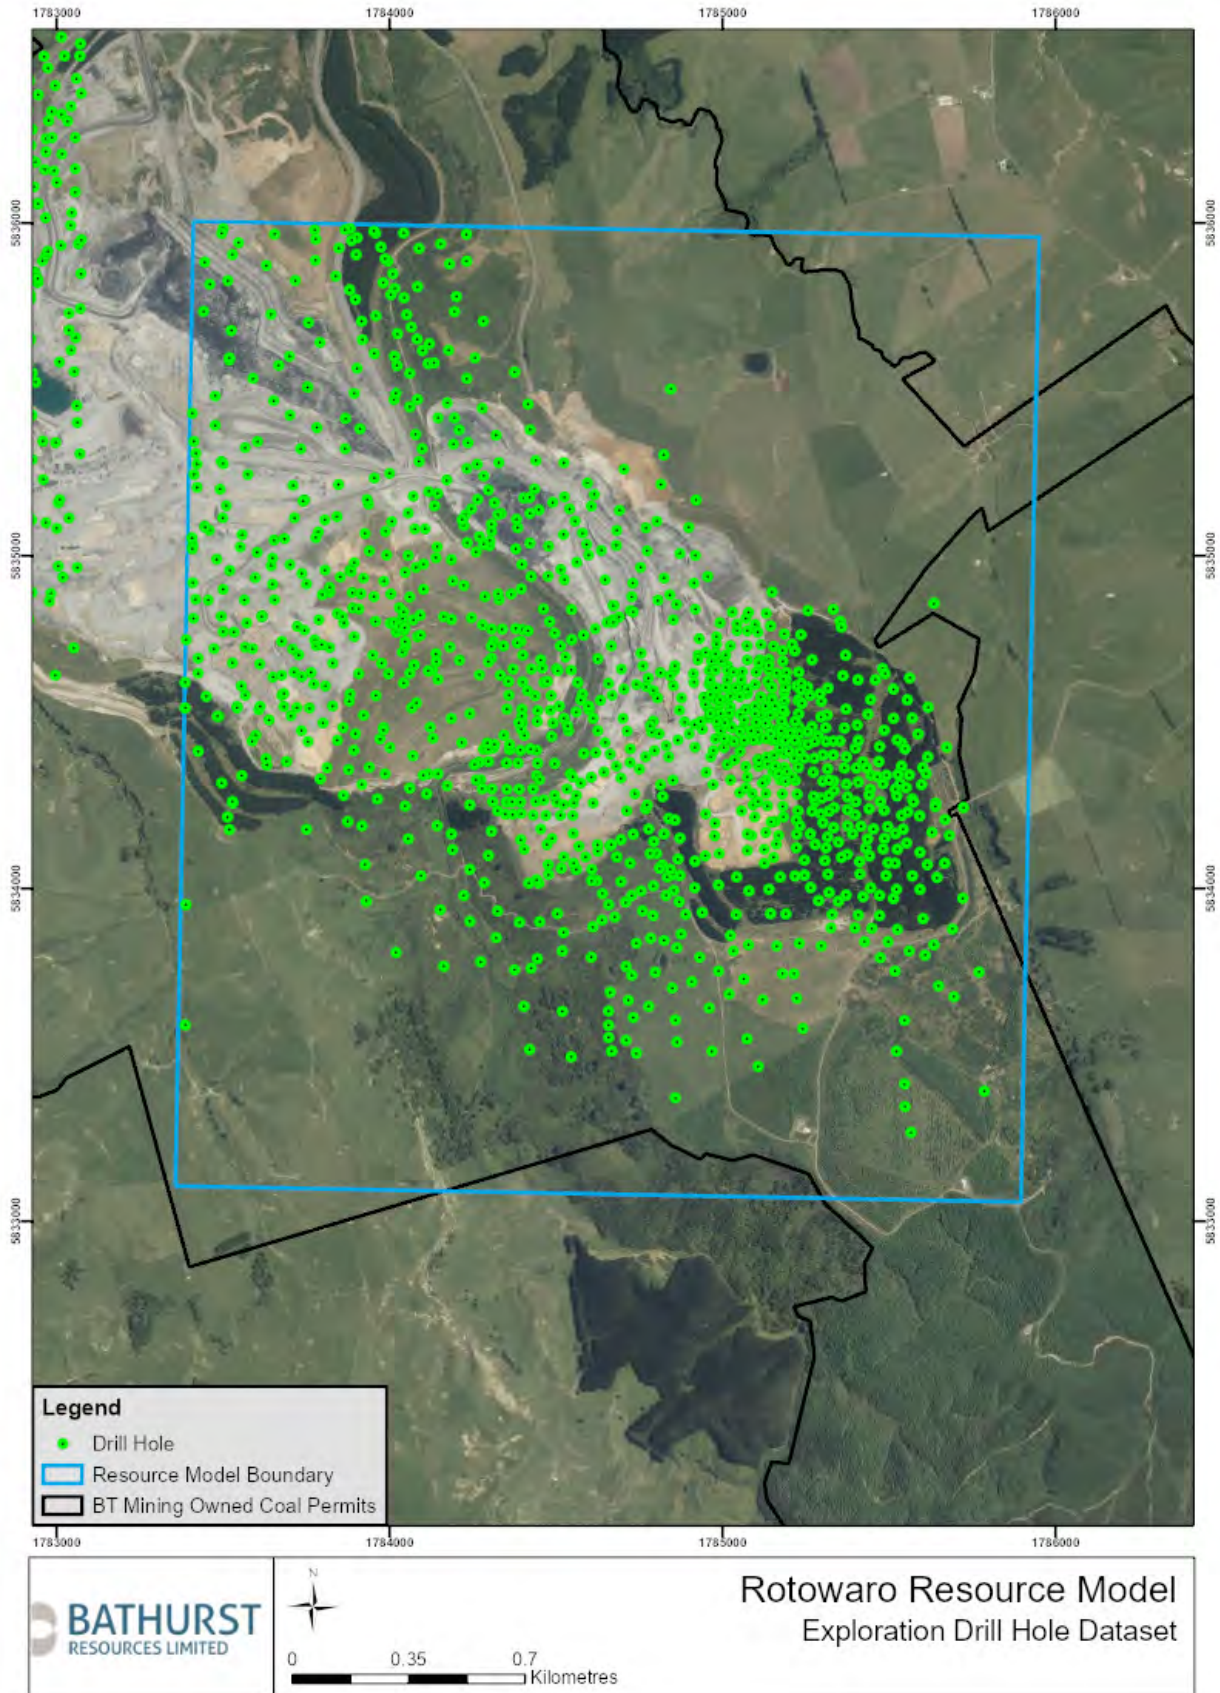


Figure 4: Plan showing the drilling dataset used to produce the resource model

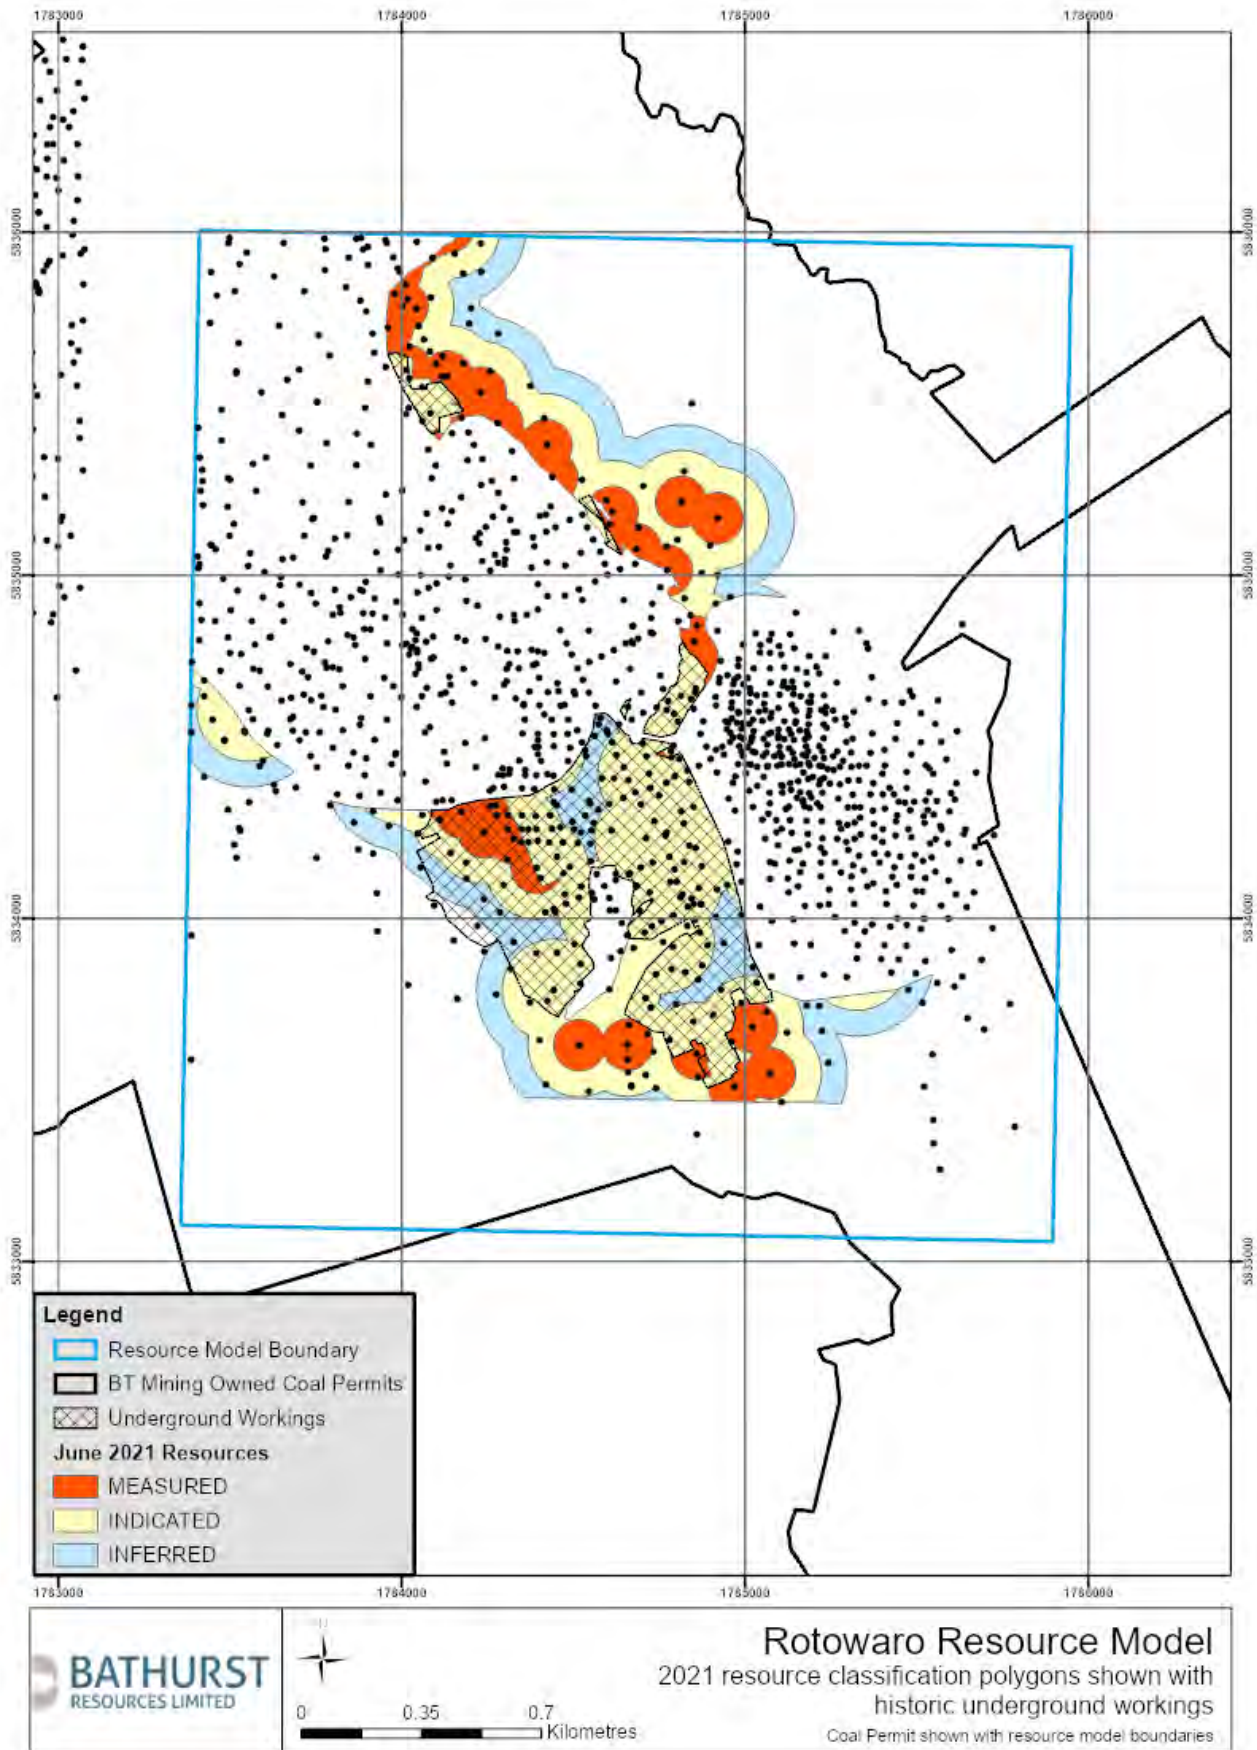


Figure 5: Plan showing the resource classification polygons

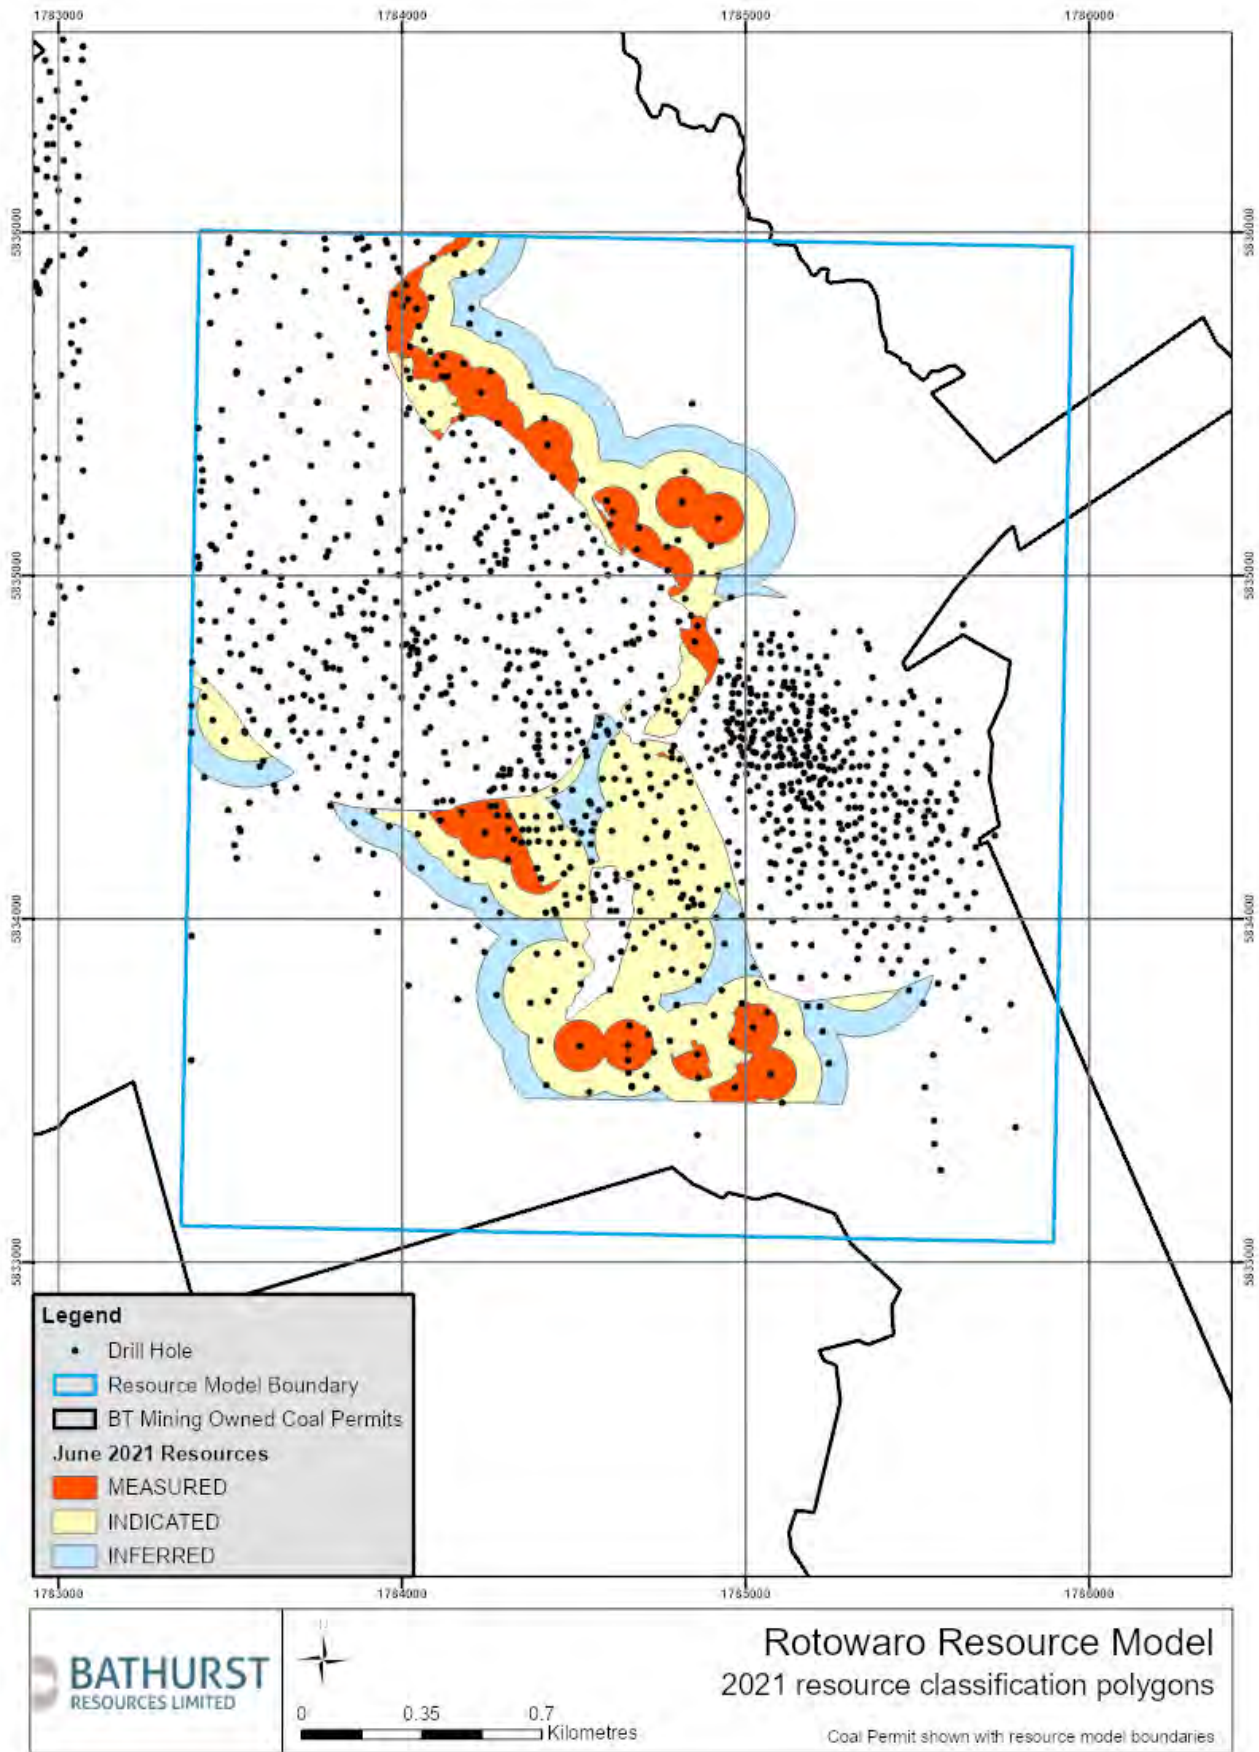


Figure 6: Extent of Underground Workings and Resource classifications.

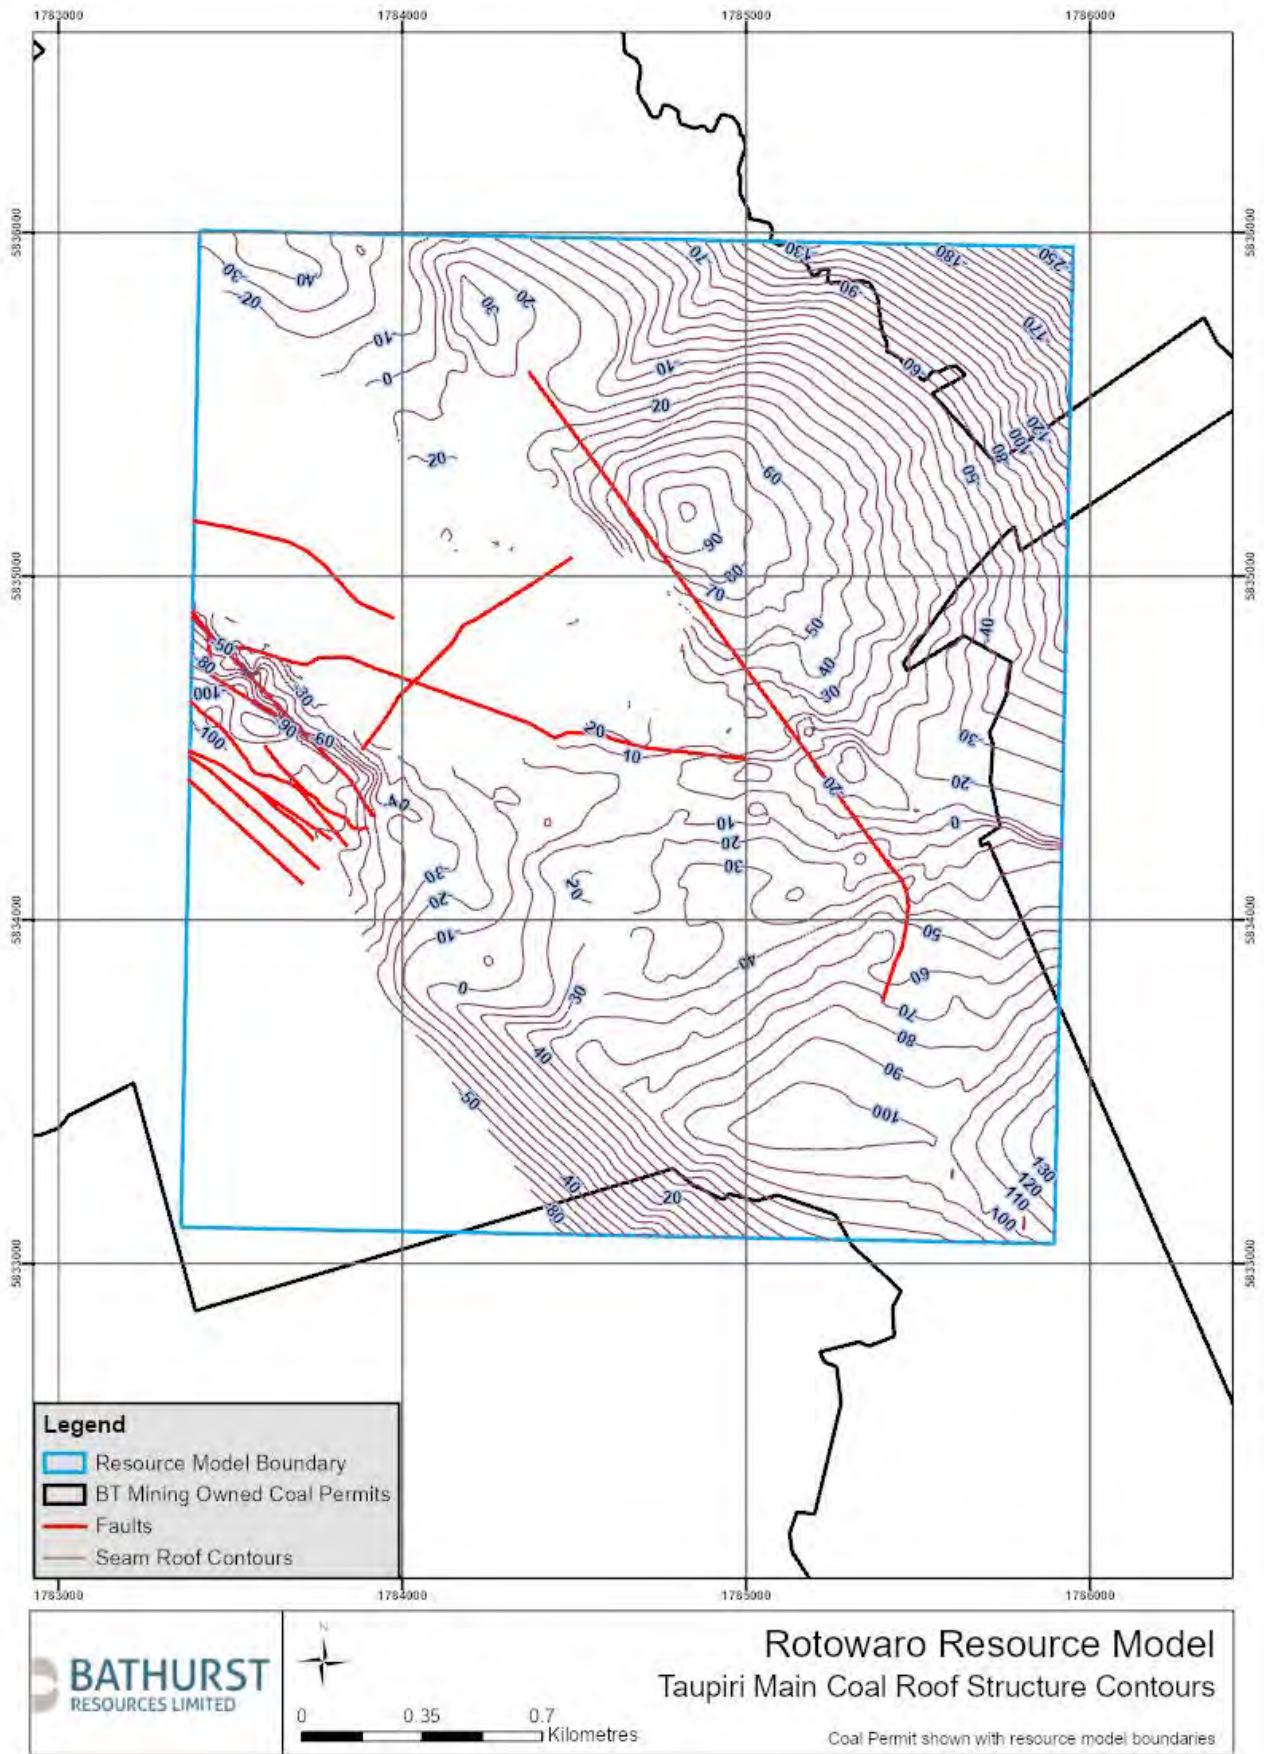


Figure 7: Plan showing the structure contours of coal seam roof

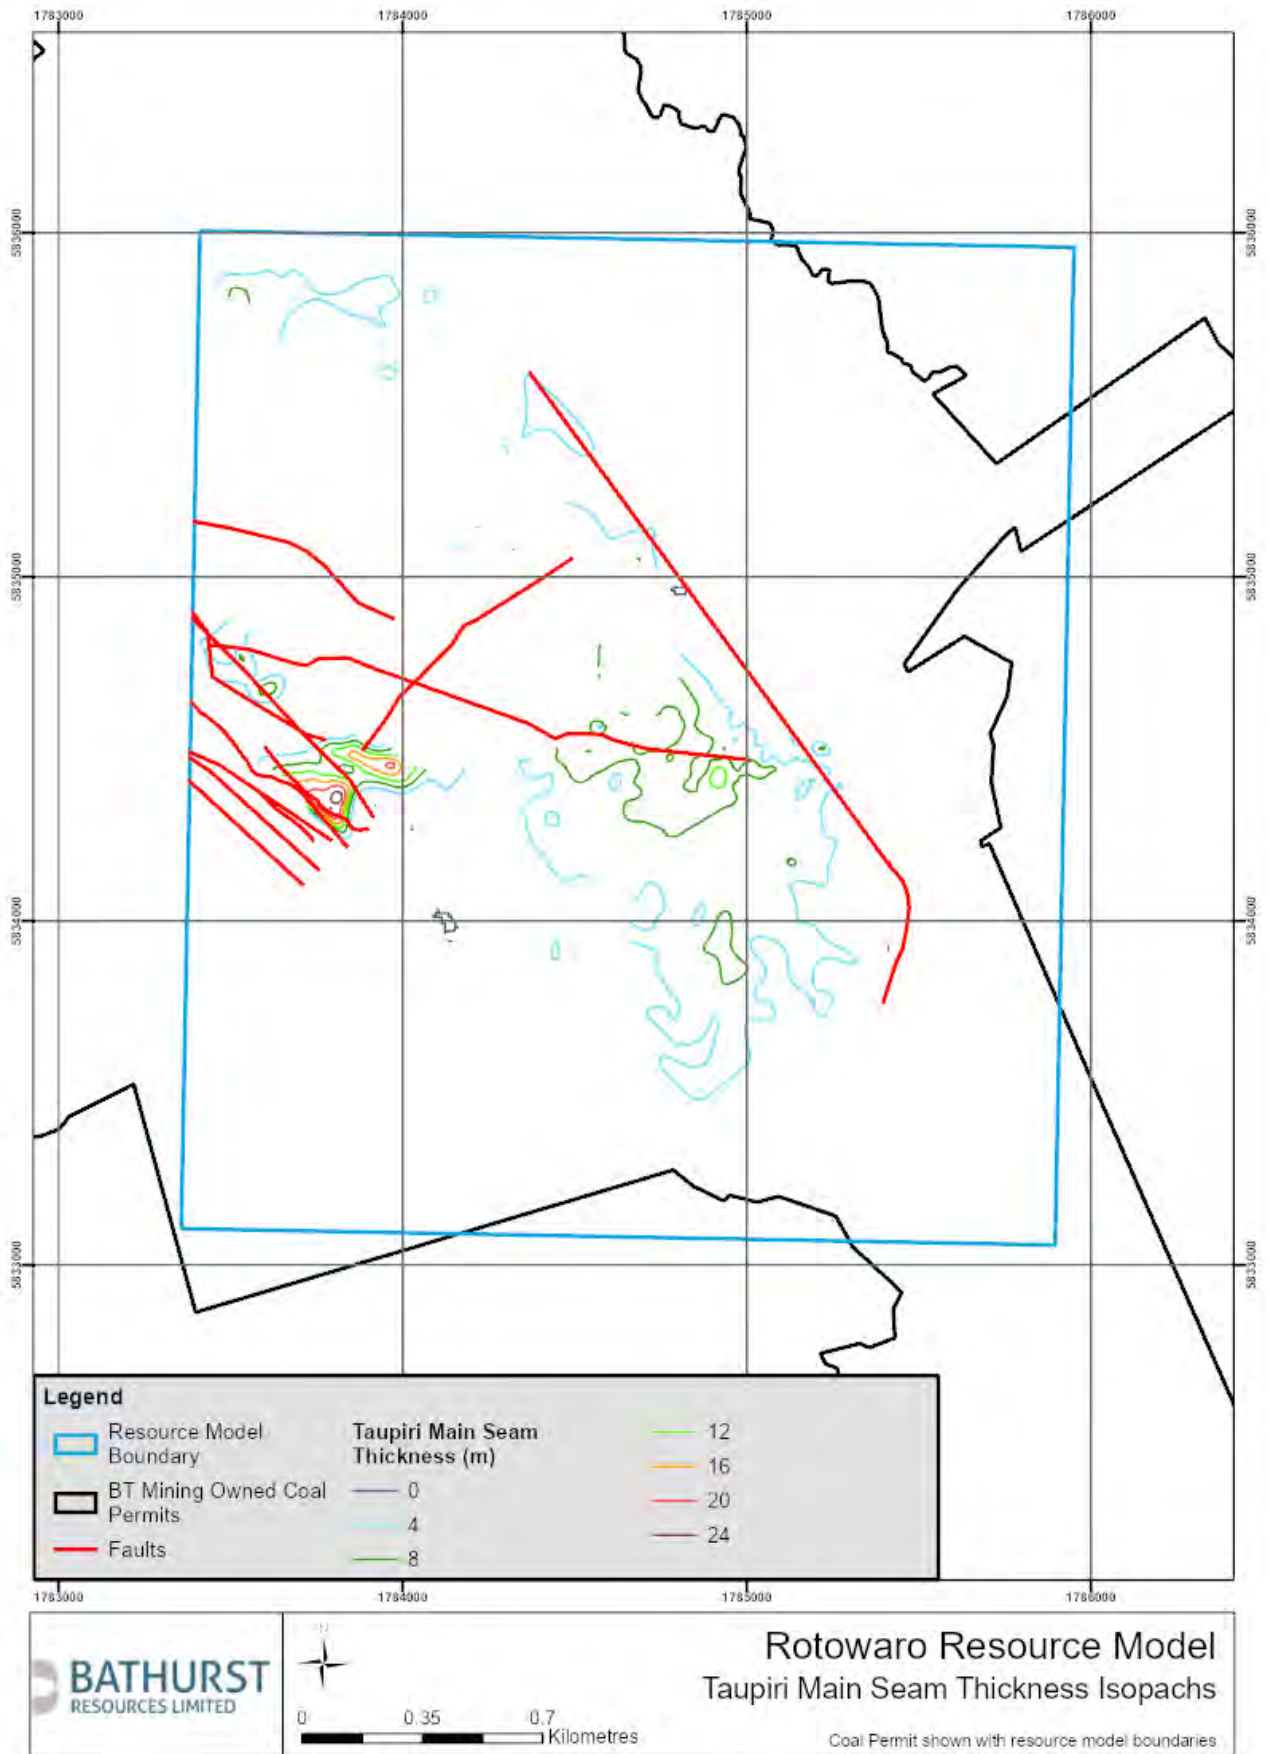


Figure 8: Plan showing full seam thickness contours over the model area

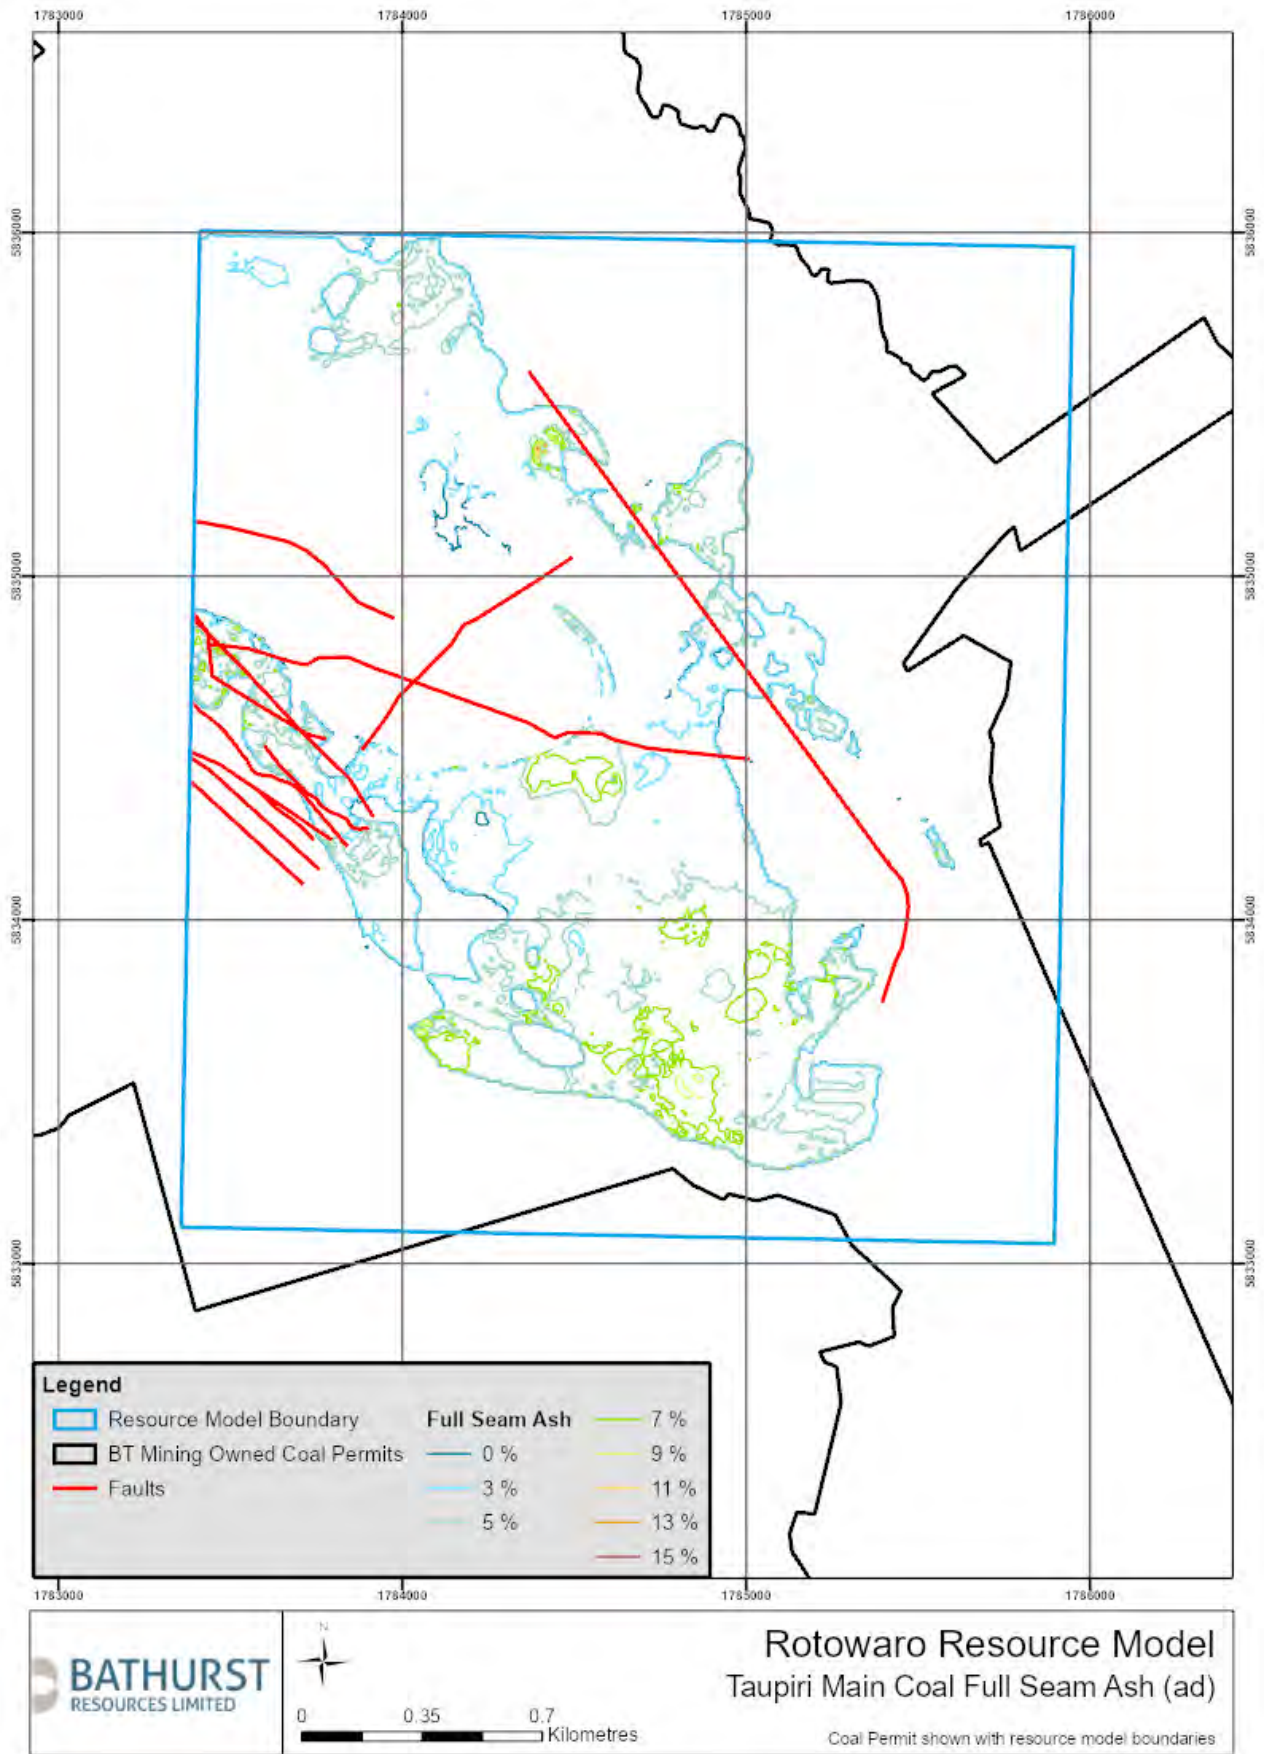


Figure 9: Plan showing in situ full seam ash on an air-dried basis as modelled over the deposit area

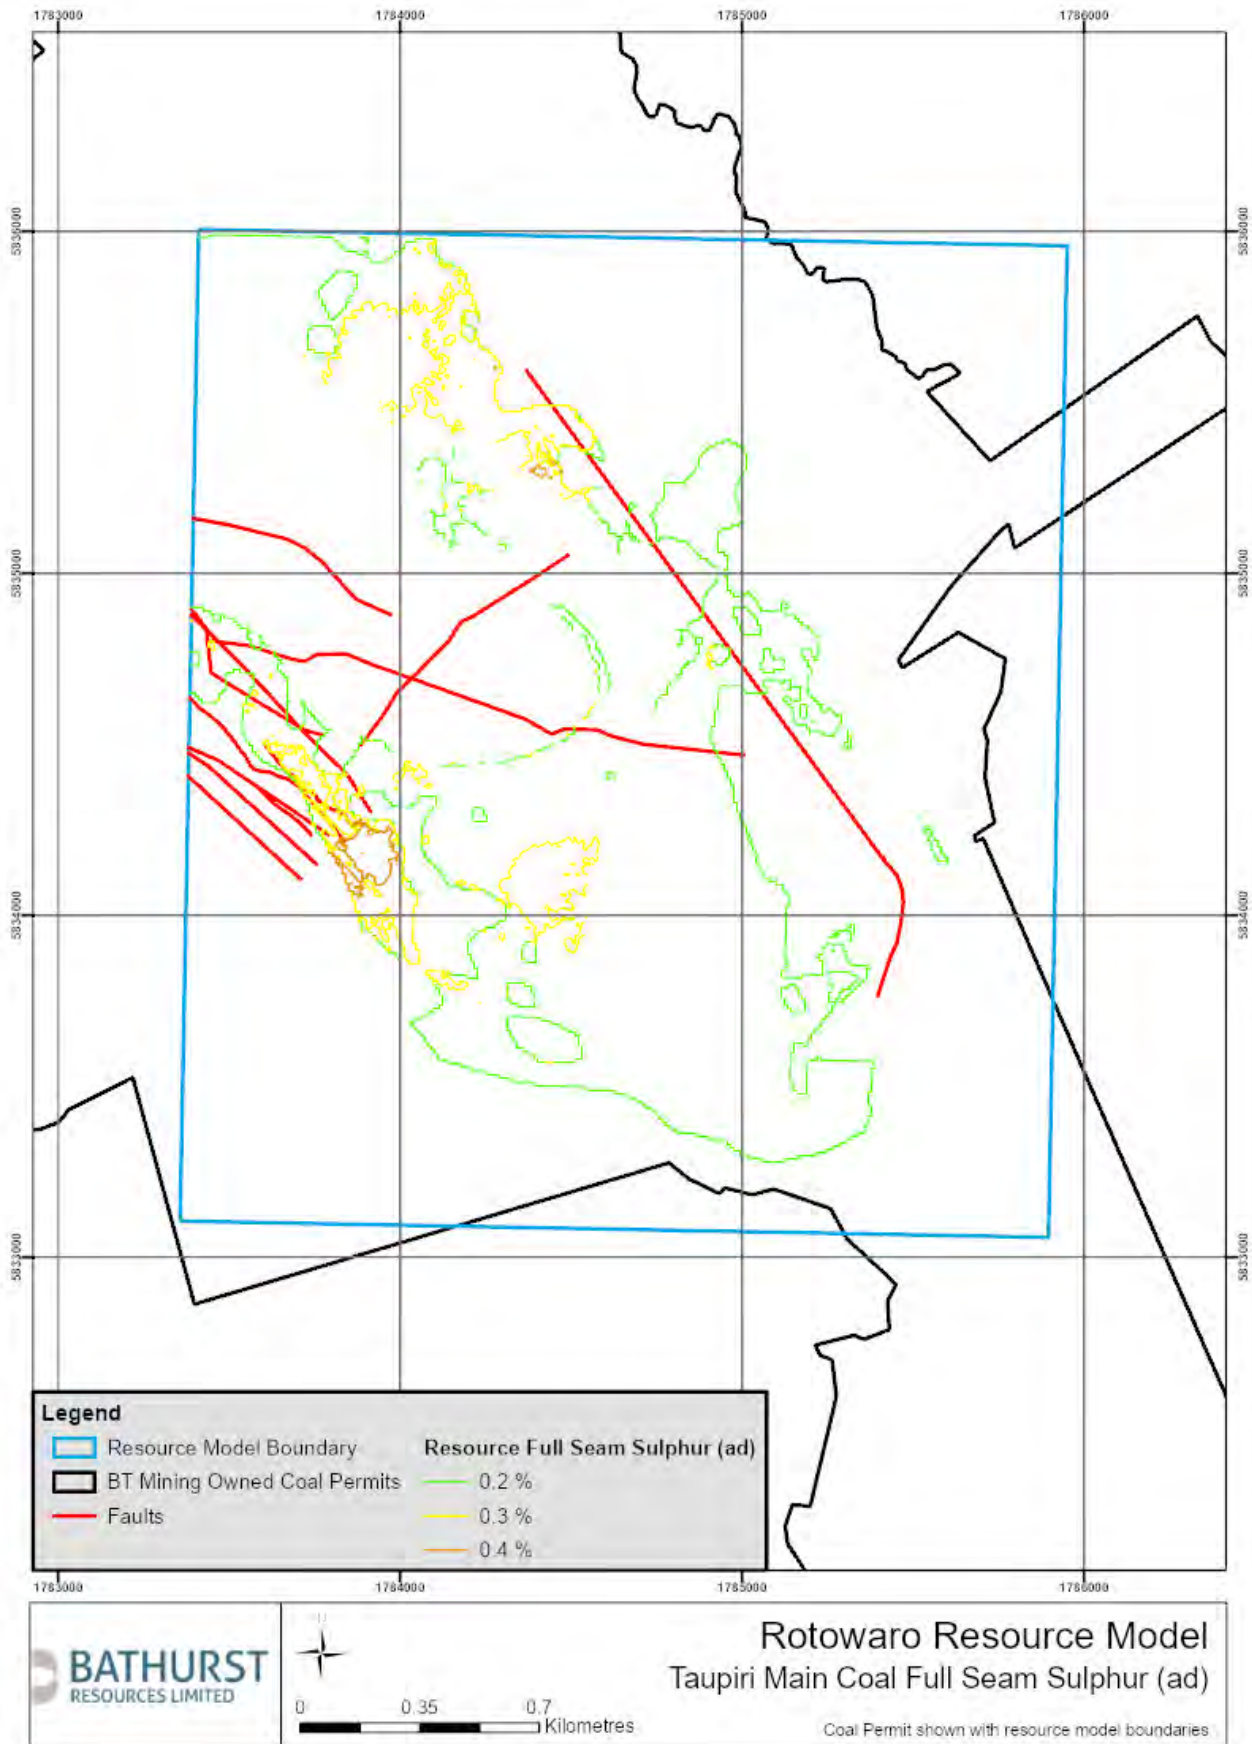


Figure 10: Plan showing full seam sulphur on an air-dried basis across the resource area



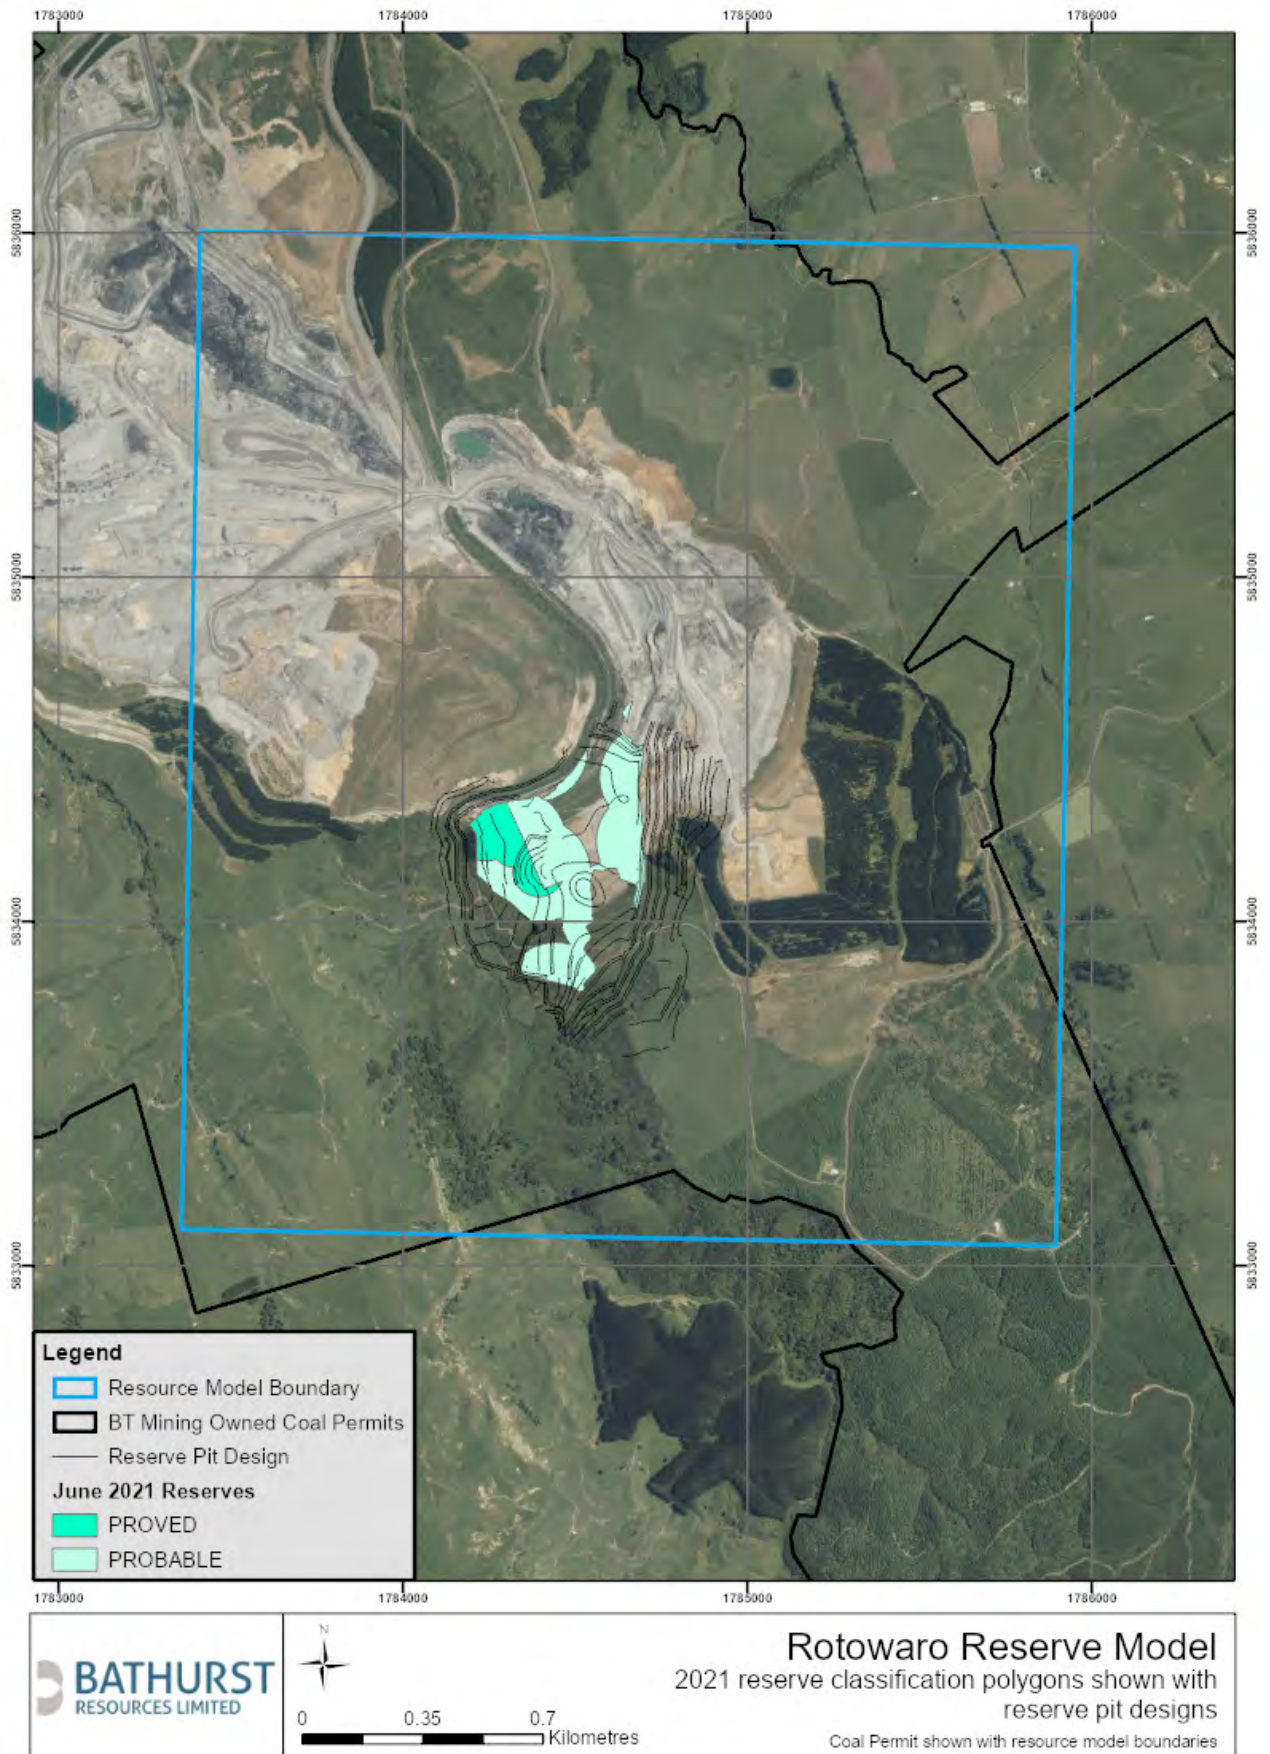


Figure 11: Rotowaro reserve pit shells

# JORC Code, 2012 Edition – Table 1 Report for Rotowaro North 2021

## Section 1 Sampling Techniques and Data

Criteria	Commentary
<b>Sampling techniques</b>	<ul style="list-style-type: none"> <li>Multiple campaigns of data acquisition have been conducted in the Waikato Coalfield over the past century.</li> <li>Core drilling for coal quality sampling is limited in this area. When core drilling is undertaken it is done so using HQ (63.5 mm core diameter) Triple Tube Coring (TTC) methods. Coal core samples are assigned unique identifiers and dispatched to the laboratory with Chain of Custody tracked using paper, e-mail and/or acQuire software. Core recovery recorded in the field is validated and adjusted if required using downhole geophysical logs during core logging and sampling. Composite samples are generated from individual coal plies at the laboratory that are thickness weighted.</li> <li>A suite of downhole wireline geophysical logs, including density, natural gamma, caliper, sonic, dipmeter, acoustic scanner, and verticality were typically run in all drill holes drilled in the last 10 years. All tools were calibrated on a regular and systematic basis. All downhole geophysical logging work was conducted by a reputable geophysical contractor.</li> <li>All analytical data has been assessed and verified before inclusion into the resource model.</li> </ul>
<b>Drilling techniques</b>	<ul style="list-style-type: none"> <li>Tungsten drag bits have been used to wash drill fully open holes (OH) and open hole sections. TTC barrels have been used to recover coal core to established industry standards. Core diameters are HQ (63.5 mm). No core has been orientated.</li> <li>In recent times, diamond drill holes have been infilled with air-core (AC) holes. AC samples are logged onsite and provide coal seam roof and floor locations.</li> <li>A large number of historical drill holes are included in the resource modelling database for the areas modelled. Drill holes that have no verifiable location, lithology log or survey, or contradict adjacent reliable data, are considered unreliable and are excluded from the Coal Resource modelling database.</li> </ul>
<b>Drill sample recovery</b>	<ul style="list-style-type: none"> <li>Core recovery was measured as the length of core recovered divided by the length of driller's run and noted by the core logging geologist. If recovery of coal intersections dropped below 90%, the drill hole required a re-drill.</li> <li>Standard industry techniques are employed for recovering core samples from HQ (63.5 mm) core diameter TTC drill holes.</li> <li>Mean total core recovery over recent drilling campaigns was 96%, with core recovery of coal at 90%.</li> <li>For open holes and open hole sections, cuttings are sampled in intervals five metres in length or when there is a change in lithology and logged.</li> <li>Little core recovery data is available for historical drill holes.</li> </ul>
<b>Logging</b>	<ul style="list-style-type: none"> <li>Bathurst Resources Limited (BRL) has developed standardised core logging procedures (BRL Coal Logging Procedures), and all core logging completed by Bathurst Talley's Mining (BT) has followed these procedures.</li> <li>All recent drill core has been geologically and geotechnically logged by logging geologists under the supervision and guidance of experienced exploration and geotechnical geologists.</li> <li>All drill core was photographed prior to sampling. Depth meter marks and coal ply intervals are noted on the drill core in each photograph.</li> <li>All TTC core samples are logged in detail (centimetre scale).</li> <li>Quantitative logging for lithology, stratigraphy, texture, hardness, Rock Quality Designation (RQD) and defects is conducted using defined material code types based on characterisation studies and mineralogical assessments. Colour and any other additional qualitative comments are also recorded.</li> <li>In conjunction with geological logging, most drill holes are geophysically logged with a suite of tools being used (as described above). Downhole geophysical logs are analysed extensively and used to confirm and correct depth measurements on geological logs and sample locations.</li> </ul>

Criteria	Commentary
	<p>Validation and, if required, correction of the geological logs against downhole geophysical logs is undertaken to ensure accuracy and consistency. Verticality, calliper, density and natural gamma tools are checked regularly with standard calibration assemblies. Density calibrations are performed routinely with blocks of material of known densities (aluminium and/or water). A quality report is generated by the logging technician for each drill hole.</p> <ul style="list-style-type: none"> <li>Downhole geophysical logs were used to aid core logging. Downhole geophysics was used to correlate coal seams, to confirm depths and thickness of coal seams and to validate drillers' logs. Downhole geophysical logs were also used to accurately calculate recovery rates of coal.</li> </ul>
<p><b>Sub-sampling techniques and sample preparation</b></p>	<ul style="list-style-type: none"> <li>For all exploration data acquired by BRL, in-house detailed sampling procedures were used (BRL Coal Sampling Procedures). Sampling and sample preparation are consistent with internationally accepted coal sampling and sample preparation methodologies.</li> <li>No splitting of core is undertaken in the field or during sampling.</li> <li>Typically, recovery from TTC drilling is &gt;90%. Sample interval and core recovery recorded in the field by drillers is validated and adjusted if required using downhole geophysical logs during core logging and sampling.</li> <li>Sample selection is determined in-house according to the BRL Coal Sampling Procedures. Clean coal core has been sampled in plies 0.5 m length, depending also on core loss intervals and lithological variations. A maximum ash cut off of 20% has been applied to all seams.</li> <li>Sampling and sample preparation are consistent with international coal sampling methodology.</li> <li>Associated high ash coal intervals and partings were sampled separately to assess potential dilution effects where they are &lt; 0.5 m thick. Composite horizons were determined by the ash yield of the plies. Plies with ash yield &gt; 20% were excluded.</li> <li>Samples are placed into labelled bags to ensure proper Chain of Custody and transported to the laboratory for testing. The laboratory continues with the Chain of Custody requirements. Sample preparation is undertaken according to industry standards.</li> <li>HQ (63.5 mm) core diameter is considered to provide a sample of sufficient volume to be representative of the in situ material and provides adequate sample mass to undertake the variety of raw coal tests together with composite testing when required. Where the testing regime requires additional sample volume PQ (85 mm) core size is employed.</li> <li>Coal ply thickness weighted compositing is conducted by SGS New Zealand Limited (SGS).</li> </ul>
<p><b>Quality of assay data and laboratory tests</b></p>	<ul style="list-style-type: none"> <li>SGS and CRL (ACIRL Australia and Newman Energy subcontracted for specific tests) laboratories are used to undertake physical and chemical testing and use Industry Standards for all coal tests and systematic Quality Assurance/Quality Control (QA/QC) procedures for all work. Both laboratories hold accreditation by International Accreditation New Zealand (IANZ). The processes employed are considered appropriate for coal quality analysis. Results are reviewed in-house by a senior geologist to ensure the accuracy of the data. The laboratory has been inspected by the BT personnel. Tests include: <ul style="list-style-type: none"> <li><b>Chemical Analysis</b> <ul style="list-style-type: none"> <li>Loss on air drying (ISO 13909-4).</li> <li>Inherent moisture (ASTM D 7582 mod).</li> <li>Ash (ASTM D 7582 mod).</li> <li>Volatile matter (ASTM D 7582 mod).</li> <li>Fixed carbon (by difference).</li> <li>Sulphur (ASTM D 4239).</li> <li>Swelling Index (ISO 501).</li> <li>Calorific value (ISO 1928).</li> <li>Mean maximum reflectance all vitrinite (RoMax) (Laboratory Standard).</li> <li>Chlorine in Coal (ASTM D4208).</li> <li>Gieseler plastometer (ASTM D 2639).</li> <li>Forms of sulphur (AS 1038 Part 11).</li> <li>Ash fusion temperatures (ISO 540).</li> <li>Ash constituents (xrf) (ASTM 4326).</li> <li>Ultimate Analysis (ASTM D3176-09).</li> </ul> </li> </ul> </li> </ul>

Criteria	Commentary
	<p><b>Rheological and Physical</b></p> <ul style="list-style-type: none"> <li>○ Hardgrove grindability index (ISO 5074, ASTM D409-02).</li> <li>○ Relative density (AS 10382111-1994).</li> </ul> <ul style="list-style-type: none"> <li>• All analysis was undertaken and reported on an air-dried basis unless stated otherwise.</li> </ul>
<b>Verification of sampling and assaying</b>	<ul style="list-style-type: none"> <li>• Sample coal quality results have been cross-referenced and compared against lithology logs and downhole geophysical data. Results are also inspected by experienced geologists and compared with expected values utilising known coal quality relationships for the Waikato Coalfield.</li> <li>• Anomalous coal quality analytical results were investigated, and where necessary the laboratory was contacted and a re-test was undertaken from sample residue.</li> <li>• Generally, drill holes are geophysically logged, and verification of coal seam details is made through analysis of downhole geophysical logs. Assessments of coal intersections is undertaken by an internal or contract geologist, and by a senior geologist. Downhole geophysical logs allow confirmation of the presence (or absence) of coal seams, accurate determination of contacts to coal seams, and density measurements are used to guide sampling and identify high ash bands.</li> <li>• Downhole geophysical logs (dual density and gamma) are analysed extensively and used to validate and, if required, correct geological and sample interval logs to ensure accuracy and consistency.</li> <li>• All diamond core samples are checked, measured, and marked up before being logged in detail.</li> <li>• Every discrepancy between the measured length of the core and the driller's length marked on the core blocks is investigated.</li> <li>• Quantitative logging for lithology, stratigraphy, texture, hardness, RQD and defects is conducted using defined material code types based on characterisation studies and mineralogical assessments to the nearest centimeter. Colour and any other additional qualitative comments are also recorded.</li> <li>• Raw logs, as well as sample dispatch details, are recorded on paper then transferred into the acQuire database in accordance with BRL standards.</li> <li>• All drill core was photographed prior to sampling. Depth meter marks and coal ply intervals are noted on the drill core in each photograph.</li> <li>• Sample sheets are developed in-house and receive a final check by the laboratory prior to testing.</li> <li>• All data is provided by the coal laboratory and reviewed internally. No adjustments are made to any coal quality data. In instances where results are significantly different from what was observed in downhole geophysical logs or outside of local or regional ranges defined by previous testing, sample results are queried and/or retested.</li> <li>• Since 2006, all coal quality data has been directly submitted and stored in electronic format using acQuire database software. Historical data is stored electronically either in Excel spreadsheets or scanned documents.</li> <li>• Twin drill holes have not been used.</li> </ul>
<b>Location of data points</b>	<ul style="list-style-type: none"> <li>• Rotowaro North data is presented in Mt Eden 1949 grid co-ordinate system in New Zealand, with Auckland 1946 mean sea level datum (MSL).</li> <li>• All drill holes post-1997 have been surveyed using GPS technology and are located within +/- 40 mm in three dimensions. Older drill hole collars were surveyed using conventional methods with an unknown precision.</li> <li>• The topographic dataset consists of a digital terrain model (DTM) constructed from an airborne photogrammetry survey (accurate to +/- 0.5 m) collected for the whole of the Rotowaro North site in December 2014.</li> <li>• Surveyed elevations of drill hole collars are validated against the topographic surface and ortho-corrected aerial photography.</li> <li>• Historical underground mine workings plans are based on historical hand drawn plans that have been geo-rectified (in 2D only) by converting from cadastral links to the Mt Eden 1949 geodetic grid.</li> </ul>

Criteria	Commentary
	<ul style="list-style-type: none"> <li>• Drill holes with a full suite of downhole geophysics are surveyed for deviation with a verticality tool (+/- 15° azimuth and +/- 0.5° inclination).</li> </ul>
<b>Data spacing and distribution</b>	<ul style="list-style-type: none"> <li>• Drill holes are variably spaced (&lt;75 m to 500 m in easting and northing directions) depending on target seam depth, geological structure, topographic constraints, downhole conditions due to historical underground mine workings, and degree of existing data density in immediate surrounds.</li> <li>• Coal Resources in areas previously mined by underground methods are classified as Indicated Resources on the basis that historical mining records provide coal quality data continuity across the area. The Competent Person was informed by BT that this data is in existence and has reviewed tabulated data from the Renown and MacDonald's undergrounds mines.</li> </ul>
<b>Orientation of data in relation to geological structure</b>	<ul style="list-style-type: none"> <li>• Orientation/spacing/ density of drill holes is driven by both coal quality and geological structure.</li> <li>• Drill hole spacing is biased by design, aiming to delineate areas of elevated and low sulphur and ash, as well as high structural complexity throughout the mining areas.</li> <li>• The low angle of strata dips means vertical drill holes are the most successful in achieving desired high angle intercepts of the coal seams.</li> <li>• The modelling of the deposit uses drill holes both with and without reliable verticality data. Drill holes without verticality data are considered to be vertical.</li> <li>• Vertical drilling is the most suitable drilling method of assessing the resource at Rotowaro North.</li> </ul>
<b>Sample security</b>	<ul style="list-style-type: none"> <li>• Rigorous sample preparation and handling procedures have been followed by BRL. Core is removed from the borehole and put into core splits. Core is wrapped in clear-wrap to retain natural moisture and put into core boxes.</li> <li>• Core is transported to the core shed, unwrapped, logged, sampled and then re-wrapped.</li> <li>• Chip samples are put into bags with marked intervals by drillers and transported to the core shed for logging. Chip samples are disposed of once logged.</li> <li>• Logged core is stored at the Rotowaro core logging facility on Rotowaro Road under lock and key and is accessed only by registered personnel. Drill core is stored according to the written procedure 'EXDP-N-27 Drill Core Storage'.</li> <li>• Samples are bagged and labelled as outlined in BRL procedure 'EXDP-N-24 Coal Quality Sampling and Analysis'.</li> <li>• All coal quality analysis results are approved for input directly into the acQUIRE database by the resource geologist.</li> <li>• It is not considered likely that individual coal samples face a risk of theft or sabotage as coal is a bulk commodity with little value for small volumes of coal from drill core.</li> </ul>
<b>Audits or reviews</b>	<ul style="list-style-type: none"> <li>• Golder and BRL have reviewed the geological data available and consider the data used to produce the resource model is reliable and suitable for the purposes of generating a Coal Resource estimate to the extent that the Coal Resource estimate has been classified.</li> <li>• BRL Senior geologists have undertaken audits of the sample collection and analysis processes. Integrity of all data (drill hole, geological, survey, geophysical and CQ) is reviewed by a resource geologist before being incorporated into the database system.</li> </ul>

## Section 2 Reporting of Exploration Results

Criteria	Commentary
<b>Mineral tenement and land tenure status</b>	<ul style="list-style-type: none"> <li>• The Rotowaro North resource area includes a mixture of Crown and privately-owned coal.</li> <li>• BT is a joint venture between BRL (65%) and Talley's Energy Limited (TEL) [35%].</li> <li>• Rotowaro North Exploration Permit (EP) 40698 is approximately 363.96 hectares in area, with an expiry date of 8 November 2018. An extension of duration application to this permit was lodged by BT and accepted by New Zealand Petroleum &amp; Minerals (NZP&amp;M). A subsequent Mining Permit Application (MPA) is being prepared. It is reasonably expected that these applications will be granted.</li> </ul>

Criteria	Commentary								
	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="background-color: #4F81BD; color: white;">Permit/Rights</th> <th style="background-color: #4F81BD; color: white;">Operation</th> <th style="background-color: #4F81BD; color: white;">Mining Type</th> <th style="background-color: #4F81BD; color: white;">Expiry</th> </tr> </thead> <tbody> <tr> <td style="background-color: #D3D3D3;">EP 40698</td> <td style="background-color: #D3D3D3;">Ruawaro</td> <td style="background-color: #D3D3D3;">N/A</td> <td style="background-color: #D3D3D3;">08 Nov 2018*</td> </tr> </tbody> </table> <p>*Note: An extension of duration application to this permit is pending</p> <ul style="list-style-type: none"> <li>There are three coal owners accounting for Coal Resources in the Rotowaro North resource area. These are the Crown in the south, Tapp Estate in the central region and Broughton Estate in the north. BT has entered negotiations with the Tapp Estate to gain access to the Coal Resource in the central region and these are included in the Coal Resource Estimate. The Coal Resources of the Broughton Estate are excluded.</li> </ul>	Permit/Rights	Operation	Mining Type	Expiry	EP 40698	Ruawaro	N/A	08 Nov 2018*
Permit/Rights	Operation	Mining Type	Expiry						
EP 40698	Ruawaro	N/A	08 Nov 2018*						
<b>Exploration done by other parties</b>	<ul style="list-style-type: none"> <li>The previous owners, Solid Energy New Zealand Limited (SENZ), Glencol Ltd (Glencol) and their predecessors, have conducted a significant proportion of the exploration completed in the area. However, there have been earlier periods of work that have contributed to the understanding of the Coal Resource.</li> <li>Early data collection is based on drill hole logs recorded by drillers.</li> <li>From the 1970's, drill holes were also logged by geologists, which had the effect of increasing the accuracy, the level of detail, and ultimately the reliability of the exploration data.</li> </ul>								
<b>Geology</b>	<ul style="list-style-type: none"> <li>The Rotowaro North deposit is located in the Waikato Coalfield and shares its southern boundary with the Rotowaro Coal Mining Licence (CML) 37155.</li> <li>The Rotowaro North deposit generally dips 3 to 7° to the north. Local dip variations occur adjacent to faults, and seam dip varies related to differential compaction within the coal seams.</li> <li>Major faults in the Rotowaro Coalfield were active in the basement rocks before the deposition of the Tertiary units began, several faults continued activity during early coal measure deposition. Faults vary in displacement with the displacement increasing northward.</li> <li>The north-south trending faults tend to be up-thrown to the west and east-west trending faults tend to be up-thrown to the south (Kirk, 1986).</li> <li>During the late Miocene, the Kaikoura tectonism re-activated many of the late Cretaceous and early Paleogene faults, leading to extensive sub-rectangular block faulting of the Te Kuiti Group.</li> <li>The Renown Fault is a north-northeast trending fault developed along the western margin of the coalfield, up-thrown to the west with displacement varying from approximately 50 m in the south up to approximately 150 m in the north.</li> <li>The Waikokowai Fault is a north trending fault that defines the eastern coalfield boundary. This fault also shows an increase in displacement northward. The fault appears to have been active during the deposition of the older Tertiary marine formations, as these units appear to be thicker on the downthrown side (Kirk, 1986).</li> <li>The Hetherington Fault is small scale northeast trending fault that joins the Waikokowai and Renown Faults. The Bain Fault is an east trending fault that increases from approximately 50 m displacement near the Waikokowai Fault, to approximately 150 m displacement near the Renown Fault.</li> <li>The area is underlain by indurated siltstones, with common sandstones, of the Mesozoic Newcastle Group, weathered to a depth of 5-30 m. This unit is referred to as "Basement".</li> <li>The Waikato Coal Measures (WCM) lie unconformably on the basement and form the lower part of the Te Kuiti Group. The WCM consist mainly of mudstones and siltstones, often referred to collectively as "fireclay", with common siderite concretions, referred to as "hardbars". There are two major coal seam groups within the WCM in the Coalfield, Renown and Kupakupa.</li> <li>The upper part of the Te Kuiti Group consists of marine to marginal marine claystones, mudstones, sandstones, limestones and siltstones which are conformably overly the WCM.</li> <li>A regional unconformity at the top of the Te Kuiti Group limits the vertical extent of this unit.</li> <li>Quaternary deposits of the Tauranga Group unconformably overly the Te Kuiti Group and consists of interlayered alluvial clays, muds and highly weathered volcanic ashes of the Hamilton formation.</li> </ul>								
<b>Drill hole Information</b>	<ul style="list-style-type: none"> <li>In summary, 460 drill holes are located across the Rotowaro North prospect. All drill holes have been used to develop the geological model.</li> <li>Most drill holes were drilled between 1942 and 1986. Many of the coal intercepts are obtained from coal contact information from historical maps and do not have geological logs.</li> </ul>								

Criteria		Commentary			
		Drill hole Type	Number of Holes/Sites	Number of Metres	Geophysically Logged (Number of Drill Holes)
		Wash Drill – with geo logs	72	3,983	0
		Wash Drill – no geo logs	374	18143	0
		Partially Cored Drilling	9	823	9
		Air-core	5	253	3
		Total	460	23,202	12
<b>Data aggregation methods</b>		<ul style="list-style-type: none"> <li>A minimum reported coal thickness of 0.5 m has been used as a lower limit.</li> <li>No coal quality data in the model has been estimated. Mean values for each coal quality attributes are applied using default values for the KK and RM seams.</li> </ul>			
<b>Relationship between mineralisation widths and intercept lengths</b>		<ul style="list-style-type: none"> <li>The stratigraphic nature of coal measures means that the coal seams generally lie in a horizontal or sub-horizontal plane. The resource discussed throughout this Table 1 document has a general dip to the north. Folding and faulting through the coal seams create localised dips in different directions due to the orientation of the faults.</li> <li>All of the surface drill holes were drilled vertically.</li> </ul>			
<b>Diagrams</b>		<ul style="list-style-type: none"> <li>Diagrams can be found in Appendix A for each of the following: <ul style="list-style-type: none"> <li>Location map.</li> <li>Geological QMap.</li> <li>Map showing Mining Licenses and Permits.</li> <li>Map showing exploration drill holes.</li> <li>Map of Coal Resource classification.</li> <li>Map of underground workings.</li> <li>Map showing Taupiri Main seam roof distribution.</li> <li>Map showing Taupiri Main seam thickness distribution.</li> </ul> </li> </ul>			
<b>Balanced reporting</b>		<ul style="list-style-type: none"> <li>No exploration results are being presented in this Table 1 document, rather this document is focussed on advanced projects that have been defined by geological models with associated Coal Resource estimates completed.</li> <li>The exclusion of this information from this Table 1 document is considered to not be material to the understanding of the deposit.</li> </ul>			
<b>Other substantive exploration data</b>		<ul style="list-style-type: none"> <li>Groundwater has been encountered in most drill holes, with saturated conditions encountered when there has been intersection with historically pillared mined out areas.</li> <li>Bulk density of the coal has been defaulted to the common value of 1.3 t/m<sup>3</sup>, as experienced in the adjacent coalfield operated by the Rotowaro Mine.</li> </ul>			
<b>Further work</b>		<ul style="list-style-type: none"> <li>There is currently a pre-feasibility study (PFS) being conducted on the Rotowaro North project with workstreams including but not limited to: <ul style="list-style-type: none"> <li>Structural and CQ drilling and associated test work.</li> <li>Increased accuracy in definition of the historical opencast areas.</li> <li>Geotechnical parameter determination.</li> <li>Piezometer installation.</li> <li>Washability test work.</li> <li>Environmental assessments.</li> <li>Stakeholder and community engagement.</li> <li>Land and Mineral Access arrangements.</li> <li>Mine optimization.</li> <li>Mine planning and scheduling.</li> <li>Financial analysis.</li> </ul> </li> </ul>			

### Section 3 Estimation and Reporting of Mineral Resources

Criteria	Commentary
<b>Database integrity</b>	<ul style="list-style-type: none"> <li>BRL utilises an acQuire database to store and maintain its exploration dataset.</li> <li>All historical and legacy datasets have been thoroughly checked and validated against original</li> </ul>

Criteria	Commentary
	<p>logs and results tables.</p> <ul style="list-style-type: none"> <li>• Data recorded in the field is input into field books and later transcribed into the acQuire database.</li> <li>• The acQuire database places explicit controls on certain data fields as they are entered or imported into the database, such as overlapping intervals, coincident samples, out of range sample values, standardised look-up tables for logging codes.</li> <li>• Manual data entry of coal quality results is not required as results are imported directly from laboratory results files.</li> <li>• Validation of historical wash drilled drill holes has been conducted by comparing coal seam depths and thicknesses with those of adjacent more reliable cored drill holes in cross-section. Coal quality data and downhole geophysical logs have been used to validate more recent (post-1977) drill holes, to provide confidence in coal seam depths and thicknesses.</li> </ul>
<b>Site visits</b>	<ul style="list-style-type: none"> <li>• Henry Dillon (the Competent Person) has visited the area on numerous occasions over the past 10 years and is familiar with the site and with the geology of the Waikato Coalfield.</li> </ul>
<b>Geological interpretation</b>	<ul style="list-style-type: none"> <li>• Golder has reviewed the modelling processes in use by BRL to develop their resource model and Coal Resource estimates.</li> <li>• Golder has confidence in the methodologies used by BRL for geological modelling and the interpretation of the available Rotowaro North Project data. Confidence varies for different areas, and this is reflected in the resource classification.</li> <li>• Confidence in interpretation of geological stratigraphy, structure and coal seam correlation/continuity is high across the Rotowaro North area, as the coal seams have a consistent thickness and there are only two main coal seams.</li> <li>• Variations in geological confidence are reflected representatively in the reported resource classifications.</li> <li>• Residual uncertainty exists concerning the major geological structures in the deposit and their precise location and local effects on coal seams. These structures have been defined using regional geological maps and interpretation of the drill hole data sets in cross-section.</li> <li>• The data used in the geological interpretation included field mapping, regional geological maps, drill hole data, core logging data, geophysical logs, sampling, coal quality laboratory testing and assessments.</li> <li>• Coal seam ash content can vary locally due to the occurrence of siderite concretions and calcite veining in the coal seams. The resource model does not predict these occurrences well, which leads to localised increases in ash. Due to the low numbers of Coal Quality samples in this deposit, the Coal Quality attributes have not been estimated. All CQ attributes are defined by default values.</li> <li>• Uncertainty surrounds the historical mine workings, both in the quality and quantity of coal extracted and the surveying and positioning of underground workings. This is reflected in the resource classification. No areas of underground workings are classified as Measured.</li> <li>• Other factors affecting continuity of geology are basement ridges/thin coal and faulting. This may lead to a want zone where the coal seam is absent.</li> </ul>
<b>Dimensions</b>	<ul style="list-style-type: none"> <li>• The Rotowaro North resource area covers approximately 1,698 ha.</li> <li>• Within this area, both the Kupakupa and Renown seams have been mined via underground methods (Renown in the north and Kupakupa in the south) as well as subsequent open cut mining methods in areas of historical first worked coal.</li> <li>• Coal thickness varies across the Rotowaro North area, generally ranging from 9 m down to 0.5 m.</li> </ul>
<b>Estimation and modelling techniques</b>	<ul style="list-style-type: none"> <li>• One single geological model is used to define the geology within the resource area.</li> <li>• Modelling has been undertaken using Maptrek's Vulcan™ (Vulcan) software by geologists and mining engineers trained and experienced in its use.</li> <li>• The Tauranga Group (Quaternary sediments and soils) structural floor is modelled using a stacking algorithm with a pre-mining topographical surface as a reference.</li> <li>• Structural surfaces for coal seams, Whaingaroa, Glen Massey, and Mangakotuku Formation's roof and floor are modelled using a triangulation algorithm to produce grids on a 10 x10 m</li> </ul>



Criteria	Commentary
----------	------------

basis in order to best define the structure in the project area.

- Structural surfaces are cropped using an as-cut topography to remove material that has been mined, and an as-built topographical surface is then overlaid to create a structural roof of fill surface.
- Maptek’s Integrated Stratigraphic Model (ISM) module is used to produce the structure model. The Hybrid stacking method is used which triangulates a reference surface and then stacks the remaining horizons by adding structure thickness. Thickness grids are created using a triangulation modelling algorithm. Design data from other horizons is incorporated into the final grid structure.
- Modelling parameters for the structural modelling are as follows:
  - Reference grid surface (KK22 Floor) by Hybrid Stacking:
    - Method is Triangulation.
    - Trend Order is 1 (Linear).
    - Smoothing is 9.
    - The maximum triangle length is 500 m.
    - Surfaces are splined.
  - Grid thickness modelling by Hybrid Stacking:
    - Method is Triangulation.
    - Trend Order is 1 (Linear).
    - Smoothing is 9.
    - The maximum triangle length is 500 m.
    - Surfaces are splined.
  - Validation of data during modelling occurs at three different stages:
    - Firstly, when importing drill hole data from the master acQuire database to ensure that the original dataset is in order.
    - Once structural grids have been produced from drill hole data, the slice viewer tool is used to run sections through the grids both across and along dip to check for any anomalies.
    - Finally, once structural grids have been produced from drill hole data the data posting tool is used to ensure grid nodes honour drill hole data. Contour plans are also produced to ensure modelled values represent original data.
- Coal Quality is assigned using the default values provided in Table 1:

**Table 1: Default coal quality attributes in the Rotowaro North Resource model**


<b>Seam</b>	<b>Ash % (dry basis)</b>	<b>Fixed Carbon % (dry basis)</b>	<b>Sulphur % (dry basis)</b>	<b>Inherent Moisture % (air dried basis)</b>	<b>Volatile Matter % (dry basis)</b>
RU	8.90	49.10	0.33	13.6	42.03
RM	8.90	49.10	0.33	13.6	42.03
RLM	8.90	49.10	0.33	13.6	42.03
KU	6.45	48.70	0.23	11.40	40.30
KK	6.45	48.70	0.23	11.40	40.30
KL	6.45	48.70	0.23	11.40	40.30

- The resources within the Rotowaro North project area were underground mined by the MacDonalds Mine from 1930 to 1971, and the Renown Mine from 1927 to 1972. Underground mining studies for the site have been conducted with historical plans digitised and void size estimated based on mining techniques. From this the Coal Resources and Ore (Coal) Reserves are depleted based on estimated recoveries as detailed below (see *Mining factors or assumptions*).
- The resource has also been mined by numerous opencast mines that have mainly targeted the regions of first worked coal.
- The only material that could be considered by-product that is recovered from the Rotowaro resource is contaminated coal. This comes from collapsed underground workings and roof and

Criteria	Commentary
	<p>floor cleanings. It is “washed” at the washery at an estimated 62% product yield.</p> <ul style="list-style-type: none"> <li>• Mining has been occurring at Rotowaro North between 1927 and 2004, with no record of acid mine drainage (AMD).</li> </ul>
<b>Moisture</b>	<ul style="list-style-type: none"> <li>• The resource model has taken an average of available drill hole data and historical mine sampling records. These moisture values have been applied to the model as default values.</li> </ul>
<b>Cut-off parameters</b>	<ul style="list-style-type: none"> <li>• A minimum coal seam thickness cut off for all modelled seams is 0.50 m. It is the minimum economic mining horizon at the current Rotowaro operation.</li> <li>• The coal has been classified as high volatile sub-bituminous B rank and is likely to be marketed as thermal coal, however based on historical coal quality records, there may be a slight rank change across the resource.</li> <li>• No ash cut-off is applied as all coal blocks have an ash of less than 10% (dry basis).</li> </ul>
<b>Mining factors or assumptions</b>	<ul style="list-style-type: none"> <li>• Geotechnical parameters for cut slope design were developed based on the Rotowaro Mine’s historical cut slope performance, slope back analysis and laboratory testing of material strength parameters. Slopes are designed to comply with a Factor of Safety (FoS) that exceeds 1.2 and within BT risk volume criteria, which is a function of the probability of failure and potential failure dimensions.</li> <li>• Minimum seam thickness is set at 0.5 m or one block in height.</li> <li>• Lerchs-Grossman pit optimisation is used as a tool to identify Coal Resources that have the potential to be converted to Coal Reserves.</li> <li>• The following mining recovery parameters have been assumed: <ul style="list-style-type: none"> <li>○ Minimum recoverable coal thickness 0.5 m.</li> <li>○ Unworked coal seam recovery 97%.</li> <li>○ First worked coal recovery 94%.</li> <li>○ Pillared coal recovery 34%.</li> <li>○ All Underground worked factors include a 62% wash recovery.</li> </ul> </li> </ul>
<b>Metallurgical factors or assumptions</b>	<ul style="list-style-type: none"> <li>• Limited test work has been conducted to date. This will be determined during the PFS project.</li> </ul>
<b>Environmental factors or assumptions</b>	<ul style="list-style-type: none"> <li>• There are a number of Resource Consents regarding land use, air, and water quality that will be sought at the end of the PFS, and any issues will have mitigation factors applied in the application process.</li> <li>• It is not anticipated that the Rotowaro North area will have rock types capable of generating acid rock drainage (ARD) based on historical compliance when the area was in operation and looking at the discharges currently occurring on the site.</li> </ul>
<b>Bulk density</b>	<ul style="list-style-type: none"> <li>• Bulk density is assumed the same as air-dried relative density.</li> <li>• Density has been defaulted to the value of 1.3 t/m<sup>3</sup> based on Rotowaro Mine records.</li> <li>• This will be tested during the PFS project.</li> </ul>
<b>Classification</b>	<ul style="list-style-type: none"> <li>• Coal Resources have been classified based on geological and grade continuity balanced by relative uncertainties surrounding historical underground extraction and proximity to faults and unconformities. The result reflects the Competent Person’s view of the deposit.</li> <li>• Coal Resource estimation is based on the following criteria: <ul style="list-style-type: none"> <li>○ A Point of Observation (POB) is defined by a drill hole with has a reliable intercept in a coal seam.</li> <li>○ An Area of Interest (AOI) is defined by a polygon drawn around POB’s. <ol style="list-style-type: none"> <li>1. Indicated Resource <ul style="list-style-type: none"> <li>• A drill hole that intersected the coal seam(s).</li> <li>• Distance between POB of no more than 150 m and extrapolation of no more than 300 m from a POB.</li> <li>• Minimum of three (3) POB to define an AOI.</li> </ul> </li> <li>2. Inferred Resource <ul style="list-style-type: none"> <li>• A drill hole that intersected the coal seam(s).</li> <li>• Distance between POB of no more than 300 m and extrapolation of no more than 600 m from a POB.</li> <li>• Minimum of three (3) POB to define an AOI.</li> </ul> </li> </ol> </li> </ul> </li> </ul>

Criteria	Commentary
	<ul style="list-style-type: none"> <li data-bbox="354 161 1456 226">Closely spaced drilling with valid data increases the confidence for each seam in resource assessments.</li> </ul>
<b><i>Audits or reviews</i></b>	<ul style="list-style-type: none"> <li data-bbox="354 233 1456 298">The current resource model used for Coal Resource estimation and reporting has been reviewed by the Competent Person.</li> </ul>
<b><i>Discussion of relative accuracy/confidence</i></b>	<ul style="list-style-type: none"> <li data-bbox="354 304 1456 430">Based on the data available, the degree of accuracy of this statement is considered high for the Rotowaro resource. The process for calculation has used: Standards, Guidelines and the JORC Code to define drill hole spacing for each resource classification.</li> </ul>

Appendix A:

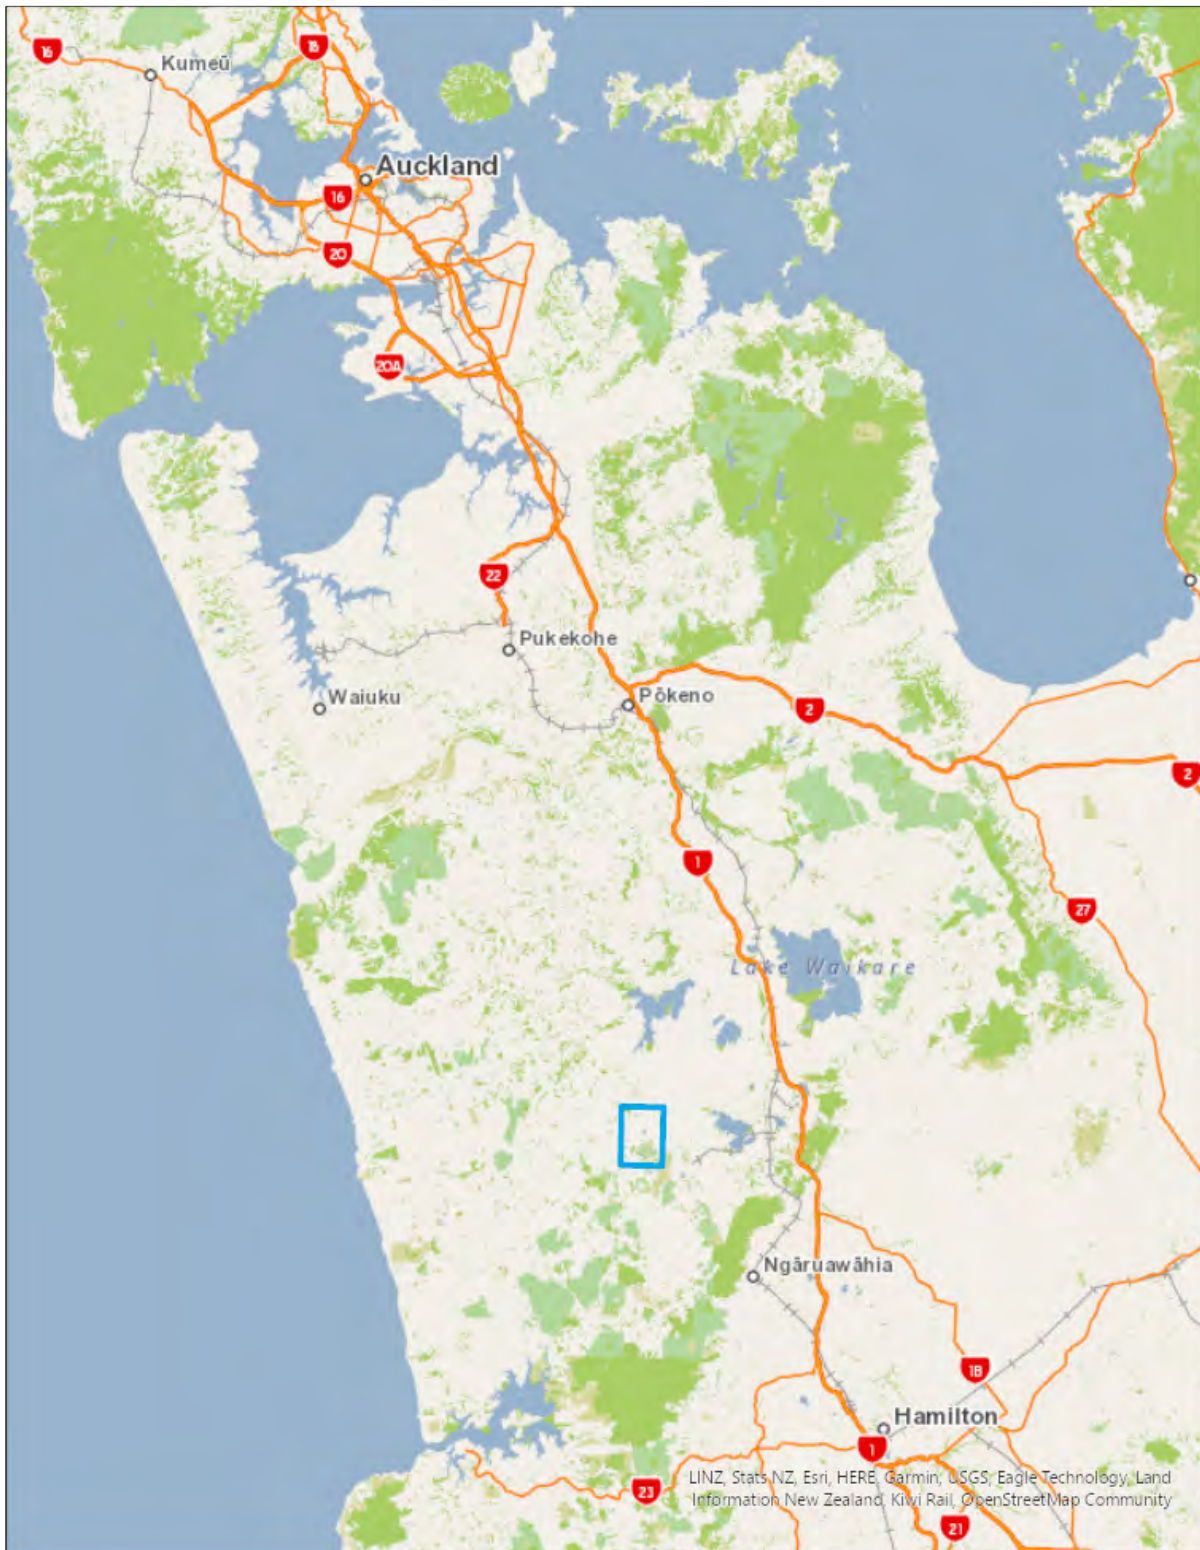

		<p>Rotowaro North Resource Model Resource Model Location</p>
--	--	--

Figure 1: Location map of Rotowaro North

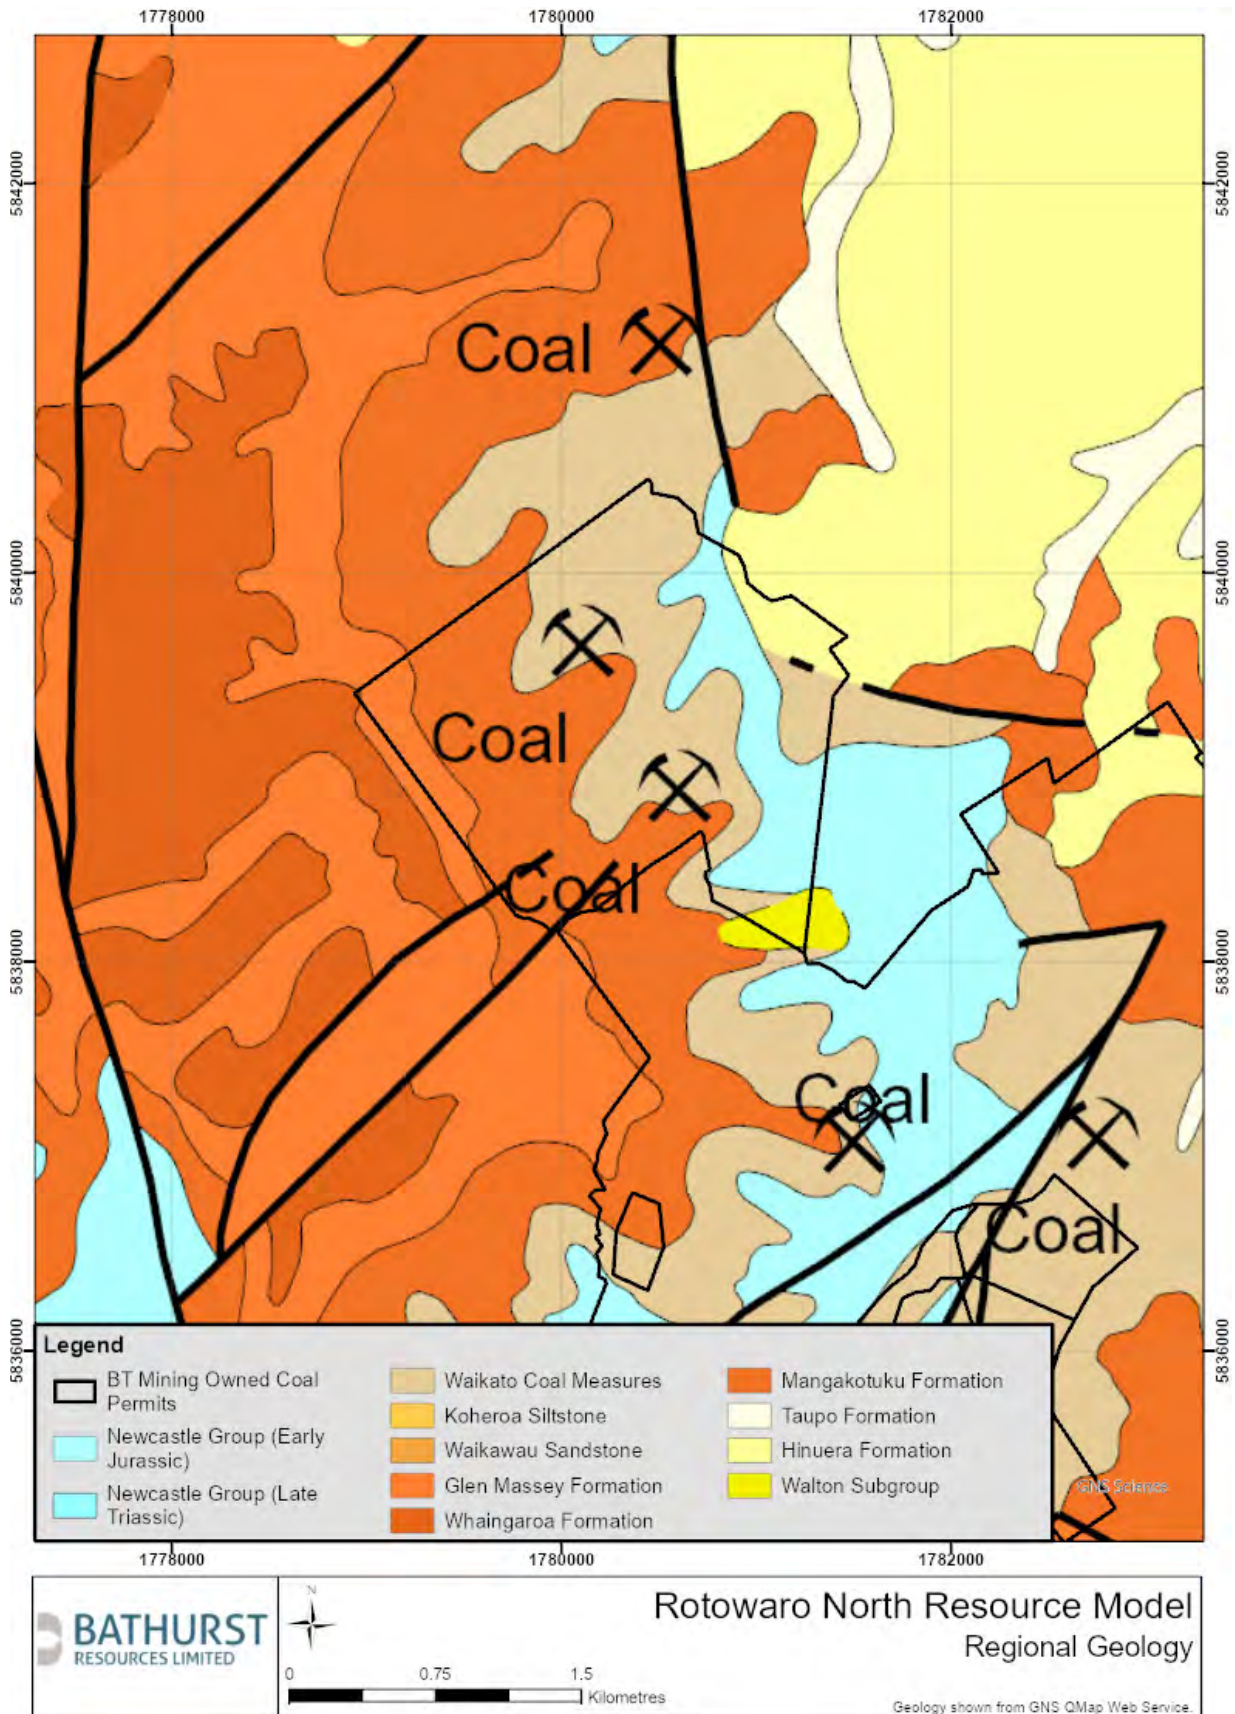


Figure 2: Regional Geology

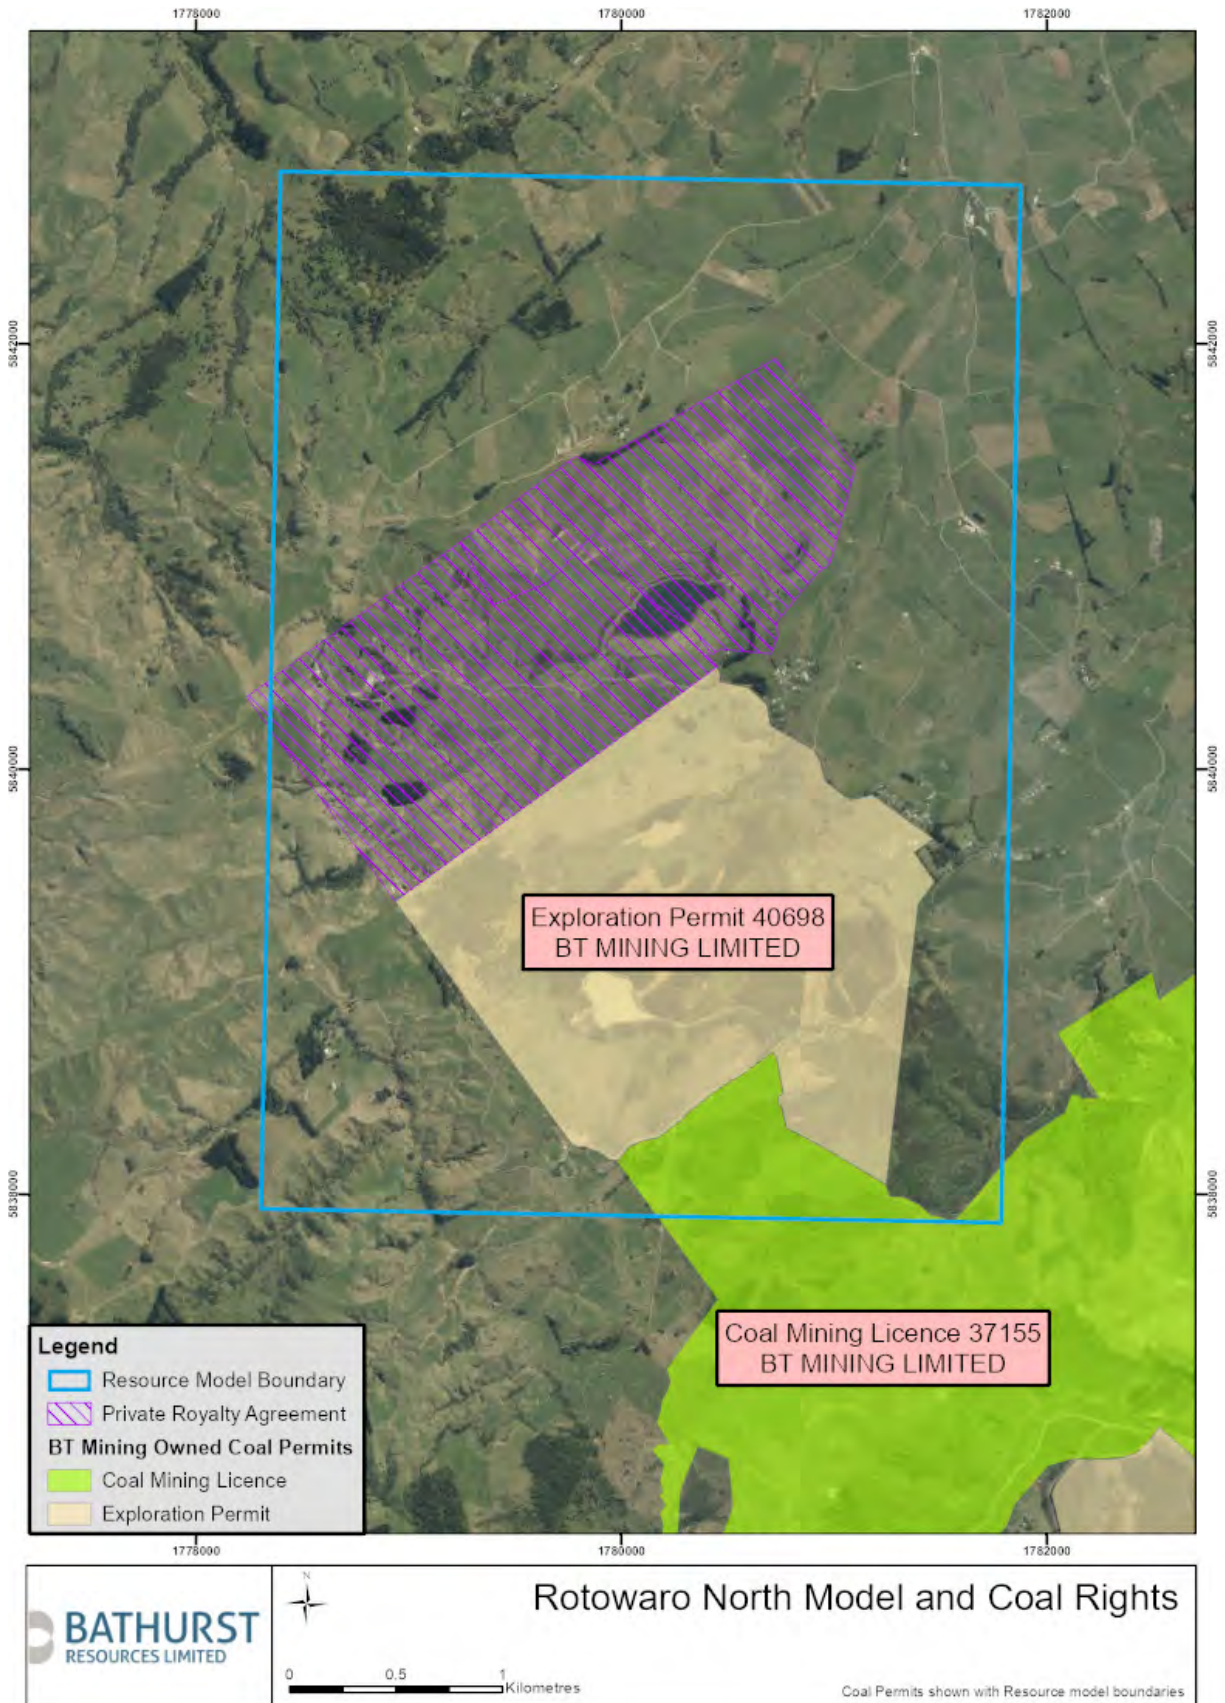


Figure 3: Rotowaro North permits within the resource model area

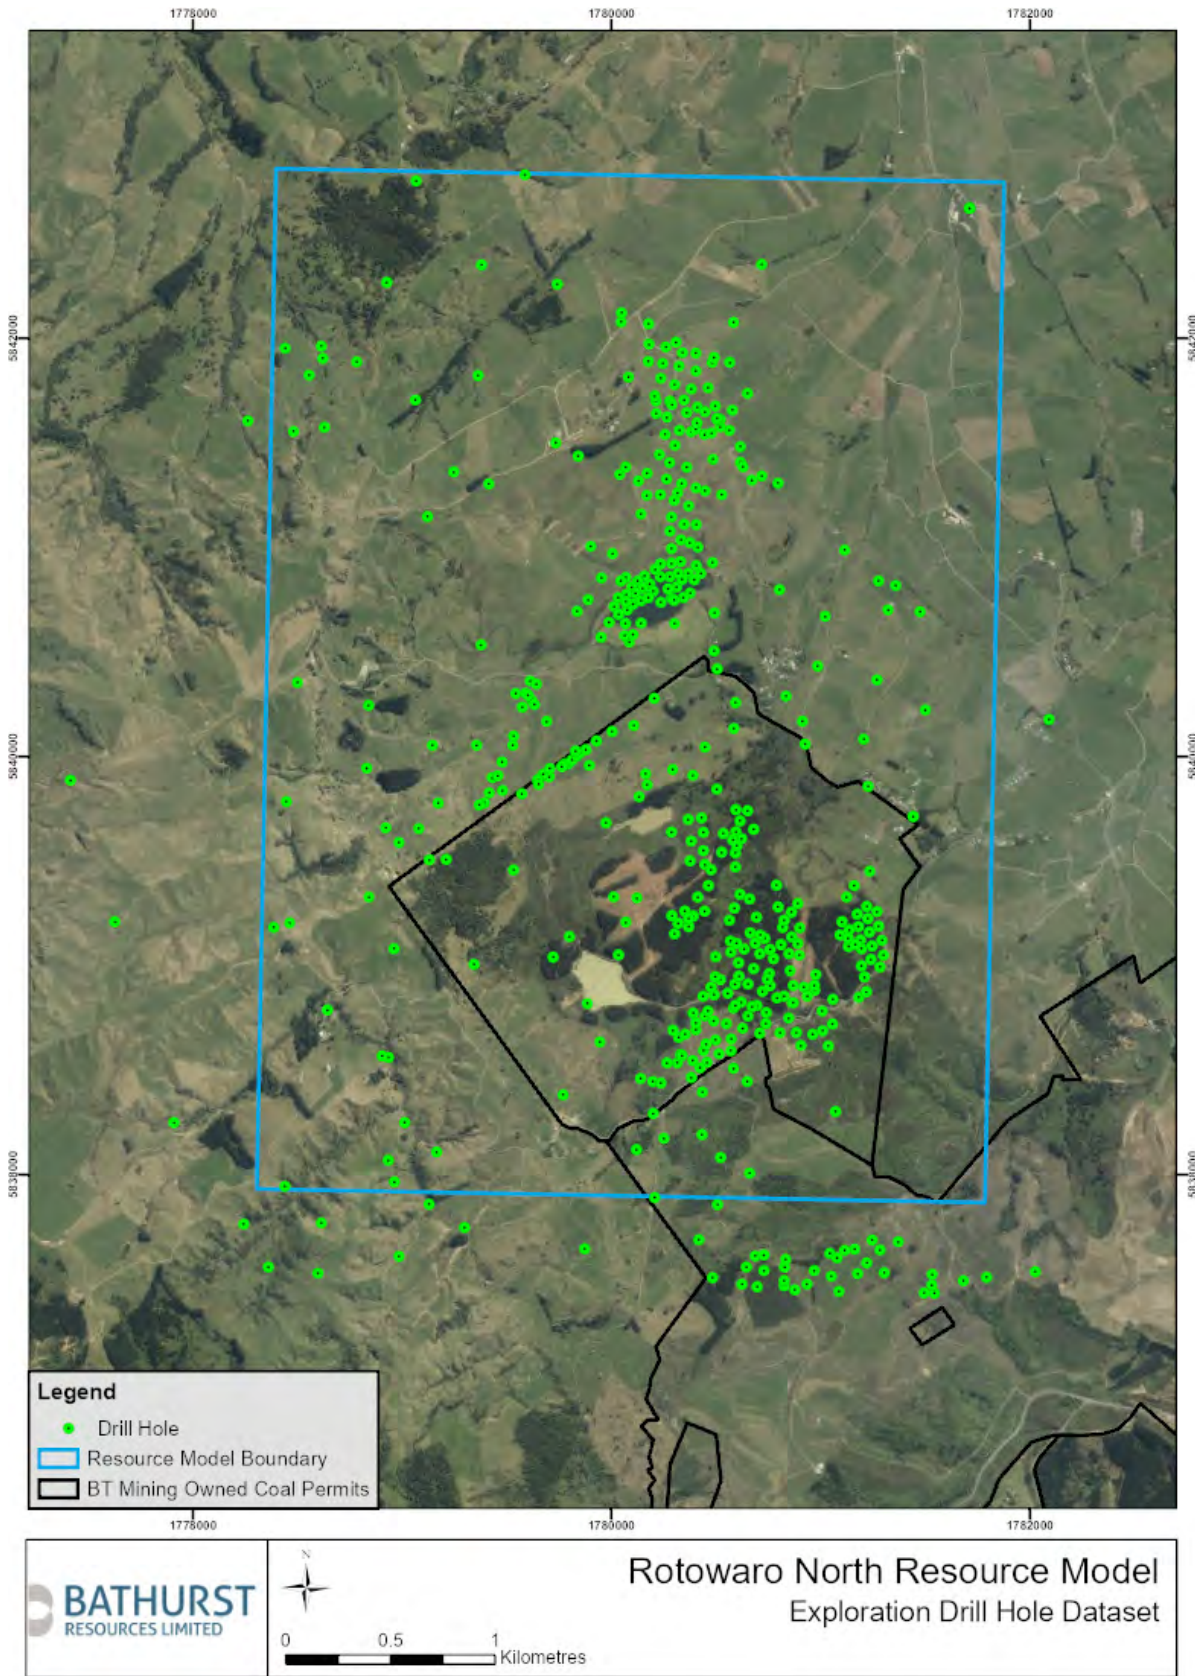


Figure 4: Plan showing the drilling dataset used to produce the resource model

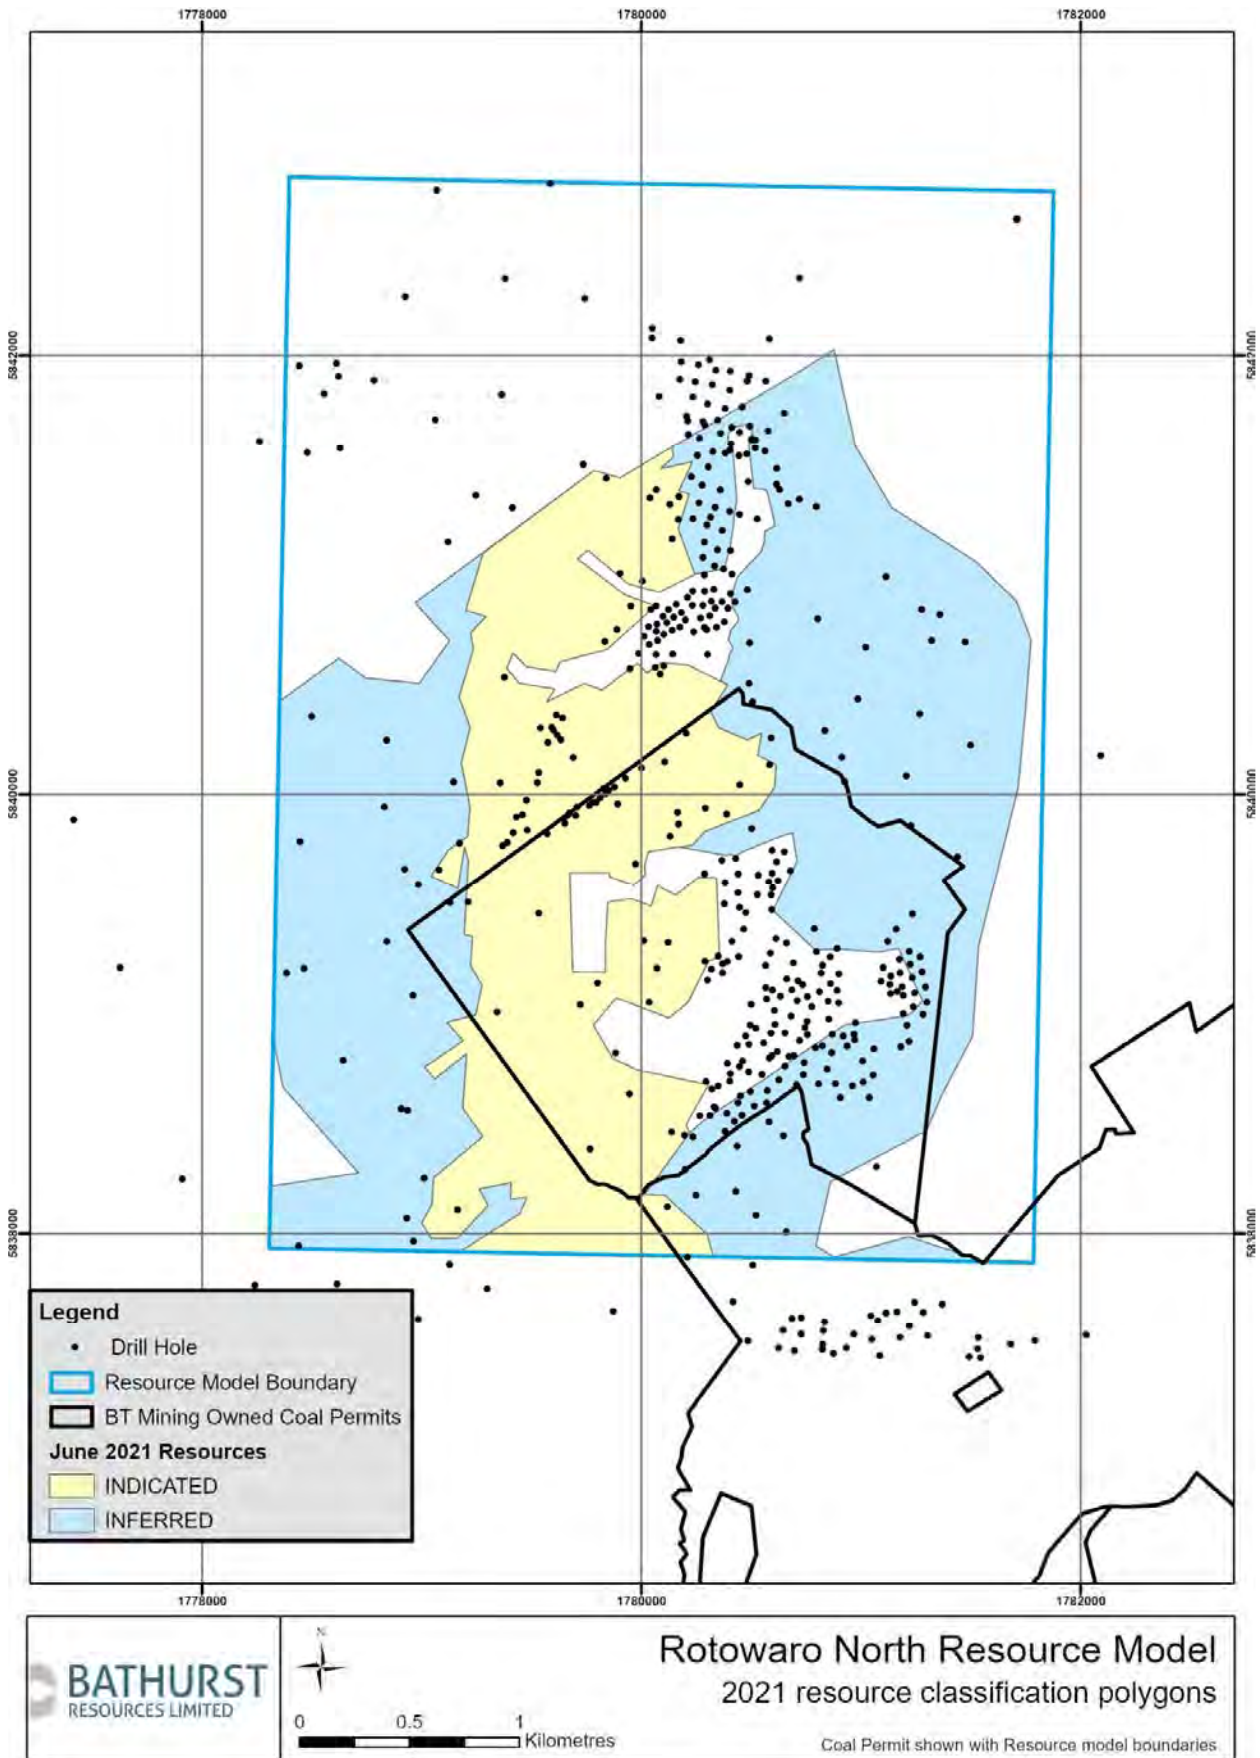


Figure 5: Plan showing the resource classification polygons



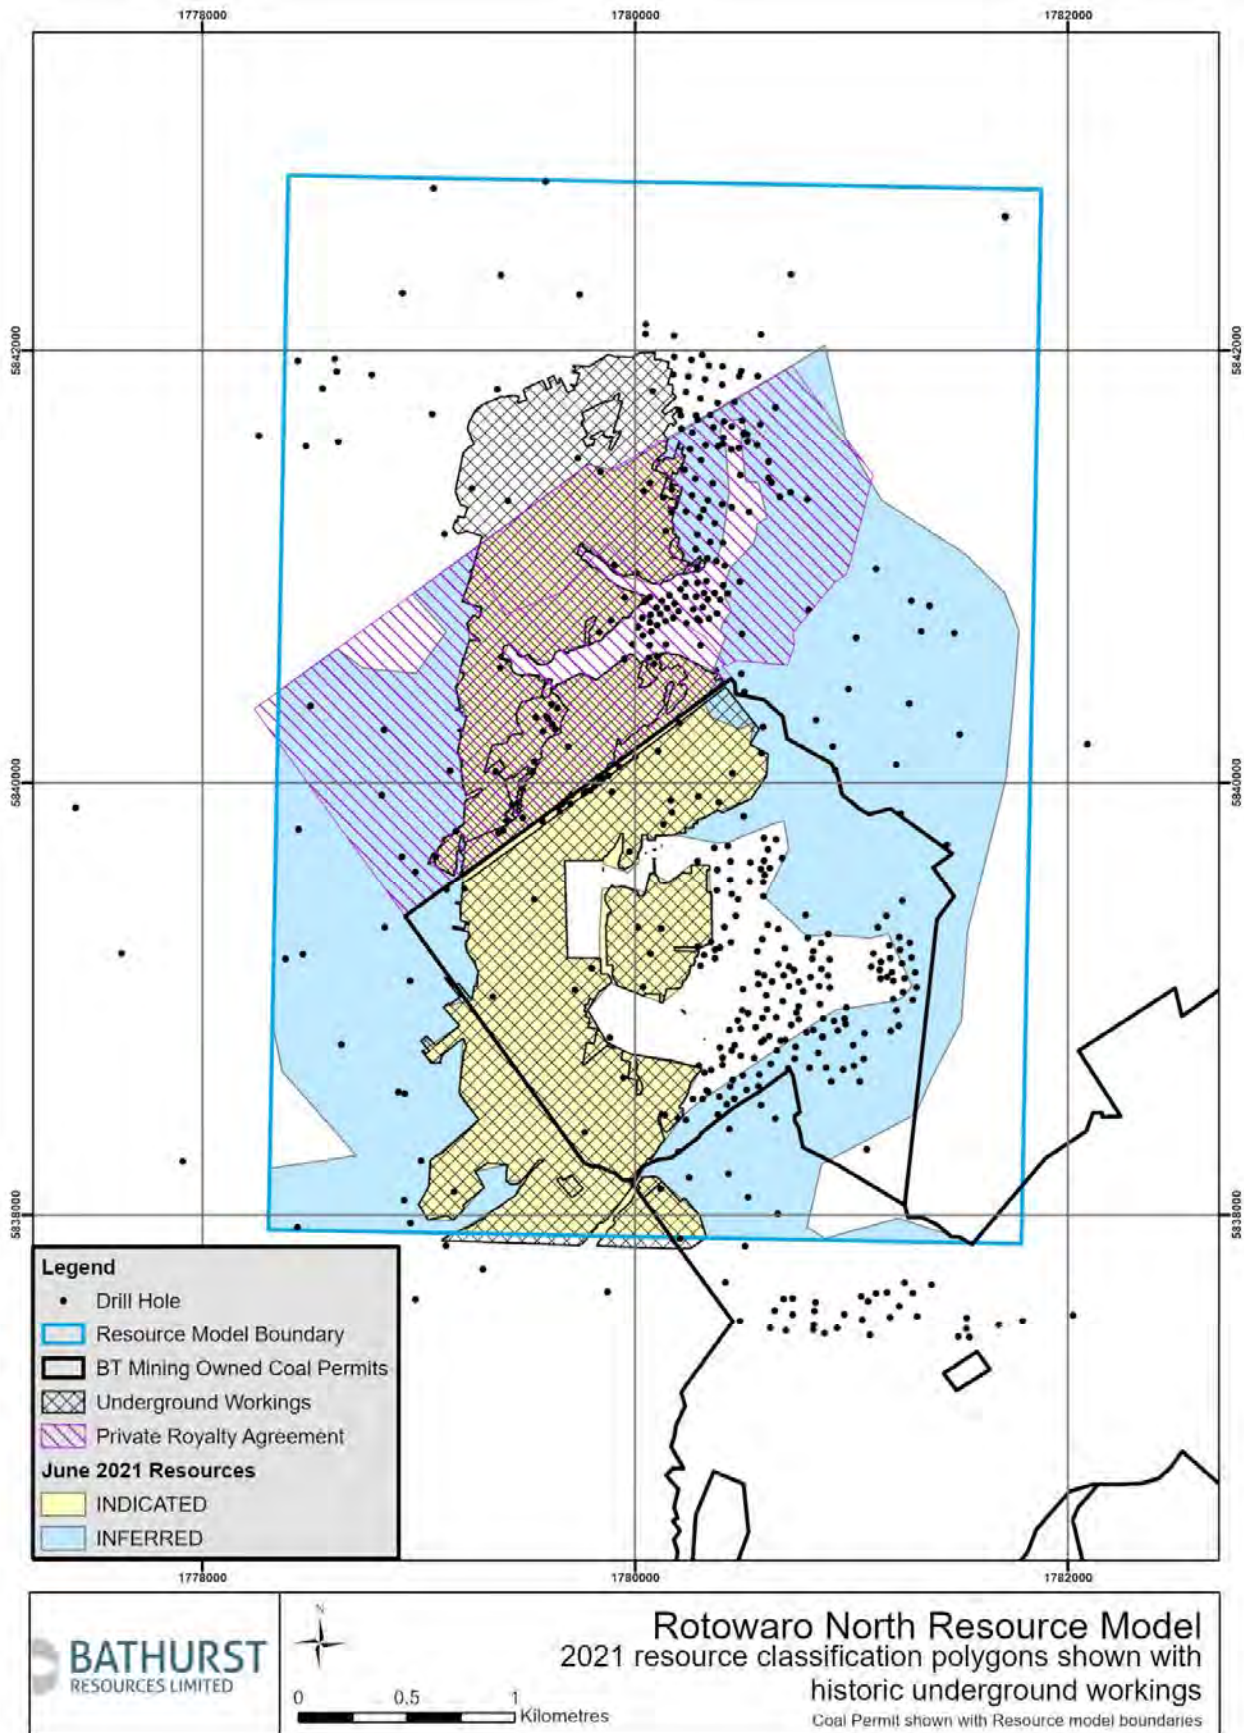


Figure 6: Extent of Underground Workings and Resource classifications

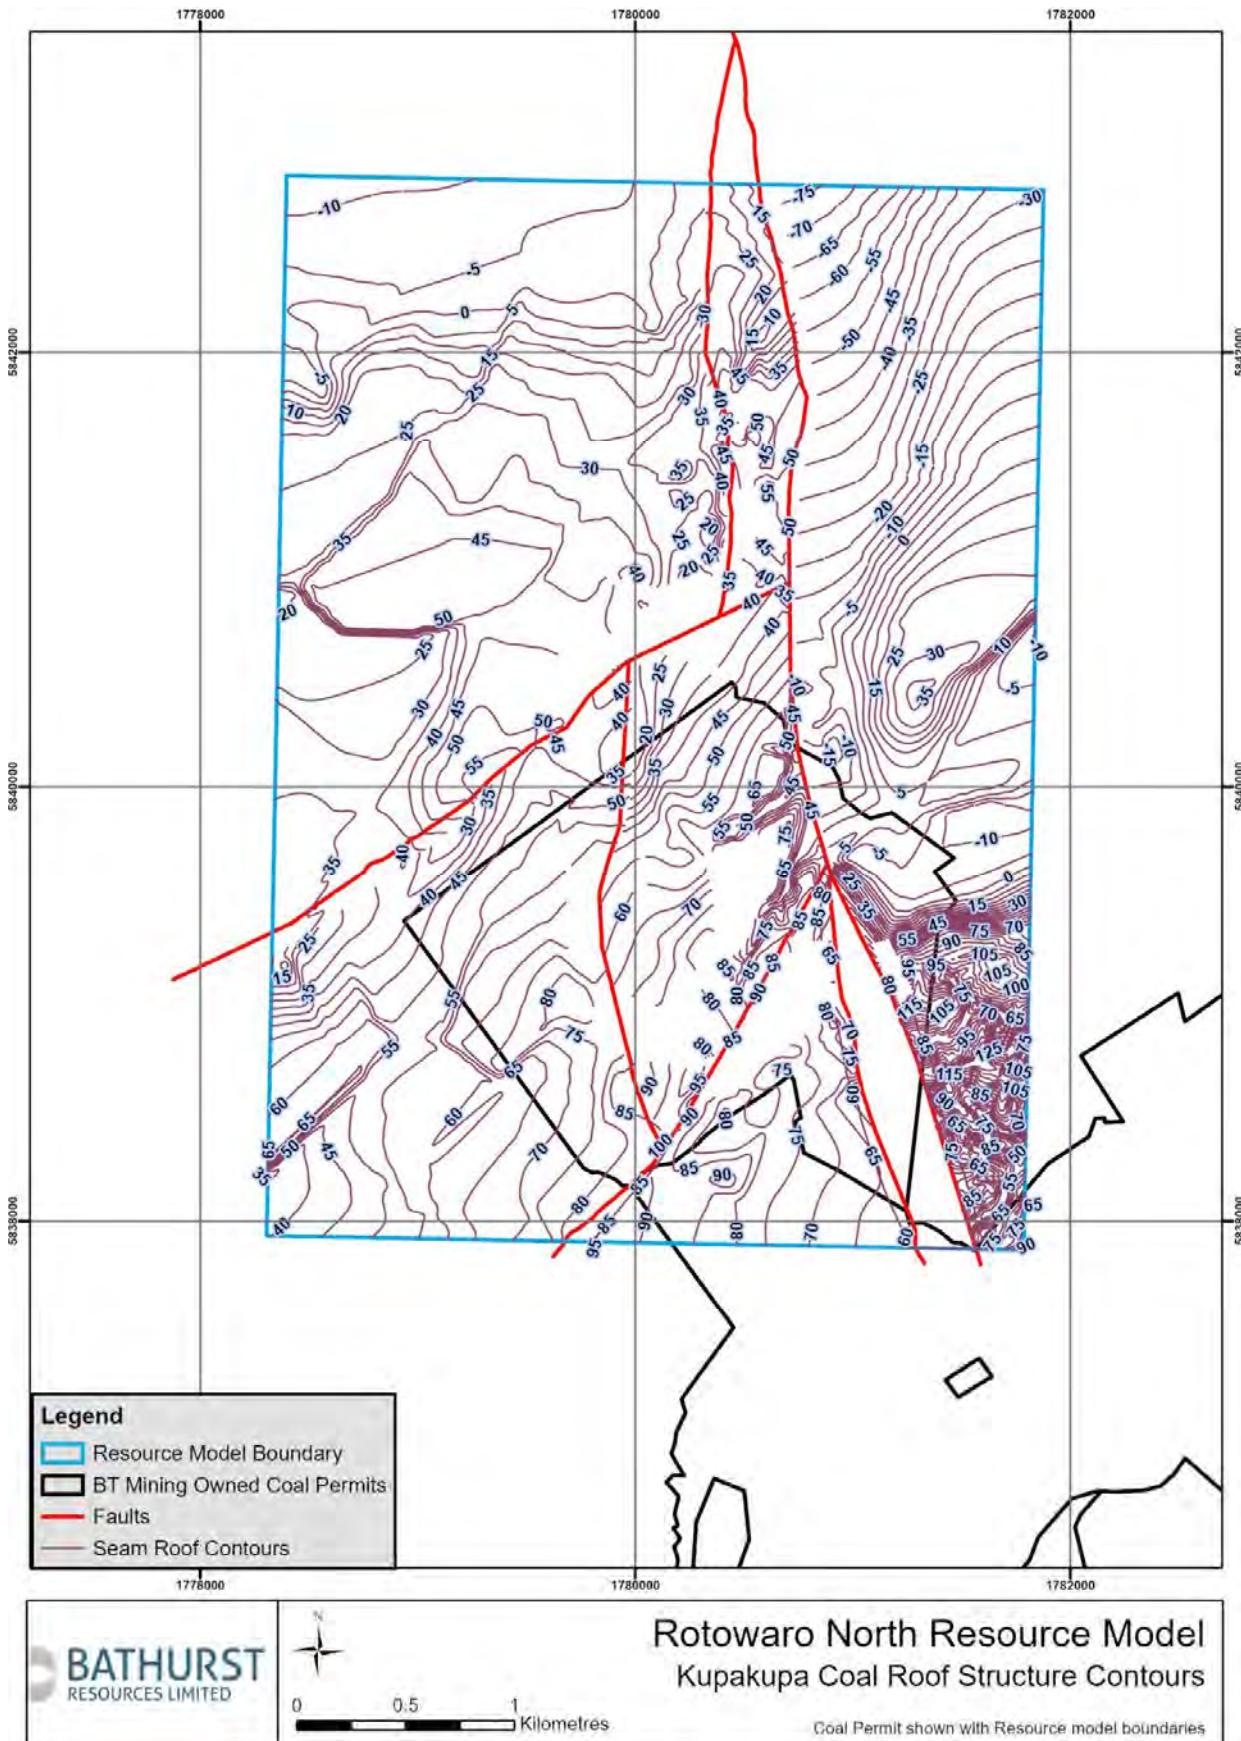


Figure 7: Plan showing the structure contours of coal seam roof

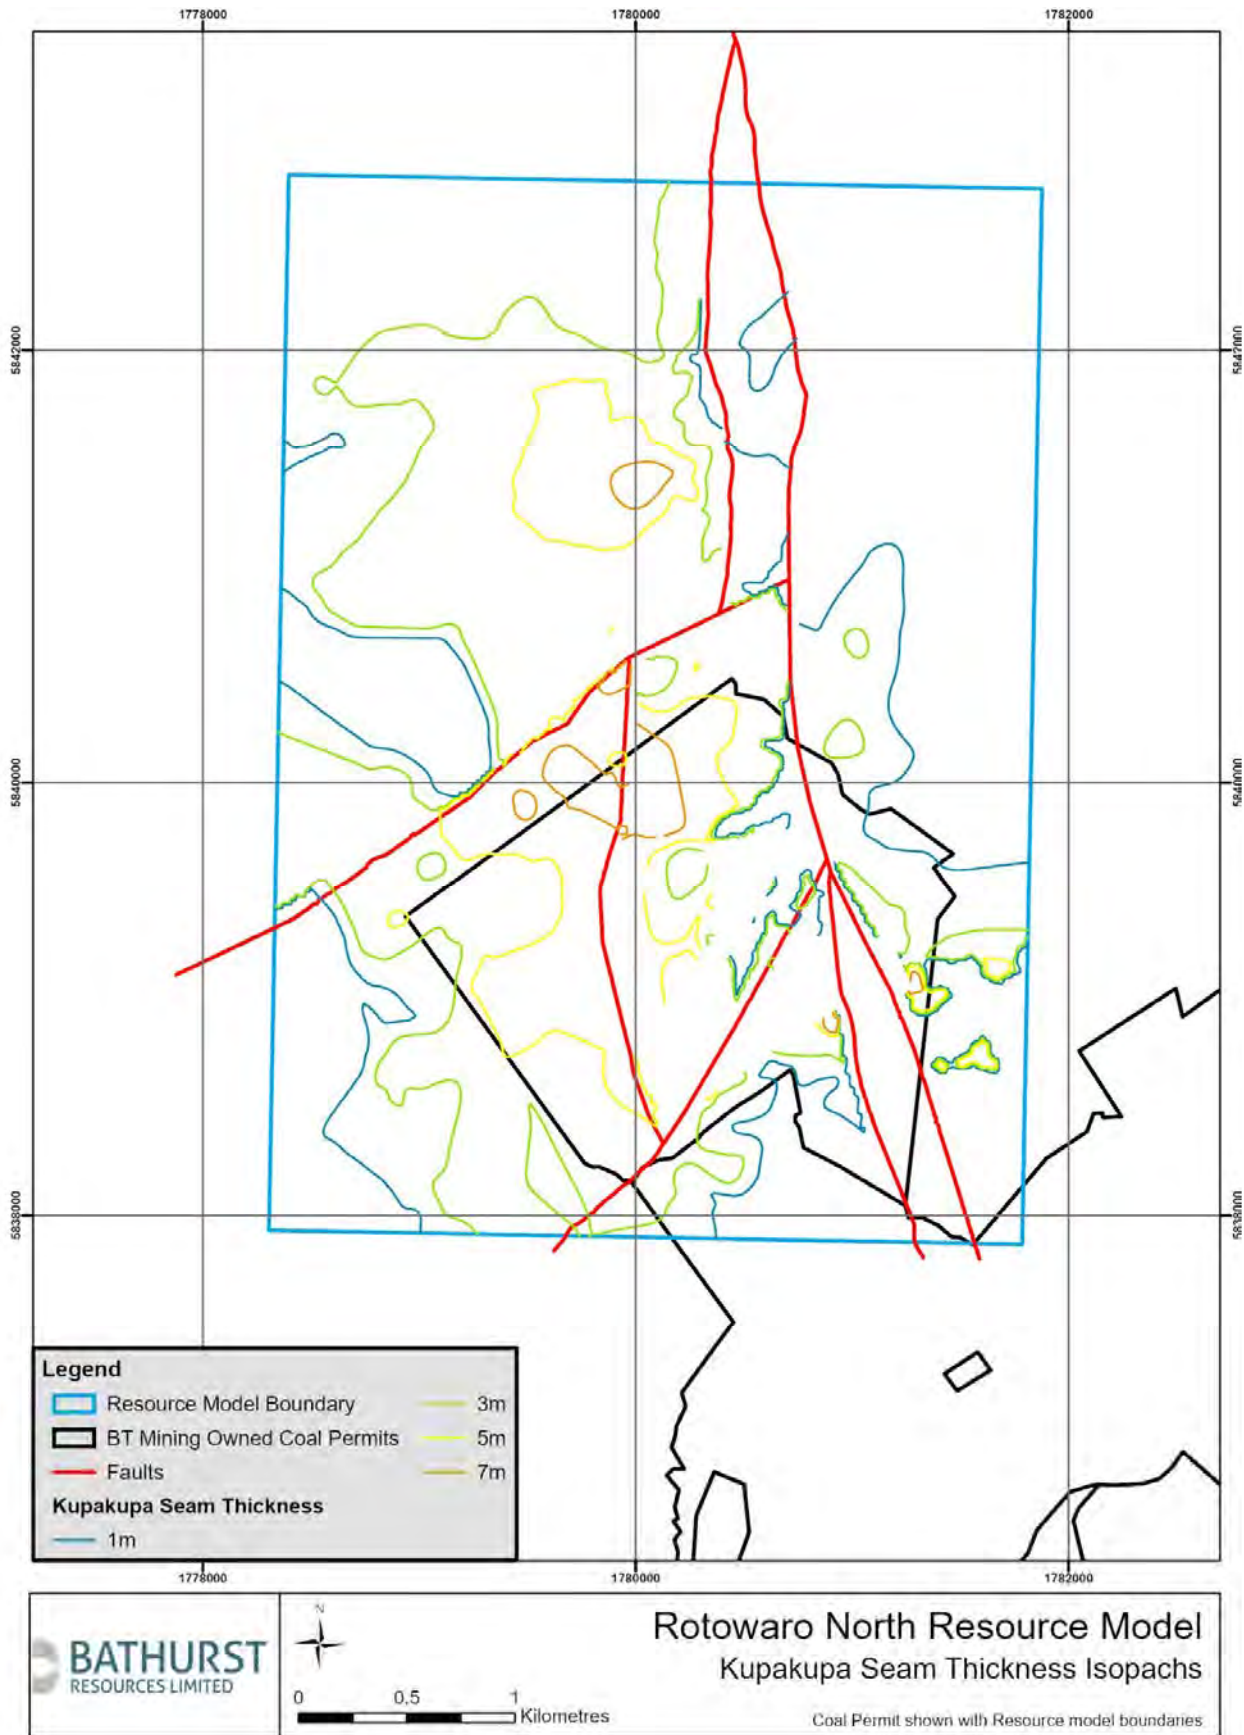


Figure 8: Plan showing full seam thickness contours over the model area

# JORC Code, 2012 Edition – Table 1 Report for Maramarua 2021

## Section 1 Sampling Techniques and Data

Criteria	Commentary
<b>Sampling techniques</b>	<ul style="list-style-type: none"> <li>Multiple campaigns of data acquisition have been conducted in the Waikato Coalfield over the past century.</li> <li>The resource modelling drill hole database contains 1,004 drill holes. 560 of these drill holes are contained within the resource model area. <ul style="list-style-type: none"> <li>432 drill holes were drilled between 1945 and 1960 and were wash drilled, with chip samples being logged by the driller.</li> <li>Since 1977, the majority of drill holes have had coal seams cored. Overburden and interburden was typically wash drilled. Coal core was logged by geologists.</li> <li>Sampling of coal core for coal quality testing has been conducted since 1977, typically using HQ (63.5 mm diameter) coring techniques.</li> <li>Since 2014 air-core (AC) drilling has been used to infill areas to obtain more detailed structural information, complemented by diamond core for reliable coal quality analysis.</li> </ul> </li> <li>Coal samples are assigned unique identifiers and are sent to the laboratory with a chain-of-custody note and tracked using paper, e-mail and acQuire software.</li> <li>Core recovery recorded in the field is validated and adjusted if required using downhole geophysical density logs during core logging and sampling. In some cases, intervals of lost core (coded as NR - Not Recovered) have been included inside coal quality samples.</li> <li>Composite samples by the laboratory are produced from individual coal plies that are thickness weighted.</li> <li>Ply samples were generally taken over intervals no greater than 0.5 m in length.</li> <li>All analytical data has been assessed and verified before inclusion into the resource model. A suite of downhole geophysical logs including density, natural gamma, calliper, sonic, dipmeter, acoustic scanner and verticality have been run in most drill holes since the late 1970's. All tools are calibrated on a regular and systematic basis. All geophysical logging work has been conducted by a contractor (Weatherford and its predecessors).</li> </ul>
<b>Drilling techniques</b>	<ul style="list-style-type: none"> <li>Open hole (OH) drilling, with a 4" or 6" tungsten drag bit, was typically used to drill through overburden, and triple tube core (TTC) barrels were used to recover HQ sized (63.5 mm diameter) coal core.</li> <li>In recent times, diamond drill holes have been infilled with (AC) drill holes. AC samples are logged onsite and provide coal seam roof and floor locations.</li> <li>The 1950's (pre-opencast) drill holes were entirely OH drilled.</li> <li>Core is not oriented. Downhole strata orientations are taken from downhole wireline geophysical logs.</li> <li>Several historical drill holes are included in the resource modelling database.</li> <li>Drill holes that have no verifiable location, lithology log or survey, or contradict adjacent reliable data, are considered unreliable and are excluded from the resource modelling database.</li> <li>A total of 35 drill holes were excluded from structural modelling.</li> </ul>
<b>Drill sample recovery</b>	<ul style="list-style-type: none"> <li>Core recovery was measured by the logging geologist for each driller's run (typically 1.5 m in length) in each drill hole.</li> <li>In open holes and open hole sections, cuttings are typically sampled at 5 m intervals in overburden lithologies, or when there is a change in lithology noted by the driller. Cuttings are logged, and stratigraphic logs for these intervals are corrected using downhole wireline geophysical logs.</li> <li>Core was obtained by HQ TTC (63.5 mm) diameter coring techniques providing good core recovery (averaging approximately 90%).</li> <li>Recovery standards for target horizons are generally high and are typically greater than 90%. Re-drills are required if there is less than 90% recovery in the coal seam.</li> </ul>
<b>Logging</b>	<ul style="list-style-type: none"> <li>Bathurst Talley's Mining (BT) has developed standardised core logging procedures (BRL Coal</li> </ul>

Criteria	Commentary
	<p>Logging Procedures), and all core logging completed by BRL has followed these procedures.</p> <ul style="list-style-type: none"> <li>• All TTC samples are logged in a high level of detail, down to a centimetre scale. Quantitative logging for lithology, stratigraphy, texture, hardness, Rock Quality Designation (RQD) and defects is conducted using defined material code types based on characterisation studies and mineralogical assessments. Colour and any other qualitative comments are also recorded.</li> <li>• All drill core was photographed prior to sampling. Depth meter marks and coal ply intervals were noted on the drill core in each photograph.</li> <li>• Wash drill samples are washed in a sieve to leave rock chips, which are quantitatively logged by assessing lithology. Samples were photographed.</li> <li>• Where drill holes were geophysically logged, the logs were used to confirm and correct geological logs. Validation and, if required, correction of geological logs against geophysics is undertaken to ensure accuracy and consistency. Verticality, calliper, density, and natural gamma tools are checked regularly with standard calibration assemblies. The density calibrations are performed routinely with blocks of known densities (aluminium and/or water). A geophysical log quality report is generated by the logging technician for each drill hole.</li> </ul>
<p><b>Sub-sampling techniques and sample preparation</b></p>	<ul style="list-style-type: none"> <li>• For all exploration data acquired by BT, an in-house detailed sampling procedure was used (BRL Coal Sampling Procedures). Sampling and sample preparation are consistent with internationally accepted coal sampling and sample preparation methodologies.</li> <li>• No splitting of core is undertaken in the field or during sampling. Typically, recovery from TTC is greater than 90%.</li> <li>• Sample interval and recovery recorded in the field by drillers is validated and adjusted if required using geophysical logs during core logging and sampling.</li> <li>• Bagged OH samples are washed in a sieve to remove drilling mud, leaving rock chips for logging. OH samples are not sent to the laboratory for coal quality analysis.</li> <li>• Sample selection is determined in-house and is documented in a core sampling procedure. Clean coal has generally been sampled in plies 0.5 m in length (some thicker plies for older drill holes).</li> <li>• Where potentially high ash coal intervals and partings are noted in core or in geophysical logs, these were sampled separately.</li> <li>• Samples are placed into labelled bags to ensure proper chain of custody, and then transported to the laboratory for testing. The laboratory continues with the chain of custody requirements. Sample preparation is undertaken according to laboratory and ISO or ATM standards.</li> <li>• HQ core diameter is considered to provide a sample of sufficient volume to be representative of the in situ material and provides adequate sample mass to undertake the variety of raw coal tests together with composite testing when required.</li> </ul>
<p><b>Quality of assay data and laboratory tests</b></p>	<ul style="list-style-type: none"> <li>• SGS and CRL (ACIRL Australia, Newman Energy and Eurofin ELS Ltd subcontracted for specific tests) laboratories are used to undertake physical and chemical testing and use Industry Standards for all coal tests and systematic Quality Assurance/Quality Control (QA/QC) procedures for all work. Both laboratories hold accreditation by International Accreditation New Zealand (IANZ). The processes employed are appropriate for coal sample analysis. Results are reviewed in-house to ensure the accuracy of the data by the Project Geologist. The laboratories have been inspected by BT's personnel. Tests include: <ul style="list-style-type: none"> <li><b>Chemical Analysis</b> <ul style="list-style-type: none"> <li>○ Loss on air drying (ISO 13909-4).</li> <li>○ Inherent moisture (ASTM D 7582 mod).</li> <li>○ Ash (ASTM D 7582 mod).</li> <li>○ Volatile matter (ASTM D 7582 mod).</li> <li>○ Fixed carbon (ASTM D 7582 mod).</li> <li>○ Sulphur (ASTM D 4239).</li> <li>○ Swelling index (ASTM D 4239).</li> <li>○ Calorific value (ISO 1928).</li> <li>○ Mean maximum reflectance all vitrinite (RoMax) (laboratory standard).</li> <li>○ Chlorine in coal (ASTM D4208).</li> <li>○ Gieseler plastometer (ASTM D 2639).</li> </ul> </li> </ul> </li> </ul>

Criteria	Commentary
	<ul style="list-style-type: none"> <li>○ Forms of sulphur (AS 1038 Part 11).</li> <li>○ Ash fusion temperatures (ISO 540).</li> <li>○ Ash constituents (XRF) (ASTM D 4326).</li> <li>○ Ultimate analysis (ASTM D3176-09).</li> </ul> <p><b>Rheological and Physical</b></p> <ul style="list-style-type: none"> <li>○ Hardgrove grindability index (ISO 5074, ASTM D409-02).</li> <li>○ Relative density (AS 10382111-1994).</li> </ul> <ul style="list-style-type: none"> <li>● All samples for CV, sulphur and proximate analysis are split into two samples to provide a duplicate sample. The duplicates are tested with a repeatability level in accordance with the standard method. Reference standards are used to confirm the calibration of each test. The reference standards are plotted daily by the laboratory to correct and biases or trends. The laboratory also participates in external quality control auditing on a regular basis. The results of these audits are shared with BT.</li> </ul>
<b>Verification of sampling and assaying</b>	<ul style="list-style-type: none"> <li>● All diamond core samples are checked, measured, and marked up before being logged to a high level of detail.</li> <li>● Every discrepancy between the measured length of core and the driller's length marked on the core blocks is investigated and corrected prior to sampling, if necessary.</li> <li>● Quantitative logging for lithology, stratigraphy, texture, hardness, RQD and defects is conducted using defined material code types based on characterisation studies and mineralogical assessments to the nearest centimetre. Colour and other additional qualitative comments are also recorded.</li> <li>● Raw logs, as well as sample dispatch details, are logged onto paper then transferred into the acQuire database in accordance with BRL standards.</li> <li>● Assessments of coal intersections are undertaken by an internal or contract geologist, and by a senior geologist. Geophysical logs allow confirmation of the presence (or absence) of coal seams and accurate determination of coal seam roof and floor contact. Geophysical density measurements are used to guide sampling and identify high ash bands.</li> <li>● Downhole wireline geophysical logs (dual density and gamma) are analysed and used to validate or correct geological and sample interval logs to ensure accuracy and consistency, where required.</li> <li>● Sample sheets are developed in-house and receive a final check by the laboratory prior to testing. The Technical Marketing Manager provides guidance on the specific testing regime to be undertaken on both ply and composite samples.</li> <li>● Since 2006, all coal quality data has been directly submitted and stored in electronic format using acQuire database software. All data provided by the coal laboratory is reviewed before acceptance into the database.</li> <li>● Sample assay results have been cross-referenced and compared against lithology logs and downhole geophysical data. Results are also inspected by experienced geologists and compared with expected values utilising known coal quality relationships for the Waikato Coalfield.</li> <li>● Anomalous assay results were investigated and, where necessary, the laboratory was contacted, and a re-test was undertaken from sample residue.</li> <li>● Where drill holes were geophysically logged, verification of seam depths and quality is made through analysis of the geophysics. Where no geophysical logs are available, this is done by physical assessment of the core and/or other drill hole samples.</li> <li>● Historical data is stored electronically either in Excel spreadsheets or scanned documents. All coal quality data has been validated and transferred into the acQuire database.</li> <li>● Twin drill holes have not been used.</li> </ul>
<b>Location of data points</b>	<ul style="list-style-type: none"> <li>● All drill holes have been surveyed by BT qualified professional surveyors.</li> <li>● Holes drilled prior to 1997 were surveyed using conventional survey methods with unknown precision. Since 1997, drill hole collars have been surveyed using GPS technology and are located within +/- 40 mm in three dimensions.</li> <li>● All Maramarua drill hole collars are surveyed in Mt Eden 1949 co-ordinate system, with Auckland 1946 mean sea level datum (MSL).</li> </ul>

Criteria	Commentary
	<ul style="list-style-type: none"> <li>The topographic dataset consists of a digital terrain model (DTM) constructed from an airborne LiDAR survey (accurate to +/- 0.2 m) collected for the whole of the Maramarua site in May 2012. The DTM has been supplemented by GPS survey data (+/- 40 mm accuracy) and aerial drone photogrammetric survey.</li> <li>Surveyed elevations of drill hole collars are validated against the LiDAR topography and ortho-corrected aerial photography.</li> <li>Drill holes with downhole geophysics are surveyed for deviation with the verticality tool (+/- 15° azimuth and +/- 0.5° inclination).</li> </ul>
<b>Data spacing and distribution</b>	<ul style="list-style-type: none"> <li>Drill holes are variably spaced (less than 75 m to greater than 300 m) depending on target seam depth, geological structure, and topographical constraints.</li> <li>In areas of prospective mining, the average drill hole spacing approximately 75 m.</li> <li>The current drill hole spacing is deemed sufficient for coal seam correlation purposes.</li> <li>Sample composites are generated in Maptek's Vulcan™ software prior to building the coal quality model. The composite samples are not weighted.</li> </ul>
<b>Orientation of data in relation to geological structure</b>	<ul style="list-style-type: none"> <li>In the Maramarua area the strata dips approximately 10 to 15°, with localised increases, particularly adjacent to faults. All drill holes are designed to intercept the target coal seams or some other key geological structure (i.e. faults). Several inclined drill holes have been completed to intercept normal faults in the area.</li> <li>Targeted infill drilling is utilised in areas of prospective mining to decrease coal quality sample spacing.</li> <li>The low angle of strata dips means vertical drill holes are the most successful in achieving desired high angle intercepts of the coal seams.</li> <li>The modelling of the deposit uses holes both with and without reliable verticality data. Drill holes without verticality data are considered to be vertical.</li> <li>Vertical drilling is the most suitable drilling method of assessing the Coal Resource at Maramarua.</li> </ul>
<b>Sample security</b>	<ul style="list-style-type: none"> <li>Sampling was conducted in accordance with the BRL standard 'Coal Quality Sampling and Analysis'.</li> <li>Core is removed from the drill hole and put into core splits. Core is wrapped in clear-wrap to retain natural moisture and put into core boxes. Additionally, coal core is wrapped in cling film before placing in clear-wrap to assist moisture retention.</li> <li>Core is removed from the clear-wrap at the core logging facility where it is photographed, logged, sampled and then re-wrapped.</li> <li>Coal samples are placed into labelled bags that are transported directly to the laboratory accompanied by soft and hard copies of the sample submission to insure proper chain of custody.</li> <li>Chip samples are placed into bags labelled with drilling intervals by the driller and transported to the core logging facility for logging. Chip samples are disposed of once logged.</li> <li>It is not considered likely that individual coal samples face a risk of theft or sabotage as coal is a bulk commodity with little value for small volumes of coal from drill core.</li> <li>Laboratory data is imported directly into an acQuire database, with no manual data entry at either the laboratory or BRL.</li> </ul>
<b>Audits or reviews</b>	<ul style="list-style-type: none"> <li>Golder and BRL have reviewed the geological data available and consider the data used to produce the resource model is reliable and suitable for the purposes of generating a Coal Resource estimate to the extent that the Coal Resource estimate has been classified.</li> <li>Integrity of all data (drill hole, geological, survey, geophysical and laboratory information) is reviewed by the resource geologist before being incorporated into the BT's centralised database system.</li> <li>Internal audits are regularly conducted (e.g. at the start of drilling campaigns or when new logging geologists are employed) to verify that samples are being logged and sampled in accordance with BRL standards and procedures. All corrections and changes made to the database are recorded.</li> </ul>

## Section 2 Reporting of Exploration Results

Criteria	Commentary
<b>Mineral tenement and land tenure status</b>	<ul style="list-style-type: none"> <li>• The Maramarua resource area includes a mixture of Crown and privately owned coal.</li> <li>• Coal Mining Permit (CMP) 41821 held by BT in the Maramarua Coalfield at Kopako comprises 274.3 hectares and was granted on 21 February 2005. It is due to expire 31 March 2037. BT Mining is 65% owned by BRL. Historical Solid Energy NZ Limited (SENZ) mining operations such as the KCQ1, K1 and K2 opencast pits are located within this CMP. The minerals underlying CMP 41821 are owned by the Crown, and BT owns or has access to the majority of the land.</li> <li>• BT currently leases land adjacent to CMP 41821 from the landowners.</li> </ul>
<b>Exploration done by other parties</b>	<ul style="list-style-type: none"> <li>• The previous owner SENZ and its predecessors completed all exploration in the area from 1986 to 2017. However, there have been earlier periods of work that have contributed to the understanding of the Coal Resource. These exploration programs include an extensive OH programme undertaken between 1952 and 1957 prior to the commencement of open cut mining.</li> <li>• The New Zealand Coal Resources Survey (NZCRS) drilled 122 holes in the Maramarua Coalfield between 1977 and 1980. The majority of the NZCRS drill holes were also geophysically logged and the campaign included two seismic reflection programmes.</li> </ul>
<b>Geology</b>	<ul style="list-style-type: none"> <li>• The stratigraphy of the Maramarua Coalfield is similar to that of other northern Waikato Coalfields, being dominated by thick, Cenozoic, Te Kuiti Group sediments which unconformably overlie Mesozoic basement rock of the Newcastle Group. The Waikato Coal Measures, and later Te Kuiti Group sediments, were deposited in a broad north to north-northwest trending elongated trough which appears to have been controlled by structural trends within the underlying Newcastle Group basement rock.</li> <li>• The Waikato Coal Measures are present over the entire coalfield with a thickness of up to 134 m.</li> <li>• The Kupakupa main seam (KK) is located near the base of the coal measures, is the most widespread and thickest seam, and ranges in thickness ranging from less than 1 m to 15 m.</li> <li>• The Kupakupa seam has up to four lower seams (KL1, KL2, KL3, KL4) located 1 m to 3 m below the main KK seam. These lower seams are discontinuous and generally less than a metre thick.</li> <li>• The Kupakupa seam is overlain by carbonaceous shales, siltstones and claystones of the upper Te Kuiti Group.</li> <li>• The generalised structure of the coalfield dips at 15° north-northwest and flattens out towards the Miranda Fault due to fault drag effects on the hanging wall.</li> <li>• Two major faults dominate the deposit.             <ul style="list-style-type: none"> <li>○ The Foote Fault zone is interpreted to be a large displacement fault striking north-northeast that is downthrown to the southeast with an estimated throw of 150 m.</li> <li>○ The Miranda Fault is a northeast striking fault, with displacements of up to 60 m to the southeast.</li> </ul> </li> <li>• Several other smaller displacement faults (less than 10 m), which generally strike parallel to the two major faults, are interpreted to exist throughout the coalfield. Fault dips have been interpreted to be 65°, based on fault zone intercepts in drill holes.</li> <li>• The main Kupakupa (KK) seam is low ash, low fixed carbon and very low sulphur coal. There is some evidence of higher phosphorous coal (greater than 0.06% phosphorous in coal) at the base of the KK seam. The coal resource is sub-bituminous C rank.</li> </ul>



Criteria	Commentary																																																																																																																		
<b>Drill hole Information</b>	<ul style="list-style-type: none"> <li>1,004 drill holes are located within the Maramarua area, of which 540 of the drill holes have been used for modelling and Coal Resource estimation. 35 of these 540 drill holes in the model area were not used as they were considered unreliable.</li> </ul> <table border="1"> <thead> <tr> <th rowspan="2">Range of Collar ID</th> <th rowspan="2">Drill hole Range</th> <th rowspan="2">No. of Holes</th> <th colspan="2">Data acquisition</th> <th rowspan="2">Wash(W) Core(C) Air core (AC)</th> <th rowspan="2">Reliability</th> </tr> <tr> <th>Structural model only</th> <th>Coal Quality</th> </tr> </thead> <tbody> <tr> <td>1945-60</td> <td>1735-5405</td> <td>432</td> <td>432</td> <td>0</td> <td>W</td> <td>Low-Mod</td> </tr> <tr> <td>1977-80</td> <td>8105;9000-9124</td> <td>95</td> <td>38</td> <td>51</td> <td>W/C</td> <td>Mod-High</td> </tr> <tr> <td>1982-1984</td> <td>9131-9160</td> <td>7</td> <td>2</td> <td>5</td> <td>W/C</td> <td>Mod-High</td> </tr> <tr> <td>1986-1987</td> <td>9162-9214</td> <td>51</td> <td>28</td> <td>15</td> <td>W/C</td> <td>High</td> </tr> <tr> <td>1993-1994</td> <td>9215-9248</td> <td>30</td> <td>14</td> <td>26</td> <td>W/C</td> <td>High</td> </tr> <tr> <td>1996</td> <td>9249-9252</td> <td>3</td> <td>1</td> <td>0</td> <td>C</td> <td>High</td> </tr> <tr> <td>1996</td> <td>9278-9290</td> <td>13</td> <td>1</td> <td>11</td> <td>W/C</td> <td>Moderate</td> </tr> <tr> <td>2002</td> <td>9257-9264</td> <td>3</td> <td>2</td> <td>0</td> <td>W/C</td> <td>Moderate</td> </tr> <tr> <td>2005-2006</td> <td>9265-9268;9272-9277;9291-9298</td> <td>14</td> <td>2</td> <td>7</td> <td>W/C</td> <td>High</td> </tr> <tr> <td>2007 and 2012</td> <td>9299-9316;9317;9320-9328</td> <td>17</td> <td>0</td> <td>17</td> <td>W/C</td> <td>High</td> </tr> <tr> <td>2008 and 2011</td> <td>9321-9322;9303;9323-9324</td> <td>5</td> <td>4</td> <td>0</td> <td>W/C</td> <td>Mod-High</td> </tr> <tr> <td>2014</td> <td>9329</td> <td>1</td> <td>0</td> <td>1</td> <td>W/C</td> <td>High</td> </tr> <tr> <td>2017-18</td> <td>9342 - 9383</td> <td>41</td> <td>41</td> <td>0</td> <td>AC</td> <td>High</td> </tr> <tr> <td>2018</td> <td>9384 - 9396</td> <td>13</td> <td>11</td> <td>2</td> <td>AC/C</td> <td>High</td> </tr> <tr> <td>2019</td> <td>17599 - 17605</td> <td>7</td> <td>2</td> <td>5</td> <td>AC/C</td> <td>High</td> </tr> </tbody> </table>	Range of Collar ID	Drill hole Range	No. of Holes	Data acquisition		Wash(W) Core(C) Air core (AC)	Reliability	Structural model only	Coal Quality	1945-60	1735-5405	432	432	0	W	Low-Mod	1977-80	8105;9000-9124	95	38	51	W/C	Mod-High	1982-1984	9131-9160	7	2	5	W/C	Mod-High	1986-1987	9162-9214	51	28	15	W/C	High	1993-1994	9215-9248	30	14	26	W/C	High	1996	9249-9252	3	1	0	C	High	1996	9278-9290	13	1	11	W/C	Moderate	2002	9257-9264	3	2	0	W/C	Moderate	2005-2006	9265-9268;9272-9277;9291-9298	14	2	7	W/C	High	2007 and 2012	9299-9316;9317;9320-9328	17	0	17	W/C	High	2008 and 2011	9321-9322;9303;9323-9324	5	4	0	W/C	Mod-High	2014	9329	1	0	1	W/C	High	2017-18	9342 - 9383	41	41	0	AC	High	2018	9384 - 9396	13	11	2	AC/C	High	2019	17599 - 17605	7	2	5	AC/C	High
Range of Collar ID	Drill hole Range				No. of Holes	Data acquisition			Wash(W) Core(C) Air core (AC)	Reliability																																																																																																									
		Structural model only	Coal Quality																																																																																																																
1945-60	1735-5405	432	432	0	W	Low-Mod																																																																																																													
1977-80	8105;9000-9124	95	38	51	W/C	Mod-High																																																																																																													
1982-1984	9131-9160	7	2	5	W/C	Mod-High																																																																																																													
1986-1987	9162-9214	51	28	15	W/C	High																																																																																																													
1993-1994	9215-9248	30	14	26	W/C	High																																																																																																													
1996	9249-9252	3	1	0	C	High																																																																																																													
1996	9278-9290	13	1	11	W/C	Moderate																																																																																																													
2002	9257-9264	3	2	0	W/C	Moderate																																																																																																													
2005-2006	9265-9268;9272-9277;9291-9298	14	2	7	W/C	High																																																																																																													
2007 and 2012	9299-9316;9317;9320-9328	17	0	17	W/C	High																																																																																																													
2008 and 2011	9321-9322;9303;9323-9324	5	4	0	W/C	Mod-High																																																																																																													
2014	9329	1	0	1	W/C	High																																																																																																													
2017-18	9342 - 9383	41	41	0	AC	High																																																																																																													
2018	9384 - 9396	13	11	2	AC/C	High																																																																																																													
2019	17599 - 17605	7	2	5	AC/C	High																																																																																																													
<b>Data aggregation methods</b>	<ul style="list-style-type: none"> <li>Samples are numerically averaged into 0.5 m long composite samples for Coal Resource estimation.</li> <li>The resource model is built as a block model with a maximum 0.5 m block thicknesses for coal. Coal composite sample data is used to grade estimate the block model.</li> <li>Some full seam composite samples have been created at the laboratory for thorough analysis of marketing attributes including ash constituents, forms of Sulphur, ash fusion temperatures, and ultimate analysis. These composite samples are not used in grade estimation.</li> <li>No seam thickness cut-offs have been applied, as the reported coal seam does not thin below the minimum thickness cut-off (typically less than 0.5 m in thickness) which is generally acceptable for opencast mining.</li> </ul>																																																																																																																		
<b>Relationship between mineralisation widths and intercept lengths</b>	<ul style="list-style-type: none"> <li>The stratigraphic nature of coal measures presents the coal seams in a horizontal or sub horizontal plane.</li> <li>The Maramarua Resource has a dip of 10 to 15° to the north-northwest.</li> <li>Drill holes are generally oriented vertically (90°) and are designed to intercept target seams at as high angle as possible for drilled seam thickness to represent true seam thickness as closely as possible. Several drill holes have been inclined to target the major fault zones.</li> <li>Drill holes can deviate from the vertical. Drill hole deviation is measured during downhole geophysical logging using the verticality tool and incorporated into modelling workflows.</li> </ul>																																																																																																																		
<b>Diagrams</b>	<ul style="list-style-type: none"> <li>Diagrams can be found in the Appendix A for each of the following: <ul style="list-style-type: none"> <li>Location map.</li> <li>Geological QMap.</li> <li>Map showing coal rights.</li> <li>Map showing land rights with pit shell design.</li> <li>Map showing exploration drill holes.</li> <li>Map of resource classification.</li> <li>Map showing Kupakupa roof contour distribution.</li> <li>Map showing Kupakupa thickness contour distribution.</li> <li>Map showing Kupakupa ash distribution.</li> </ul> </li> </ul>																																																																																																																		

Criteria	Commentary
	<ul style="list-style-type: none"> <li>○ Map showing Kupakupa sulphur distribution.</li> <li>○ Map showing reserve classification with pit shell designs</li> </ul>
<b>Balanced reporting</b>	<ul style="list-style-type: none"> <li>• No exploration results are being presented in this Table 1, rather this report is focused on advanced projects that have been defined by geological models with associated Coal Resource estimates completed.</li> <li>• The exclusion of this information from this report is considered to not be material to the understanding of the deposit.</li> </ul>
<b>Other substantive exploration data</b>	<ul style="list-style-type: none"> <li>• The Coal Resources reported in this report relate to the area in and around and existing operating coal mine.</li> <li>• Groundwater has been encountered in most drill holes. Piezometers have been installed in 40 drill holes to monitor changes in groundwater levels.</li> <li>• Relative density of coal has been determined for 435 samples from the modelled area. Due to poor correlation of the ash density relationship the resource estimate is based on a default relative density of 1.3 t/m<sup>3</sup>.</li> <li>• Geotechnical and rock characteristics of the overburden units have been calculated using laboratory test data to determine strength parameters (such as UCS, shear box and ring shear tests) and empirical classifications (RMR, GSI and Hoek-Brown) and back analysis of existing cut slopes.</li> </ul>
<b>Further work</b>	<ul style="list-style-type: none"> <li>• Future exploration drilling is proposed to infill spatial gaps in coal quality data and further delineate fault locations and displacements within the proposed mining areas.</li> </ul>

### Section 3 Estimation and Reporting of Mineral Resources

Criteria	Commentary
<b>Database integrity</b>	<ul style="list-style-type: none"> <li>• All historical and legacy datasets have been thoroughly validated against original logs and results tables. Where reliability of the data is poor the data is excluded from the modelling process.</li> <li>• Data recorded in the field is input into field books and later transcribed into electronic databases using standard software.</li> <li>• BRL utilises an acQuire database to store and maintain its geological exploration dataset.</li> <li>• All core logging data is recorded on paper then transferred directly into a central database using acQuire software.</li> <li>• The acQuire database places explicit controls on certain data fields as they are entered or imported into the database, such as overlapping intervals, coincident samples, out of range sample values, standardised look-up tables for logging codes.</li> <li>• All changes to the database are tracked and archived. Data correction and validation checks are undertaken internally before the data is used for modelling purposes.</li> <li>• Manual data entry of coal quality results is not required as results are imported directly from laboratory results files.</li> <li>• Validation of historical wash drilled drill holes has been carried out by comparing coal seam depths and thicknesses with those of adjacent more reliable cored drill holes in cross-section. Coal quality data and geophysical logs have been used to validate more modern (post 1977) drill holes, to provide confidence in coal seam depths and thicknesses.</li> </ul>
<b>Site visits</b>	<ul style="list-style-type: none"> <li>• Henry Dillon (the Competent Person) has visited the area on numerous occasions over the past 10 years and is familiar with the site.</li> </ul>
<b>Geological interpretation</b>	<ul style="list-style-type: none"> <li>• Golder has reviewed the modelling processes in use by BRL to develop their resource model and Coal Resource estimates.</li> <li>• Golder has confidence in the methodologies used by BRL for geological modelling and the interpretation of the available Nightcaps Project data. Confidence varies for different areas, and this is reflected in the resource classification.</li> <li>• Confidence in interpretation of geological stratigraphy, structure and seam correlation/continuity is variable across the permit area, and differing seam correlation interpretations exist in some areas. This is typically a result of the complex structural</li> </ul>

Criteria	Commentary
	<p>environment, rather than the presence of numerous seam splits and discontinuous seams.</p> <ul style="list-style-type: none"> <li>• Golder considers the quantity of geological data sufficient to estimate Coal Resources.</li> <li>• Some residual uncertainty of quality and confidence of historical drilling data remains despite thorough evaluation of the historical logs and drill locations.</li> </ul>
<b>Dimensions</b>	<ul style="list-style-type: none"> <li>• The Maramarua Coal Resources area is approximately 3.1 km in length and 1.5 km in width, covering approximately 250 hectares. Within this area there are two main areas of focus for future mining – K1 and M1 areas. As discussed above, the coal seams are generally laterally continuous, however thickness can vary over short lateral distances due to the highly faulted nature of the deposit.</li> <li>• The main Kupakupa (KK) seam is the target in this area. Seam thickness ranges from 1 m to 15 m. Reasonable prospects depth of the seam ranges from 7 m to 120 m. The KK seam outcrops in the walls of the historical K1 opencast pit and dips at 10°– 15° north-northwest.</li> </ul>
<b>Estimation and modelling techniques</b>	<ul style="list-style-type: none"> <li>• All available exploration data has been validated and, where reliable, has been used to create a 3D geological block model for Coal Resource estimation and classification.</li> <li>• All exploration drilling data is stored in an acQuire database and exported to a Maptek Vulcan™ (Vulcan) drill hole database.</li> <li>• Interpretive design data is stored within Vulcan in various layers</li> <li>• The model is domained further into four fault blocks using the large faults as bounding surfaces.</li> <li>• Each domain is modelled for structure and grade separately.</li> <li>• Vulcan is used to build the structure model. Grid spacing is 10 m x 10 m.</li> <li>• Maptek's Integrated Stratigraphic Model (ISM) module is used to produce the structure model.</li> <li>• Structural surfaces for coal seams, Te Kuiti Group rocks (Pukemiro Sandstone, Glen Afton Claystone, Mangakotuku Siltstone and Whaingaroa Siltstone) and the Waitemata Group roof and floor are modelled using a triangulation algorithm to produce grids on a 10m-by-10m basis, in order to best define the structure in the project area.</li> <li>• The 'Hybrid Method' was used to develop the structure model. This method triangulates a reference surface and then stacks the remaining horizons by adding structure thickness grids. Thickness grids are created using a triangulation modelling algorithm. Design data from other horizons is incorporated into the final grid structure.</li> <li>• Modelling parameters for the structural modelling are as follows: <ul style="list-style-type: none"> <li>• Reference grid surface (NB21 roof) by Hybrid Stacking: <ul style="list-style-type: none"> <li>○ Method is Triangulation.</li> <li>○ Trend Order is 0 (Horizontal Planar).</li> <li>○ Smoothing is 9.</li> <li>○ The maximum triangle length is 500 m.</li> <li>○ Surfaces are splined.</li> </ul> </li> <li>• Reference grid thickness modelling by Hybrid Stacking: <ul style="list-style-type: none"> <li>○ Method is Triangulation.</li> <li>○ Trend Order is 0 (Horizontal Planar).</li> <li>○ Smoothing is 9.</li> <li>○ Search Radius is 500 m.</li> <li>○ Surfaces are splined.</li> </ul> </li> </ul> </li> <li>• Structural surfaces are not cropped.</li> <li>• Structure grids are checked and visually validated before being used to construct the resource block model.</li> <li>• A conventional block model is generated using the stratigraphic structure grids for each domain, along with end of month site survey combined with lidar topography surface, and other mining related surfaces are used to build the block model. The block dimensions are constructed at 10 m x 10 m. The maximum vertical thickness for coal blocks is 0.5 m.</li> <li>• Vulcan is used to build the block model and to estimate grade. The process is automated using a Lava script.</li> <li>• Grade estimation is performed utilizing Vulcan's Tetra Projection Model. Coal quality data is modelled using inverse distance squared block estimation. The estimation is completed over</li> </ul>

Criteria	Commentary
	<p>three runs for each coal quality parameter with increasing search distances.</p> <ul style="list-style-type: none"> <li>• The coal seams are estimated in four fault domains. <ul style="list-style-type: none"> <li>○ Proximate, Calorific value and sulphur coal qualities are estimated on a dry basis.</li> <li>○ Air-dried and Total Moisture are estimated on air-dried and as received bases respectively.</li> <li>○ Ash, moisture (inherent and total), volatile matter, sulphur, and CV are estimated simultaneously.</li> </ul> </li> <li>• Estimated block values are determined as part of the modelling workflow and are reviewed by a senior geologist to ensure no anomalies exist and that original data is honoured.</li> <li>• Historical coal winning limits produced following mining of the K1 and K2 and KCQ pits are available, and these have been considered when modelling resource areas.</li> <li>• Geological interpretation, including the modelling of both major and minor faulting in the area has been considered when building structural surfaces. Allowances are made in the surfaces for coal loss through fault zones, with the volume of coal loss dependent on the dip and displacement of the fault.</li> <li>• It is expected other, currently unmapped, minor faults will be discovered during mining; with their expected small displacements will result in minimal change to the resource estimation.</li> <li>• No deleterious elements with economic significance have been identified in Maramarua coal.</li> <li>• Over the past three years, the mine has consistently produced coal products suitable for iron sand metallurgical processing and thermal processing heat. No other by-products have been considered at this stage.</li> <li>• Validation of data during modelling occurs at four different stages: <ul style="list-style-type: none"> <li>○ Firstly, when importing drill hole data from the master acQuire database, to ensure that the original dataset is in order.</li> <li>○ Structural grids are checked in cross section both along strike and down dip to check the grids are honouring drill hole data.</li> <li>○ Once structural grids have been produced from drill hole data, the grid nodes are exported and analysed to ensure they honour drill hole data. Contour plans are also produced to ensure modelled values represent original data.</li> <li>○ Various methods have been used to check the validity of the block estimation. This includes manual inspection of the model, Quantile Quantile (QQ) plots of block model qualities vs the coal quality database and visual comparison tools.</li> </ul> </li> </ul>
<b>Moisture</b>	<ul style="list-style-type: none"> <li>• Testing work has been undertaken to determine moisture levels in drill hole core with total moisture and inherent moisture typically being measured. Resource tonnages are reported on an air-dried basis (inherent moisture).</li> </ul>
<b>Cut-off parameters</b>	<ul style="list-style-type: none"> <li>• The coal has been classified as sub-bituminous C rank and will be marketed as coal products suitable for iron sand metallurgical processing and thermal coal. A maximum ash cut-off of (20% air-dried basis) has been applied to all seams.</li> <li>• No lower ash cut-off has been applied.</li> <li>• Coal Resources have been defined as economic by using a Lerchs-Grossman optimized pit shell using budgeted mining costs and contracted coal sales values. The RF 0.85 shell from the optimization has been used. No resources have been reported outside of this pit shell. This optimised pit shell is used to determine Reasonable Prospects for Eventual Economic Extraction (RPEEE).</li> </ul>
<b>Mining factors or assumptions</b>	<ul style="list-style-type: none"> <li>• The target (KK) seam is considered suitable for opencast operations due to seam depth, thickness and dip. The selected mining method has been chosen based on long term experience of opencast mining the KK seam. Roof and floor losses are not built into the Coal Resource estimate.</li> <li>• Only coal that falls within an optimized 0.85RF pit shell is reported as Coal Resources. Costs and revenue parameters used in the pit optimisation are based on the 2020 Maramarua budget and include allowances for royalties, commissions, mining costs, coal processing and administration, and basic mining and processing losses.</li> </ul>
<b>Metallurgical factors or</b>	<ul style="list-style-type: none"> <li>• The KK seam at Maramarua will provide coal products suitable for iron sand metallurgical processing and thermal coal. This has been determined by past performance of coal from the</li> </ul>

Criteria	Commentary
<b>assumptions</b>	<p>area for thermal purposes, and by average coal quality values.</p> <ul style="list-style-type: none"> <li>Studies have been carried out in the past to analyse combustion potential, ash fusion temperatures and Hardgrove Grindability Index (HGI), to confirm the suitability of the coal for thermal uses.</li> <li>Currently no wash plant is used at the Maramarua operation. The Run-of-Mine (ROM) coal produced is processed through a crushing/screening plant where losses are minimal.</li> </ul>
<b>Environmental factors or assumptions</b>	<ul style="list-style-type: none"> <li>At Maramarua, waste rock is transported and stored in an engineered landform to backfill a historical opencast pit. The low sulphur levels in the coal will mean acid mine drainage will not occur.</li> <li>BRL (through BT) hold resource consents regarding land use, air and water quality for the current operations. It is reasonably expected that any modifications to existing agreements or additional agreements required to operate in this area can be obtained in a timely manner.</li> </ul>
<b>Bulk density</b>	<ul style="list-style-type: none"> <li>The relative density of the coal within the model is set to 1.30 t/m<sup>3</sup>.</li> <li>The bulk density of overburden materials are defined based on existing relationships in the reserve model.</li> </ul>
<b>Classification</b>	<ul style="list-style-type: none"> <li>BRL classifies Coal Resources using a multivariate approach.</li> <li>Coal Resources have been classified on the basis of geological and grade continuity balanced by relative uncertainties surrounding historical underground extraction, historical fire-affected areas and proximity to faults and unconformities.</li> <li>Closely spaced drill holes with valid coal quality samples (point of observation) increase the confidence in resource assessments.</li> <li>The confidence is reduced by: <ul style="list-style-type: none"> <li>A block being within an area of historical underground workings due to extraction rate uncertainty.</li> <li>A block being within 20 m of historical underground workings due to uncertainty with historical survey of the workings and georeferencing of mine plans.</li> <li>A block lying in an area where structure dip is greater than 20° due to proximity to large faults. Faulting can impact coal thickness and quality.</li> <li>A block lying within an area with thin or splitting seams resulting in uncertainty of geological continuity. Where a seam is thin or is splitting, a small change in thickness can have a large impact to reported vs actual coal tonnages and qualities.</li> <li>A block being within an area close to a possible erosional 'washout' of Morley coal as indicated by historical underground mine plans and extents.</li> <li>A block lying within an area identified to be affected by historical underground mine fires.</li> <li>A block is less than 2 m below the modelled regional unconformity between Beaumont and Morley formations due to uncertainties in unconformity surface topology.</li> </ul> </li> <li>Closely spaced drilling with valid samples increases the confidence for each seam in resource assessments.</li> <li>Figure 5 presents the resource classification polygons for Maramarua. Coal Resources are reported from within these polygons provided they lie within the Lerchs-Grossman optimized opencast pit shell.</li> </ul>
<b>Audits or reviews</b>	<ul style="list-style-type: none"> <li>The currently reported model has been reviewed by the Competent Person.</li> <li>The 2021 resource model represents an update to the 2020 resource model and incorporates all drilling and exploration data to 30 June 2020.</li> </ul>
<b>Discussion of relative accuracy/confidence</b>	<ul style="list-style-type: none"> <li>The Competent Person has reviewed the Coal Resource estimates and has visited the existing operations. The Competent Person has examined the methodology used to estimate the resources and reserves and is satisfied that the processes have been properly conducted. The estimation methodology is generally in accordance with industry practice and the estimates can be regarded as consistent with the requirements of JORC 2012.</li> <li>Geostatistics and variography, along with best practice where available, to define the Resource estimates provided to confirm search estimation ranges and drill hole spacing for each resource classification.</li> <li>Classical geostatistics were used to understand the available data prior to modelling. This</li> </ul>

Criteria	Commentary
	<p>allowed an assessment of the variability of both coal seam thickness and quality parameters. Thickness, ash and sulphur variograms were created to determine any spatial variation present in the data, and to provide suitable confidence categories for the coal resource estimate. The confidence categories are taken from the thickness variogram range values.</p> <ul style="list-style-type: none"> <li>The Resource is declared as coal in-ground and potentially mineable resources. The current resource model has generally been in line with production data to date. Formal reconciliation is yet to take place as sufficiently sized areas of the pit are yet to be completely mined out.</li> </ul>

## Section 4 Estimation and Reporting of Ore Reserves

Criteria	Commentary
<b>Mineral Resource estimate for conversion to Ore Reserves</b>	<ul style="list-style-type: none"> <li>A 3D Resource Block model of topography, structure and quality are used for in situ Resource definition.</li> <li>Mineral Resources are inclusive of Ore Reserve.</li> </ul>
<b>Site visits</b>	<ul style="list-style-type: none"> <li>Damian Spring (the Competent Person) is an employee of BRL and visits the project area on a regular basis.</li> </ul>
<b>Study status</b>	<ul style="list-style-type: none"> <li>Maramarua is an operating mine project. The reportable Ore Reserve is based on the life of mine (LOM) plan and has resulted in a mine plan that is technically achievable and economically viable, and that material modifying factors have been considered.</li> <li>In 2020 the geology and geotechnical models were updated and this has resulted in revised reserve pit shells.</li> </ul>
<b>Cut-off parameters</b>	<ul style="list-style-type: none"> <li>No additional quality cut-offs have been used in the determination of Reserves in addition to what has been used in the declaration of Resources.</li> <li>Pit optimisation runs were completed to determine economic pit limits.</li> <li>Only the main Kupakupa (KK) seam is reported. Coal of a potentially mineable thickness is present in lower seams but the quality is not well understood and it may not be marketable. This coal has not been considered in the Reserves determination process and is not reported as Reserves.</li> </ul>
<b>Mining factors or assumptions</b>	<ul style="list-style-type: none"> <li>Pit limits have been determined using pit optimisation techniques, with restrictions for current land and mineral access. Pit optimisations used current cost and revenue budget assumptions.</li> <li>All mining is via open cut methods. Mining equipment is hydraulic backhoes/mechanical drive rigid body trucks and articulated trucks.</li> <li>Pit slopes for the revised K1 design have been geotechnically assessed and found to be in accordance with BRL stability criteria. The pit design for M1 (formerly known as KCQ2) has not been specifically geotechnically assessed but does use updated site-specific generic design criteria for each rock unit.</li> <li>Coal is present in a thick seam and is easily distinguishable from the surrounding waste rock. Coal quality has been shown to be consistent both laterally and within the seam.</li> <li>No waste dilution has been used in the determination of the Reserves.</li> <li>Coal recovery estimates consist of two parts: <ul style="list-style-type: none"> <li>Minimum recoverable in-situ thickness is 0.5m</li> <li>75mm of coal is assumed lost from both the roof and the floor (150mm in total) during mining to ensure no waste dilution within the coal.</li> </ul> </li> <li>Minimum mining widths are to suit 90t capacity trucks and are typically &gt;50m.</li> <li>Inferred Resources have not been included in the Reserves.</li> <li>The selected mining method requires simple infrastructure to support mobile open-cut mining equipment (i.e. workshop, fuel farm, site ablation and offices).</li> </ul>
<b>Metallurgical factors or assumptions</b>	<ul style="list-style-type: none"> <li>The ROM coal produced at Maramarua is crushed and screened on site. A process recovery of 95% is used based on a processing reconciliation study.</li> <li>Product coal specifications include ash, sulphur, moisture and calorific value.</li> <li>Some parts of the Reserve show the base of the seam with elevated phosphorous levels. This</li> </ul>

Criteria	Commentary
	can be effectively blended out within the entire seam thickness; however, care will need to be taken not to mine the seam floor as a discrete entity.
<b>Environmental</b>	<ul style="list-style-type: none"> <li>The current planned and operating pits are fully consented.</li> <li>All water related consents are in place.</li> <li>Updating of approvals is an ongoing process and it is reasonably expected that any modifications to existing agreements or additional agreements that may be required can be obtained in a timely manner.</li> </ul>
<b>Infrastructure</b>	<ul style="list-style-type: none"> <li>All necessary infrastructure is in place and operational for the current operation.</li> </ul>
<b>Costs</b>	<ul style="list-style-type: none"> <li>All infrastructure is in place at Maramarua. The primary ongoing capital requirements are for equipment replacement and this is included in the economic model.</li> <li>All operating costs were based on the 3-year budget estimates developed by BT Mining and include allowances for royalties, commissions, mining costs, road haulage loading and administration.</li> <li>Contracted product specifications and penalties for failure to meet specification are included in the cost model. Levies and royalties have been applied as per the appropriate NZ legislation (Crown AVR/APR royalty, Mines Rescue Levy and Energy and Resources Levy).</li> </ul>
<b>Revenue factors</b>	<ul style="list-style-type: none"> <li>Revenues are as per the current sales contracts.</li> <li>Revenues are based on the as-received calorific value which is in turn determined by the dry-basis calorific value of the coal and the total moisture as delivered to the customer.</li> <li>Resource model estimates are used to determine the dry calorific value estimates, and actual production calorific value data from the bulk sample deliveries to customers.</li> </ul>
<b>Market assessment</b>	<ul style="list-style-type: none"> <li>Annual sales volumes are as per internal market forecasts and within the quantities allowed in long term sales contracts.</li> </ul>
<b>Economic</b>	<ul style="list-style-type: none"> <li>To demonstrate the Reserve as economic it has been evaluated as part of the annual budgeting cycle through a standard financial model. All capital, operating and closure costs as well as current sales contract revenue factors were included in the financial model. This model has shown that the Maramarua Reserve has a positive NPV.</li> </ul>
<b>Social</b>	<ul style="list-style-type: none"> <li>As part of the resource consenting process and general site operations, regular communication and consultation has taken place with the local communities including the local Iwi.</li> </ul>
<b>Other</b>	<ul style="list-style-type: none"> <li>All mining projects operate in an environment of geological uncertainty.</li> <li>Updating of approvals is an ongoing annual process and it is reasonably expected that any modifications to existing agreements or additional agreements that may be required can be obtained in a timely manner.</li> </ul>
<b>Classification</b>	<ul style="list-style-type: none"> <li>The Reserve coal within the K1 and M1 (formerly known as KCQ) pits has been categorised based on the underlying Resource categories, where Measured Resources have mapped to Proven Reserves and Indicated Resources to Probable Reserves.</li> <li>These categorisations reflect the Competent Person's view of the deposit.</li> </ul>
<b>Audits or reviews</b>	<ul style="list-style-type: none"> <li>Palaris completed an external review of this estimation in May 2016 as part of Solid Energy's Vendor Due Diligence process. No substantial issues were raised.</li> <li>Several internal reviews have been completed during the various project stages and during purchase due diligence.</li> <li>A complete update of model has been completed following review of all data inputs and additional infill new drilling.</li> </ul>
<b>Discussion of relative accuracy/confidence</b>	<ul style="list-style-type: none"> <li>The accuracy of the Coal Reserve estimate is primarily dependent on the accuracy of the Coal Resource model, the ability to sell the coal at the estimated prices and the site operating costs.</li> <li>In the opinion of the Competent Person, the modifying factors and long-term cost and revenue assumptions used in the Coal Reserve are reasonable. Some risk is associated with: <ul style="list-style-type: none"> <li>Long term market demand for this coal.</li> <li>Obtaining Resource Consents that are yet to be applied for (M1 pit extension).</li> </ul> </li> <li>The site is in operation but has limited production history and therefore has little current reconciliation data. The KCQ bulk sample pit completed in 2011 mined 68,000t of coal vs an estimated 78,000t at the expected coal quality. This reconciliation was adversely affected by unexpected minor faults within the coal and this has been considered with the new resource</li> </ul>

**Criteria****Commentary**

model update completed in June 2020 and used to determine these Coal Reserves.



Appendix A:

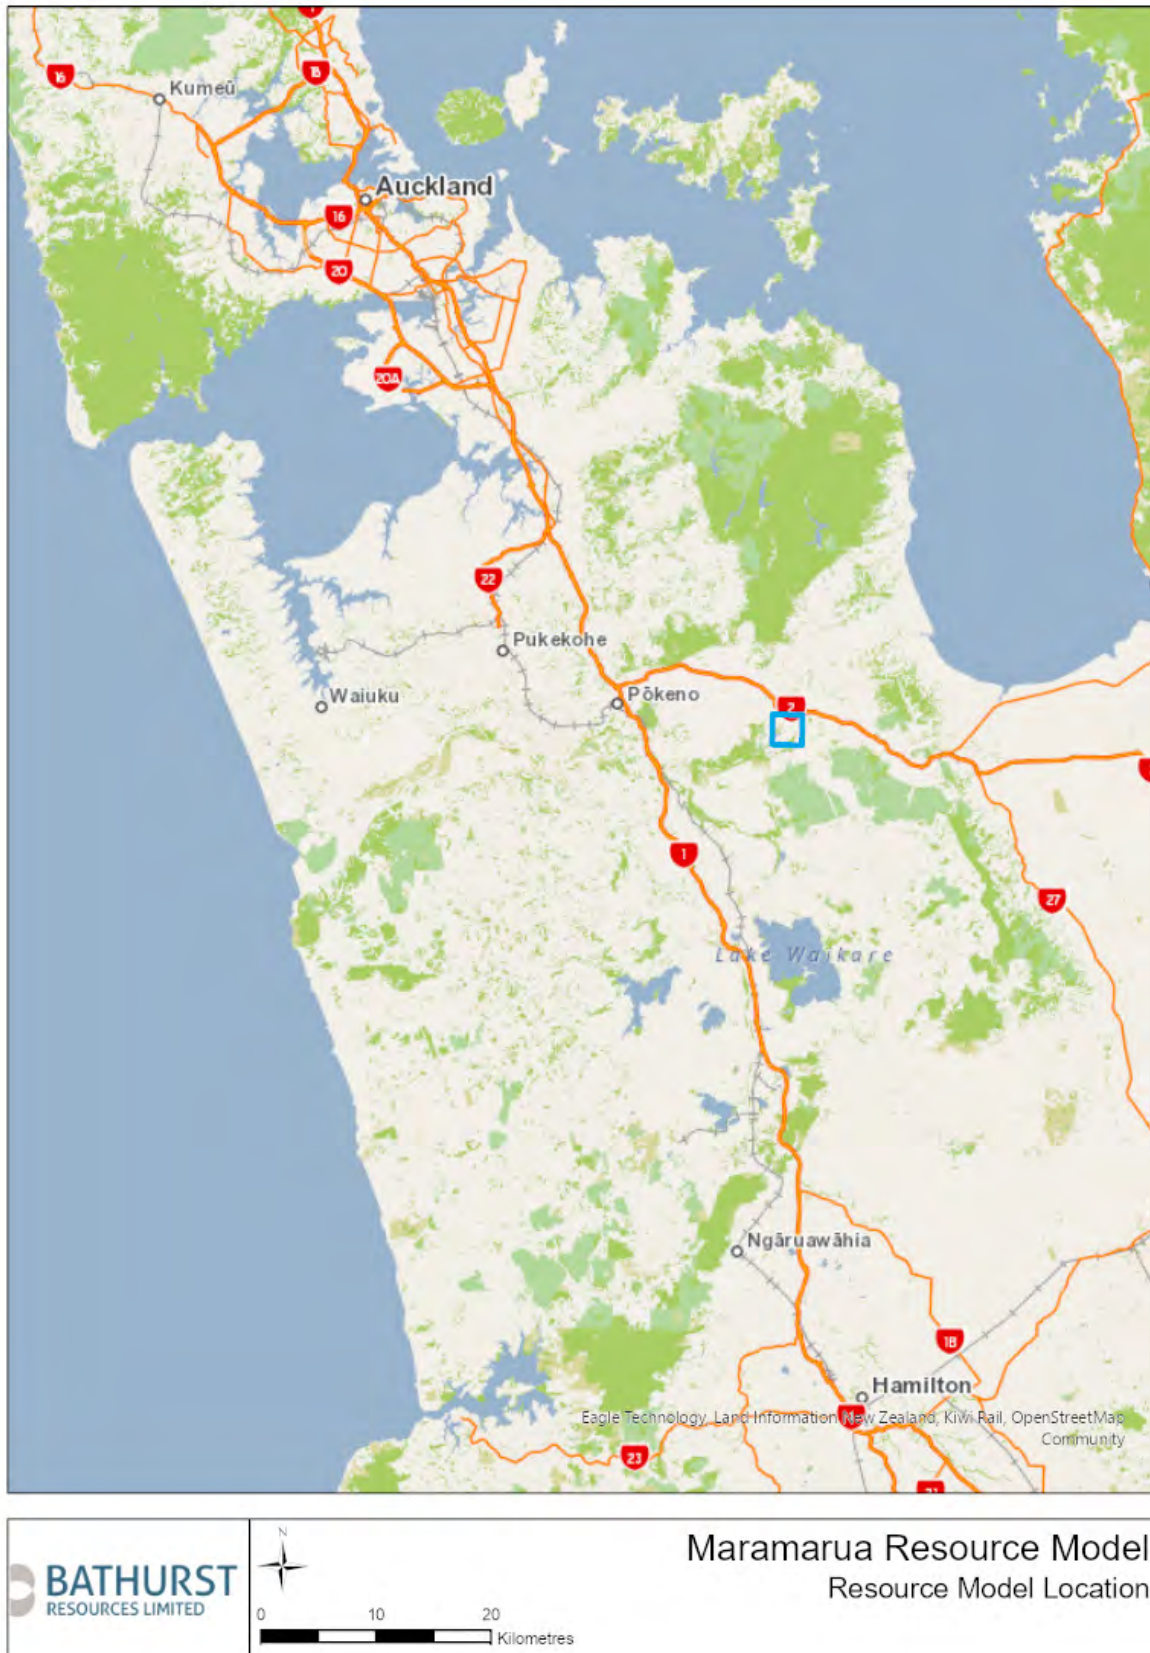


Figure 1: Location Plan

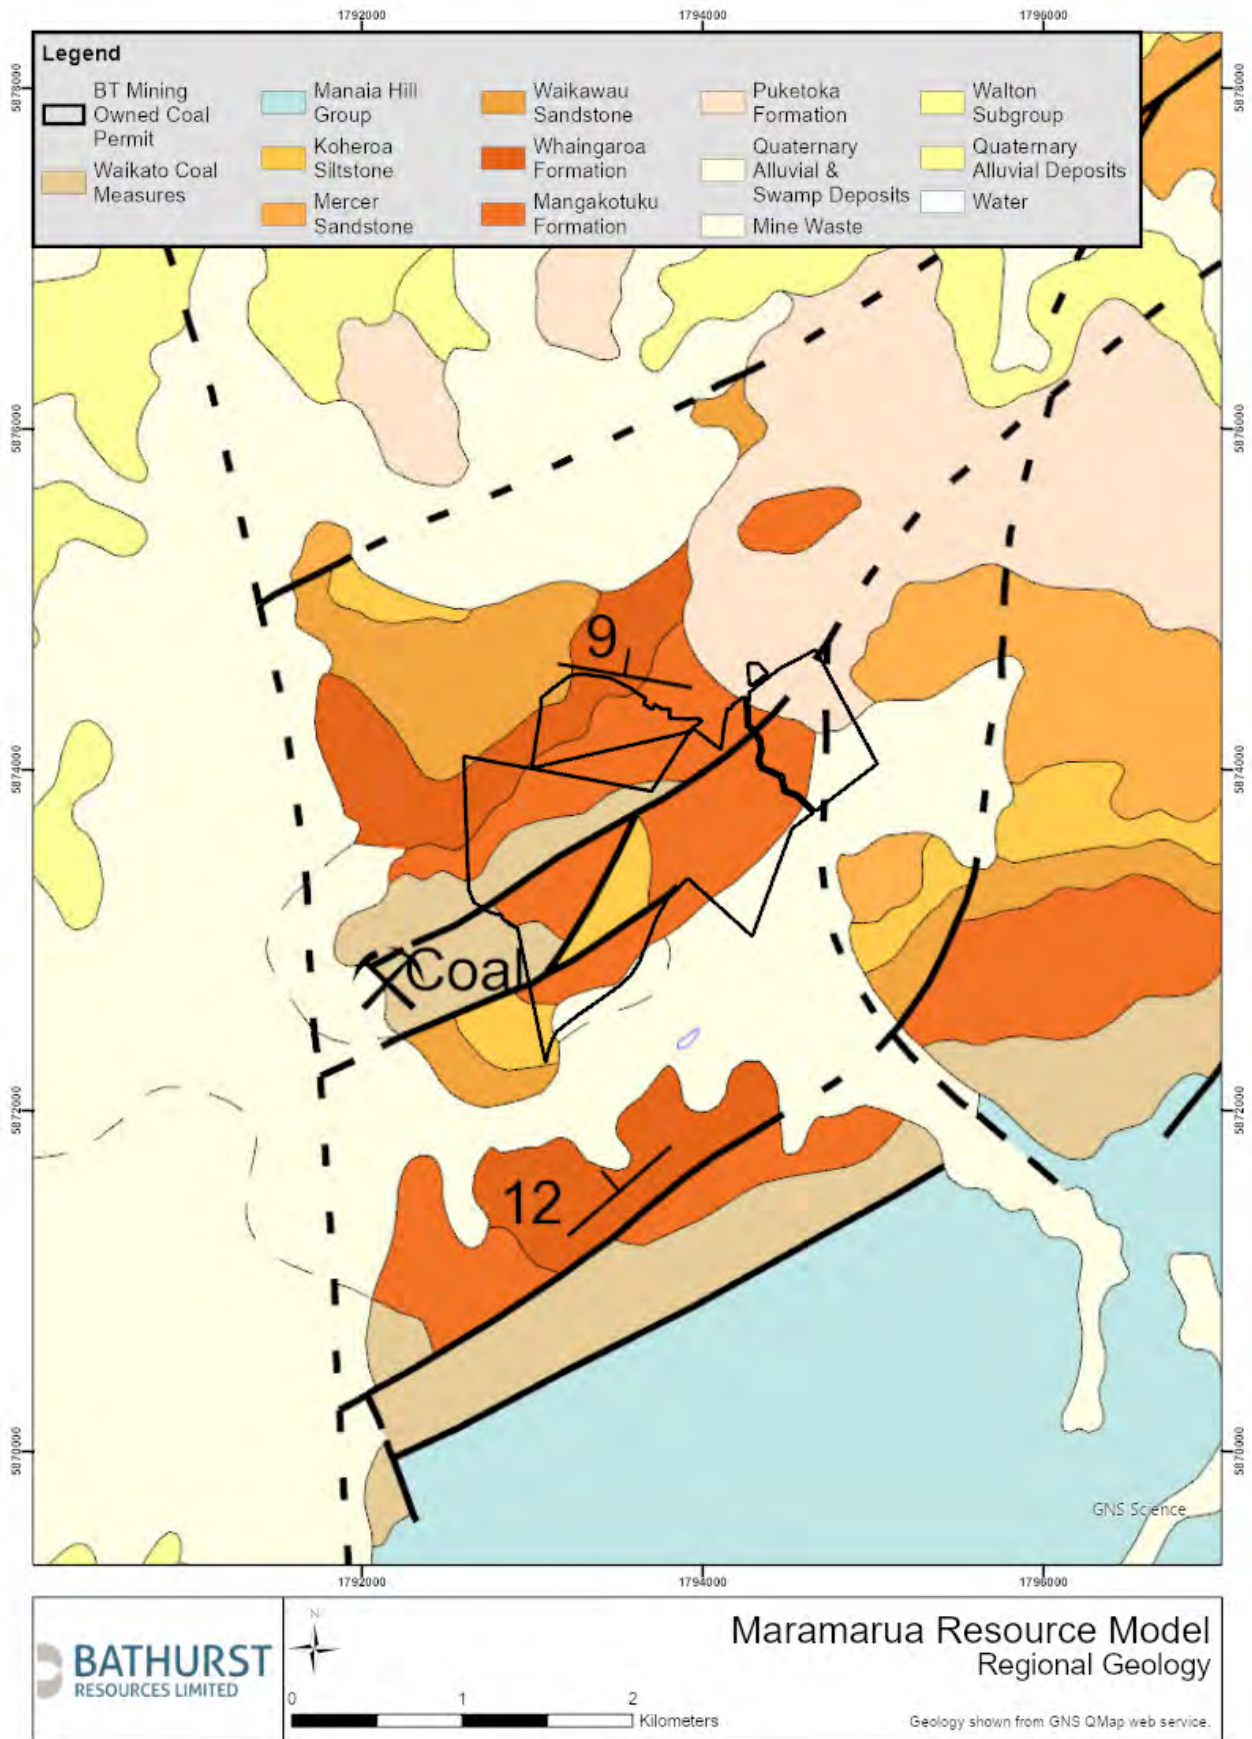


Figure 2: Regional Geology

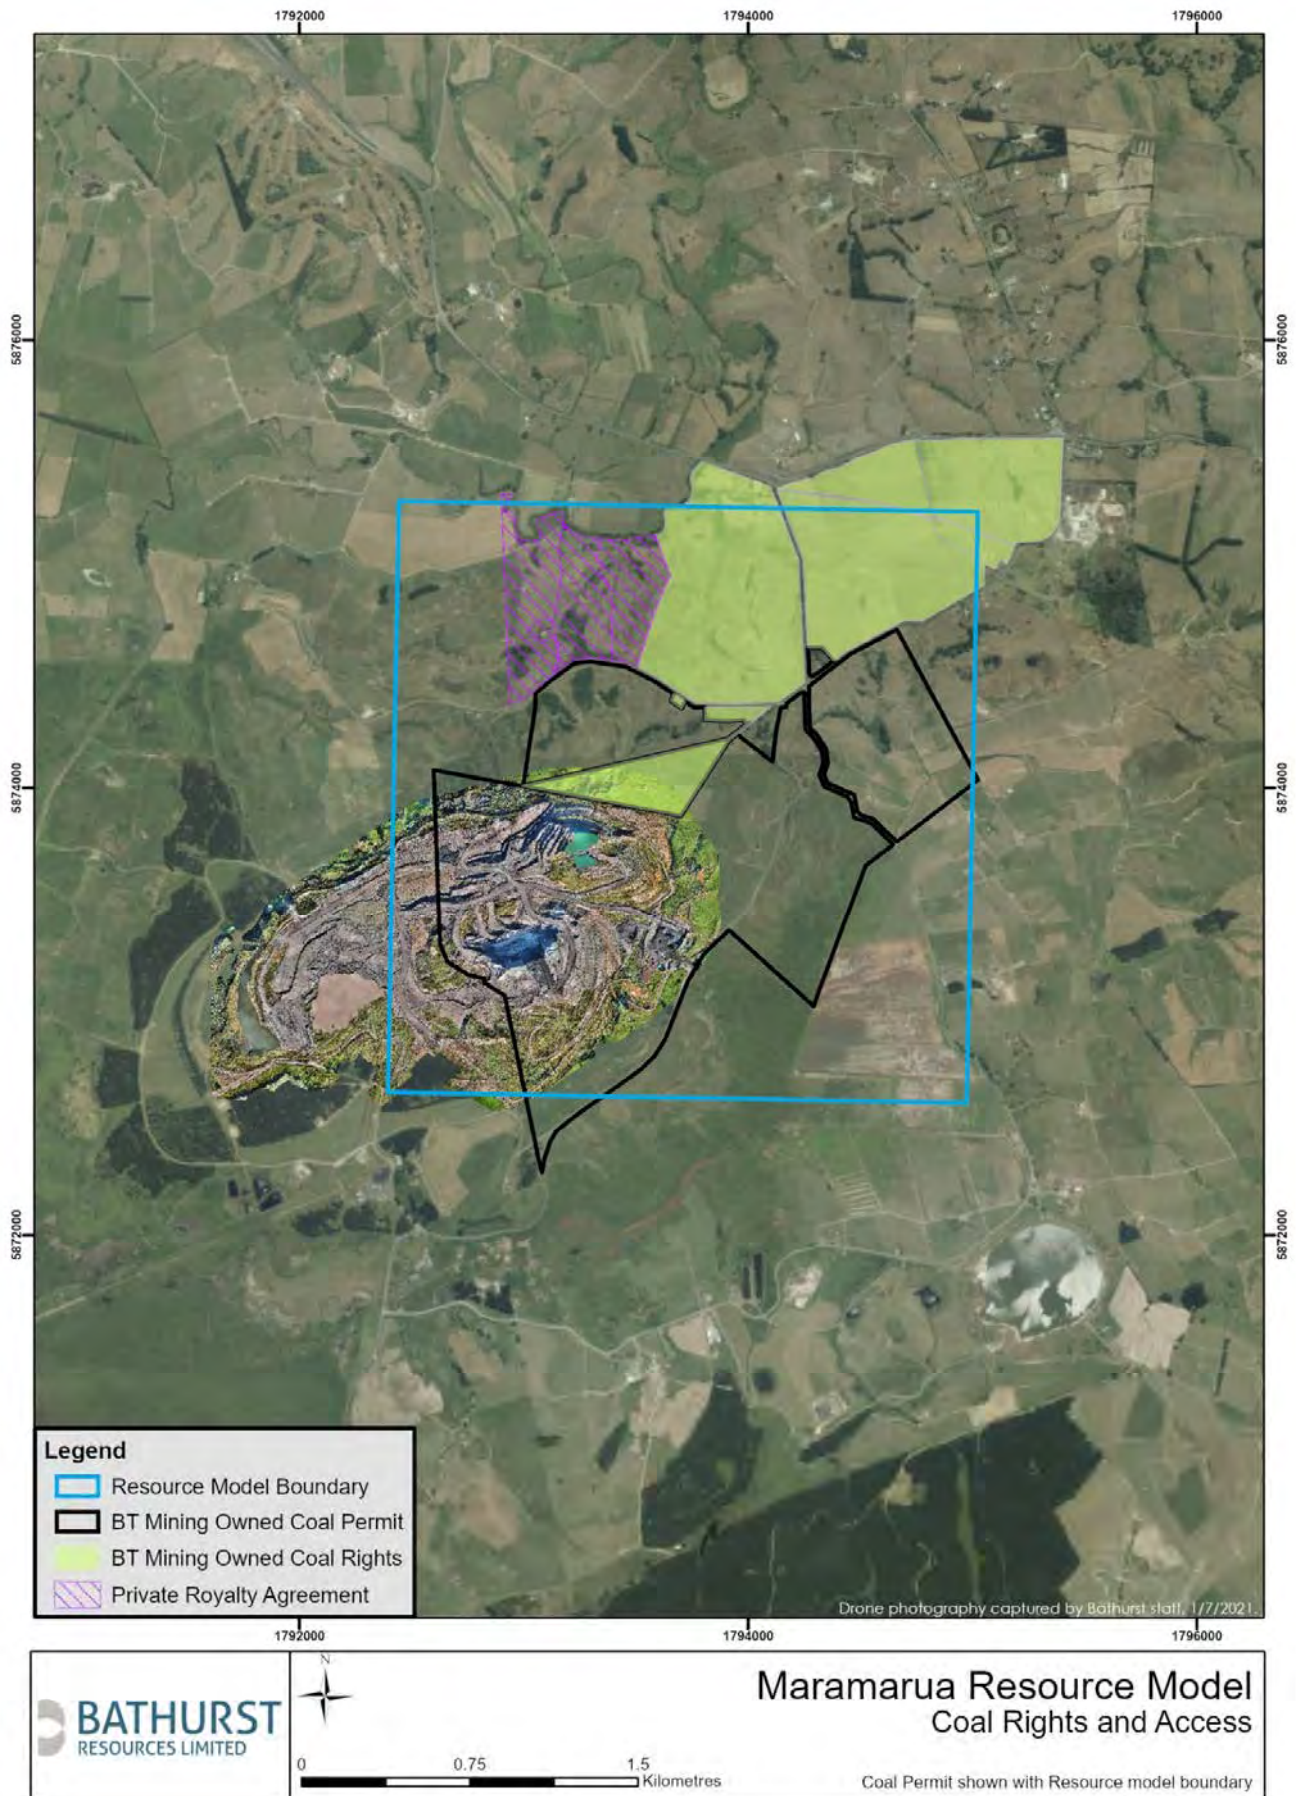


Figure 3: Maramarua and the coal permits within the resource area

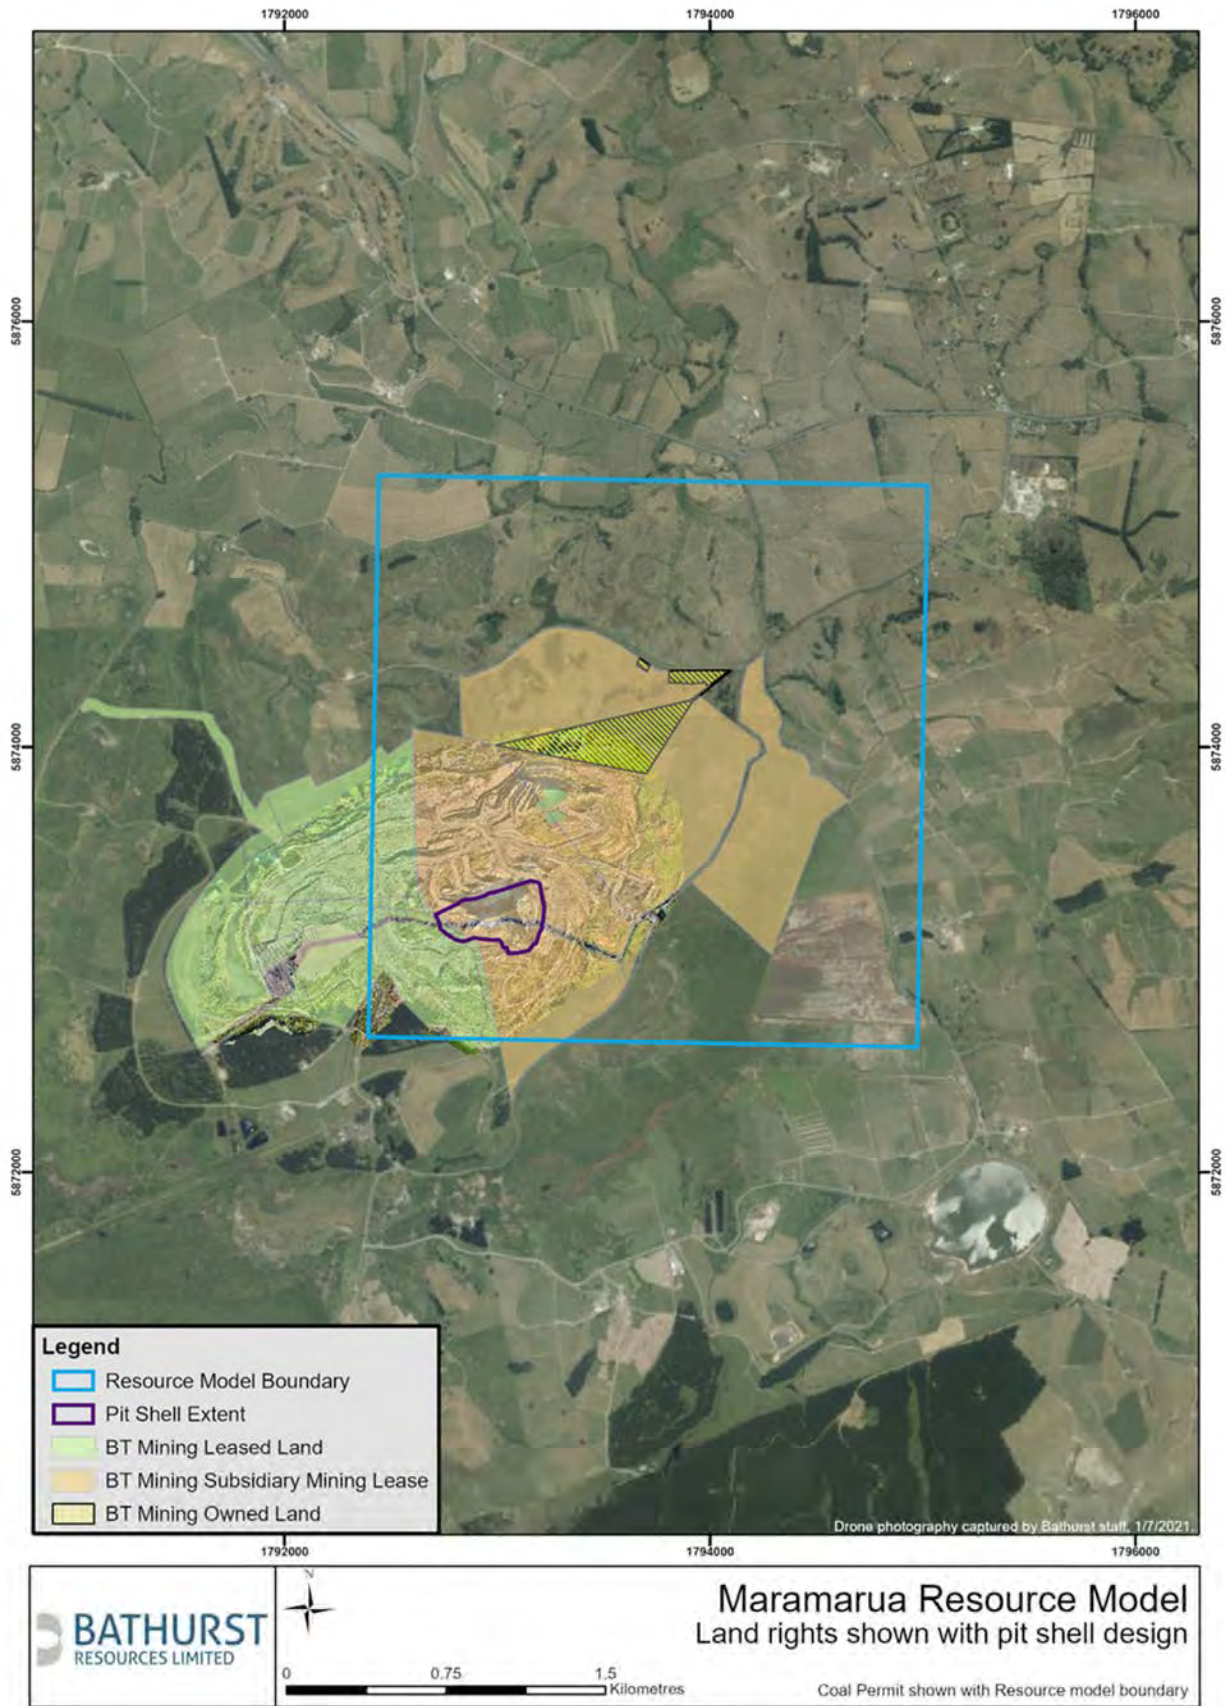


Figure 4 Maramarua land rights shown with pit shell design

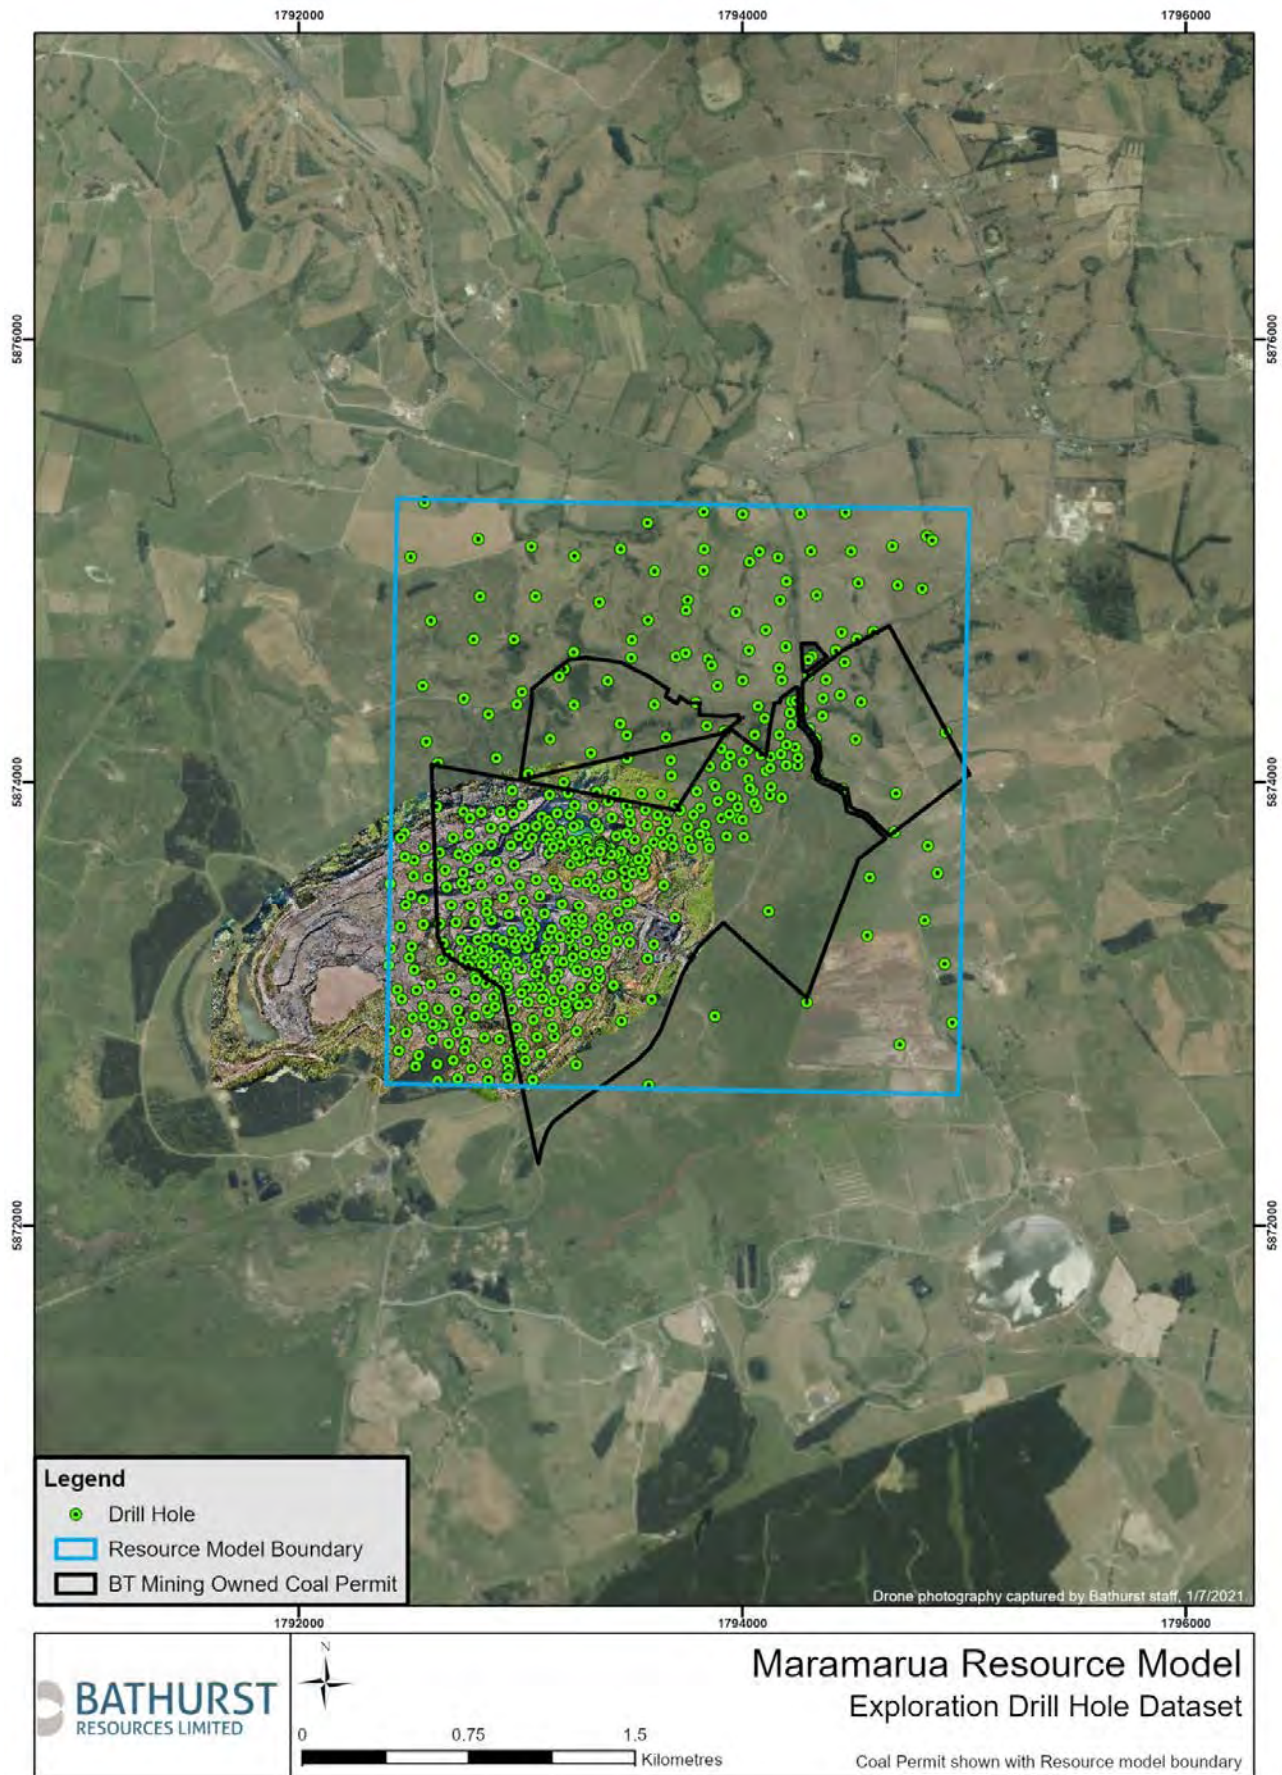


Figure 5: Plan showing the drilling dataset used to produce the resource model

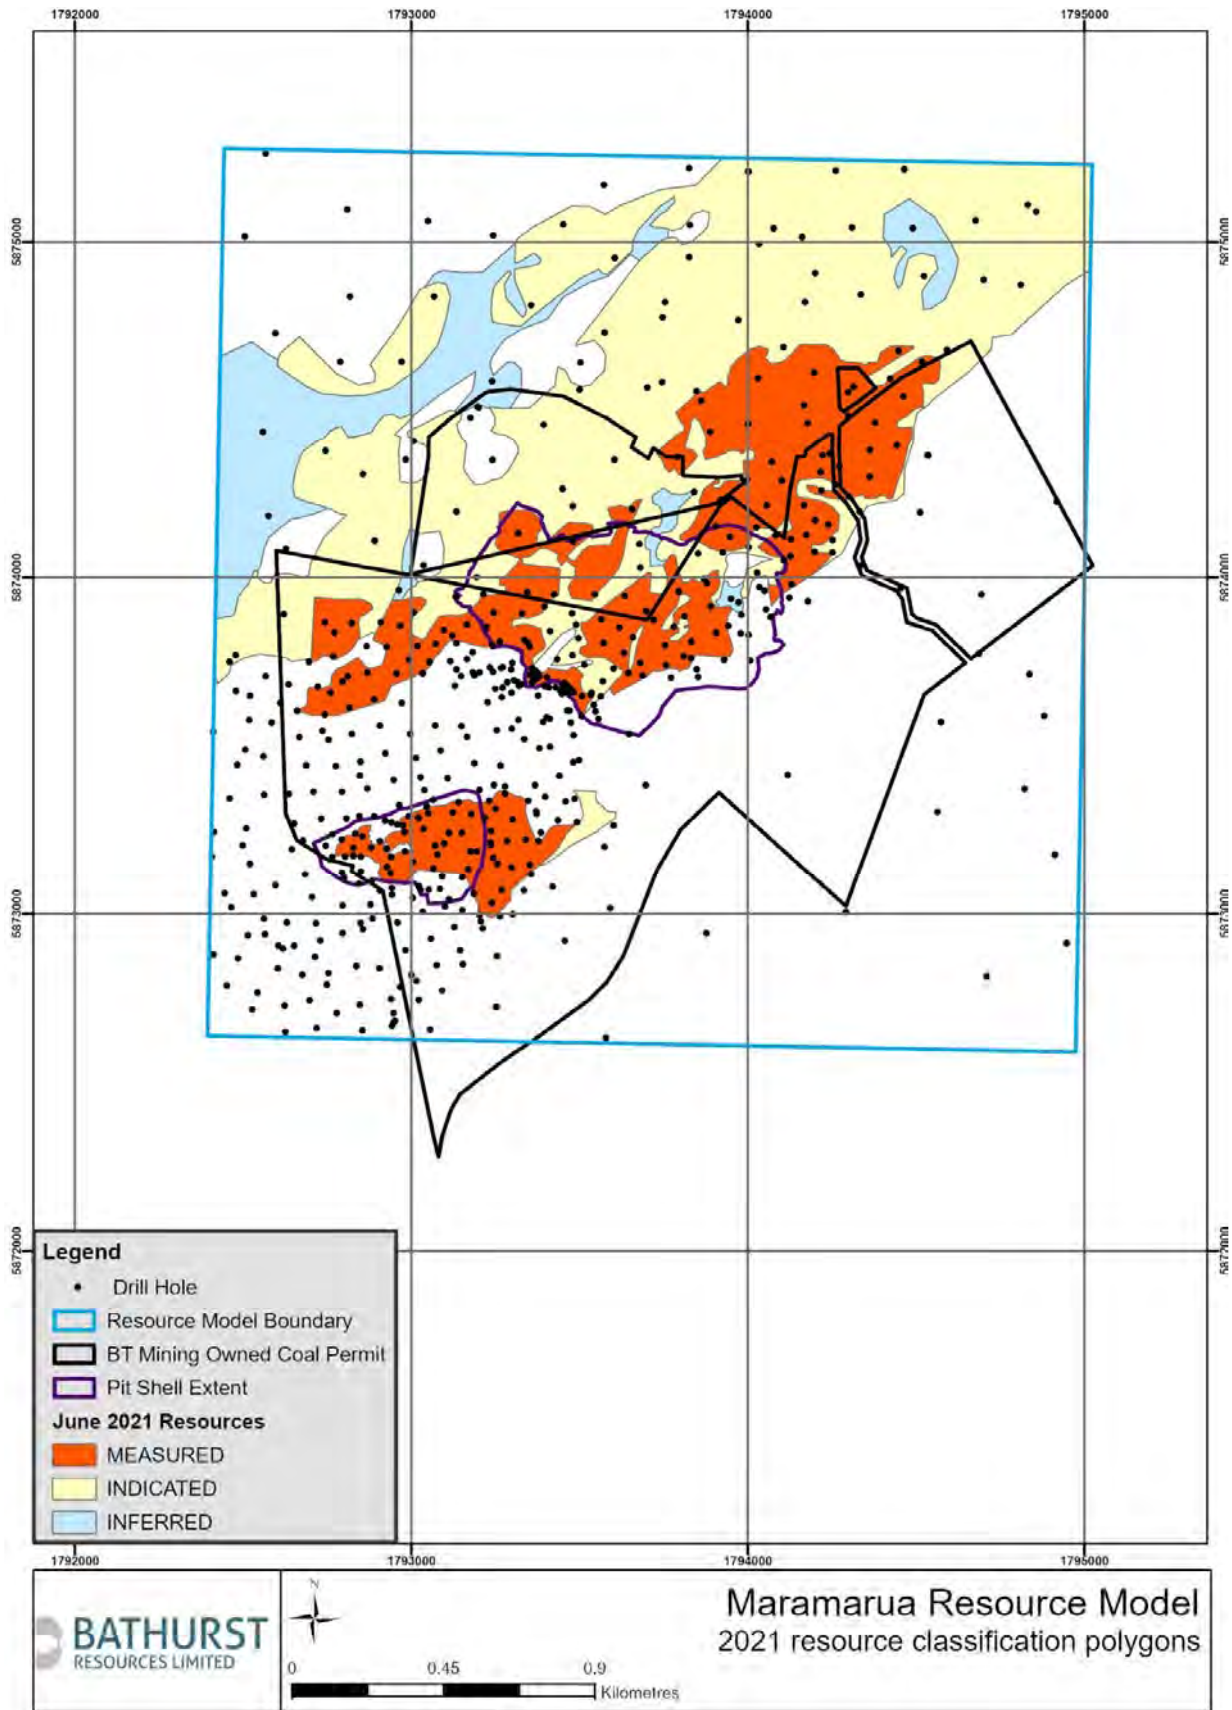


Figure 6: Plan showing the 2021 resource classification polygons

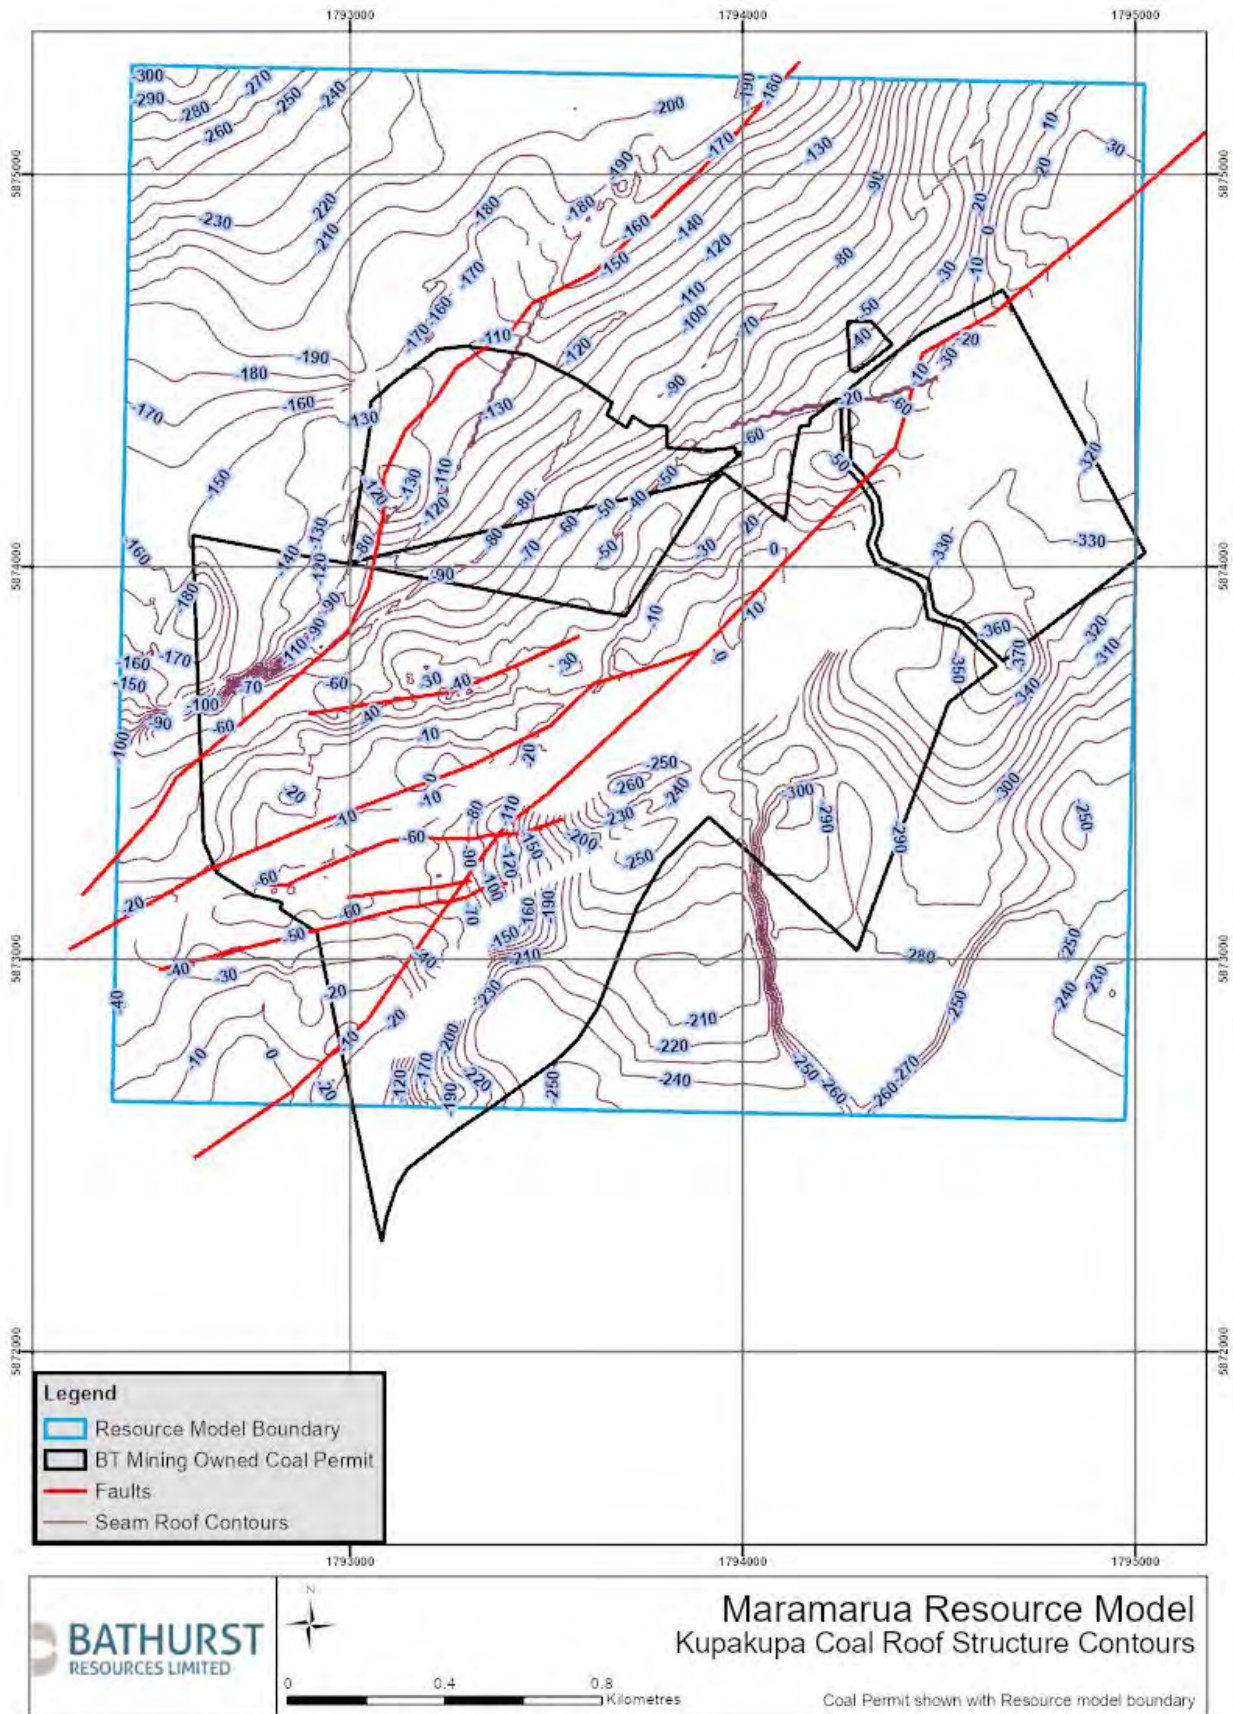


Figure 7: Plan showing the structure contours of the coal seam roof

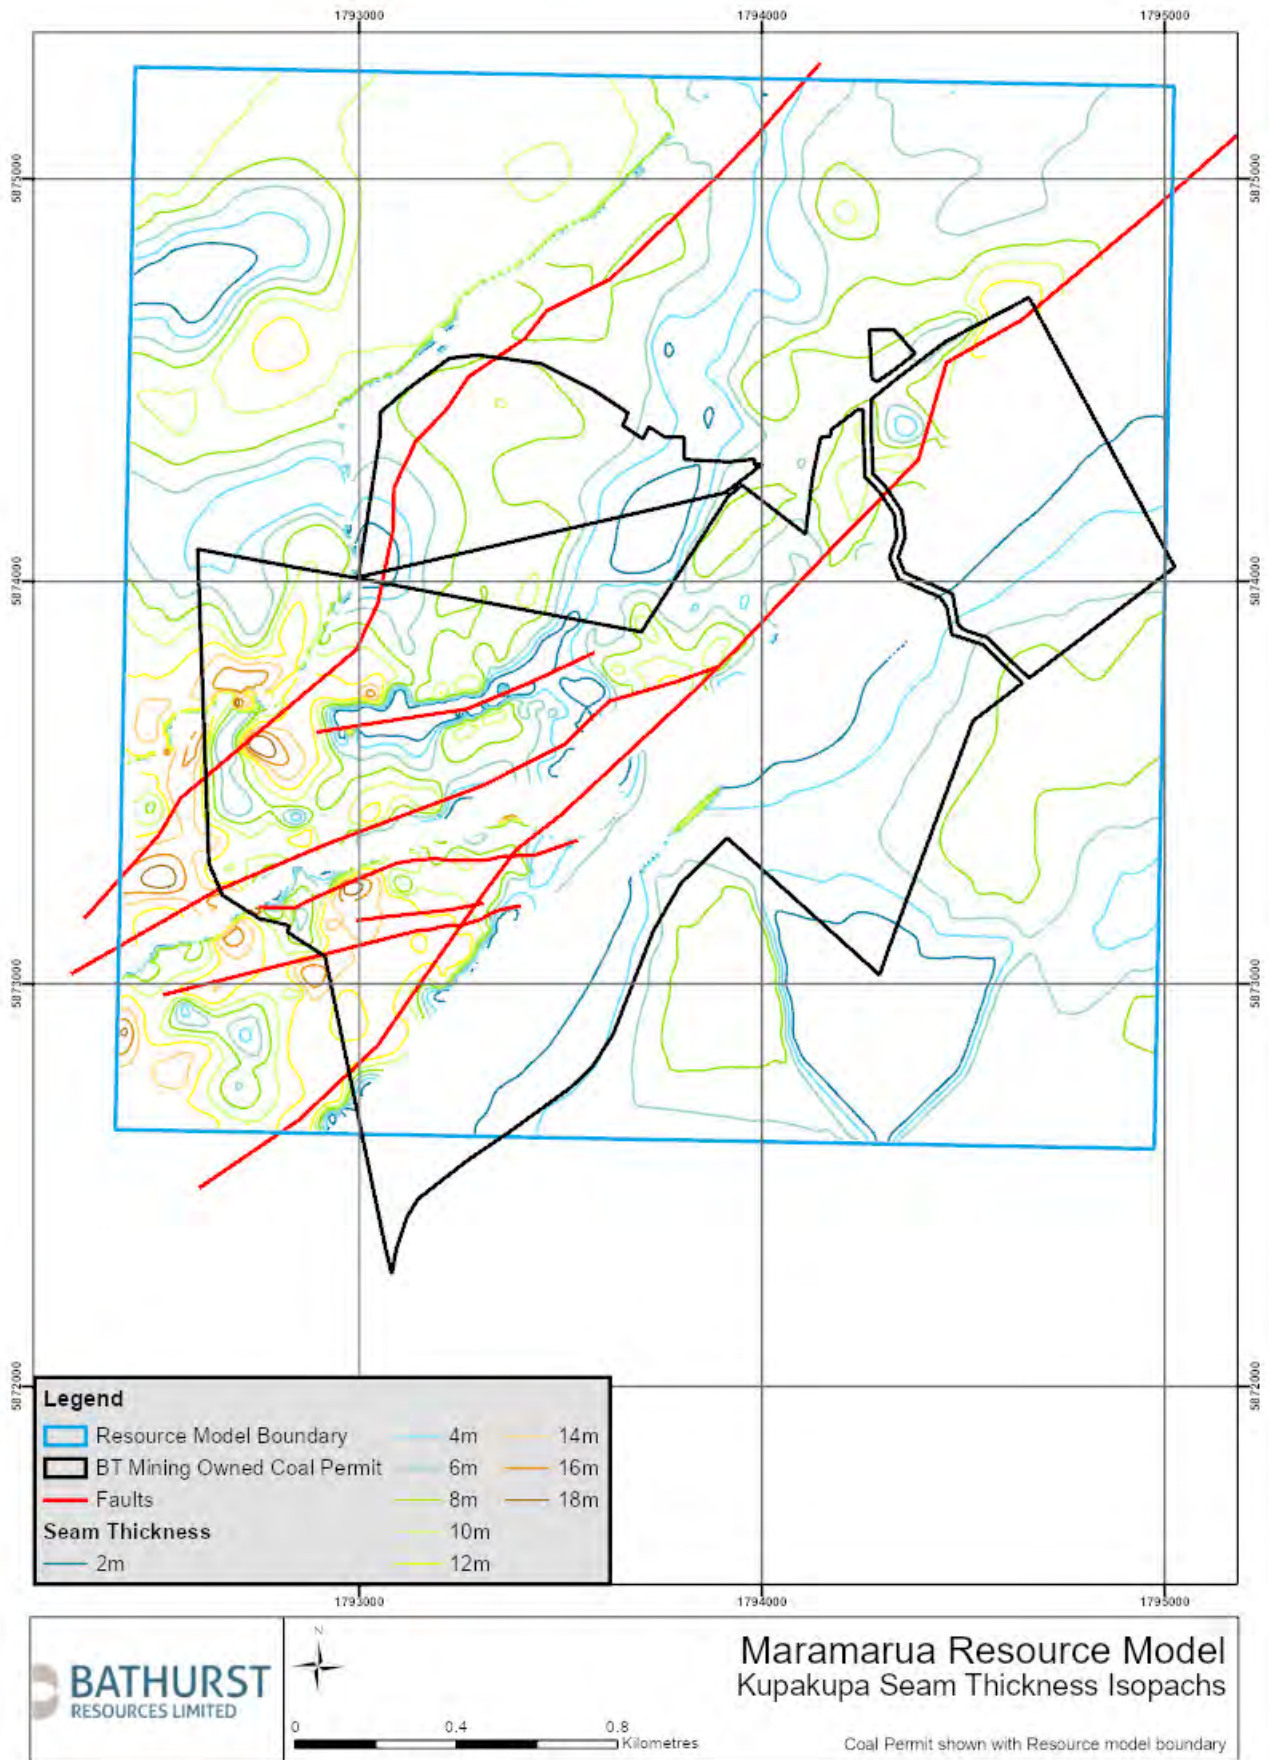


Figure 8: Plan showing full seam thickness contours over the model area



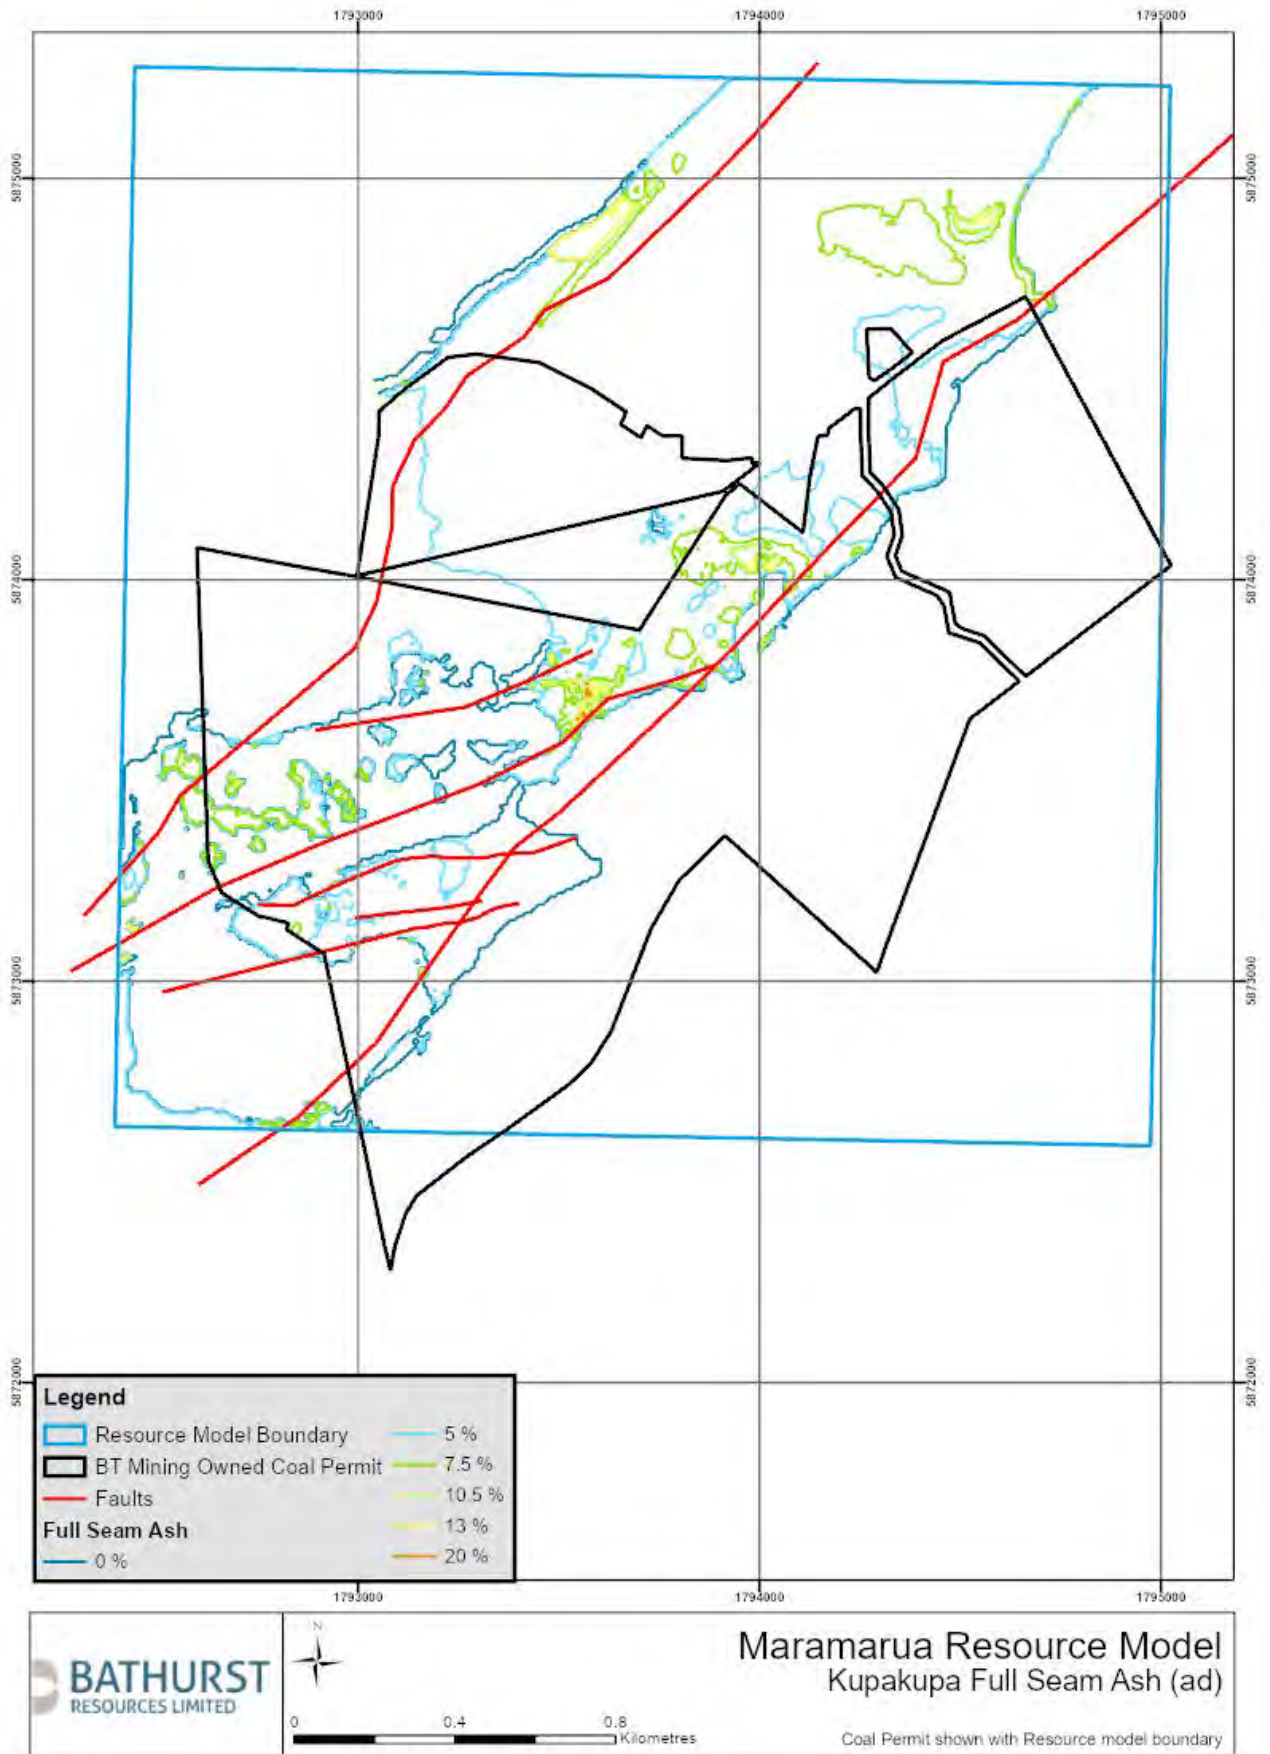


Figure 9: Plan showing in situ full seam ash on an air-dried basis as modelled over the deposit area

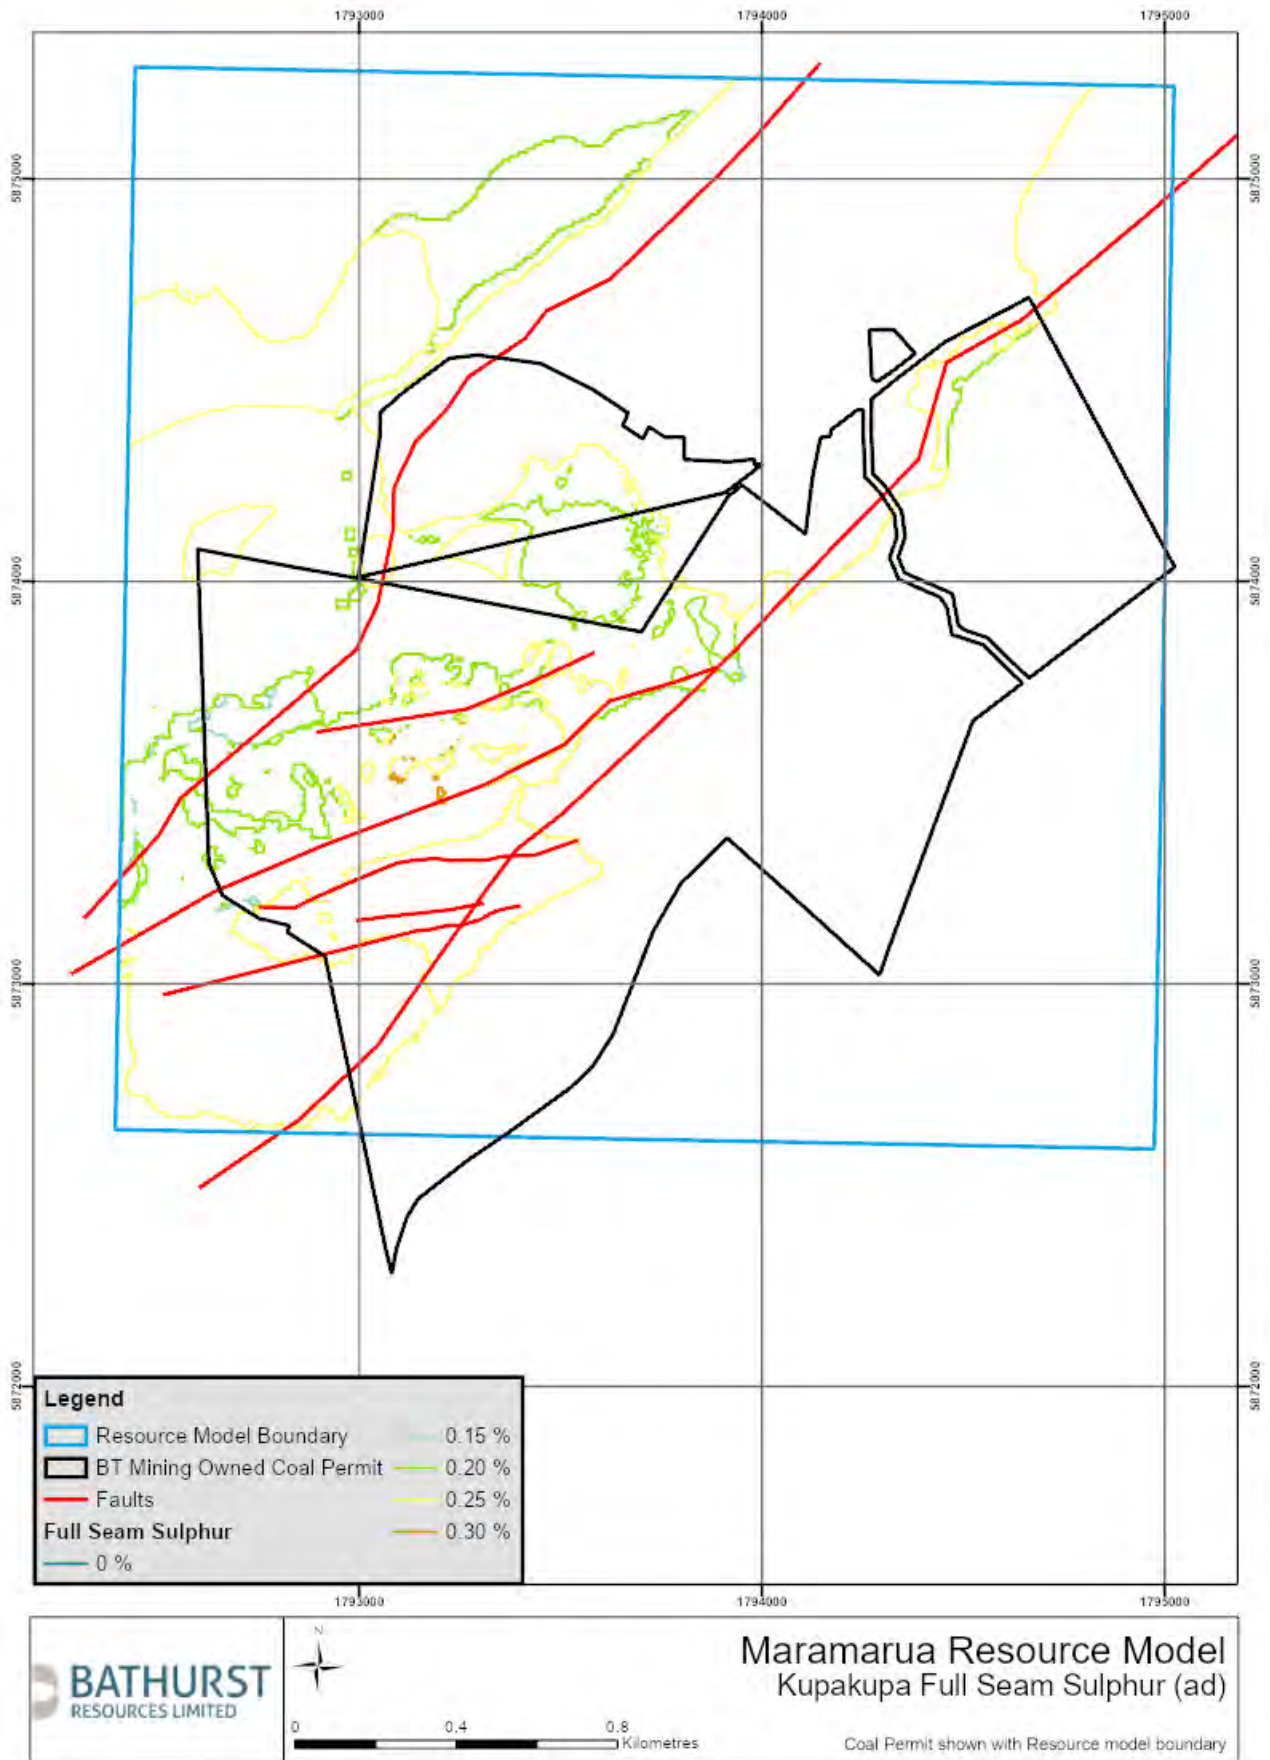


Figure 10: Plan showing full seam sulphur on an air-dried basis across the resource area

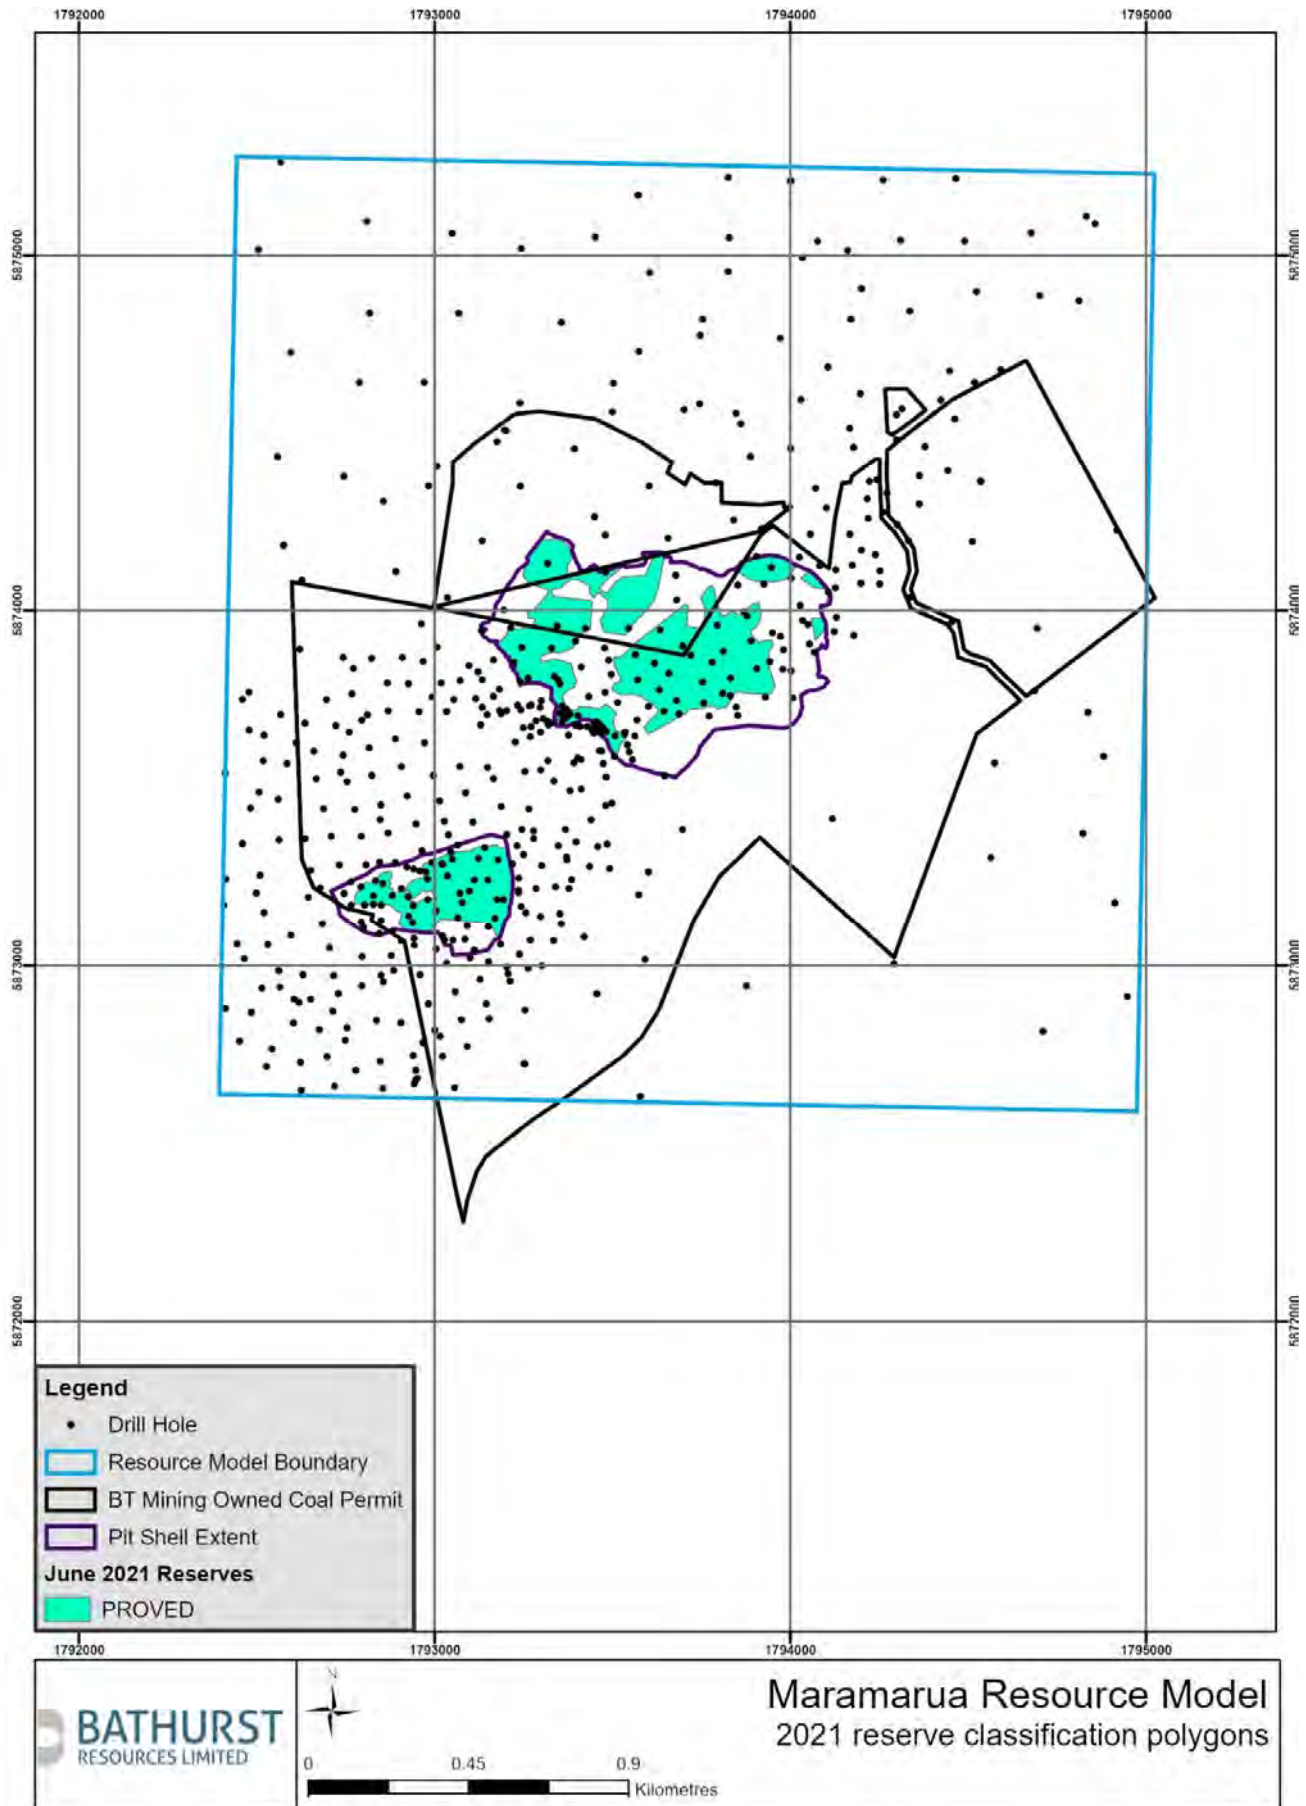


Figure 11: Mamarua reserve classification polygons with pit shell extents